



FIRST® AGE™
presented by Qualcomm

firstinspires.org/robotics/frc

2026 FIRST® Robotics Competition

Game Manual

REBUILT™ presented by Haas

Contents

1	Introduction	4
1.1	About FIRST®	4
1.2	In Memoriam	4
1.3	FIRST® Robotics Competition	5
1.4	FIRST Ethos and Core Values	5
1.5	Spirit of Volunteering	7
1.6	This Document & Its Conventions	9
1.7	Translations & Other Versions	10
1.8	Team Updates	11
1.9	Question and Answer System	11
2	FIRST Season Overview	13
3	Game Sponsor Recognition	14
4	Game Overview	15
5	ARENA	17
5.1	Dimensions and Accuracy	17
5.2	FIELD	18
5.3	Areas, Zones, & Markings	20
5.4	HUB	22
5.5	BUMP	25
5.6	TRENCH	25
5.7	DEPOT	26
5.8	TOWER	26
5.9	ALLIANCE WALL	27
5.10	SCORING ELEMENTS	32
5.11	AprilTags	33
5.12	The FIELD Management System	36
5.13	FIELD STAFF	37
6	Game Details	39
6.1	MATCH Overview	39
6.2	DRIVE TEAM	39
6.3	Setup	41
6.4	MATCH Periods	44
6.5	Scoring	45
6.6	Violations	49
6.7	Head REFEREE and FTA Interaction	52
6.8	Other Logistics	53
7	Game Rules (G)	55
7.1	Personal Safety	55
7.2	Conduct	56
7.3	Pre-MATCH	61
7.4	In-MATCH	64
7.5	Post-MATCH	73
8	ROBOT Construction Rules (R)	75

8.1	General ROBOT Design.....	78
8.2	ROBOT Safety & Damage Prevention	81
8.3	Budget Constraints & Fabrication Schedule	82
8.4	BUMPER Rules	85
8.5	Motors & Actuators.....	92
8.6	Power Distribution	96
8.7	Control, Command & Signals System.....	104
8.8	Pneumatic System.....	109
8.9	OPERATOR CONSOLE	113
9	Inspection & Eligibility (I).....	115
9.1	Rules	115
10	Tournaments (T).....	119
10.1	MATCH Schedules.....	119
10.2	MATCH Replays	119
10.3	Measurement	121
10.4	Practice MATCHES	121
10.5	Qualification MATCHES.....	122
10.6	Playoff MATCHES.....	123
11	District Tournaments.....	133
11.1	District Events	133
11.2	District Championship Eligibility	136
11.3	District Championships with Multiple Divisions	138
11.4	District Championship Playoffs	138
11.5	<i>FIRST</i> Championship Eligibility	140
12	Regional Tournaments.....	143
12.1	Regional Events.....	143
12.2	<i>FIRST</i> Championship Eligibility	145
13	<i>FIRST</i> Championship Tournament (C)	147
13.1	Advancement to the <i>FIRST</i> Championship.....	147
13.2	4-ROBOT ALLIANCES.....	147
13.3	<i>FIRST</i> Championship Pit Crews	148
13.4	<i>FIRST</i> Championship Playoffs.....	148
14	Event Rules (E).....	149
14.1	General Rules	149
14.2	Machine Shops	153
14.3	Wireless Rules.....	153
14.4	Load-In.....	154
14.5	Pits	155
14.6	TEST AREAS and PRACTICE AREAS.....	156
14.7	ROBOT Carts	158
14.8	Ceremonies	158
14.9	In the Stands	159
15	Glossary	161

1 Introduction

1.1 About FIRST®

FIRST® (For Inspiration and Recognition of Science and Technology) was founded by inventor Dean Kamen to inspire young people's interest in science and technology. As a robotics community that prepares young people for the future, *FIRST* is the world's leading youth-serving nonprofit advancing STEM education. For 30 years, *FIRST* has combined the rigor of STEM learning with the fun and excitement of traditional sports and the inspiration that comes from community through programs that have a proven impact on learning, interest, and skill-building inside and outside of the classroom. *FIRST* provides programs that span a variety of age groups:

- *FIRST®* Robotics Competition for grades 9-12, suggested ages 14-18
- *FIRST®* Tech Challenge for grades 7-12, ages 12-18
- *FIRST®* LEGO® League for grades Pre-K-8, ages 4-16
 - *FIRST®* LEGO® League Challenge for grades 4-8 (ages 9-16, ages vary by country)
 - *FIRST®* LEGO® League Explore for grades 2-4 (ages 6-10)
 - *FIRST®* LEGO® League Discover for grades Pre-K-1 (ages 4-6)

Please visit [the *FIRST* website](http://firstinspires.org/robotics/frc) for more information about *FIRST* and its programs.

Purpose	Vision	Mission
<i>FIRST</i> exists to prepare the young people of today for the world of tomorrow.	To transform our culture by creating a world where science and technology are celebrated and where young people dream of becoming science and technology leaders.	The mission of <i>FIRST</i> is to provide life-changing robotics programs that give young people the skills, confidence, and resilience to build a better world.

1.2 In Memoriam

In October 2019, Dr. Woodie Flowers, an innovator in design and engineering education and a Distinguished Advisor to *FIRST* and supporter of our mission, passed away. As thousands of heartfelt tributes to Woodie have poured in from around the world, it is clear his legacy will live on indefinitely through the gracious nature of our community and our ongoing commitment to empowering educators and building global citizens.

Figure 1-1 Dr. Woodie Flowers, 1943-2019



1.3 FIRST® Robotics Competition

FIRST® Robotics Competition combines the excitement of sport with the rigors of science and technology. Teams of students are challenged to design, build, and program industrial-size robots and compete for awards, while they also create a team identity, raise funds, hone teamwork skills, and advance respect and appreciation for STEM within the local community.

Volunteer professional mentors lend their time and talents to guide each team. It's as close to real-world engineering as a student can get. Plus, high school students gain access to exclusive scholarship opportunities from colleges, universities, and technical programs.

Each January at an event known as "Kickoff," a new, challenging game is introduced. These exciting competitions combine the practical application of science and technology with the fun, intense energy, and excitement of a championship-style sporting event. Teams are encouraged to display *Gracious Professionalism*®, help other teams, and cooperate while competing. This is known as *Coopertition*®.

In 2026, FIRST Robotics Competition is projected to reach approximately 90,000 high-school students representing more than 3,700 teams. Teams represent more than 30 countries and come from nearly every state in the United States.

FIRST Robotics Competition teams will participate in 56 Regional Competitions, 125 District Competitions, and 15 District Championships. In addition, approximately 600 teams will qualify to attend the FIRST Championship in April 2026.

This year's game, and this manual, were presented at the 2026 FIRST Robotics Competition Kickoff on Saturday, January 10, 2026. At the Kickoff, all teams:

- saw the 2026 game, REBUILT™ presented by Haas, for the first time,
- learned about the 2026 game rules and regulations, and
- received a set of game specific materials.

1.4 FIRST Ethos and Core Values

1.4.1 Core Values

The FIRST Core Values are fundamental to FIRST and unique to its programs. They emphasize friendly sportsmanship, respect for the contributions of others, teamwork, learning, and community involvement and are part of our commitment to fostering, cultivating, and preserving a culture of unity.

Our community expresses the FIRST philosophies of *Gracious Professionalism*® and *Coopertition*® through the FIRST Core Values.

Discovery: We explore new skills and ideas.

Innovation: We use creativity and persistence to solve problems.

Impact: We apply what we learn to improve our world.

Inclusion: We respect each other and embrace our differences.

Teamwork: We are stronger when we work together.

Fun: We enjoy and celebrate what we do!

1.4.2 *Gracious Professionalism*®, a FIRST Credo

Gracious Professionalism is part of the ethos of FIRST. It's a way of doing things that encourages high quality work, emphasizes the value of others, and respects individuals and the community. *Gracious Professionalism* is not clearly defined for a reason. It is an aspirational ideal to always strive towards, not a goal to be achieved or a method of measuring someone, and for this reason, you can never say someone "is" or "is not" being Graciously Professional. We should each work to better embody *Gracious Professionalism* in all our actions. How we pursue this can and should mean different things to everyone.

Some possible meanings of *Gracious Professionalism* include:

- gracious attitudes and behaviors are win-win,
- gracious folks respect others and let that respect show in their actions,
- professionals possess special knowledge and are trusted by society to use that knowledge responsibly, and
- gracious professionals make a valued contribution in a manner pleasing to others and to themselves.

In the context of FIRST, this means that all teams and participants should:

- learn to be strong competitors, but also treat one another with respect and kindness in the process and
- avoid leaving anyone feeling as if they are excluded or unappreciated.

Knowledge, pride, and empathy should be comfortably and genuinely blended.

In the end, *Gracious Professionalism* is part of pursuing a meaningful life. When professionals use knowledge in a gracious manner and individuals act with integrity and sensitivity, everyone wins and society benefits.

Figure 1-2 Dr. Woodie Flowers, *Gracious Professionalism* advocate and exemplar



"The FIRST spirit encourages doing high-quality, well-informed work in a manner that leaves everyone feeling valued. Gracious Professionalism seems to be a good descriptor for part of the ethos of FIRST. It is part of what makes FIRST different and wonderful."

- Dr. Woodie Flowers, (1943 – 2019)
Distinguished Advisor to FIRST

It is a good idea to spend time going over this concept with your team and reinforcing it regularly. We recommend providing your team with real-life examples of *Gracious Professionalism* in practice, such as when a team loans valuable materials or expertise to another team that they will later face as an opponent in competition. Routinely highlight opportunities to display *Gracious Professionalism* at events and encourage team members to suggest ways in which they can demonstrate this quality themselves and through outreach activities.

1.4.3 Coopertition®

At FIRST, *Coopertition* is displaying unqualified kindness and respect in the face of fierce competition. *Coopertition* is founded on the concept and philosophy that teams can and should help and cooperate with one another even as they compete. *Coopertition* involves learning from teammates and mentors. *Coopertition* means competing always but assisting and enabling others when you can.

Message from Woodie Flowers Award Recipients

The Woodie Flowers Award is the most prestigious mentoring award in FIRST. The award recipients created an important message for all FIRST Robotics Competition teams to consider as we tackle each season.

Performing at your best is important. Winning is important. This is a competition.

However, winning with Gracious Professionalism and being proud of what you have accomplished and how you have accomplished it is more important. FIRST could create rules and penalties to cover almost any scenario or situation, but we prefer an understandable game with simpler rules that allow us to think and be creative in our designs.

We want to know that our partners and opponents are playing at their best in every MATCH. We want to know they are playing with integrity and not using strategies based on questionable behaviors.

As you create your ROBOTS and award presentations, prepare for competition and MATCH play, create and implement game strategies, and live your daily lives, remember what Woodie said time and time again, and let's 'Make your Grandmother proud.'

Woodie Flowers	Rob Mainieri (812, 64, 498, 991, & 2375)	Eric Stokely (258, 360, 2557, & 5295)
Liz Calef (88)	Dan Green (111)	Glenn Lee (359)
Mike Bastoni (23)	Mark Breadner (188)	Gail Drake (1885)
Ken Patton (51, 65)	John Novak (16, 323)	Allen Gregory (3847)
Kyle Hughes (27)	Chris Fultz (234)	Lucien Junkin (118)
Bill Beatty (71)	John Larock (365)	Matt Fagen (4253)
Dave Verbrugge (5110, 67)	Earl Scime (2614)	Christine Sapiro (2486)
Andy Baker (3940, 45)	Fredi Lajvardi (842)	Mark Buckner (4265)
Dave Kelso (131)	Lane Matheson (932)	Norman Morgan (2468)
Paul Copioli (3310, 217)	Mark Lawrence (1816)	Francisco Guerra (4635)

1.5 Spirit of Volunteering

Message from the Global Volunteers

Welcome— we're excited for you to discover this season. We're even more excited to see what you and your team can achieve this season and at the almost 200 events worldwide this season.

FIRST is made possible by our volunteers

Volunteers are the driving force behind the delivery of all FIRST programs including the FIRST Robotics Competition. Each year it takes thousands of volunteers donating their time, energy, and enthusiasm to ensure that every FIRST Robotics Competition team has the opportunity to achieve

its goals. FIRST volunteers come from a diverse set of backgrounds and are united by the same goal: to provide the best possible FIRST experience for all participating teams.

We encourage everyone in the FIRST community to join in the fun and excitement of events by participating as a volunteer.

Why Volunteer?

- Witness capable students learning and growing
- Forge meaningful friendships with other awesome volunteers
- Be part of the magic that brings events to life
- Share the wonders of FIRST with those who are yet to discover it
- Bring invaluable event experiences back to your team
- Learn and grow beyond your usual circles

FIRST Alumni and Graduating Students:

You've experienced firsthand the impact of FIRST in your life, the opportunities it has provided, and the excitement of participating. Your FIRST experience does not have to end after you graduate – being a volunteer or mentor gives you the opportunity to continue learning, growing, building a community, and having fun at FIRST events. Your experience as a student in a FIRST program is invaluable to helping ensure future students have an amazing experience. [There are volunteer roles for every skill level, background, and level of commitment](#) – everyone is welcome!

Learn more and sign up as a FIRST volunteer on the [FIRST website](#).

FIRST is about you

Volunteers eagerly donate their time and efforts to make it possible for you to participate and have fun! We strive to demonstrate the FIRST philosophies of Gracious Professionalism and Coopertition in every interaction – in return, we ask the same of you. If for any reason you feel like our volunteers could have done a better job, we want to know about it – talk to a mentor, trusted adult, other event volunteer or staff member, or report it to FIRST via customerservice@firstinspires.org.

Join us for the 2026 season and be a part of the incredible journey that is FIRST Robotics Competition! Your involvement is key to our collective success. We look forward to welcoming you!

With gratitude and excitement for what lies ahead, your 2026 Global Volunteers:

Global Field Supervisors – Ayla DeLaat & Bryan Herbst

Global FIRST Technical Advisors (FTAs) – James Cerar & Mark McLeod

Global Head Referees – Aidan Browne & Jon Zawislak

Global Judge Advisors – Cindy Stong & Allen Bancroft

Global Lead Robot Inspectors – Chuck Dickerson & Alida Mendes-MacCracken

Global Lead Scorekeepers – Alex Herreid & Andrea "Duckie" Tribö

Global Volunteer Coordinators – Laurie Shimizu & Sarah Plemmons

1.6 This Document & Its Conventions

The 2026 Game Manual is a resource for all *FIRST* Robotics Competition teams for information specific to the 2026 season and the REBUILT game. Its audience will find the following detail:

- a general overview of the REBUILT game,
- detail about the REBUILT playing FIELD,
- a description of how to play the REBUILT game,
- rules (related to safety, conduct, game play, inspection, event, etc.), and
- a description of how teams advance at 2026 tournaments and throughout the season.

The intent of this manual is that the text means exactly, and only, what it says. Please avoid interpreting the text based on assumptions about intent, implementation of past rules, or how a situation might be in “real life.” There are no hidden requirements or restrictions. If you’ve read everything, you know everything.

Specific methods are used throughout this manual to highlight warnings, cautions, key words, and phrases. These conventions are used to alert the reader to important information and are intended help teams in constructing a ROBOT that complies with the rules in a safe manner.

Links to other section headings in this manual, external articles, and rule references appear in [blue underlined text](#).


Key words that have a particular meaning within the context of the *FIRST* Robotics Competition and REBUILT are defined in the [Glossary](#) and indicated in ALL CAPS throughout this document.

The rule numbering method indicates the section, subsection, and position of the rule within that subsection. The letter indicates the section in which the rule is published.

- Q for [6.7.1 Question Box \(Q\)](#)
- G for [7 Game Rules \(G\)](#)
- R for [8 ROBOT Construction Rules \(R\)](#)
- I for [9 Inspection & Eligibility \(I\)](#)
- T for [10 Tournaments \(T\)](#)
- C for [13 FIRST Championship Tournament \(C\)](#)
- E for [14 Event Rules \(E\)](#)

The following digit(s) represents the subsection in which the rule can be found. The final digits indicate the rule’s position within that subsection.

Figure 1-3 Rule numbering method

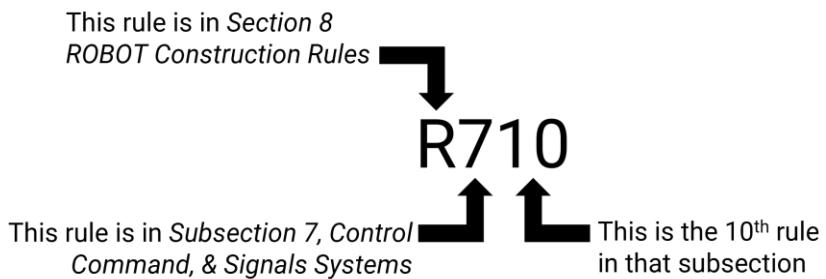

Warnings, cautions, and notes appear in blue boxes. Pay close attention to their contents as they’re intended to provide insight into the reasoning behind a rule,

helpful information on understanding or interpreting a rule, and/or possible “best practices” for use when implementing systems affected by a rule.

While blue boxes are part of the manual, they do not carry the weight of the actual rule (if there is an inadvertent conflict between a rule and its blue box, the rule supersedes the language in the blue box).

Imperial dimensions are followed by comparable metric dimensions in parentheses to provide metric users with the approximate size, mass, etc. Decimal values are rounded in order to limit the number of decimal places shown and the number of significant figures. Metric conversions in rules round such that the metric dimension is compliant with the rule (i.e. maximums round down, minimums round up). The metric conversions are offered for convenient reference only and do not overrule or take the place of the imperial dimensions presented in this manual and the official drawings (i.e. dimensions and rules will always defer to measurements using imperial units).

Rules include colloquial language, also called headlines, in an effort to convey an abbreviated version of the rule or rule set. There are two versions of headline formatting.

Evergreen rules, or rules which are expected to go relatively unchanged from season to season, are indicated with a leading asterisk and their rule number and headline are presented in **bold green text**. “Relatively unchanged” means that the overall intent and presence of the rule from season to season is constant, but game specific terms may be updated as needed (e.g. changing Power Cells to FUEL in a rule about what COACHES may not contact during a MATCH). These rules also start their respective section, so their rule number is not expected to change from season to season.

All other rule headlines use **bold blue text**. Any disagreement between the specific language used in the rules and the colloquial language is an error, and the specific rule language is the ultimate authority. If you discover a disparity, please let us know at customerservice@firstinspires.org and we will correct it.

Team resources that aren’t generally season specific (e.g., what to expect at an event, communication resources, team organization recommendations, ROBOT transportation procedures, and award descriptions) can be found on the [FIRST Robotics Competition website](#).

1.7 Translations & Other Versions

The REBUILT manual is originally and officially written in English and is occasionally translated into other languages for the benefit of FIRST Robotics Competition teams whose native language may not be English. These assets are posted on the [Translated Manuals section](#).

A text-based English version is provided only for use with assistive devices on the [Translated Manuals section](#). This document is locked for editing and has a watermark applied to indicate that it should not be copied. If you have any questions on the document, please contact the FIRST Robotics Competition Team Advocate at frcteamadvocate@firstinspires.org.

In the event that a rule or description is modified in an alternate version of this manual, the English pdf version as published on the [Season Materials webpage](#) is the commanding version.

1.8 Team Updates

Team Updates are used to notify the *FIRST* Robotics Competition community of revisions to the official season documentation (e.g. the manual, drawings, etc.) or important season news. Team Update posts are scheduled as follows:

- each Tuesday and Friday, starting on the first Tuesday after Kickoff and ending on the Tuesday prior to Week 1 events
- each Tuesday, starting Week 1 and ending the week after the final District Championship events.

Team Updates are posted on the [Season Materials webpage](#) and are generally posted before 5 pm, Eastern.

Generally, Team Updates follow the following convention:

- Additions are highlighted in yellow. **This is an example.**
- Deletions are indicated with a strikethrough. **This is an example.**

1.9 Question and Answer System

The [Question and Answer System \(Q&A\)](#) is a resource for clarifying the [2026 REBUILT Game Manual](#), [Awards webpages](#), [official FIELD drawings](#), and/or [District and Regional Events webpage](#) content. Teams can search for previously asked questions and responses or pose new questions. Questions can include examples for clarity or reference multiple rules to understand the relationships and differences between them.

The Q&A opens on January 14, 2026, 12:00 PM Eastern. Details on the Q&A can be found on the [Season Materials webpage](#). The Q&A may result in revisions to the text in the official manuals (which are communicated using the process described in Team Updates).

The responses in the Q&A do not supersede the text in the manual, although every effort will be made to eliminate inconsistencies between the two. While responses provided in the Q&A may be used to aid discussion at each event, per section [9 Inspection & Eligibility](#) and section [6.7 Head REFEREE and FTA Interaction](#), REFEREES and INSPECTORS are the ultimate authority on rules. If you have concerns about enforcement trends by volunteer authorities, please notify *FIRST* at customerservice@firstinspires.org.

The Q&A is not a resource for firm predictions on how a situation will play out an event. Questions about the following will not be addressed:

- rulings on vague situations,
- challenging decisions made at past events, or
- design reviews of a ROBOT system for legality.

Weak questions are overly broad, vague, and/or include no rule references. Some examples of questions that will not be answered in the Q&A are:

- Is this part/design legal?
- How should the REFEREE have ruled when this specific game play happened?
- Duplicate questions
- Nonsense questions

Good questions ask generically about features of parts or designs, gameplay scenarios, or rules, and often reference one or more relevant rules within the question. Some examples of questions that will likely be answered in the Q&A are:

- A device we are considering using on the ROBOT comes with purple AWG 40 wire, does this comply with R?? and R??
- We're not sure how to interpret how Rule G?? applies if blue ROBOT A does X and red ROBOT B does Y, can you please clarify?
- If a ROBOT does this specific action, is it doing what this defined term is describing?

Questions from “FRC 99999” represent content asked by key volunteers (e.g., REFEREES, INSPECTORS, etc.), answered by *FIRST*, and are considered relevant to teams.



2 FIRST Season Overview



Uncover the Future

FIRST® is the sport where every kid can go pro. As the world's leading non-profit that prepares young people for the future, FIRST offers a suite of life-changing youth robotics programs that build skills, confidence, and resilience. Participants work collaboratively to solve the annual, themed robotics challenge.

Every artifact we uncover holds a story. Each tool, each innovation, each work of art connects us to the people and ideas that came before us. Using STEM skills and teamwork, today we can dig deeper into discoveries than ever before.

Welcome to FIRST® AGE™ presented by Qualcomm, our 2025-2026 robotics season inspired by archaeology. What will you uncover? **Join us for an experience for the ages.**


UNEARTHED

DECODE

REBUILT

 PRESENTED BY


 PRESENTED BY

 Gene Haas Foundation


 LEARN MORE: firstinspires.org/firstage

3 Game Sponsor Recognition

Thank you to the 2026 FIRST® Robotics Competition season presenting sponsor, the [Gene Haas Foundation](#).



4 Game Overview

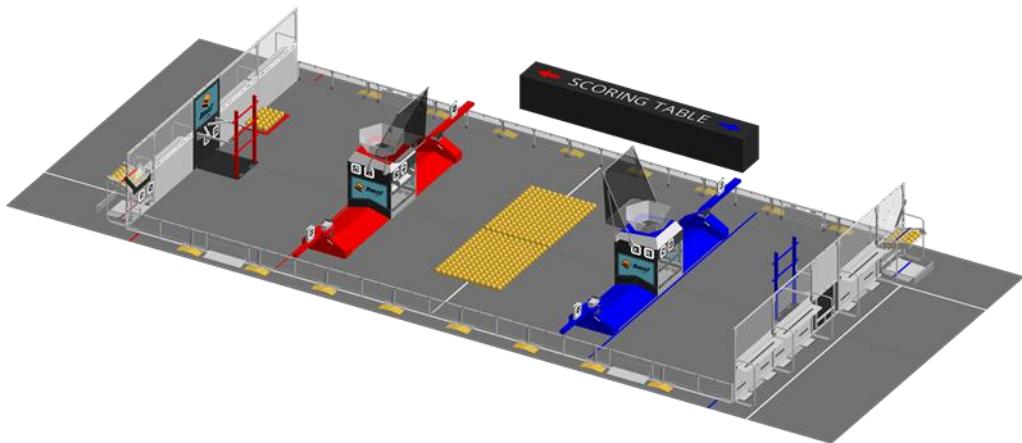

In REBUILT™ presented by Haas, two competing alliances are invited to score fuel, cross obstacles, and climb the tower before time runs out. Alliances earn additional rewards for meeting specific scoring thresholds.

During the first 20 seconds of the match, robots are autonomous. Without guidance from their drivers, robots score fuel into their hub. Fuel can be pre-loaded into a robot, obtained from the human player, collected at the depot, or picked up throughout the center of the field. Some robots may also climb the tower to obtain additional points.

During the remaining 2 minutes and 20 seconds, drivers control their robots. Based on the result of autonomous play, alliance hubs will alternate between active and inactive, shifting gameplay between both sides of the field. Robots can collect fuel at any point in the match and may control any amount of fuel at a time. Drivers control their robots to score fuel into their hub while it is active and may perform defensive strategies or collect more fuel while their hub is inactive.


As time runs out, all hubs become active, allowing all robots to score. Robots can climb to the tower's highest heights to score additional points and claim match bonuses to increase their position in the rankings.

The alliance that earns the most points wins the match!

5 ARENA

The ARENA includes all elements of the game infrastructure that are required to play REBUILT™ presented by Haas: the FIELD, SCORING ELEMENTS, queue area, team media area (when available), designated TECHNICIAN area, and all equipment needed for FIELD control, ROBOT control, and scorekeeping.

Figure 5-1 REBUILT ARENA (queue area, TECHNICIAN area, and media area not pictured)

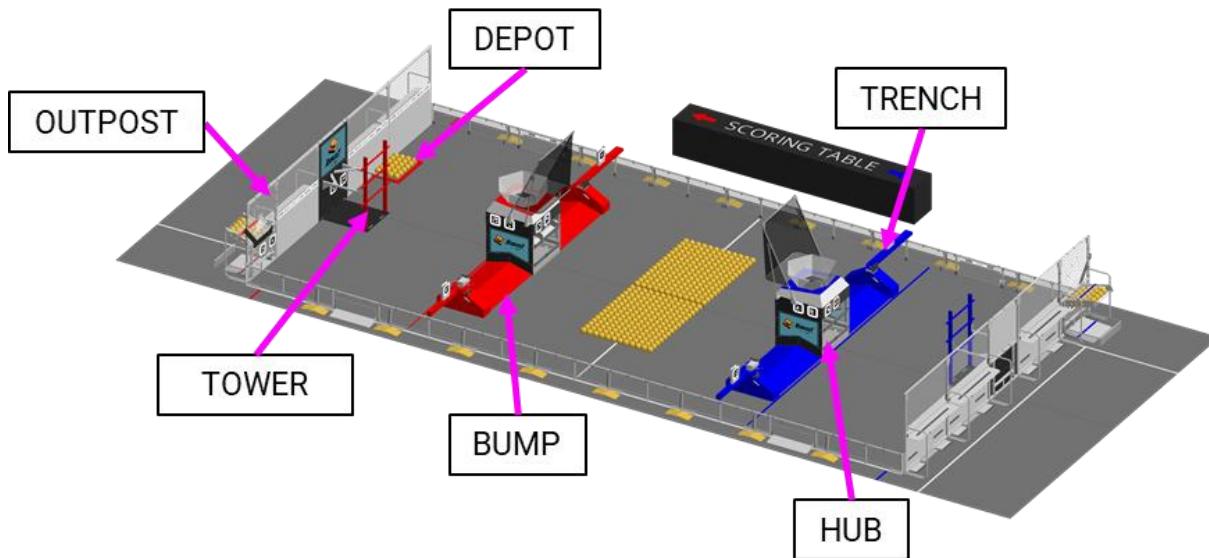

5.1 Dimensions and Accuracy

All official models for the REBUILT FIELD were created in Onshape.



The specification for the REBUILT FIELD can be retrieved from a few locations:

- The 3D CAD model is the official representation of the REBUILT FIELD and how it is constructed.
- Illustrations included in this section are for a general visual understanding of the REBUILT ARENA, and dimensions included in the manual are nominal and no tolerances are implied. Please refer to the official drawings for exact dimensions, tolerances, and construction details.
- The [Field Dimension Drawings](#) package has critical dimensions for each FIELD element.
- The [FIELD Manual](#) includes instructions on how to build the FIELD along with showing the ways construction type will influence the field tolerances. It also includes many of the key dimensions which are listed in the Official FIELD Drawings.
- The FIELD Acceptance Checklists for the [welded FIELD](#) and for the [AndyMark FIELD](#) include the controlled dimensions (with relevant tolerances) which will be checked by event staff a few times throughout the event. The FIELD is expected to change during MATCH play. Teams can ask the FTA

to re-check specific measurements if they believe something is out of spec prior to a MATCH beginning.

The official drawings, CAD models, and drawings for low-cost versions of important elements of the REBUILT FIELD are posted on [the Playing FIELD webpage](#).


The ARENA is modular and assembled, used, disassembled, and shipped many times during the competition season. It undergoes wear and tear. The ARENA is designed to withstand rigorous play and frequent shipping. Every effort is made to ensure that ARENAS are consistent from event to event.

However, ARENAS are assembled in different venues by different event staff and some small variations occur. Successful teams will design ROBOTS that are insensitive to these variations.

5.2 FIELD

Each FIELD for REBUILT is an approximately 317.7in (~8.07m) by 651.2in (~16.54m) carpeted area bounded by inward facing surfaces of the ALLIANCE WALLS, OUTPOSTS, TOWER WALLS, and guardrails.

Figure 5-2 FIELD boundary in pink

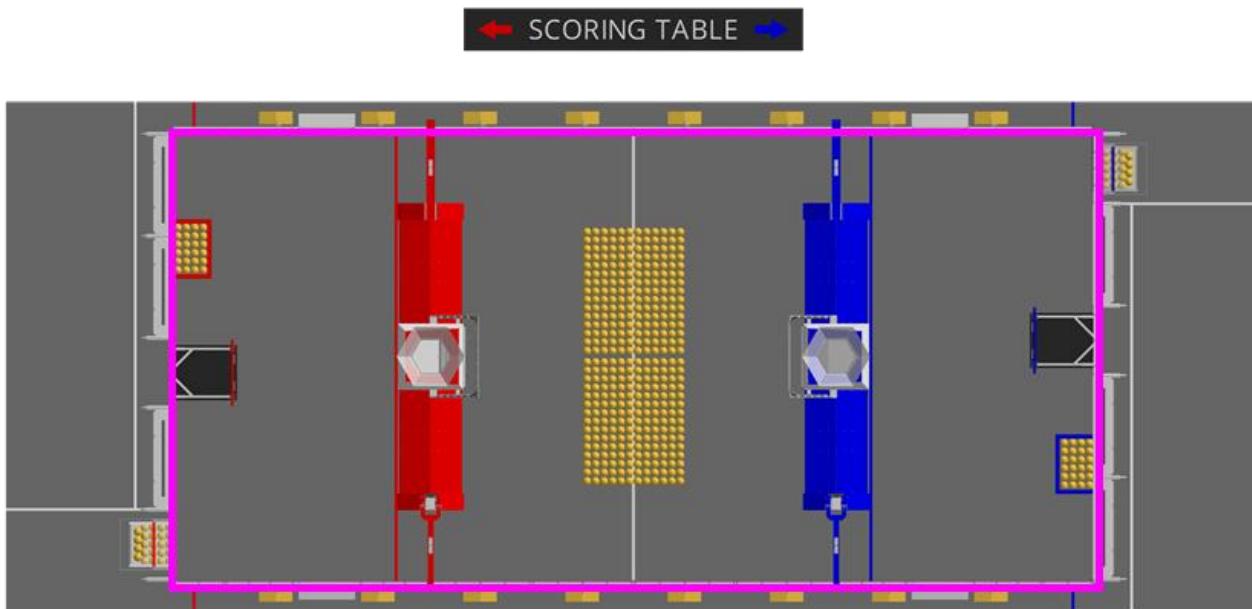

The FIELD is populated with and surrounded by the following elements:

- 1 OUTPOST per ALLIANCE,
- 1 HUB per ALLIANCE,
- 1 TOWER per ALLIANCE,
- 2 DEPOTS,
- 4 BUMPS, and


- 4 TRENCHES.

The surface of the FIELD is low pile carpet, Shaw Floors, Philadelphia Commercial, Neyland II 20, "66561 Medallion." Neyland II carpet is not available for purchase at this time, and the closest equivalent is [Shaw, Philadelphia Brand, Profusion 20, Style 54933](#); see results from evaluation in [this blog post](#).

Carpet edges and seams are secured with [3M™ Premium Matte Cloth \(Gaffers\) Tape GT2, GT3 or comparable Gaffer's Tape](#). Tears, rips, and damage to the carpet may be repaired with the same styles of tape and ROBOTS must be prepared to operate on surfaces made of carpet, tape, or combinations of both materials as repairs are made through the course of competition.

Guardrails form the long edges of the FIELD. Guardrails are a 20.0in (50.8cm) tall system of transparent polycarbonate supported on the top and bottom by aluminum extrusion. There are 4 gates in the guardrail that allow access to the FIELD for placement and removal of ROBOTS. The gate passthrough, when open, is 38.0in (96.5cm) wide. Gates are closed and shielded during the MATCH.

Figure 5-3 Gate locations

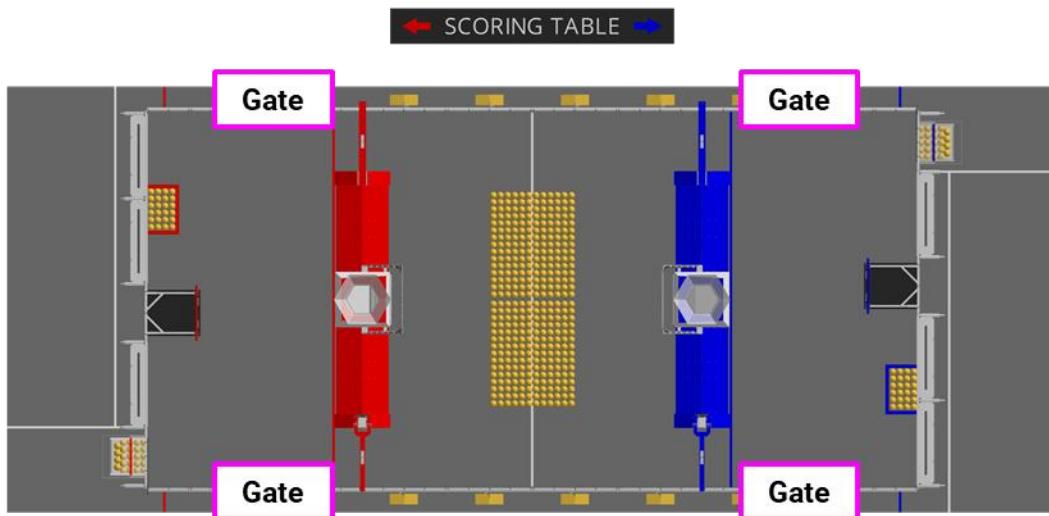

There are 2 versions of guardrails and DRIVER STATIONS used for competitions. 1 design is the Welded FIELD which is reflected in the [2026 Official FIRST FIELD Drawings & Models](#). The other is designed and sold by AndyMark. [Table 5-1](#) and

[Table 5-2](#) illustrate which areas have each kind of FIELD. While the designs are slightly different, the critical dimensions, performance, and expected user experience between them are the same unless otherwise noted. Detailed drawings for the AndyMark design are posted on the [AndyMark website](#). All illustrations in this manual show the traditional Welded FIELD design.

Table 5-1: District Field Types

District	Field Type
FIRST Chesapeake	AndyMark
FIRST California	Welded

District	Field Type
<i>FIRST</i> in Michigan	Welded
<i>FIRST</i> in Texas	AndyMark
<i>FIRST</i> Indiana Robotics	AndyMark
<i>FIRST</i> Israel	Welded
<i>FIRST</i> Mid-Atlantic	Welded
<i>FIRST</i> North Carolina	AndyMark
<i>FIRST</i> South Carolina	Welded
<i>FIRST</i> Wisconsin	AndyMark
<i>NE FIRST</i>	AndyMark
Ontario	Welded
Pacific Northwest	Welded
Peachtree	Welded


Table 5-2 Regional Field Types

Regional Location	Field Type
Australia	Welded
Brazil	AndyMark
Canada	Welded
China	AndyMark
Mexico	AndyMark
Türkiye	AndyMark
United States	Welded

5.3 Areas, Zones, & Markings

FIELD areas, zones, and markings of consequence are described below. Unless otherwise specified, the tape used to mark lines and zones throughout the FIELD is 2.0in (5.1cm) [3M™ Premium Matte Cloth \(Gaffers\) Tape \(GT2\)](#), [ProGaff® Premium Professional Grade Gaffer Tape](#), or comparable gaffers tape.

Figure 5-4 Areas, markings, and zones

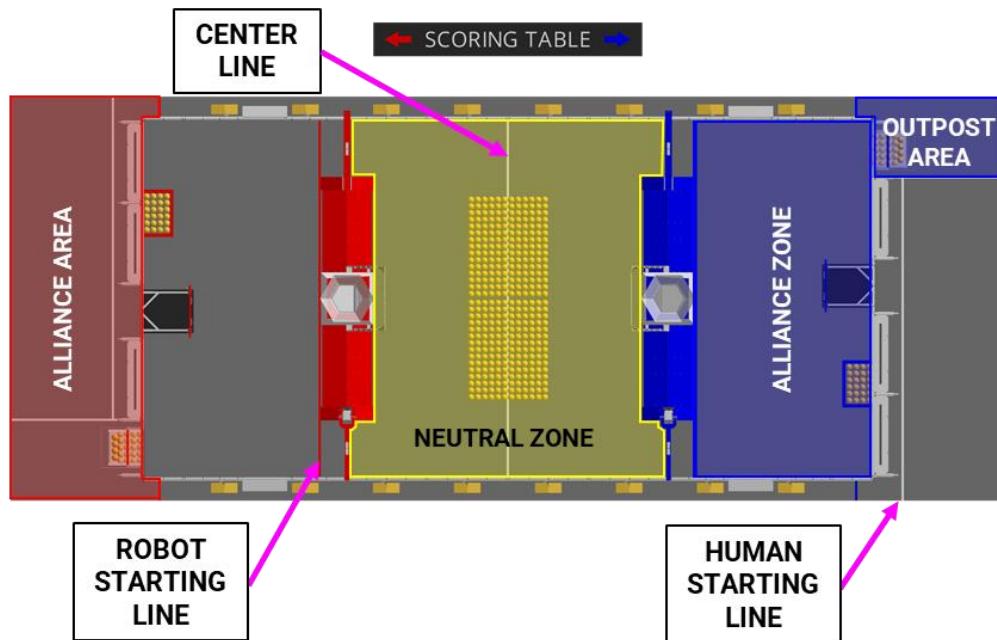

- **ALLIANCE AREA:** an approximately 360in wide by 134in deep (~9.14m by 3.4m) infinitely tall volume formed by, and including the ALLIANCE WALL, OUTPOST, TOWER WALL, the edge of the carpet, and ALLIANCE colored tape perpendicular to the DRIVER STATIONS.
- **ALLIANCE ZONE:** A 158.6in deep by 317.7in long (~4.03m by 8.07m), infinitely tall volume formed by an ALLIANCE WALL, TOWER WALL, and guardrails. It surrounds an ALLIANCE TOWER and a DEPOT. It is bounded by and includes the ROBOT STARTING LINE.
- **CENTER LINE:** a white line that spans the width of the FIELD that bisects the NEUTRAL ZONE in half.
- **NEUTRAL ZONE:** A 283in deep by 317.7in long (7.19m by 8.07m), infinitely tall volume formed by the BUMPS, TRENCHES, HUBS, and guardrails. It surrounds and includes the CENTER LINE.
- **HUMAN STARTING LINE:** a white line spanning the ALLIANCE AREA up to the OUTPOST AREA that is parallel to and located 24.0in (61.0cm) from the bottom square tube of the ALLIANCE WALL to the near edge of the tape.
- **OUTPOST AREA:** a 71.0in wide by 134in deep (1.8m by 3.4m) infinitely tall volume bounded by the OUTPOST, edge of carpet, and ALLIANCE and white colored tape.
- **ROBOT STARTING LINE:** an ALLIANCE colored line that spans the width of the FIELD at the edge of an ALLIANCE ZONE in front of two BUMPS and an ALLIANCE HUB.


5.4 HUB

Figure 5-5 HUB




A HUB is one of two 47in by 47in (~1.19m by 1.19m) rectangular prism structures with an extended opening at the top surface. Each ALLIANCE has a dedicated HUB centered between two BUMPS located 158.6in (~4.03m) away from their ALLIANCE WALL. Each HUB has a set of exits that randomly distributes FUEL into the NEUTRAL ZONE. A net structure located in the back of the HUB prevents FUEL launched from most prohibited areas from entering the opening.

Figure 5-6: HUB distance to the ALLIANCE WALL

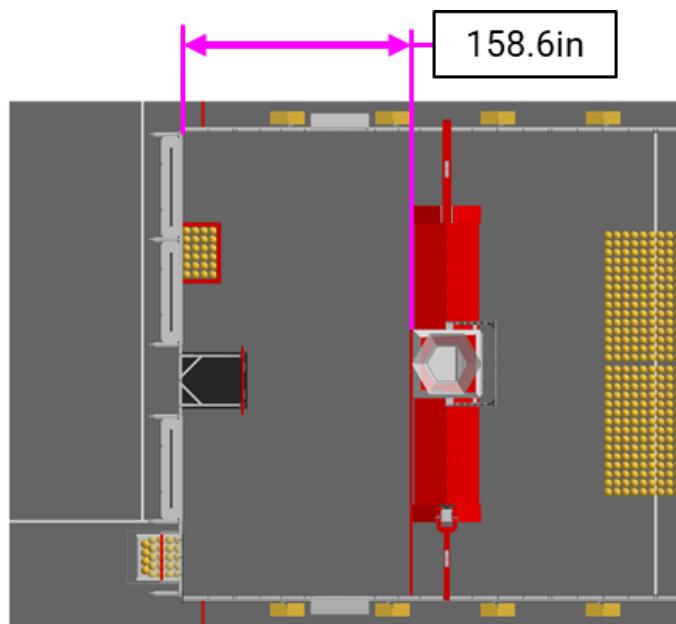


The top of each HUB has a 41.7in (~1.06m) hexagonal opening into which ROBOTS can deliver FUEL. The front edge of the opening is 72in (~1.83m) off the carpet.

Figure 5-7: HUB Dimensions

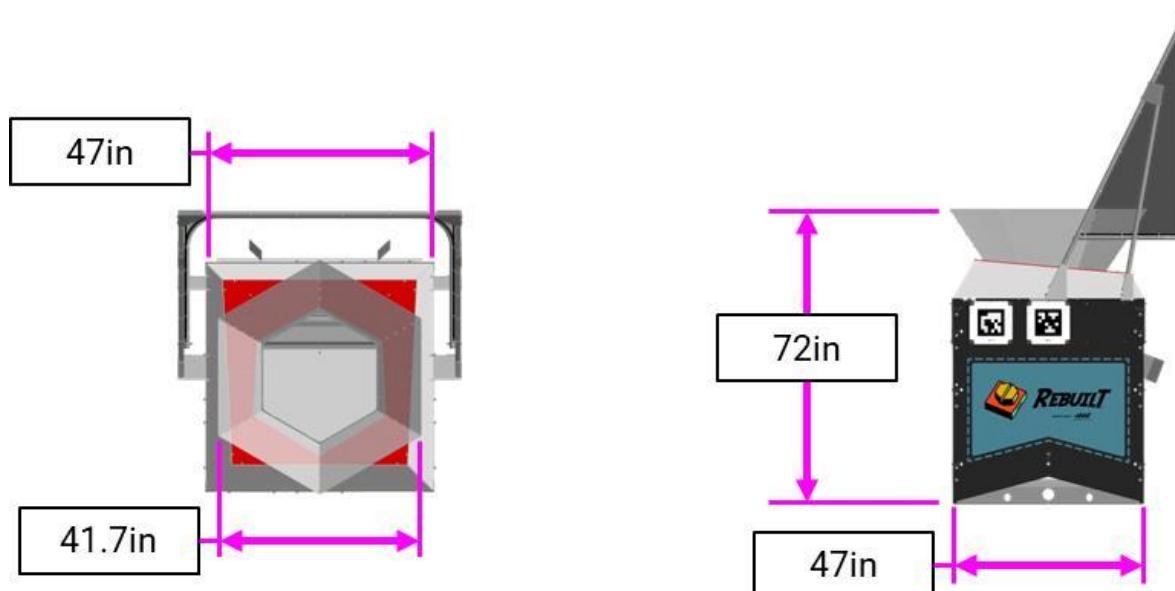

HUBS have a series of exits at the base of the HUB facing towards the NEUTRAL ZONE. FUEL processed through the HUB are distributed into the NEUTRAL ZONE via one of four exits as shown in [Figure 5-8](#). Examples of FUEL distribution from the HUB can be found on the [Playing FIELD webpage](#).

Figure 5-8: HUB exits (approximation)

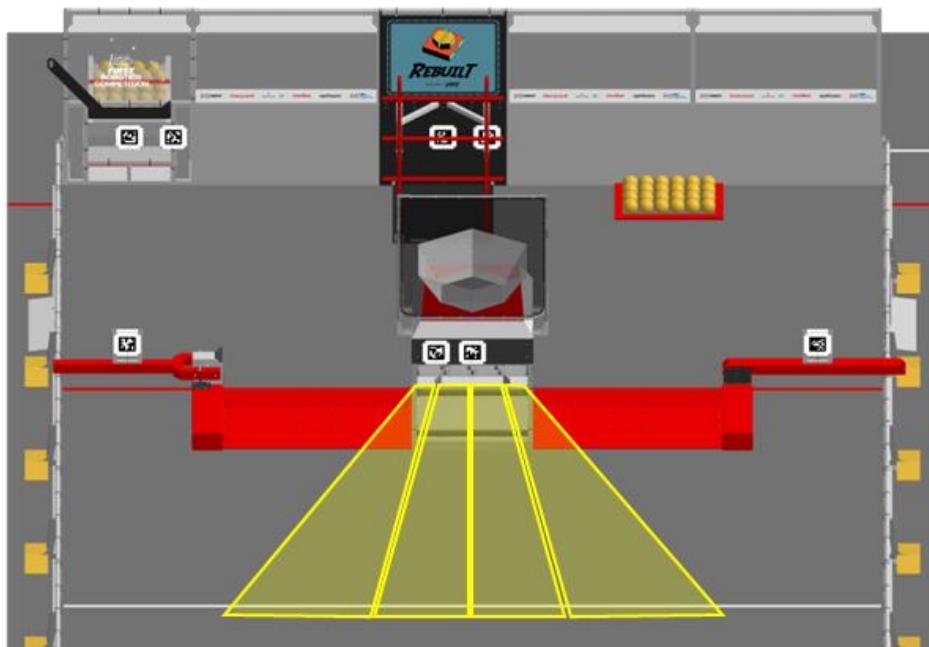


The top angles of the HUB are lit by DMX light bars that indicate if the HUB is active. See [Table 5-3](#) for more details about the various light states in the HUB.

Table 5-3: HUB Lighting

Color	Pre-MATCH	MATCH	Post-Match
ALLIANCE color at 100% brightness		HUB active	
ALLIANCE color pulsing		HUB deactivation warning. Starts 3 seconds before and continues until deactivation or end of MATCH.	N/A
ALLIANCE color with white chase	N/A	During the TRANSITION SHIFT, Indicates the ALLIANCE HUB that will be inactive in ALLIANCE SHIFT 1. HUB is active.	
Purple			FIELD is safe for FIELD STAFF.
Green			FIELD is safe for all.
White			Post MATCH 3 Second Scoring Assessment Period
Off	MATCH ready to start.	HUB is not active.	N/A

5.5 BUMP


Figure 5-9 BUMP

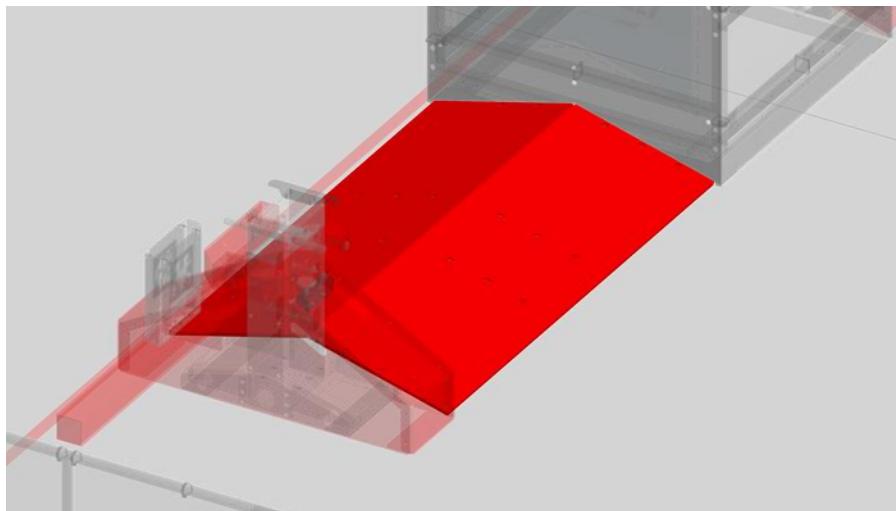

BUMPS are 73.0in (1.854m) wide, 44.4in (1.128m) deep, and 6.513in (16.54cm) tall structures on either side of the HUB that ROBOTS drive over. The top surface of each BUMP is made up of 0.5in (1.27cm) thick, ALLIANCE colored, Orange Peel textured, HDPE ramps at a 15-degree angle with one ramp sloping down towards the NEUTRAL ZONE and the other ramp sloping down towards the ALLIANCE ZONE.

5.6 TRENCH

Figure 5-10: TRENCH

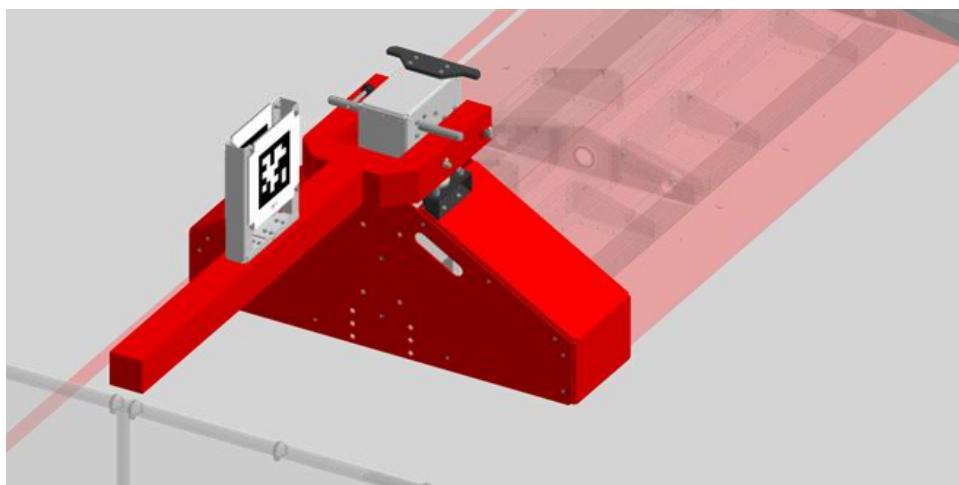


TRENCHES are a 65.65in (1.668m) wide, 47.0in (1.194m) deep, and 40.25in (1.022m) tall structure that ROBOTS drive underneath. The TRENCH extends from the guardrail to the BUMP on both sides of the FIELD. The space underneath each TRENCH arm is 50.34in (1.279m) wide, 22.25in (56.52cm) tall.

TRENCHES along the guardrail closest to the scoring table contain additional electronics to reach the HUB. The TRENCHES along the guardrail furthest from the scoring table have a pivot arm that allows the horizontal portion of the TRENCH to rotate into a vertical position for post-MATCH ROBOT retrieval and to let FIELD staff reset the field between matches. The pivot arm will be locked in the horizontal position during the MATCH.

5.7 DEPOT

Figure 5-11: DEPOT

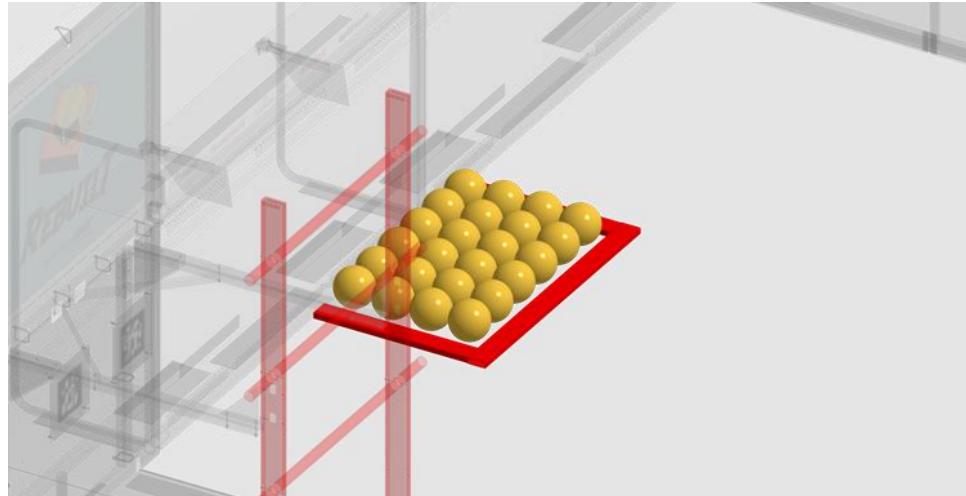

A DEPOT is a 42.0in (1.07m) wide, 27.0in (68.6cm) deep structure located along the ALLIANCE WALL. There is 1 DEPOT per ALLIANCE. DEPOTS are made up of 3.0in (7.62cm) wide, 1.0in (2.54cm) tall steel barriers. The DEPOT is secured to the carpet using hook fastener which increases the height to approximately 1.125in (2.86cm).

5.8 TOWER

Figure 5-12: TOWER



A TOWER is a 49.25in (1.251m) wide, 45.0in (1.143m) deep, and 78.25in (1.988m) tall structure made up of the TOWER WALL, TOWER BASE, UPRIGHTS, RUNGS and supporting structures. There is 1 TOWER per ALLIANCE. A TOWER is integrated into each ALLIANCE WALL between DRIVER STATION 2 and DRIVER STATION 3.

The TOWER BASE is a 39.0in (99.06cm) wide by 45.18in (1.148m) deep plate that sits on the floor and extends from the TOWER WALL. The TOWER BASE is powder-coated steel with hook fastener underneath. The edges of the TOWER BASE are approximately 0.2in (0.5cm) to 0.3in (0.8cm) tall.


The UPRIGHTS are two 72.1in (1.831m) tall, 1.5in (3.81cm) thick, 3.5in (8.89cm) deep sheet metal box frames that extend vertically up from the TOWER BASE. The distance between each UPRIGHT is 32.25in (81.92cm).

The UPRIGHTS hold three horizontal RUNGS made up of 1-1/4in Sch 40 (1.66in (4.216cm) OD) pipe. Each RUNG is centered between the UPRIGHT and extend 5.875in (14.92cm) from the outer face of the UPRIGHT on either side. The center of the LOW RUNG is located 27.0in (68.58cm) from the floor. The center of the MID RUNG is located 45.0in (114.3cm) from the floor. The center of the HIGH RUNG is 63.0in (1.6m) from the floor. The RUNGS are 18.0in (45.72cm) apart center to center.

The UPRIGHTS and RUNGS are powder-coated red or blue.

Each TOWER has additional supporting structures extending from the UPRIGHT to the TOWER WALL between approximately 28.40in (72.14cm) and 43.38in (1.102m) off the floor.


Figure 5-13: TOWER Dimensions

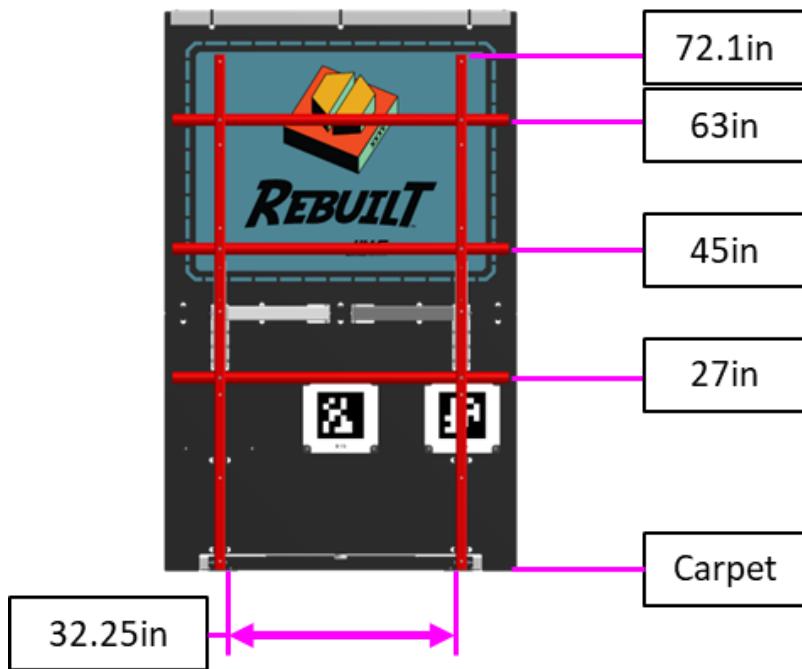

5.9 ALLIANCE WALL



The ALLIANCE WALL separates ROBOTS from DRIVE TEAM members in the ALLIANCE AREA. It consists of 3 DRIVER STATIONS, an OUTPOST, and a TOWER WALL.

Figure 5-14: ALLIANCE WALL

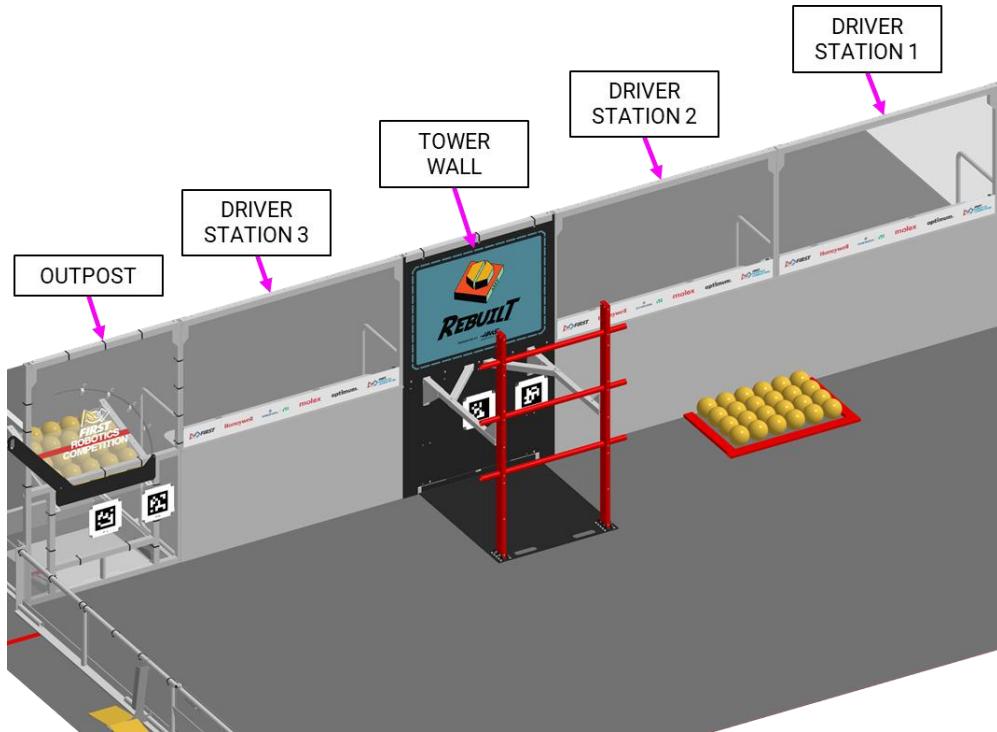

5.9.1 DRIVER STATIONS

Figure 5-15: DRIVER STATION (ALLIANCE AREA perspective and FIELD perspective)

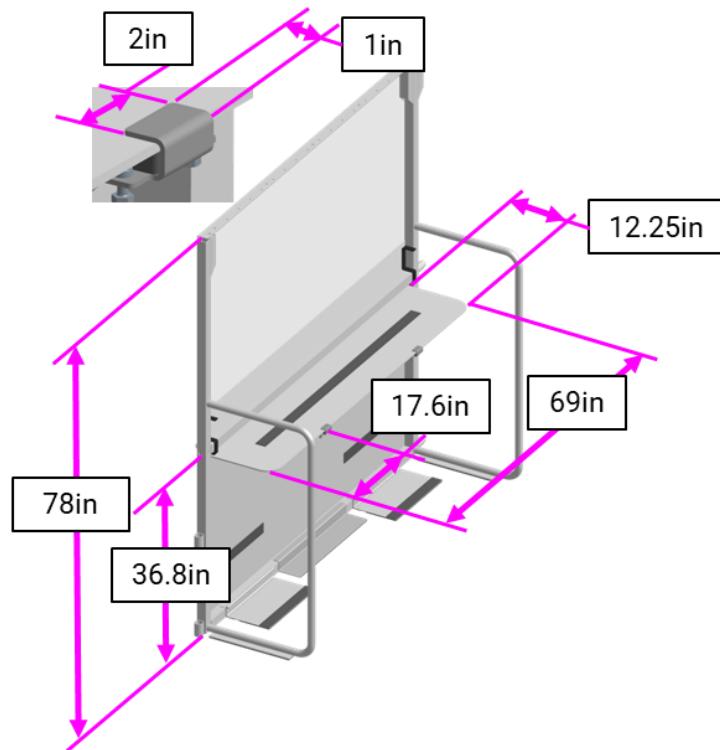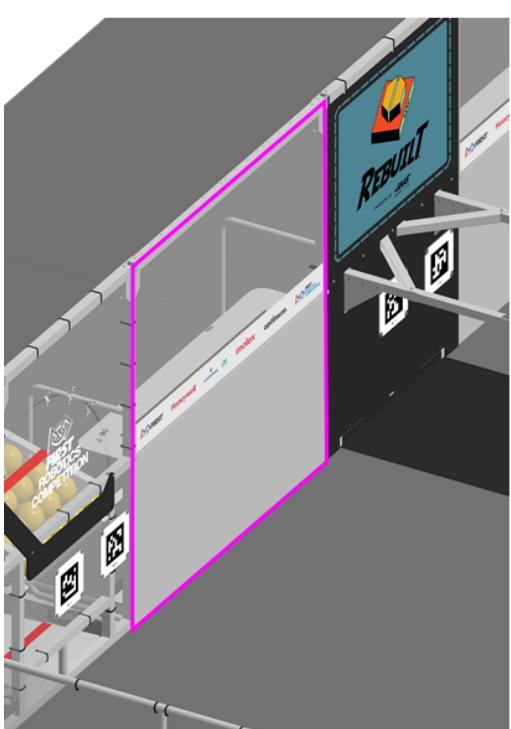

A DRIVER STATION is 1 of 3 assemblies within an ALLIANCE WALL behind which a DRIVE TEAM operates their ROBOT. Each DRIVER STATION is made from a 36.8in (93.5cm) tall diamond plate base topped with a 42in (1.07m) tall transparent plastic sheet and a top rail.

An aluminum shelf is attached to each DRIVER STATION to support an OPERATOR CONSOLE. The shelf is 69in (1.75m) wide and 12.25in (31.1cm) deep. There is a 54.0in (1.372m) long by 2.0in (nominal) wide strip of hook-and-loop tape ("loop" side) along the center of the support shelf that may be used to secure the OPERATOR CONSOLE to the shelf. The shelf also includes two clips to hold the shelf in place with a 1.0in (2.5cm) wide by 2.0in (5.1cm) deep tab that sits on the top surface of the shelf.

There is a 6.0in (15.2cm) tall sponsor panel in each DRIVER STATION. The top of this panel is 42.9in (1.09m) from the carpet.

There may be a ramp available at events for DRIVE TEAMS with limited mobility. It is designed to allow an individual using a wheelchair to access the DRIVER STATION shelf and/or see onto the FIELD; however, this accommodation is available to anyone who has a wheelchair or other physical disability that obstructs their view of the FIELD. Teams should speak to the FTA before MATCHES begin to ensure that it is available for each of the team's MATCHES.

This ramp is available at many Regional and District events. For questions, please connect with the local [Program Delivery Partner](#).

Teams should also speak to the FTA for any other FIELD side accommodations needed.

Each DRIVER STATION contains the following elements for DRIVE TEAMS:

- 1 Ethernet cable: attaches to the Ethernet port of the OPERATOR CONSOLE and provides connectivity to the FIELD Management System (FMS).
- 1 120VAC NEMA 5-15R power outlet (i.e. standard US outlet): located on each DRIVER STATION shelf and protected by its own 2-Amp circuit breaker. It can be used to power the OPERATOR CONSOLE. DRIVE TEAMS are responsible for monitoring their power consumption as a tripped breaker in the outlet does not constitute an ARENA FAULT. For some events in regions that don't use NEMA 5-15 shaped outlets, event organizers may install appropriate plug adapters to be used throughout the event.
- 1 Emergency Stop (E-Stop) button: located on the left side of the DRIVER STATION shelf and is used to deactivate a ROBOT in an emergency.
- 1 Autonomous Stop (A-Stop) button: located on the right side of the DRIVER STATION shelf and is used to DISABLE a ROBOT during AUTO.
- 1 team sign: located at the top of each DRIVER STATION. The FIELD facing side of the sign displays the team number in the ALLIANCE color. The ALLIANCE AREA side of the sign displays the following information in red:
 - o Pre-MATCH: team number and ROBOT connection state
 - o During Qualification MATCHES:
 - Current SHIFT and time remaining in that period,
 - A shows for AUTO when both ALLIANCE's HUBS are active
 - T shows for the TRANSITION SHIFT when both ALLIANCE's HUBS are active
 - R shows when the Red ALLIANCE'S HUB is active

- B shows when the Blue ALLIANCE'S HUB is active
- E shows for END GAME when both ALLIANCE's HUBS are active
- Progress towards the FUEL Ranking Points. This shows total scored out of the ENERGIZED RP and once that threshold passes it shows out of the SUPERCHARGED RP
- AUTO TOWER points, and
- remaining MATCH period time.

Figure 5-16 Back of team sign (during Qualification MATCH)



- During the MATCH during Playoff MATCHES:
 - Which MATCH period is active and time remaining in that period,
 - MATCH scores, and
 - remaining MATCH period time.

Figure 5-17 Back of team sign (during Playoff MATCH)



- 1 timer (in DRIVER STATION 2 only): displays the official time remaining in the MATCH period on the FIELD-facing side (in white) and on the team facing side the following information in red:
 - remaining MATCH period time, and
 - MATCH scores.

Figure 5-18 Back of timer



- 1 team LED stack: indicates ALLIANCE color, ROBOT status, E-Stop and A-Stop status, and is centered at the top of each DRIVER STATION.


The stack includes 2 identical ALLIANCE-colored ROBOT status LEDs above a third amber A-stop/E-stop LED. LED states are as follows:

- ROBOT status LEDs
 - Solid: indicates that the ROBOT is connected and enabled. This only happens during a MATCH.
 - Blinking: indicates that either the FMS is preset for the MATCH and the ROBOT is not connected yet, or it's during a MATCH and the corresponding ROBOT has lost connectivity, or the E-stop was pressed.

- Off: indicates that the ROBOT is linked and DISABLED prior to the start of the MATCH, or the ROBOT is BYPASSED. This light is also off, regardless of ROBOT connection status, after the MATCH has concluded.
- A-Stop/E-stop LED
 - Solid: the ROBOT is DISABLED due to a press of the team E-stop button, the FIELD E-stop button, or by the scorekeeper via the FMS.
 - Blinking: the ROBOT is DISABLED for the remainder of AUTO due to a press of the team A-Stop button.
 - Off: the ROBOT is not DISABLED by the FIELD.
- FMS hardware and wiring: mostly located below shelves in the 2 DRIVER STATIONS closer to the scoring table.

5.9.2 OUTPOST

Figure 5-19 OUTPOST

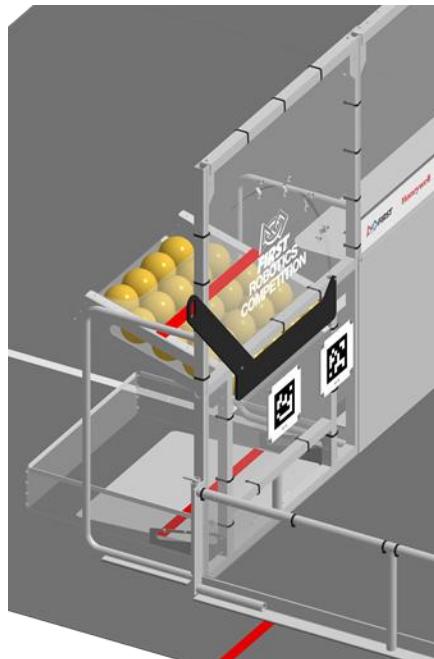

An OUTPOST is an assembly through which HUMAN PLAYERS feed FUEL into the FIELD and ROBOTS can deliver FUEL to their HUMAN PLAYERS. There are 2 OUTPOSTS, 1 on either end of the FIELD connecting the guardrail to the ALLIANCE WALL. Each OUTPOST has a 31.8in (80.8cm) wide by 7.0in (17.8cm) tall opening through which FUEL passes to the FIELD. The bottom of the opening is 28.1in (71.4cm) off the floor.

A 15.0° sloped tunnel, called the CHUTE, leads to the upper opening in the OUTPOST. The CHUTE can hold approximately 25 FUEL at a time retained by the CHUTE DOOR. The CHUTE DOOR is an HDPE arm on a pivot that can be rotated approximately 90 degrees by the HUMAN PLAYER to open or close the CHUTE.

At the base of the OUTPOST is an opening 32.0in (81.3cm) wide by 7.0in (17.8cm) tall where ROBOTS can push FUEL into the CORRAL. The bottom of the opening is 1.88in (4.77cm) off the ground. The opening is divided in the center by a vertical 1-1/4in Sch 40 (1.66in (4.216cm) OD) pipe. The CORRAL is made up of 8.13in (20.6cm) tall polycarbonate panels that create a 35.8in (90.8cm) wide, 37.6in (95.5cm) deep area on the floor in which FUEL can be stored.

The CHUTE and CORRAL each feature an ALLIANCE-colored tape line that indicates where DRIVE TEAMS may be restricted from reaching. The near edge of the CORRAL tape is 12.7in (32.3cm) from the FIELD-facing wall of the OUTPOST. The near edge of the CHUTE tape line is 12.9in (32.8cm) from the FIELD-facing wall of the OUTPOST.

There are 2 stools available at events for DRIVE TEAMS to use. Each stool is 23.0in (58.42cm) wide by 13.5in (34.29cm) deep, 6.25in (15.88cm) tall, and rated for 300lb (136.0kg).

It is specially intended to allow individuals who are shorter, better sightlines onto the FIELD; however, this accommodation is available to anyone who has another physical disability that obstructs their view of the FIELD.

Only 2 stools are available, and priority will be given to those with the biggest need. Teams should speak to the FTA before MATCHES begin to request that it is available for each of the team's MATCHES. Teams may also purchase their own ([Item Number: 779ac01stpm](#)) or bring an equivalent (e.g. not foldable and similar dimensions) version to the event to guarantee use for every match.

This stool is available at all events within the US & Canada and equivalents are available at international events. For questions, please connect with the local [Program Delivery Partner](#).

5.10 SCORING ELEMENTS

SCORING ELEMENTS are items that teams use to score points. There is one type of SCORING ELEMENT used in REBUILT: FUEL.

In REBUILT, a ROBOT may CONTROL any number of SCORING ELEMENTS after the start of the MATCH.

5.10.1 FUEL

Figure 5-20 FUEL



A FUEL is a 5.91in (15.0cm) diameter, high density foam ball. FUEL is a custom made SCORING ELEMENT available for purchase on the AndyMark website, [am-5801](#).

FUEL has a weight of between 0.448-0.500lb (~0.203-0.227kg).

FUEL undergoes wear and tear during a competition. Generally, a FUEL that still appears to look approximately like a FUEL is considered a FUEL for the purposes of rule evaluation and scoring, whether damaged or not. Small chunks of a FUEL are not considered a FUEL.


Most new FUEL will have small impressions due to being pressed against other FUEL or the sides of the packaging during shipping. These impressions are purely cosmetic and do not affect the function of the FUEL. Most impressions will gradually disappear as the FUEL is used.

5.11 AprilTags

AprilTags are 8.125in (20.64cm) square targets located on the HUB, TOWER WALL, OUTPOST, and TRENCHES. There are 32 unique markers on the FIELD positioned as shown in [Figure 5-21](#).


Figure 5-21 AprilTag Locations

← SCORING TABLE →

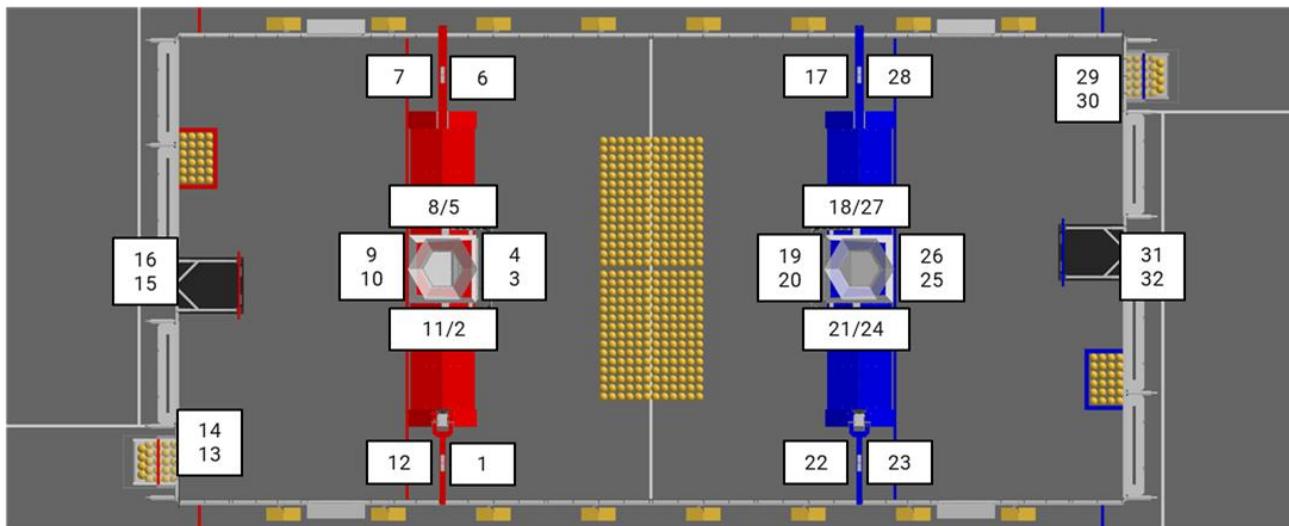


All markers are from the 36h11 tag family, IDs 1-32. All AprilTags are mounted to and centered on a 10.5in (26.67cm) square polycarbonate panel. Each marker has an identifying text label. If AprilTags experience wear and marking during MATCHES they are repaired with gaffers tape.

Figure 5-22 AprilTag sizing

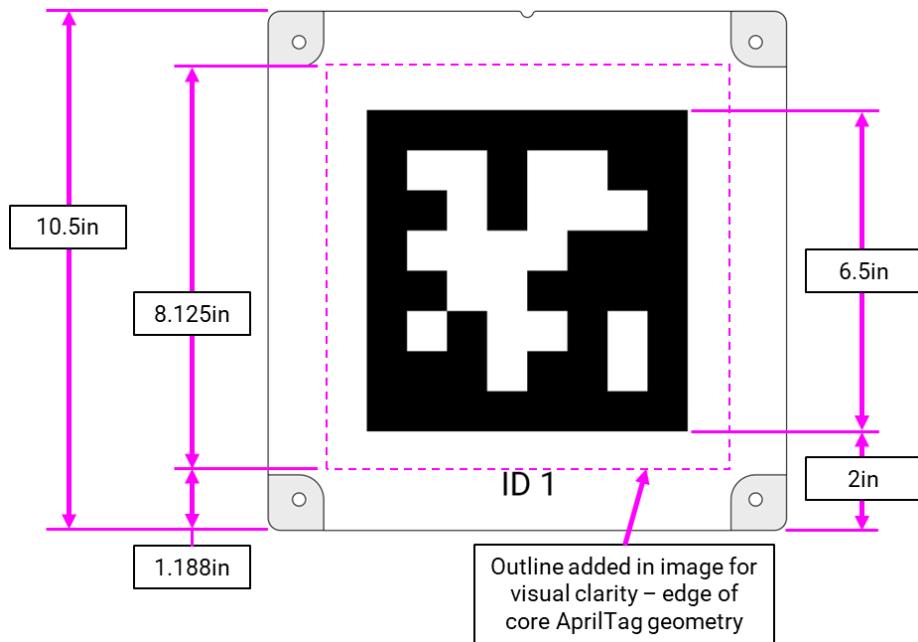


HUB AprilTags (IDs 2, 3, 4, 5, 8, 9, 10, 11, 18, 19, 20, 21, 24, 25, 26, 27) are located on all four faces of the HUB. Each face has two AprilTags with centers located 44.25in (1.124m) off the floor as shown in [Figure 5-23](#). One AprilTag per face is centered and the other AprilTag is horizontally offset.

Figure 5-23 HUB AprilTags

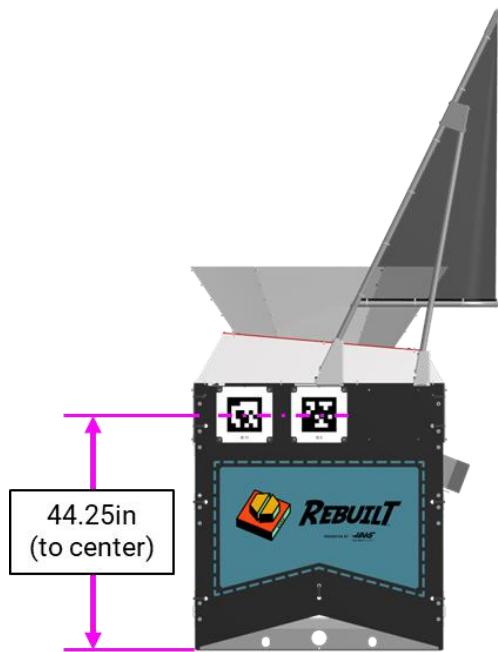


Two AprilTags (IDs 15, 16, 31, 32) are located on each TOWER WALL with centers 21.75in (55.25cm) off the floor as shown in [Figure 5-24](#). One AprilTag per TOWER is centered and the other AprilTag is horizontally offset.

Figure 5-24 TOWER WALL AprilTags

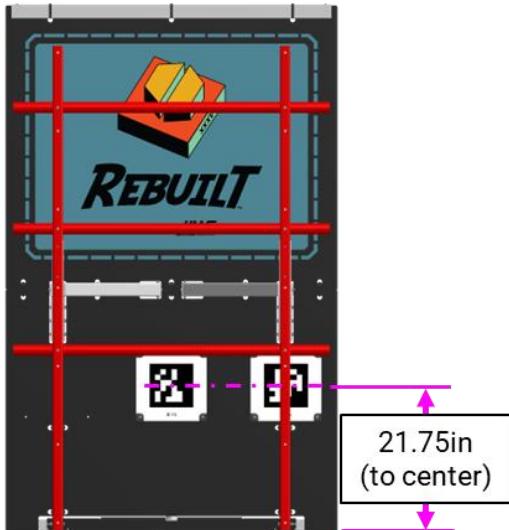


Two AprilTags (IDs 13, 14, 29, 30) are located on each OUTPOST with centers 21.75in (55.25cm) off the floor as shown in [Figure 5-25](#). One AprilTag per OUTPOST is centered with the CHUTE and CORRAL openings and the other AprilTag is horizontally offset.

Figure 5-25 OUTPOST AprilTags

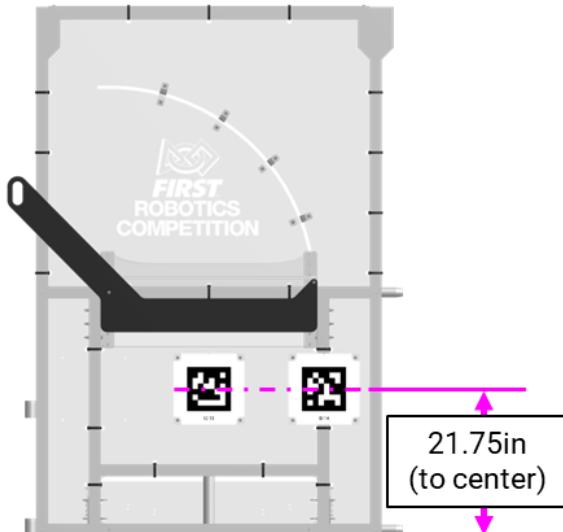

TRENCH AprilTags (IDs 1, 6, 7, 12, 17, 22, 23, 28) are attached to mounting brackets located on the top surface of the horizontal arm of the TRENCH. Each TRENCH has two AprilTags, one facing the ALLIANCE ZONE and one facing the NEUTRAL ZONE. TRENCH AprilTags are approximately centered on the opening under the TRENCH arm and their centers are located 35in (88.9cm) off the floor as shown in [Figure 5-26](#).

Figure 5-26 TRENCH AprilTags

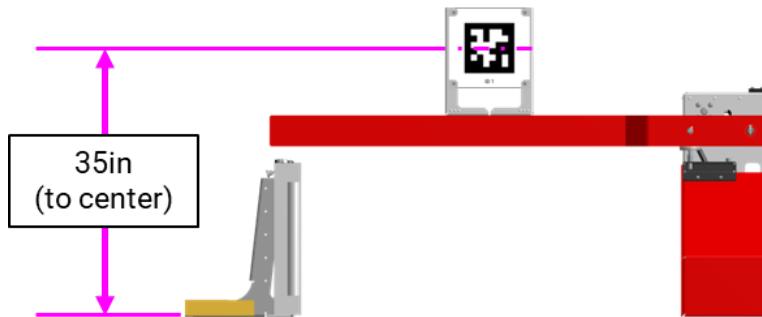

For further marker locating information please refer to the [2026 Field Dimension Drawings](#). Printable copies of the field AprilTags can be found on the [Playing FIELD webpage](#).

5.12 The FIELD Management System

The FIELD Management System (FMS) is all the electronics responsible for sensing and controlling the FIRST Robotics Competition FIELD. The FMS encompasses all FIELD electronics, including computers, REFEREE touchscreens, the wireless access point, sensors, stack lights, A-Stops and E-Stops, etc.

When a DRIVE TEAM connects the Ethernet cable from their assigned DRIVER STATION to their OPERATOR CONSOLE, the Driver Station Software on the OPERATOR CONSOLE computer communicates with FMS. Once connected, the open ports available are described in [Table 8-5](#).

Note that ROBOT code cannot be deployed while connected to the FMS. Additional information about the FMS may be found in the [FMS Whitepaper](#).

The FMS alerts participants to milestones in the MATCH using audio cues detailed in [Table 5-4](#). Please note that audio cues are intended as a courtesy to participants and not intended as official MATCH markers. If there is a discrepancy between an audio cue and the FIELD timers, the FIELD timers are the authority.

Table 5-4: Audio Cues

Event	Timer Value(s)	Audio Cue
MATCH start	0:20 (for AUTO)	"Cavalry Charge"
AUTO ends	0:00 (for AUTO)	"Buzzer"
TELEOP & TRANSITION begins	2:20	"3 Bells"
ALLIANCE SHIFT starts	2:10 1:45 1:20 0:55	"POWER UP – Linear Popping"
END GAME begins	0:30	"Steam Whistle"
MATCH end	0:00	"Buzzer"
MATCH stopped	n/a	"Foghorn"

5.13 FIELD STAFF


FIELD STAFF are responsible for making sure the MATCHES are cycled through efficiently, fairly, safely, and with a spirit of cooperation, *Gracious Professionalism*, and generosity of spirit. FIELD STAFF roles are filled by volunteers from the community who prepare for the event with thorough training and certification. There are 3 FIELD-side key volunteer roles with whom teams should be familiar and are encouraged to use as resources to make their event experience valuable (in whatever way the team defines “valuable”).

- **Head REFEREE** – trains, directs, and supervises REFEREES. They oversee all scoring processes and procedures in collaboration with the *FIRST* Technical Advisor (FTA). They interact with STUDENTS, volunteers, and contracted/*FIRST* staff. The Head REFEREE is positioned between the FIELD and the scoring table and wears a yellow shirt. The Head REFEREE has final authority for decisions regarding MATCH scores, penalties, and YELLOW and RED CARD assignments. For additional details, please refer to the [Head REFEREE role description](#).
- ***FIRST*Technical Advisor (FTA)** - ensures events run smoothly, safely, and in accordance with *FIRST* requirements. The FTA collaborates with *FIRST* staff, event staff, and other event volunteers in many different areas at events. The FTA is the liaison between *FIRST* HQ and the event for all things related to the FIELD, ROBOTS, and game, acts as a team advocate for all teams competing at the event and is a major point of escalation and conflict resolution for the event. For additional details, please refer to the [FTA role description](#).
- **FIELD Supervisor** - directs activity on the FIELD to ensure efficient execution of the MATCHES, pacing of the event, and smooth flow of MATCH play. FIELD Supervisors are responsible for ensuring the FIELD is intact and lead FIELD Reset teams, who are responsible for resetting the FIELD after each MATCH in preparation for the subsequent MATCH. For additional details, please refer to the [FIELD Supervisor role description](#).



6 Game Details

Figure 6-1 REBUILT

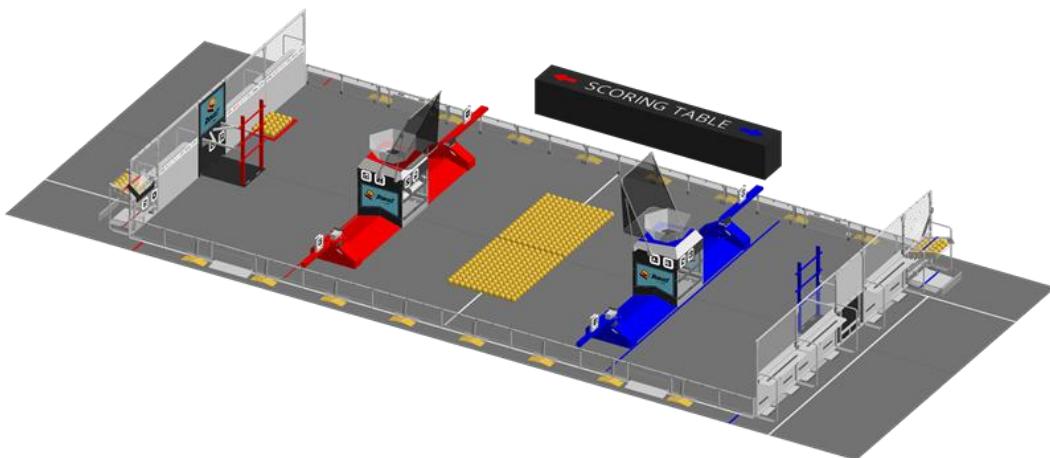

In REBUILT, 2 ALLIANCES (an ALLIANCE is a cooperative of up to 4 FIRST Robotics Competition teams) play MATCHES, set up and implemented per the details described below.

6.1 MATCH Overview

MATCHES run on 7–10-minute cycles, which consist of pre-MATCH setup, the 2-minute and 40-second MATCH, and the post-MATCH reset.

During the MATCH, ROBOTS collect FUEL and score in their HUB. HUMAN PLAYERS can deliver FUEL to ROBOTS or score them in their HUB.

ROBOTS conclude the MATCH climbing on their TOWER.

6.2 DRIVE TEAM

A DRIVE TEAM is a set of up to 5 people from the same FIRST Robotics Competition team responsible for team performance for a specific MATCH. There are 4 specific roles on a DRIVE TEAM which ALLIANCES can use to assist ROBOTS, and no more than 1 member of the DRIVE TEAM may be a non-STUDENT.

The intent of the definition of DRIVE TEAM and DRIVE TEAM related rules is that, barring extenuating circumstances, the DRIVE TEAM consists of people who arrived at the event affiliated with that team and are responsible for their team's and ROBOT'S performance at the event (this means a person may be affiliated with more than 1 team).

The intent is not to allow teams to "adopt" members of other teams for strategic advantage for the loaning team, borrowing team, and/or their ALLIANCE (e.g. an ALLIANCE CAPTAIN believes 1 of their DRIVERS has more experience than a DRIVER on their first pick, and the teams agree the first pick team will "adopt" that DRIVER and make them a member of their DRIVE TEAM for Playoffs).

The definition isn't stricter for 2 main reasons. First, to avoid additional bureaucratic burden on teams and event volunteers (e.g. requiring that teams submit official rosters that Queuing must check before allowing a DRIVE TEAM into the ARENA). Second, to provide space for exceptional circumstances that give teams the opportunity to display *Gracious Professionalism* (e.g. a bus is delayed, a DRIVE COACH has no DRIVERS, and their pit neighbors agree to help by loaning DRIVERS as temporary members of the team until their bus arrives).

Table 6-1 DRIVE TEAM roles

Role	Description	Max./ Criteria
DRIVE TEAM		
DRIVE COACH	a guide or advisor	1 any team member, must wear "DRIVE COACH" button
TECHNICIAN	a resource for ROBOT troubleshooting, setup, and removal from the FIELD	1 any team member, must wear "TECHNICIAN" button
DRIVER	an operator and controller of the ROBOT	3 STUDENT, must wear a "DRIVE TEAM" button
HUMAN PLAYER	a SCORING ELEMENT manager	

A STUDENT is a person who has not completed high-school, secondary school, or the comparable level as of September 1 prior to Kickoff.

The TECHNICIAN provides teams with a technical resource for pre-MATCH setup, ROBOT connectivity, OPERATOR CONSOLE troubleshooting, and post-MATCH removal of the ROBOT. Some pre-MATCH responsibilities for the TECHNICIAN may include, but are not limited to:

- location of the ROBOT radio, its power connection, and understanding of its indicator lights
- location of the roboRIO and understanding of its indicator lights
- username and password for the OPERATOR CONSOLE
- restarting the Driver Station and Dashboard software on the OPERATOR CONSOLE
- changing the bandwidth utilization (e.g. camera resolution, frame rate, etc.)
- changing a battery
- charging pneumatics

While the TECHNICIAN may be the primary technical member of the DRIVE TEAM, all members of the DRIVE TEAM are encouraged to have knowledge of the basic functionality of the ROBOT, such as the location and operation of the main circuit breaker, connecting and resetting joysticks or gamepads from the OPERATOR CONSOLE, and removing the ROBOT from the FIELD.

Per [Table 6-1](#), each team is allotted up to 3 STUDENTS who may be assigned as DRIVERS or HUMAN PLAYERS. If multiple teams on an ALLIANCE do not have 3 STUDENTS at the event to act in these roles, 1 of

the ALLIANCE'S teams may substitute a STUDENT TECHNICIAN as a HUMAN PLAYER for that MATCH only. In this case,

- the Head REFEREE must be notified,
- all HUMAN PLAYER rules now apply to this DRIVE TEAM member, and
- this DRIVE TEAM member is no longer considered a TECHNICIAN for that MATCH.

6.3 Setup

Before each MATCH begins, FIELD STAFF stage SCORING ELEMENTS as described in section [6.3.4 SCORING ELEMENTS](#). DRIVE TEAMS stage their ROBOTS (as described in section [6.3.3 ROBOTS](#)) and OPERATOR CONSOLES (as described in section [6.3.2 OPERATOR CONSOLES](#)). Then, DRIVE TEAMS take their places as described in section [6.3.1 DRIVE TEAMS](#).

6.3.1 DRIVE TEAMS

DRIVE TEAMS prepare for a MATCH by staging in the appropriate areas, according to their role on the DRIVE TEAM, and by identifying themselves accordingly. DRIVE TEAM starting conditions are listed below, and a DRIVE TEAM obstructing or delaying any of the conditions is at risk of violating [G301](#).

- A. only DRIVE TEAM members assigned to the upcoming MATCH are present,
- B. for Qualification MATCHES only DRIVE TEAM members whose ROBOTS have passed initial, complete Inspection are present,
- C. any number of HUMAN PLAYERS are staged in their OUTPOST AREAS,
- D. HUMAN PLAYERS not included in C, DRIVERS, and DRIVE COACHES are in their ALLIANCE AREA and behind the HUMAN STARTING LINE,
- E. TECHNICIANS are in the event-designated area near the FIELD,
- F. DRIVE TEAM members clearly display their designated buttons above their waists (DRIVE COACH - "Drive Coach", DRIVERS and HUMAN PLAYERS - "Drive Team", and TECHNICIAN - "Technician"), and
- G. if a Playoff MATCH, the ALLIANCE CAPTAIN clearly displays their designated ALLIANCE CAPTAIN identifier (e.g. hat or armband).

6.3.2 OPERATOR CONSOLES

DRIVE TEAMS set up their OPERATOR CONSOLE as soon as the DRIVE TEAM from the previous MATCH has cleared the area. OPERATOR CONSOLES must be compliant with all relevant rules, specifically those in section [8.9 OPERATOR CONSOLE](#). The OPERATOR CONSOLE is plugged into the team's assigned DRIVER STATION, as indicated on the team sign. Any control devices worn or held by their HUMAN PLAYERS and/or DRIVERS during the MATCH must be disconnected from or set on or beside the OPERATOR CONSOLE before the MATCH can begin. A DRIVE TEAM obstructing or delaying OPERATOR CONSOLE setup is at risk of violating [G301](#).

For the purposes of FIRST Robotics Competition, any device connected to the OPERATOR CONSOLE is considered a control device because REFEREES are not expected to differentiate between devices that can or cannot control the ROBOT.

6.3.3 ROBOTS

DRIVE TEAMS stage their ROBOT in accordance with [G303](#). A DRIVE TEAM obstructing or delaying ROBOT setup requirements is at risk of violating [G301](#).

If order of placement matters to either or both ALLIANCES, the ALLIANCE notifies the Head REFEREE during setup for that MATCH, and the Head REFEREE instructs ALLIANCES to alternate placement of ROBOTS. In a Qualification MATCH, REFEREE instructions are that ROBOTS are placed in the following order:

1. red DRIVER STATION 1 ROBOT
2. blue DRIVER STATION 1 ROBOT
3. red DRIVER STATION 2 ROBOT
4. blue DRIVER STATION 2 ROBOT
5. red DRIVER STATION 3 ROBOT
6. blue DRIVER STATION 3 ROBOT


In an intra-Division Playoff MATCH, the same pattern is applied, but instead of blue ALLIANCE placing last, the higher seeded ALLIANCE (regardless of color) places last. For inter-Division Playoff MATCHES, the ALLIANCE that places last is determined by a (real or virtual) coin flip facilitated by the Head REFEREE where a “heads” result invites the red ALLIANCE to place last.

FIELD STAFF may ask teams to indicate their intended location and are not required to wait for a team to stage their ROBOT in its exact location before moving to the next team.

6.3.4 SCORING ELEMENTS

Before each MATCH begins, FIELD STAFF stage SCORING ELEMENTS.

Figure 6-2 SCORING ELEMENT staging positions

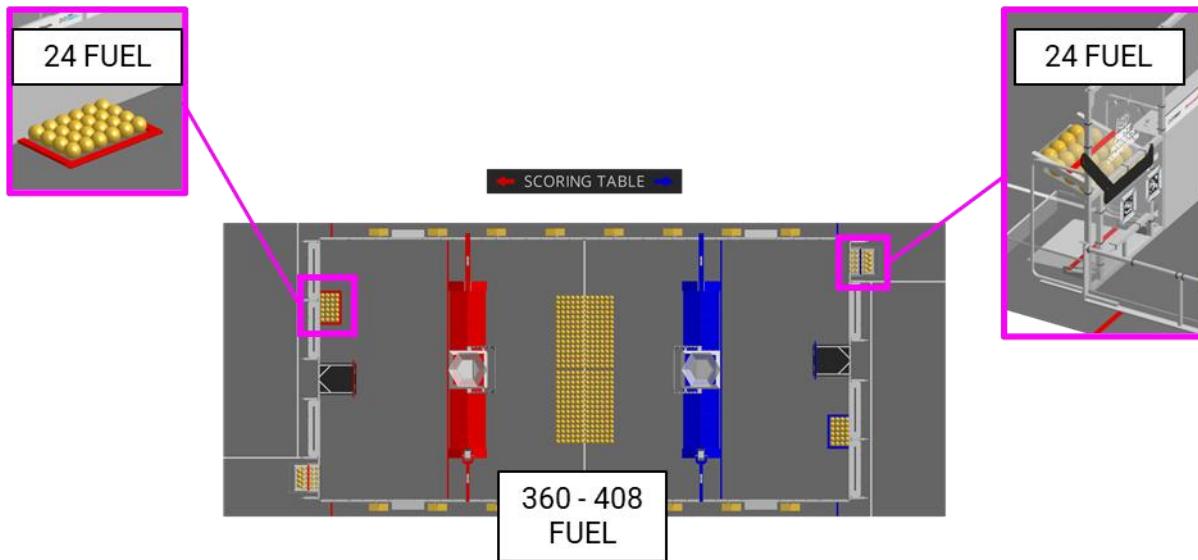

504 FUEL are staged for each MATCH as follows (reference [Figure 6-2](#)):

- A. 24 FUEL are staged in each DEPOT (FUEL may not be in a uniform layout),
- B. 24 FUEL are staged in each OUTPOST CHUTE,
- C. 8 FUEL may be preloaded in each ROBOT by the ROBOT'S DRIVE TEAM, such that each FUEL is fully supported by the ROBOT (up to 48 total; a FUEL not pre-loaded in a ROBOT is staged in the NEUTRAL ZONE), and
- D. remaining FUEL are arranged in the NEUTRAL ZONE through a process listed in Section 6.3.4.1 (360 to 408, depending on how many are preloaded in ROBOTS).


Due to the high number of SCORING ELEMENTS in REBUILT, FIELD STAFF may not be able to perfectly count all FUEL put into the NEUTRAL ZONE. The number of FUEL staged in the NEUTRAL ZONE for any given match may fluctuate around +/- 24 FUEL.

For District Championship and/or FIRST Championship events, the quantity of FUEL staged in a MATCH may increase up to 600. If this happens, the additional FUEL will be included as part of an updated FUEL arrangement in the NEUTRAL ZONE.

6.3.4.1 NEUTRAL ZONE FUEL ARRANGEMENT

The NEUTRAL ZONE is staged by the FIELD crew by corralling all FUEL within a bounding box that is approximately 206.0in (5.23m) wide and 72.0in (1.83m) deep. The bounding box has a solid divider in the middle that is 2.0in (5.08cm) wide that will result in a small gap in FUEL. The dividers will be removed prior to the start of the MATCH.

Figure 6-3 NEUTRAL ZONE FUEL setup

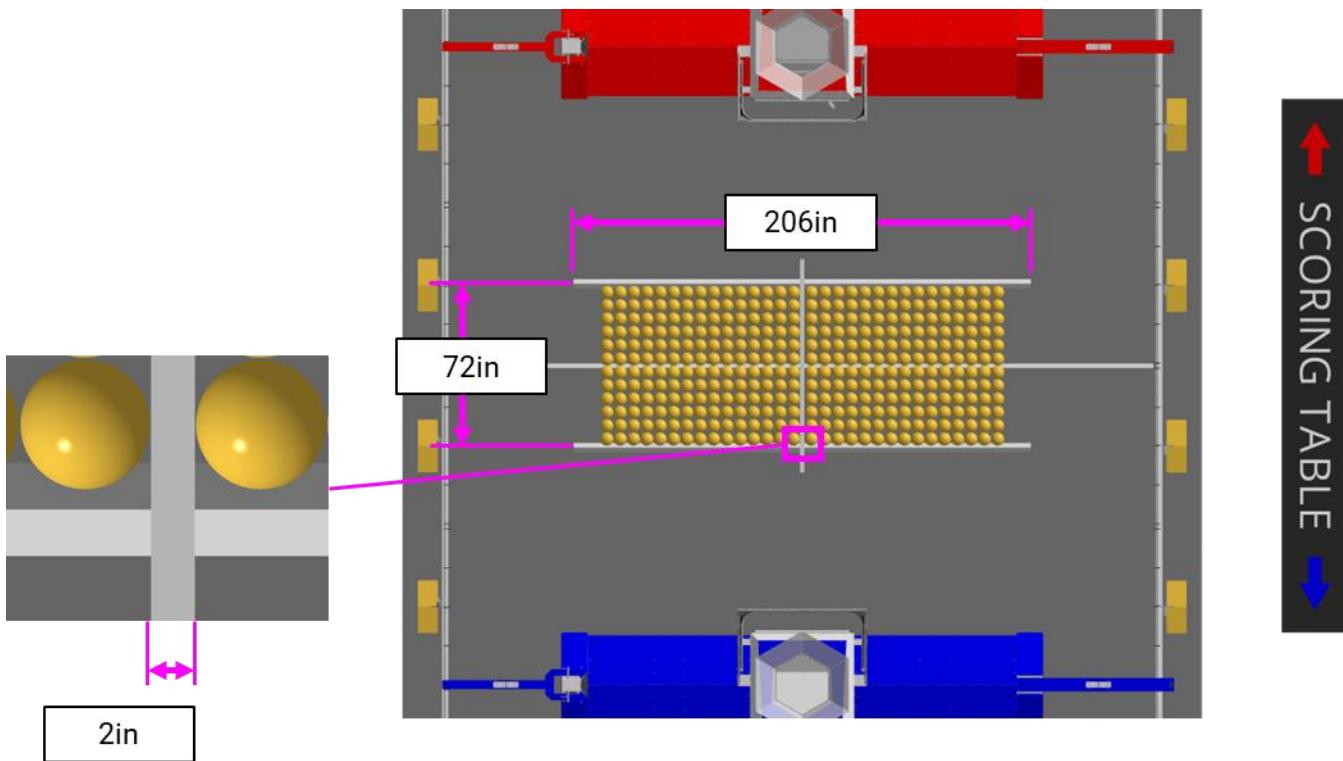

The expected result of the dispersal is a roughly equal split of FUEL on both sides of the CENTER LINE. The dispersal between the scoring table side and non-scoring table side of the field is expected to vary match to match.

The placement of FUEL in the NEUTRAL ZONE is not intended to be in a perfect grid. Teams should expect variances in the placement of FUEL in the NEUTRAL ZONE at the start of the MATCH.

6.4 MATCH Periods

The first period of each MATCH is 20 seconds long and called the Autonomous Period (AUTO). During AUTO, ROBOTS operate without any DRIVE TEAM control or input. ROBOTS score SCORING ELEMENTS, may leave their ROBOT STARTING LINE and retrieve additional SCORING ELEMENTS, and may climb their TOWER. There is a 3-second delay between AUTO and TELEOP for scoring purposes as described in section [6.5 Scoring](#).

The second period of each MATCH is the remaining 2 minutes and 20 seconds (2:20) and called the Teleoperated Period (TELEOP). During TELEOP, DRIVERS remotely operate ROBOTS to retrieve and score SCORING ELEMENTS and climb their TOWER. TELEOP is split into further segments: the TRANSITION SHIFT, the ALLIANCE SHIFTS, and END GAME. There are four ALLIANCE SHIFTS named SHIFT 1, SHIFT 2, SHIFT 3, and SHIFT 4. The duration of each timeframe is shown in [Table 6-2](#).

Table 6-2: MATCH SHIFTS

MATCH Period	MATCH Timeframe	Duration	Timer Values
AUTO	AUTO	20 Seconds	0:20 – 0:00
TELEOP	TRANSITION SHIFT	10 Seconds	2:20 – 2:10
	SHIFT 1	25 Seconds	2:10 – 1:45
	SHIFT 2	25 Seconds	1:45 – 1:20
	SHIFT 3	25 Seconds	1:20 – 0:55
	SHIFT 4	25 Seconds	0:55 – 0:30
	END GAME	30 Seconds	0:30 – 0:00

6.4.1 HUB Status

During the MATCH, the status of a HUB can be either active or inactive. FUEL scored in an active HUB is worth MATCH points but FUEL scored in an inactive HUB will not earn any points as shown in [Table 6-3](#). Both ALLIANCE HUBS are active during AUTO, the TRANSITION SHIFT, and END GAME. During the ALLIANCE SHIFTS, only one ALLIANCE HUB will be active while the other ALLIANCE'S HUB becomes inactive.

The status of both HUBS during the ALLIANCE SHIFTS is based on the results of AUTO. The ALLIANCE that scores the most FUEL during AUTO will have their HUB set to inactive for SHIFT 1 while their opponent's HUB will be active, as shown in [Table 6-3](#). HUB statuses will then alternate at the start of each following ALLIANCE SHIFT, until the start of END GAME where both HUBS return to active. If both ALLIANCES score the same number of FUEL during AUTO, the FMS will randomly select an ALLIANCE and use its HUB status order for the ALLIANCE SHIFTS during the MATCH.

FMS Game Data relays the ALLIANCE who scored more FUEL during AUTO, or the ALLIANCE selected by FMS, to all OPERATOR CONSOLES simultaneously at the start of TELEOP. Lights on the HUB will also indicate the ALLIANCE HUB that will be inactive in ALLIANCE SHIFT 1 as noted in [Table 5-3](#). Specific details on the format of the data can be found on the [2026 FRC Control System website](#).

Table 6-3: Hub Status during MATCH Timeframes

AUTO Result:	RED ALLIANCE scores more FUEL during AUTO or is selected by the FMS	BLUE ALLIANCE scores more FUEL during AUTO or is selected by the FMS		
MATCH Timeframe (timer values)	RED ALLIANCE HUB status	BLUE ALLIANCE HUB status	RED ALLIANCE HUB status	BLUE ALLIANCE HUB status
AUTO (0:20 – 0:00)	Active	Active	Active	Active
TRANSITION SHIFT (2:20 – 2:10)	Active	Active	Active	Active
SHIFT 1 (2:10 – 1:45)	Inactive	Active	Active	Inactive
SHIFT 2 (1:45 – 1:20)	Active	Inactive	Inactive	Active
SHIFT 3 (1:20 – 0:55)	Inactive	Active	Active	Inactive
SHIFT 4 (0:55 – 0:30)	Active	Inactive	Inactive	Active
END GAME (0:30 – 0:00)	Active	Active	Active	Active

6.5 Scoring

ALLIANCES are rewarded for accomplishing various actions throughout a MATCH, including scoring FUEL, climbing their TOWER, and winning or tying MATCHES.

Rewards are granted either via MATCH points or Ranking Points (often abbreviated to RP, which increase the measure used to rank teams in the Qualification Tournament).

All scores are assessed and updated throughout the MATCH, except as follows:

- assessment of FUEL scored in the HUB continues for up to 3 seconds after the ARENA timer displays 0:00 following AUTO.
- assessment of FUEL scored in the HUB continues for up to 3 seconds after the ARENA timer displays 0:00 following TELEOP.
- assessment of AUTO TOWER points is made after the ARENA timer displays 0:00 following AUTO.

- D. assessment of TELEOP TOWER points is made 3 seconds after the ARENA timer displays 0:00 following TELEOP, or when all ROBOTS have come to rest following the conclusion of the MATCH, whichever happens first.

Assessment of FUEL scored in the HUB continues for 3 seconds after the HUB deactivates to account for FUEL processing time.

TOWER points are evaluated and scored by human volunteers. Teams are encouraged to make sure that it is obvious and unambiguous that the criteria are met.

6.5.1 SCORING ELEMENT Scoring Criteria

A FUEL is scored in the HUB once it passes through the top opening of the HUB and through the sensor array.

6.5.2 ROBOT Scoring Criteria

To qualify for TOWER points for a given LEVEL, a ROBOT must meet the following conditions:


- For LEVEL 1 – a ROBOT must no longer be touching the carpet or the TOWER BASE, or
- For LEVEL 2 – a ROBOT must be positioned such that its BUMPER covers are completely above the LOW RUNG, or
- For LEVEL 3 – a ROBOT must be positioned such that its BUMPER covers are completely above the MID RUNG.

Additionally, a ROBOT **must be** contacting at least one RUNG and/or UPRIGHT and may additionally only contact the following elements:

- A. the TOWER WALL,
- B. support structure,
- C. FUEL, and/or.
- D. another ROBOT.

A ROBOT may only earn TOWER points for LEVEL 1 during AUTO. A ROBOT may only earn TOWER points for a single LEVEL during TELEOP. A ROBOT that earns TOWER points in AUTO is eligible to earn additional TOWER points during TELEOP.

Figure 6-4: TOWER contact limitation for ROBOT Scoring Criteria

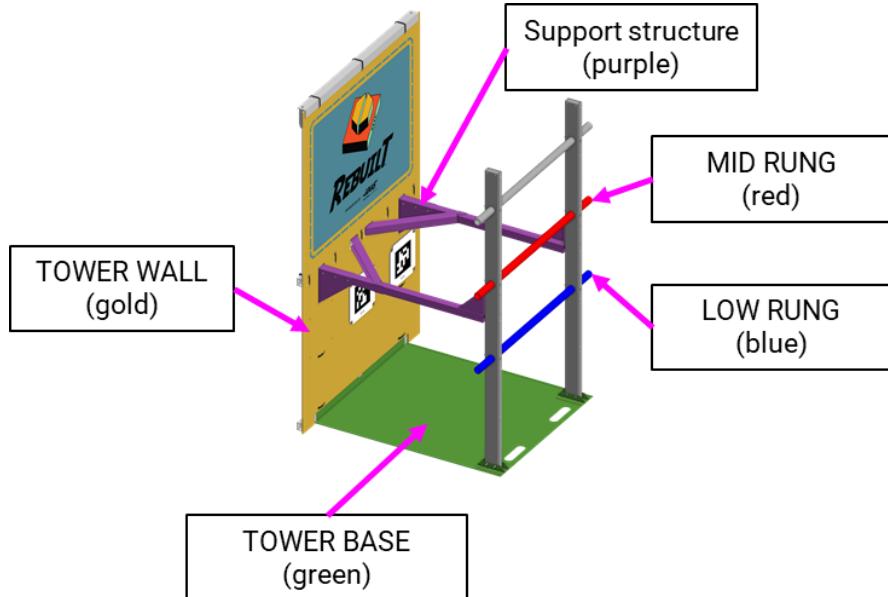

6.5.3 Point Values

Point values for tasks in REBUILT are detailed in [Table 6-4](#).

Table 6-4 REBUILT point values

		MATCH points		Ranking Points	
		AUTO	TELEOP		
FUEL	FUEL scored in an active HUB	1	1		
	FUEL scored in an inactive HUB	-	-		
TOWER	Each ROBOT at LEVEL 1 (2 ROBOTS max in AUTO)	15	10		
	Each ROBOT at LEVEL 2	-	20		
	Each ROBOT at LEVEL 3		30		
*ENERGIZED RP – The amount of FUEL scored in an active HUB is at or above threshold.				1	
*SUPERCHARGED RP – The amount of FUEL scored in an active HUB is at or above threshold.				1	
*TRAVERSAL RP – The amount of TOWER points scored during the MATCH is at or above threshold.				1	
Win	completing a MATCH with more MATCH points than your opponent			3	
Tie	completing a MATCH with the same number of MATCH points as your opponent			1	

*See [Table 6-5](#) for threshold values. For District Championship and/or *FIRST* Championship events, the BONUS RP (ENERGIZED RP, SUPERCHARGED RP, and TRAVERSAL RP) requirement thresholds may increase.

Table 6-5: REBUILT BONUS RP thresholds

BONUS RP Type	Regional/ District Events	District Championships	<i>FIRST</i> Championship
ENERGIZED RP	100	TBA	TBA
SUPERCHARGED RP	360	TBA	TBA
TRAVERSAL RP	50	TBA	TBA

BONUS RP thresholds for District Championships and *FIRST* Championship will be announced in Team Updates.

6.6 Violations

Unless otherwise noted, all violations are assigned for each instance of a rule violation. A description of the penalties is listed in [Table 6-6](#). All rules throughout the Game Rules section are called as perceived by a REFEREE.

Table 6-6 Rule violations

Penalty	Description
MINOR FOUL	a credit of 5 points towards the opponent's MATCH point total
MAJOR FOUL	a credit of 15 points towards the opponent's MATCH point total
YELLOW CARD	issued by the Head REFEREE for egregious ROBOT or team member behavior or rule violations. A subsequent YELLOW CARD within the same tournament phase results in a RED CARD.
RED CARD	issued by the Head REFEREE for egregious ROBOT or team member behavior or rule violations which results in a team being DISQUALIFIED for the MATCH.
DISABLED	the state in which a ROBOT is commanded to deactivate all outputs, rendering the ROBOT inoperable for the remainder of the MATCH.
DISQUALIFIED	the state of a team in which they receive 0 MATCH points and 0 Ranking Points in a Qualification MATCH or causes their ALLIANCE to receive 0 MATCH points in a Playoff MATCH
VERBAL WARNING	a warning issued by event staff or the Head REFEREE.
ALLIANCE is ineligible for RP	An ALLIANCE is ineligible for the specified RP for that MATCH. This overrides any RP awarded through normal MATCH play or other rule violations.

6.6.1 YELLOW and RED CARDS

In addition to rule violations explicitly listed throughout this document, YELLOW CARDS and RED CARDS are used in *FIRST* Robotics Competition to address team and ROBOT behavior that does not align with the mission, values, and culture of *FIRST*.

The Head REFEREE may assign a YELLOW CARD as a warning, or a RED CARD for egregious behavior inappropriate at a *FIRST* Robotics Competition event.

If an action resulting in the assignment of a YELLOW or RED CARD is determined to be the result of an ARENA FAULT, per section 10.2, the CARD will be rescinded.

A YELLOW or RED CARD is indicated on the audience display MATCH results screen. During Qualification MATCHES, A YELLOW or RED CARD is indicated next to the team who received the CARD and the Game Announcer describes the violation. During Playoff MATCHES, the card is applied to the whole ALLIANCE and as such "RED CARD" or "YELLOW CARD" appears above the ALLIANCE number.

YELLOW CARDS are additive, meaning that a second YELLOW CARD is automatically converted to a RED CARD. A team is issued a RED CARD for any subsequent incident in which they receive an additional YELLOW CARD, including earning a second YELLOW CARD during a single MATCH. A second YELLOW CARD is indicated with a RED CARD on the audience display next to the team who received the CARDS. A team that has received either a YELLOW CARD or a RED CARD carries a YELLOW CARD into subsequent MATCHES, except as noted below.

Once a team receives a YELLOW or RED CARD, a yellow rectangle will show next to the team number on the audience display during subsequent MATCHES, including any replays.

Figure 6-5 Example audience screen graphic showing YELLOW CARD indicators



All YELLOW CARDS are cleared in FMS at the conclusion of Practice, Qualification, and division Playoff MATCHES. VERBAL WARNINGS issued by the head REFEREE are cleared after Practice MATCHES and persist from Qualification MATCHES through subsequent tournament phases.

6.6.2 YELLOW and RED CARD application

YELLOW and RED CARDS are applied based on the following:

Table 6-7: YELLOW and RED CARD application

Time YELLOW or RED CARDS earned:	MATCH to which CARD is applied:
Prior to Qualification MATCHES	REFEREES may or may not be present during Practice MATCHES. With input from event staff, the Head REFEREE may opt to perpetuate a VERBAL WARNING or YELLOW CARD earned prior to Qualification MATCHES to the first Qualification MATCH for particularly egregious behavior.
during the Qualification MATCHES	team's current (or just-completed) MATCH. In the case where the team participated as a SURROGATE in the current (or just completed) MATCH, the card is applied to the team's previous MATCH (i.e. the team's second Qualification MATCH)
between the end of Qualification MATCHES and the start of Playoff MATCHES	ALLIANCE'S first Playoff MATCH
during the Playoff MATCHES	ALLIANCE'S current (or just-completed) MATCH

A MATCH is no longer the current MATCH once the results of the MATCH have been posted or the Head REFEREE or their designee has indicated that teams can collect their ROBOTS, whichever is later.

Please see examples of the application of YELLOW and RED CARDS as shown in section [6.6.4 Violation Details](#).

6.6.3 YELLOW and RED CARDS during Playoff MATCHES

During Playoff MATCHES, YELLOW and RED CARDS are assigned to the violating team's entire ALLIANCE instead of to only the violating team. If an ALLIANCE receives 2 YELLOW CARDS, the entire ALLIANCE is issued a RED CARD which results in DISQUALIFICATION for the associated MATCH. If both ALLIANCES receive a RED CARD, the ALLIANCE assessed the first RED CARD, chronologically, is DISQUALIFIED and loses the MATCH.

6.6.4 Violation Details

There are several styles of violation wording used in this manual. Below are some example violations and a clarification of the way the violation would be assessed. The examples shown do not represent all possible violations, but rather a representative set of combinations.

Table 6-8 Violation examples

Example Violation	Expanded Interpretation
MINOR FOUL	Upon violation, a MINOR FOUL is assessed against the violating ALLIANCE.
MAJOR FOUL and YELLOW CARD	Upon violation, a MAJOR FOUL is assessed against the violating ALLIANCE. After the MATCH, the Head REFEREE presents the violating team with a YELLOW CARD.
MINOR FOUL per additional SCORING ELEMENT. If egregious, YELLOW CARD	Upon violation, a number of MINOR FOULS are assessed against the violating ALLIANCE equal to the number of additional SCORING ELEMENTS beyond the permitted quantity. Additionally, if the REFEREES determine that the action was egregious, the Head REFEREE presents the violating team with a YELLOW CARD after the MATCH.
MINOR FOUL. MAJOR FOUL IF REPEATED	Upon initial violation in a MATCH, a MINOR FOUL is assessed against the violating ALLIANCE. If the ALLIANCE ROBOT repeats the infraction in the MATCH, a MAJOR FOUL is assessed against the violating ALLIANCE. Assuming no additional infractions of that rule by that ROBOT in that MATCH, the ROBOT has "earned" a MINOR FOUL and a MAJOR FOUL for their ALLIANCE.
MAJOR FOUL, and for every 3 seconds in which the situation is not corrected, a MAJOR FOUL is assessed	Upon violation, a MAJOR FOUL is assessed against the violating ALLIANCE and the REFEREE begins to count. Their count continues until the criteria to discontinue the count are met, and for each 3 seconds within that time,

Example Violation	Expanded Interpretation
	an additional MAJOR FOUL is assessed against the violating ALLIANCE. A ROBOT in violation of this type of rule for 15 seconds receives a total of 6 MAJOR FOULS (assuming no other rules were being simultaneously violated).
RED CARD for the ALLIANCE	<p>After the MATCH, the Head REFEREE presents the violating ALLIANCE with a RED CARD in the following fashion:</p> <ul style="list-style-type: none"> • In a PLAYOFF MATCH, a single RED CARD is assessed to the ALLIANCE. • In all other scenarios, each team on the ALLIANCE is issued a RED CARD.

6.7 Head REFEREE and FTA Interaction

The Head REFEREE has the ultimate authority in the ARENA during the event, but may receive input from additional sources, e.g. Game Designers, FIRST personnel, FTA, and other event staff. The Head REFEREE rulings are final. No event staff, including the Head REFEREE, will review video, photos, artistic renderings, etc. of any MATCH, from any source, under any circumstances.

6.7.1 Question Box (Q)

Each ALLIANCE has a designated Question Box near the scoring table. If a DRIVE TEAM has a question about a MATCH, the FIELD, etc., they may send up to 2 DRIVE TEAM members to their corresponding Question Box. Depending on timing, the Head REFEREE or FTA may postpone any requested discussion until the end of the subsequent MATCH.

Technical questions regarding FIELD or ROBOT operation are addressed by the FTA, and additional team members are invited to participate in these conversations if necessary. If a DRIVE TEAM needs clarification on a ruling or score, per [Q101](#), up to 2 DRIVE TEAM members should address the Head REFEREE after the ARENA Reset Signal (e.g. FIELD lights turn green).

While FMS tracks quantities of MINOR and MAJOR FOULS, FIRST instructs REFEREES to not self-track details about MINOR FOULS and MAJOR FOULS; as a result, REFEREES are not expected to recall details about what MINOR FOULS and MAJOR FOULS were made, when they occurred, and against whom.

Any reasonable question is fair game in the Question Box, and Head REFEREES will make good faith efforts to provide helpful feedback (e.g. how/why certain MINOR FOULS are being called, why a particular ROBOT may be susceptible to certain MINOR FOULS based on its design or game play, how specific rules are being called or interpreted), but please know that they may not be able to supply specific details.

Q101 *Head REFEREE Interactions. A team may only address the Head REFEREE with maximum of 2 people, 1 of which must be a STUDENT.

Violation: The Head REFEREE will not address non-compliant team members or peripheral conversations.

Some events may restrict ARENA access to members of the DRIVE TEAM. Team members are permitted to swap buttons within their team as needed to access the Question Box.

As much as possible, the STUDENT should be an active participant in the conversation.

Teams should not record interactions without consent (see [E117](#)).

Q102 Conversations must be civil. Any team interaction with the Head REFEREE must be appropriate.

Violation: The Head REFEREE may terminate the conversation to allow time for parties to cool down. A person with subsequent violations will not be allowed to interact with the Head REFEREE.

Examples of inappropriate behavior are outlined in [G201](#).

6.8 Other Logistics

SCORING ELEMENTS that leave the FIELD (other than through the opening at the base of the OUTPOST) are placed back into the FIELD approximately at the point of exit by FIELD STAFF (REFEREES, FTAs, or other staff working around the FIELD) at the earliest safe opportunity.

Note that ROBOTS and HUMAN PLAYERS may not deliberately cause SCORING ELEMENTS to leave the FIELD (see [G405](#)).

An ARENA FAULT (an error in ARENA operation described in section [10.2 MATCH Replays](#)) is not called for MATCHES that accidentally begin with damaged SCORING ELEMENTS. Damaged SCORING ELEMENTS are not replaced until the next ARENA reset period. DRIVE TEAMS should alert the FIELD STAFF to any missing or damaged SCORING ELEMENTS prior to the start of the MATCH but as noted in [6.3.4](#), the exact number of FUEL in the NEUTRAL ZONE may vary.

Once the MATCH is over and the Head REFEREE determines that the FIELD is safe for FIELD STAFF and DRIVE TEAMS, they or their designee change the FIELD lights to green and DRIVE TEAMS may retrieve their ROBOT. Some MATCHES may include a short period afterward to allow FIELD staff to begin to clean the field to make it easier and safer for teams to collect their robot. This period is indicated with purple lights on the team signs and the word "clean" displayed. TEAMS are not allowed on the field during this time.

During ARENA reset, the ARENA is cleared of ROBOTS and OPERATOR CONSOLES from the MATCH that just ended, ROBOTS and OPERATOR CONSOLES for the subsequent MATCH are loaded into the ARENA by DRIVE TEAMS, and FIELD STAFF reset ARENA elements.

FIRST Robotics Competition uses 3 words in the context of how durations and actions are assessed with regards to evaluation of rules and assignment of violations. These words provide general guidance to describe benchmarks to be used across the program. It is not the intent for REFEREES to provide a count during the time periods.

- MOMENTARY describes durations that are fewer than approximately 3 seconds.
- CONTINUOUS describes durations that are more than approximately 10 seconds.
- REPEATED describes actions that happen more than once within a MATCH.



7 Game Rules (G)

7.1 Personal Safety

- G101 *Humans, remain outside the FIELD.** A team member may not reach into the FIELD with any part of their body during a MATCH .

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations during the event.

Violations of this rule apply to the entire team, not specifically to any 1 individual. For example, a member of Team 9999 reaches onto the FIELD during MATCH 3, and a different member reaches onto the FIELD during MATCH 25. The team receives a VERBAL WARNING for the first violation and a YELLOW CARD for the second.

- G102 *Never step over the guardrail.** A team member may only enter or exit the FIELD through open gates and only enter if FIELD lighting (FIELD facing side of the team signs and timers) is green, unless explicitly instructed by a REFEREE or an FTA.

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations during the event.

Teams are encouraged to ensure that all members of their DRIVE TEAM are aware of this rule. It's easy to violate, particularly when teams are doing their best to move on and off the FIELD quickly. The violations of this rule are intended to avoid nuisance penalties, but still enforce safety requirements around the FIELD. There is the potential for injury when stepping over the guardrail.

Violations of this rule apply to the entire team, not specifically to any 1 individual. For example, a member of Team 9999 steps over the guardrail prior to MATCH 3, and a different member steps over the guardrail prior to MATCH 25. The team receives a VERBAL WARNING for the first violation and a YELLOW CARD for the second.

- G103 *Be careful what you interact with.** A team member is prohibited from the following actions with regards to interaction with ARENA elements.

- climbing on or inside,
- hanging from,
- manipulating such that it doesn't return to its original shape without human intervention, and
- damaging.

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations during the event.

The REBUILT FIELD has obstacles, and caution should be applied when navigating the FIELD. Teams should avoid carrying their ROBOT over the BUMP.

Walking over the BUMP is not considered climbing on.

- G104 *Teams may not enable their ROBOTS on the FIELD.** Teams may not tether to the ROBOT while on the FIELD except in special circumstances (e.g. after Opening Ceremonies, before an immediate MATCH replay, etc.) and with the express permission from the FTA or a REFEREE.

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations during the event.

Teams are encouraged to consider this rule when developing their ROBOTS.

FMS will not enable ROBOTS after the conclusion of the MATCH.

For the purposes of this rule, tethering includes any wired or wireless connection used to electrically energize and/or control elements on the ROBOT. The safety of teams and volunteers in close proximity to ROBOTS and ARENA elements on the FIELD is of the utmost importance, therefore ROBOTS or ROBOT COMPONENTS may not be enabled in any way on the FIELD before or after the MATCH.

ROBOTS need to be safely transported off the FIELD and back to the pits after the MATCH, and there may be bystanders, doorways, or height restrictions along the route.

7.2 Conduct

- G201 *Be a good person.** All teams must be civil toward everyone and respectful of team and event equipment while at a FIRST Robotics Competition event.

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations during the event.

Examples of inappropriate behavior include, but are not limited to, the use of offensive language or other uncivil conduct.

Examples of particularly contemptible behavior that is likely to result in ARENA ejection include, but are not limited to, the following:

- A. assault, e.g. throwing something that hits another person (even if unintended),
- B. threat, e.g. saying something like “if you don’t reverse that call, I’ll make you regret it,”
- C. harassment, e.g. badgering someone with no new information after a decision’s been made or a question’s been answered,
- D. bullying, e.g. using body or verbal language to cause another person to feel inadequate,
- E. insulting, e.g. telling someone they don’t deserve to be on a DRIVE TEAM,
- F. swearing at another person (versus swearing under one’s breath or at oneself), and
- G. yelling at another person(s) in anger or frustration.

- G202 *Don’t bang on the glass.** A team member may never strike or hit the DRIVER STATION plastic windows.

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations during the event.

- G203 *Asking other teams to throw a MATCH – not cool.** A team may not encourage an ALLIANCE of which it is not a member to play beneath its ability.

Note: This rule is not intended to prevent an ALLIANCE from planning and/or executing its own strategy in a specific MATCH in which all the teams are members of the ALLIANCE.

Violation: VERBAL WARNING. RED CARD if subsequent violations during the event.

Example 1: A MATCH is being played by Teams A, B, and C, in which Team C is encouraged by Team D to not get on the TOWER at the end of the MATCH, resulting in Teams A, B, and C not earning a Ranking Point. Team D's motivation for this behavior is to prevent Team A from rising in the Tournament rankings and negatively affecting Team D's ranking. Team D has violated this rule.

Example 2: A MATCH is being played by Teams A, B, and C, in which Team A is assigned to participate as a SURROGATE. Team D encourages Team A to not participate in the MATCH so that Team D gains ranking position over Teams B and C. Team D has violated this rule.

Example 3: Asking a team to "no show" for a MATCH.

FIRST considers the action of a team influencing another team to throw a MATCH, to deliberately miss Ranking Points, etc. incompatible with *FIRST* values and not a strategy any team should employ.

- G204 *Letting someone coerce you into throwing a MATCH – also not cool.** A team, as the result of encouragement by a team not on their ALLIANCE, may not play beneath its ability.

Note: This rule is not intended to prevent an ALLIANCE from planning and/or executing its own strategy in a specific MATCH in which all the ALLIANCE members are participants.

Violation: VERBAL WARNING. RED CARD if subsequent violations during the event.

Example 1: A MATCH is being played by Teams A, B, and C. Team D requests Team C ignore the TOWER at the end of the MATCH, resulting in Teams A, B, and C not being able to earn the TRAVERSAL RP. Team C accepts this request from Team D. Team D's motivation for this behavior is to prevent Team A from rising in the Tournament rankings negatively affecting Team D's ranking. Team C has violated this rule.

Example 2: A MATCH is being played by Teams A, B, and C, in which Team A is assigned to participate as a SURROGATE. Team A accepts Team D's request not to participate in the MATCH so that Team D gains ranking position over Teams B and C. Team A has violated this rule.

FIRST considers the action of a team influencing another team to throw a MATCH, to deliberately miss Ranking Points, etc. incompatible with *FIRST* values and not a strategy any team should employ.

- G205 *Throwing your own MATCH is bad.** A team may not intentionally lose a MATCH or sacrifice Ranking Points in an effort to lower their own ranking or manipulate the rankings of other teams.

Violation: VERBAL WARNING. RED CARD if subsequent violations during the event.

The intent of this rule is not to punish teams who are employing alternate strategies, but rather to ensure that it is clear that throwing MATCHES to negatively affect your own rankings, or to manipulate the rankings of other teams (i.e. throw a MATCH to lower a partner's ranking, and/or increase the ranking of another team not in the MATCH) is incompatible with FIRST values and not a strategy any team should employ.

- G206 *Don't violate rules for RPs.** A team or ALLIANCE may not collude with another team to each purposefully violate a rule in an attempt to influence Ranking Points.

Violation: YELLOW CARD and the ALLIANCE is ineligible for the BONUS RPs.

For example, if Team A on the blue ALLIANCE agrees with Team F on the red ALLIANCE to contact each other while each ROBOT is climbing the TOWER resulting in both ALLIANCES being awarded the TRAVERSAL RP.

- G207 *Don't abuse ARENA access.** A team member (except DRIVERS, HUMAN PLAYERS, and DRIVE COACHES) granted access to restricted areas in and around the ARENA (e.g. via TECHNICIAN button, event issued Media badges, etc.) may not assist or use signaling devices during the MATCH. Exceptions will be granted for inconsequential infractions and in cases concerning safety.

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations during the event.


The TECHNICIAN'S role is to help the team prepare the ROBOT so it can perform at its full potential during a MATCH. The TECHNICIAN, except as described at the end of section [6.2 DRIVE TEAM](#), is not an additional DRIVE COACH, DRIVER, or HUMAN PLAYER.

Team members in open-access spectator seating areas are not considered to be in a restricted area and are not prevented from assisting or using signaling devices. See [E102](#) for related details.

- G208 *Show up to your Qualification MATCHES.** If a ROBOT has passed initial, complete inspection, at least 1 member of its DRIVE TEAM must report to the ARENA and participate in each of their assigned Qualification MATCHES.

Violation: DISQUALIFIED from the current MATCH.

Figure 7-1 MATCH participation flowchart

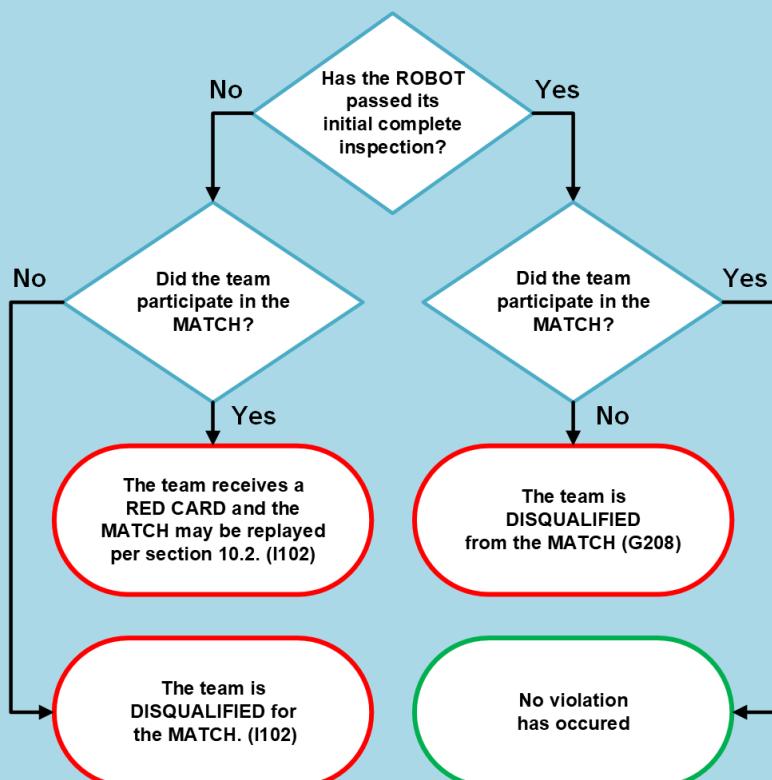

The team should inform the Lead Queuer if the team's ROBOT is not able to participate.

G209 *Keep your ROBOT together. A ROBOT may not intentionally detach or leave a part on the FIELD.

Violation: RED CARD.

G210 *Don't expect to gain by doing others harm. A strategy not consistent with standard gameplay and clearly aimed at forcing the opponent ALLIANCE to violate a rule is not in the spirit of FIRST Robotics Competition and not allowed. Rule violations forced in this manner will not result in an assignment of a penalty to the targeted ALLIANCE.

Violation: MAJOR FOUL. YELLOW CARD if REPEATED.

This rule does not apply for strategies consistent with standard gameplay, for example:

- a red ALLIANCE ROBOT attempting to climb their TOWER in the final 30 seconds of the MATCH contacts a blue ALLIANCE ROBOT.
- a blue ALLIANCE ROBOT is attempting to play defense on a red ALLIANCE ROBOT attempting to score into the HUB from within their ALLIANCE ZONE and pushes them outside their ALLIANCE ZONE.

This rule requires an intentional act with limited or no opportunity for the team being acted on to avoid the penalty such as:

- C. forcing an opponent ROBOT to catch FUEL by pushing them far from (i.e. more than 48.0in (1.22m)) the HUB exit to under the HUB exit to make them violate [G408](#).
- D. a blue ALLIANCE ROBOT, pushing a red ALLIANCE ROBOT far from (i.e. more than 48.0in (1.22m)) the TOWER into another blue ALLIANCE ROBOT which is in contact with the blue TOWER and the REFEREE perceives that the blue ROBOT is deliberately making the red ROBOT violate [G420](#).

G211 *Egregious or exceptional violations. Egregious behavior beyond what is listed in the rules or subsequent violations of any rule or procedure during the event is prohibited.

In addition to rule violations explicitly listed in this manual and witnessed by a REFEREE, the Head REFEREE may assign a YELLOW or RED CARD for egregious ROBOT actions or team member behavior at any time during the event.

Please see section [6.6.1 YELLOW and RED CARDS](#) for additional detail.

Violation: YELLOW or RED CARD.

The intent of this rule is to provide the Head REFEREES the flexibility necessary to keep the event running smoothly, as well as keep the safety of all the participants as the highest priority. Behaviors that put the FIRST community or integrity of the game at risk are not allowed and are violations of this rule. Those behaviors include, but are not limited to the list below:

- A. inappropriate behavior as outlined in the blue box of [G201](#),
- B. jumping over the guardrail,
- C. pushing past the FIELD reset person blocking an open gate to get on the FIELD,
- D. reaching into the FIELD and grabbing a ROBOT during a MATCH,
- E. a single PIN in excess of 15 seconds,
- F. exploiting the 3-second window after a MATCH described in section [6.5 Scoring](#) to avoid rule violations (e.g. triggering an over-extension that enables TOWER points or using a ROBOT'S residual energy to impact an opponent ROBOT on their TOWER),
- G. triggering scoring sensors or otherwise interfering with FMS or FIELD operation,
- H. intentionally crossing the CENTER LINE in AUTO and contacting an opponent ROBOT in order to interfere with an opponent ROBOT'S AUTO,
- I. intentionally ejecting a large quantity of FUEL out of the FIELD,
- J. intentionally exceeding the expansion limits for strategic benefit (i.e. climb the TOWER, block part of the FIELD, etc.),
- K. a HUMAN PLAYER hoarding a large quantity of FUEL outside the designated locations in [G427](#),
- L. Intentionally scoring a large quantity of FUEL into the HUB from the NEUTRAL ZONE.

The Head REFEREE may assign a YELLOW or RED CARD for a single instance of a rule violation such as the examples given in items above, or for multiple

instances of any single rule violation. Teams should be aware that any rule in this manual could escalate to a YELLOW or RED CARD. The Head REFEREE has final authority on all rules and violations at an event.

- G212 *All teams can play.** A team may not encourage another team to exclude their ROBOT or be BYPASSED from a qualification MATCH for any reason.

Violation: YELLOW CARD. RED CARD if the ROBOT does not participate in the MATCH.

7.3 Pre-MATCH

- G301 *Be prompt.** A DRIVE TEAM member may not cause significant delays to the start of their MATCH. Causing a significant delay requires both of the following to be true:

- A. The expected MATCH start time has passed, and

Event volunteers communicate schedule delays with teams to the best of their ability. The Pit Display (which is typically located near the Pit Administration desk) shows any event timing delay. Announcements on the FIELD and in the pits also provide information on delays, and any team uncertain of when to queue for a MATCH should communicate with queuing volunteers.

During Qualification MATCHES, the expected start time of the MATCH is the time indicated on the MATCH schedule or the cycle time for current round minus 3 minutes from the end of the previous MATCH (which is reflected on the schedule on the Pit Display), whichever is later.

During Playoff MATCHES, the expected start time of the MATCH is the time indicated on the MATCH schedule or 15 minutes from either ALLIANCE'S previous MATCH, whichever is later.

- B. The DRIVE TEAM has access to the FIELD and is neither MATCH ready nor making a good faith effort, to quickly become MATCH ready.

Teams that have violated [G208](#) or have 1 DRIVE TEAM member present and have informed event staff that their ROBOT will not be participating in the MATCH are considered MATCH ready and not in violation of this rule.

Violation: If a Qualification MATCH, VERBAL WARNING. MAJOR FOUL for the upcoming MATCH if a subsequent violation occurs within the tournament phase. If the DRIVE TEAM is not MATCH ready within 2 minutes of the VERBAL WARNING/MAJOR FOUL and the Head REFEREE perceives no good faith effort by the DRIVE TEAM to quickly become MATCH ready, DISABLED.

If a Playoff MATCH, VERBAL WARNING issued to the ALLIANCE. MAJOR FOUL for the ALLIANCE'S upcoming MATCH if a subsequent violation occurs within the tournament phase. If the ALLIANCE is not MATCH ready within 2 minutes of the VERBAL WARNING/MAJOR FOUL having been issued to all 3 teams and the Head REFEREE perceives no good faith effort by the DRIVE TEAM(s) to quickly become MATCH ready, the offending team's ROBOT is DISABLED.

The intent of this rule is to provide an equitable amount of time for both ALLIANCES to prepare for each MATCH and give DRIVE TEAMS grace given extenuating circumstances that cause them to be late.

Once a VERBAL WARNING /MAJOR FOUL is issued, the Head REFEREE starts a 2-minute timer and makes a good faith effort to share the timer's status with the delaying DRIVE TEAM.

Being "MATCH ready" requires that the ROBOT is on the FIELD, in its STARTING CONFIGURATION, and turned on. Additionally, the DRIVE TEAM members must be in their starting positions.

In general, good faith efforts to quickly become MATCH ready are entirely for the purposes of transitioning the ROBOT into a MATCH ready state (i.e. not attempts to significantly alter a ROBOT's capabilities.) Examples of good faith efforts to quickly become MATCH ready include but are not limited to:

- A. walking safely towards the FIELD with a ROBOT that a team is not actively modifying,
- B. applying quick fixes such as tape or cable ties to make the ROBOT compliant with STARTING CONFIGURATION requirements,
- C. waiting for an OPERATOR CONSOLE computer to boot, and
- D. working with FIELD STAFF to get the ROBOT connected to the FIELD.

Examples that are not considered good faith efforts to quickly become MATCH ready include but are not limited to:

- E. a ROBOT not moving to the FIELD,
- F. a ROBOT moving to the FIELD but being actively modified while doing so,
- G. a DRIVE TEAM member remaining on the FIELD once a MATCH is ready to begin (indicated by the green LEDs having turned off),
- H. installing BUMPERS, charging pneumatic systems, or any other ROBOT maintenance not considered a quick fix as described in item B above once on the FIELD,
- I. time-consuming use of alignment devices that are external to the ROBOT (e.g. a DRIVE TEAM could bring and use a measuring tape, as long as there is no delay to the MATCH by doing so), and
- J. repairs more substantial than those described in B.

There are no rules that prohibit use of hand tools (including battery operated tools) while setting up ROBOTS from the FIELD, provided they do not cause significant delay or cause safety concerns.

G302 *Limit what you use during a MATCH. Items used during a match must fit on your team's DRIVER STATION shelf, be worn or held by members from your DRIVE TEAM, or be an item used as an accommodation (e.g. stools, crutches, etc.). Regardless of if the equipment fits the criteria above, it may not:

- A. be employed in a way that introduces a safety hazard,
- B. extend more than 78.0in (1.981m) above the floor,
- C. communicate with anything or anyone outside of the ARENA with the exception of medically required equipment,
- D. block visibility for FIELD STAFF or audience members, or
- E. jam or interfere with the remote sensing capabilities of another team or the FIELD.

Exceptions to part B are granted for momentary extensions above 78.0in (1.91m) and for individuals above 78.0in (1.91m) wearing PPE or reasonable decorative apparel such as hats, headbands, etc.

Violation: MATCH will not start until the situation is remedied. If discovered or used inappropriately during a MATCH, YELLOW CARD.

Examples of equipment that may be considered a safety hazard in the confined space of the ALLIANCE AREA include, but are not limited to, a folding step stool, ladder, or a large signaling device.

Using an item that has wireless communications disabled complies with C above.

Examples of jamming or interfering with remote sensing capabilities include, but are not limited to, mimicking the FIELD AprilTags and shining bright lighting or laser pointers onto the FIELD.

G303 *Start your ROBOTS. A ROBOT must meet all following MATCH-start requirements:

- A. it does not pose a hazard to humans, FIELD elements, or other ROBOTS,
- B. has passed initial, complete inspection, i.e. it's compliant with all ROBOT rules (for exceptions regarding Practice MATCHES, see section [9 Inspection & Eligibility \(I\)](#)),
- C. if modified after initial Inspection, it's compliant with [I104](#),
- D. its BUMPERS overlap their ROBOT STARTING LINE,
- E. it's not contacting the BUMP,
- F. it's the only team-provided item left on the FIELD,
- G. it's not attached to, entangled with, or suspended from any FIELD element,
- H. it's confined to its STARTING CONFIGURATION (reference [R102](#) and [R104](#)), and
- I. it fully and solely supports not more than 8 FUEL (as described in section [6.3.4 SCORING ELEMENTS](#)).

Violation: If fix is a quick remedy, the MATCH won't start until all requirements are met. If it is not a quick remedy, DISABLED and, at the discretion of the Head REFEREE, must be re-inspected. If a ROBOT not compliant with part B or C participates, its team receives a RED CARD.

If a ROBOT is BYPASSED prior to the start of the MATCH, the DRIVE TEAM may not remove the ROBOT from the FIELD without permission from the Head REFEREE or the FTA.

For assessment of many of the items listed above, the Head REFEREE is likely to consult with the LRI.

ROBOTS may be asked to move if at least 1 of the FIELD gates for each ALLIANCE are not able to open/close when the ROBOT is in its starting location. Teams are encouraged to have multiple AUTO starting locations.

Locations for FIELD gates can be found in the [Field Dimension Drawings](#).

7.4 In-MATCH

Rules in this section pertain to game play once a MATCH begins.

7.4.1 AUTO

The AUTO period is the first 20 seconds of the MATCH, and the FMS blocks any DRIVER control, so ROBOTS operate with only their pre-programmed instructions. Rules in this section apply only during the AUTO period.

- G401 *Behind the lines.** In AUTO, each DRIVE TEAM member must remain in their staged areas. A DRIVE TEAM member staged behind a HUMAN STARTING LINE may not contact anything in front of that HUMAN STARTING LINE, unless for personal or equipment safety, to press the E-Stop or A-Stop, or granted permission by a Head REFEREE or FTA.

Violation: MINOR FOUL regardless of the number of items contacted.

Pointing, gesturing, or otherwise extending across the HUMAN STARTING LINE such that contact is not made with carpet or other ARENA elements is not a violation of this rule.

An example of an exception for equipment safety is if an OPERATOR CONSOLE starts to fall from, or has already fallen off of, the DRIVER STATION shelf. In that circumstance, DRIVE TEAM members may step forward to catch it or pick it up off the ground and return it to the shelf.

- G402 *Let the ROBOT do its thing.** In AUTO, a DRIVE TEAM member may not directly or indirectly interact with a ROBOT or an OPERATOR CONSOLE unless for personal safety, OPERATOR CONSOLE safety, or pressing an E-Stop or A-Stop. A HUMAN PLAYER entering FUEL onto the FIELD is an exception to this rule.

Violation: MINOR FOUL and YELLOW CARD.

- G403 Limited AUTO opponent interaction.** In AUTO, a ROBOT whose BUMPERS are completely across the CENTER LINE (i.e. to the opposite side of the CENTER LINE from its ROBOT STARTING LINE) may not contact an opponent ROBOT.

Violation: MAJOR FOUL.

7.4.2 SCORING ELEMENTS

- G404 *ROBOTS: use SCORING ELEMENTS as directed.** A ROBOT may not deliberately use a SCORING ELEMENT in an attempt to ease or amplify a challenge associated with a FIELD element.

Violation: MAJOR FOUL.

Examples include, but are not limited to:

- A. launching SCORING ELEMENTS at opponent ROBOTS,
- B. using SCORING ELEMENTS to elevate ROBOTS in an attempt to climb the TOWER,
- C. positioning SCORING ELEMENTS to impede opponent access to their TOWER,

G405 *Keep SCORING ELEMENTS in bounds. A ROBOT may not intentionally eject SCORING ELEMENTS from the FIELD (either directly or by bouncing off a FIELD element or other ROBOT) with an exception of through the opening at the base of the OUTPOST.

Violation: MINOR FOUL. If REPEATED, MAJOR FOUL.

G406 *Don't abuse SCORING ELEMENTS. Neither a ROBOT nor a HUMAN PLAYER may damage a SCORING ELEMENT.

Violation: VERBAL WARNING. MAJOR FOUL if REPEATED in any subsequent MATCHES during the event. If via a ROBOT and the Head REFEREE determines that further damage is likely to occur, DISABLED. Corrective action (such as eliminating sharp edges, removing the damaging MECHANISM, and/or re-inspection) may be required before the ROBOT may compete in subsequent MATCHES.

SCORING ELEMENTS are expected to undergo a reasonable amount of wear and tear as they are handled by ROBOTS, such as scratching or marking. Routinely gouging, tearing off pieces, or marking SCORING ELEMENTS are violations of this rule.

G407 Only score while in your ALLIANCE ZONE. A ROBOT may not launch a SCORING ELEMENT into their HUB unless their BUMPERS are partially or fully within their ALLIANCE ZONE.

Violation: MAJOR FOUL

G408 Don't catch FUEL. A ROBOT may not do either of the following with FUEL released by the HUB unless and until that FUEL contacts anything else besides that ROBOT or FUEL CONTROLLED by that ROBOT:

- A. gain greater than MOMENTARY CONTROL of FUEL, or
- B. push or redirect FUEL to a desired location or in a preferred direction.

A ROBOT is in CONTROL of a SCORING ELEMENT if the SCORING ELEMENT is fully supported by or stuck in, on, or under the ROBOT.

Violation: MINOR FOUL. If strategic, MAJOR FOUL and VERBAL WARNING. If subsequent strategic violations during the event, MAJOR FOUL and YELLOW CARD.

Examples of interaction with a SCORING ELEMENT that are not "CONTROL" include, but are not limited to:

- A. "bulldozing" (inadvertent contact with a SCORING ELEMENT while in the path of the ROBOT moving about the FIELD),
- B. "deflecting" (being hit by a SCORING ELEMENT that bounces off a ROBOT and moves in a random direction.)

Examples of interaction which would be considered strategic include, but are not limited to:

- C. intentionally sitting under the HUB to collect a large quantity of FUEL,
- D. intentionally sitting under the HUB in order to redirect FUEL into your ALLIANCE ZONE.

Violations of this rule are per instance and not per FUEL CONTROLLED. Generally, an instance is considered for each time a ROBOT is catching or redirecting a quantity of FUEL from the HUB. Any time flow of FUEL into the robot has stopped would be considered a separate instance. Generally, any action which attempts to exploit the definition of an instance of any rule in order to gain benefit will likely be a violation of [G211](#) and would quickly escalate to a RED CARD.

7.4.3 ROBOT

G409 *ROBOTS must be safe. A ROBOT may not pose an undue hazard to a human, an ARENA element, or another ROBOT in the following ways:

- A. the ROBOT or anything it CONTROLS, e.g. FUEL, contacts anything outside the FIELD except for MOMENTARY contact inside the CHUTE and/or the CORRAL,
- B. its BUMPERS fail such that a segment completely detaches,
- C. a corner of its ROBOT PERIMETER is exposed,
- D. its team number or ALLIANCE color are indeterminate,
- E. its BUMPERS leave the BUMPER ZONE (see R405) REPEATEDLY or for more than a MOMENTARY amount of time, or
- F. its operation or design is dangerous or unsafe.

Violation: DISABLED. Corrective action (such as repair of BUMPERS, removing the unsafe MECHANISM, and/or re-inspection) may be required before the ROBOT will be allowed to compete in subsequent MATCHES.

Examples of dangerous operation or designs that likely pose undue hazards include, but are not limited to:

- A. uncontrolled motion that cannot be stopped by the DRIVE TEAM,
- B. ROBOT parts “flailing” outside of the FIELD,
- C. ROBOTS dragging their battery, and
- D. ROBOTS that consistently extend outside the FIELD.

Please be conscious of REFEREES and FIELD STAFF working around the ARENA who may be in close proximity to your ROBOT.

G410 *Keep your BUMPERS low. ROBOT extensions may not interact with the carpet, BUMPS, or TOWER BASE such that the BUMPERS are lifted out of the BUMPER ZONE (see [R405](#)).

Violation: MINOR FOUL. Corrective action (such as removing the offending MECHANISM, and/or re-inspection) may be required before the ROBOT will be allowed to compete in subsequent MATCHES.

G411 Don't damage the FIELD. A ROBOT may not damage FIELD elements.

Violation: VERBAL WARNING. If the Head REFEREE infers that additional damage is likely, DISABLED. YELLOW CARD for any subsequent damage during the event.

Corrective action (such as eliminating sharp edges, removing the damaging MECHANISM, and/or re-inspection) may be required before the ROBOT will be allowed to compete in subsequent MATCHES.

G412 Watch your FIELD interaction. A ROBOT is prohibited from the following interactions with FIELD elements (with the exception of the RUNGS and UPRIGHTS):

- grabbing,
- grasping,
- attaching to (including the use of a vacuum or hook fastener to anchor to the FIELD carpet),
- becoming entangled with, and
- suspending from.

Violation: MAJOR FOUL, plus YELLOW CARD if REPEATED, or longer than MOMENTARY. If the Head REFEREE infers that damage is likely, DISABLED. Corrective action (such as removing the offending MECHANISM, and/or re-inspection) may be required before the ROBOT will be allowed to compete in subsequent MATCHES.

G413 Expansion limits. A ROBOT may not extend beyond any of the horizontal or vertical expansion limits described in [R105](#), [R106](#), and [R107](#).

Exceptions to this rule:

- If the over-expansion that violates [R105](#) or [R107](#) is due to visible damage and not used for strategic benefit, no penalty is imposed.
- If an expansion that contributes to a violation of [R106](#) is due to visible damage the team may extend a different component in a different direction, and no penalty is imposed.
- If the over-expansion is MOMENTARY and is not used for strategic benefit, no penalty is imposed.
- If an expansion that contributes to a violation of [R106](#) is due to flex of ROBOT components and is within 1.5in of the ROBOT PERIMETER, the team may extend in a different direction, and no penalty is imposed.

Violation: MAJOR FOUL. Corrective action (such as removing the offending MECHANISM, and/or re-inspection) may be required before the ROBOT will be allowed to compete in subsequent MATCHES.

The intent of the [G413-A](#) and [G413-B](#) exceptions to this rule are to prevent piling on a punitive response to a ROBOT that's already experienced hardship and not leveraging that hardship for gain.

Exceptions are only given for visible damage, as perceived by a REFEREE. Teams should not assume that REFEREES will give an exception for unobservable damage even if ROBOT function is affected.

Teams exploiting the exception to part B by designing in something to "break" will not be given an exception and will likely also be given a violation of [G211](#).

Examples related to exceptions A and B include the following:

- a physical device on a team's ROBOT, whose purpose is to restrain their TOWER mechanism from extending beyond the 30in (76.2cm) height limit imposed by [R107](#), breaks after a collision with another ROBOT. Provided the

- ROBOT does not use the now-too-long extension to climb the TOWER, no violation is assigned.
- B. a vertical structural member of a ROBOT breaks at the bottom and rotates out such that it exceeds the 12in (30.48cm) limit imposed by [R105](#). The ROBOT then parks such that its extension blocks opponent ROBOTS from reaching the OUTPOST. A MAJOR FOUL is issued.
 - C. a part of a ROBOT is damaged causing a panel to extend out less than 12in (30.48cm) on one side of the ROBOT. The ROBOT then extends out in another direction to intake FUEL. As visible damage has caused an expansion that contributes to the violation of [R106](#), no penalty is imposed.
 - D. a mechanism that controls a ROBOT'S intake is damaged in a way that's not visible to a REFEREE and the team can no longer bring their intake back in. The team then extends out in another direction to climb the TOWER. The intake is not visibly damaged, so a violation of a MAJOR FOUL is issued.

The intent of the [G413-C](#) extension is to prevent violations for inadvertent mechanism flexing and movement for short periods of time during the MATCH not to provide a pathway to intentionally design less-than-MOMENTARY over-extensions.

Examples related to exception C include the following:

- E. A ROBOT has a mechanism deployed out over one side of the ROBOT PERIMETER which, due to ROBOT movement or a collision, flexes MOMENTARILY beyond the projection of that side of the ROBOT PERIMETER. As the action is less than MOMENTARY and not used for strategic benefit, no penalty is imposed.
- F. A ROBOT has a mechanism designed to rotate from side A to side B of their ROBOT and MOMENTARILY extends out both side A and B during rotation. This action is used for strategic benefit so a violation of a MAJOR FOUL is issued.

For examples F, the ROBOT will likely need to take corrective action before being allowed to compete in subsequent MATCHES.

Note that [G211](#) may apply if a team is intentionally exceeding the expansion limits for strategic benefit.

At the conclusion of the MATCH, the Head REFEREE may elect to visually inspect a ROBOT and remove the violation if the damage is verified.

G414 Don't Climb on each other. ROBOTS may not fully support the weight of other ROBOTS on their ALLIANCE to climb the TOWER.

Violation: Supported ROBOTS become ineligible for TOWER points for the remainder of the MATCH.

7.4.4 Opponent Interaction

Note, [G415](#), [G416](#), [G417](#) are mutually exclusive. A single ROBOT to ROBOT interaction which violates more than 1 of these rules results in the most punitive penalty, and only the most punitive penalty, being assessed.

G415 *Stay out of other ROBOTS. A ROBOT may not use a COMPONENT outside its ROBOT PERIMETER (except its BUMPERS) to initiate contact with:

- an opponent ROBOT inside the vertical projection of the opponent's ROBOT PERIMETER, or
- with the opponent's BUMPER backing or mounting.

Contact with an opponent in an opening of their BUMPERS or in the space above the BUMPER opening are exceptions to this rule.

Violation: MINOR FOUL.

For the purposes of this rule, "initiate contact" requires movement towards an opponent ROBOT.

In a collision, it's possible for both ROBOTS to initiate contact.

G416 *This isn't combat robotics. A ROBOT may not damage or functionally impair an opponent ROBOT in either of the following ways:

- deliberately.
- regardless of intent, by initiating contact, either directly or transitively via a SCORING ELEMENT CONTROLLED by the ROBOT:
 - inside the vertical projection of an opponent's ROBOT PERIMETER, or
 - with the opponent's BUMPER backing or mounting.

Contact between the ROBOT'S BUMPERS or COMPONENTS inside the ROBOT PERIMETER and COMPONENTS inside an opening of an opponent's BUMPERS or in the space above the BUMPER opening are exceptions to this rule.

Damage or functional impairment because of contact with a tipped-over opponent ROBOT, which is not perceived by a REFEREE to be deliberate, is not a violation of this rule.

Violation: MAJOR FOUL and YELLOW CARD, or if opponent ROBOT is unable to drive, then MAJOR FOUL and RED CARD.

FIRST Robotics Competition can be a full-contact competition and may include rigorous game play. While this rule aims to limit severe damage to ROBOTS, teams should design their ROBOTS to be robust.

Examples of violations of this rule include, but are not limited to:

- A ROBOT leaves an arm extended, spins around to change course, and unintentionally hits and damages a COMPONENT inside the ROBOT PERIMETER of a nearby opponent ROBOT.
- A ROBOT, in the process of trying to quickly reverse direction, tips up on a single pair of wheels, lands atop an opponent ROBOT, and damages a COMPONENT inside that opponent's ROBOT PERIMETER.
- A ROBOT high-speed rams and/or REPEATEDLY smashes an opponent ROBOT and causes damage. The REFEREE infers that the ROBOT was deliberately trying to damage the opponent's ROBOT.

Examples of functionally impairing another ROBOT include, but are not limited to:

- opening an opponent's relief valve such that the opponent's air pressure drops and

- E. powering off an opponent's ROBOT (this example also clearly results in a RED CARD because the ROBOT is no longer able to drive).

At the conclusion of the MATCH, the Head REFEREE may elect to visually inspect a ROBOT to confirm violations of this rule made during a MATCH and remove the violation if the damage cannot be verified.

For the purposes of this rule, "initiating contact" requires movement towards an opponent ROBOT.

In a collision, it's possible for both ROBOTS to initiate contact.

"Unable to drive" means that because of the incident, the DRIVER can no longer drive to a desired location in a reasonable time (generally). For example, if a ROBOT can only move in circles, or can only move extremely slowly, the ROBOT is considered unable to drive.

The exception in [G416-B](#) effectively means that ROBOTS with BUMPER gaps are at their own risk regarding damaging contact in these areas.

- G417 *Don't tip or entangle.** A ROBOT may not deliberately, attach to, tip, or entangle with an opponent ROBOT.

Violation: MAJOR FOUL and YELLOW CARD, or if CONTINUOUS or opponent ROBOT is unable to drive, then MAJOR FOUL and RED CARD.

Examples of violations of this rule include, but are not limited to:

- using a wedge-like MECHANISM to tip over opponent ROBOTS,
- making BUMPER-to-BUMPER contact with an opponent ROBOT that is attempting to right itself after previously falling over and causing them to fall over again, and
- causing an opponent ROBOT to tip over by contacting the ROBOT after it starts to tip if, in the judgement of the REFEREE, that contact could have been avoided.

Tipping as an unintended consequence of normal ROBOT to ROBOT interaction, including single BUMPER to BUMPER hits that result in a ROBOT tipping, is not a violation of this rule.

"Unable to drive" means that because of the incident, the DRIVER can no longer drive to a desired location in a reasonable time (generally). For example, if a ROBOT can only move in circles, or can only move extremely slowly, the ROBOT is considered unable to drive.

- G418 *There's a 3-count on PINS.** A ROBOT may not PIN an opponent's ROBOT for more than 3 seconds. A ROBOT is PINNING if it is preventing the movement of an opponent ROBOT by contact, either direct or transitive (such as against a FIELD element). A PIN count ends once any of the following criteria below are met:

- the ROBOTS have separated by at least 72.0in (1.83m) from each other for more than 3 seconds,

- B. either ROBOT has moved 72.0in (1.83m) from where the PIN initiated for more than 3 seconds, or
- C. the PINNING ROBOT gets PINNED.

For criteria A, the PIN count pauses once ROBOTS are separated by 72.0in (1.83m) until either the PIN ends or the PINNING ROBOT moves back within 72.0in (1.83m), at which point the PIN count is resumed.

For criteria B, the PIN count pauses once either ROBOT has moved 72.0in (1.83m) from where the PIN initiated until the PIN ends or until both ROBOTS move back within 72.0in (1.83m), at which point the PIN count is resumed.

Violation: MINOR FOUL, and for every 3 seconds in which the situation is not corrected, a MAJOR FOUL is assessed.

A team's desired direction of travel is not a consideration when determining if a ROBOT is PINNED.

- G419 *Don't collude with your partners to shut down major parts of game play.** 2 or more ROBOTS that appear to a REFEREE to be working together may not isolate or close off any major element of MATCH play.

Violation: MAJOR FOUL, and for every 3 seconds in which the situation is not corrected, a MAJOR FOUL is assessed.

Examples of violations of this rule include, but are not limited to:

- A. shutting down access to all SCORING ELEMENTS,
- B. quarantining all opponents to a small area of the FIELD,
- C. preventing access to the opponent's TOWER,
- D. preventing traversal between field zones by blocking both TRENCHES, and
- E. preventing traversal between field zones by blocking both BUMPS.

Examples of standard gameplay that are not violations, include, but are not limited to:

- F. A single ROBOT blocking access to a particular area of the FIELD, and
- G. 2 ROBOTS independently collecting SCORING ELEMENTS in front of a BUMP or TRENCH at the same time.

- G420 TOWER protection.** A ROBOT may not contact, directly or transitively through a SCORING ELEMENT, an opponent ROBOT in contact with an opponent TOWER during the last 30 seconds of the MATCH regardless of who initiates contact.

Violation: MAJOR FOUL and if the opponent ROBOT is off the ground the opponent ROBOT is awarded LEVEL 3 TOWER points.

Transitive contact requires that each robot is contacting the same SCORING ELEMENT(S) simultaneously.

7.4.5 Human

- G421 *No wandering.** A DRIVE TEAM member must remain in their designated area as follows:

- A. DRIVERS and DRIVE COACHES may not contact anything outside their ALLIANCE AREA,
- B. a DRIVER must use the OPERATOR CONSOLE in the DRIVER STATION to which they are assigned, as indicated on the team sign,
- C. a HUMAN PLAYER may not contact anything outside their ALLIANCE AREA, and
- D. a TECHNICIAN may not contact anything outside their designated area.

Exceptions are granted as follows:

- E. for a HUMAN PLAYER partially outside the ALLIANCE AREA,
- F. in cases concerning safety, and
- G. for actions that are inadvertent, MOMENTARY, and inconsequential.

Violation: MINOR FOUL.

An intent of item B is to prevent unsafe situations where long tethers to OPERATOR CONSOLE devices increase tripping hazards as the operator moves about the ALLIANCE AREA. In the interest of avoiding nuisance penalties associated with a DRIVE TEAM member stepping outside of a prescribed area, we prefer to offer a general guideline as to what it means to use the OPERATOR CONSOLE in the ALLIANCE AREA. Provided the DRIVE TEAM member is within close proximity of their DRIVER STATION, there will be no repercussions. However, a DRIVE TEAM member located more than approximately half a DRIVER STATION width away from their own DRIVER STATION while using their OPERATOR CONSOLE is likely violating this rule.

- G422 *DRIVE COACHES and other teams: hands off the controls.** A ROBOT shall be operated only by the DRIVERS and/or HUMAN PLAYERS of that team. A DRIVE COACH activating their E-Stop or A-Stop is the exception to this rule.

Violation: MAJOR FOUL. RED CARD if greater-than-MOMENTARY.

Exceptions may be made before a MATCH for major conflicts, e.g. religious holidays, major testing, transportations issues, etc.

- G423 *DRIVE TEAMS, watch your reach.** A DRIVE TEAM member may not extend:

- A. into the CHUTE beyond the ALLIANCE-colored tape line while the CHUTE DOOR is open, or
- B. into the CORRAL beyond the ALLIANCE-colored tape line.

Violation: MINOR FOUL.

Teams should be careful when placing or collecting SCORING ELEMENTS and be aware of [G101](#).

- G424 *Humans: use SCORING ELEMENTS as directed.** A DRIVE TEAM member may not deliberately use a SCORING ELEMENT in an attempt to ease or amplify a challenge associated with a FIELD element.

Violation: MAJOR FOUL.

An example of a violation of this rule is if a HUMAN PLAYER uses a FUEL to disrupt an opponent ROBOT attempting to climb on the TOWER.

G425 *SCORING ELEMENT delivery. FUEL may only be introduced to the FIELD by a HUMAN PLAYER or DRIVER in the following ways:

- A. through the CHUTE,
- B. through the bottom opening in the OUTPOST, or
- C. thrown over the ALLIANCE WALL from the OUTPOST AREA.

Violation: MAJOR FOUL.

G426 *DRIVE COACHES, SCORING ELEMENTS are off limits. DRIVE COACHES may not touch SCORING ELEMENTS, unless for safety purposes.

Violation: MINOR FOUL.

G427 The OUTPOST has a storage limit. Off-FIELD FUEL may only be stored in the CHUTE and the CORRAL. Excess FUEL, defined as the CHUTE & CORRAL being full, must immediately be entered onto the FIELD.

HUMAN PLAYERS holding up to 2 FUEL or making a good-faith effort to immediately move or enter additional FUEL is an exception to this rule.

Violation: MINOR FOUL, and if CONTINUOUS, a MAJOR FOUL is assessed.

7.5 Post-MATCH

G501 *Leave promptly. A DRIVE TEAM member may not cause significant or multiple delays to the start of a subsequent MATCH, scheduled break content, or other FIELD activities.

Violation: VERBAL WARNING. YELLOW CARD if subsequent violations at any point during the event.



8 ROBOT Construction Rules (R)

The rules listed below explicitly address legal parts and materials and how those parts and materials may be used on a REBUILT ROBOT. A ROBOT is an electromechanical assembly built by the *FIRST* Robotics Competition team to play the current season's game and includes all the basic systems required to be an active participant in the game –power, communications, control, BUMPERS, and movement about the FIELD. A BUMPER is a protective assembly designed to attach to the exterior of the ROBOT and constructed as specified in section [8.4 BUMPER Rules](#).

There are many reasons for the structure of the rules, including safety, reliability, parity, creation of a reasonable design challenge, adherence to professional standards, impact on the competition, and compatibility with the [Kit of Parts \(KOP\)](#). The KOP is the collection of items listed on the current season's Kickoff Kit Checklists, distributed to the team via *FIRST* Choice in the current season, or paid for completely (except shipping) with a Product Donation Voucher (PDV) from the current season.

Another intent of these rules is to have all energy sources and active actuation systems on the ROBOT (e.g. batteries, compressors, motors, servos, cylinders, and their controllers) drawn from a well-defined set of options. This is to ensure that all teams have access to the same actuation resources and that the INSPECTORS are able to accurately and efficiently assess the legality of a given part.

ROBOTS are made up of COMPONENTS and MECHANISMS. A COMPONENT is any part in its most basic configuration, which cannot be disassembled without damaging or destroying the part or altering its fundamental function. A MECHANISM is an assembly of COMPONENTS that provide specific functionality on the ROBOT. A MECHANISM can be disassembled (and then reassembled) into individual COMPONENTS without damage to the parts.

Many rules in this section reference Commercial-Off-The-Shelf (COTS) items. A COTS item must be a standard (i.e. not custom order) part commonly available from a VENDOR for all teams for purchase. To be a COTS item, the COMPONENT or MECHANISM must be in an unaltered, unmodified state (with the exception of installation or modification of any software). Items that are no longer commercially available but are functionally equivalent to the original condition as delivered from the VENDOR are considered COTS and may be used.

Example 1: A team orders 2 ROBOT grippers from RoboHands Corp. and receives both items. They put 1 in their storeroom and plan to use it later. Into the other, they drill "lightening holes" to reduce weight. The first gripper is still classified as a COTS item, but the second gripper is now a FABRICATED ITEM, as it has been modified.

Example 2: A team obtains openly available blueprints of a drive module commonly available from Wheels-R-Us Inc. and has local machine shop "We-Make-It, Inc." manufacture a copy of the part for them. The produced part is not a COTS item, because it is not commonly carried as part of the standard stock of We-Make-It, Inc.

Example 3: A team obtains openly available design drawings from a professional publication during the pre-season and uses them to fabricate a gearbox for their ROBOT during the build period following Kickoff. The design drawings are

considered a COTS item and may be used as “raw material” to fabricate the gearbox. The finished gearbox itself would be a FABRICATED ITEM, and not a COTS item.

Example 4: A COTS part that has non-functional label markings added would still be considered a COTS part, but a COTS part that has device-specific mounting holes added is a FABRICATED ITEM.

Example 5: A team has a COTS single-board processor version 1.0, which can no longer be purchased. Only the COTS single-board processor version 2.0 may be purchased. If the COTS single-board processor version 1.0 is functionally equivalent to its original condition, it may be used.

Example 6: A team has a COTS gearbox which has been discontinued. If the COTS gearbox is functionally equivalent to its original condition, it may be used.

A VENDOR is a legitimate business source for COTS items that satisfies all the following criteria:

- A. has a Federal Tax Identification number. In cases where the VENDOR is outside of the United States, they must possess an equivalent form of registration or license with the government of their home nation that establishes and validates their status as a legitimate business licensed to operate within that country.
- B. is not a “wholly owned subsidiary” of a *FIRST* Robotics Competition team or collection of teams. While there may be some individuals affiliated with both a team and the VENDOR, the business and activities of the team and VENDOR must be completely separable.
- C. should maintain sufficient stock or production capability so they are able to ship any general (i.e., non-*FIRST* unique) product within 5 business days of receiving a valid purchase request. It is recognized that certain unusual circumstances (such as such as a global supply chain disruption and/or 1,000 *FIRST* teams all ordering the same part at once from the same VENDOR) may cause atypical delays in shipping due to backorders for even the largest VENDORS. Such delays due to higher-than-normal order rates are excused. This criterion may not apply to custom-built items from a source that is both a VENDOR and a fabricator.

For example, a VENDOR may sell flexible belting that the team wishes to procure to use as treads on their drive system. The VENDOR cuts the belting to a custom length from standard shelf stock that is typically available, welds it into a loop to make a tread, and ships it to a team. The fabrication of the tread takes the VENDOR 2 weeks. This would be considered a FABRICATED ITEM, and the 2-week ship time is acceptable. Alternately, the team may decide to fabricate the treads themselves. To satisfy this criterion, the VENDOR would just have to ship a length of belting from shelf stock (i.e. a COTS item) to the team within 5 business days and leave the welding of the cuts to the team.

- D. makes their products available to all *FIRST* Robotics Competition teams. A VENDOR must not limit supply or make a product available to just a limited number of *FIRST* Robotics Competition teams.

The intent of this definition is to be as inclusive as possible to permit access to all legitimate sources, while preventing ad hoc organizations from providing

special-purpose products to a limited subset of teams in an attempt to circumvent the cost accounting rules.

FIRST desires to permit teams to have the broadest choice of legitimate sources possible, and to obtain COTS items from the sources that provide them with the best prices and level of service available. Teams also need to protect against long delays in availability of parts that will impact their ability to complete their ROBOT. The build season is brief, so the VENDOR must be able to get their product, particularly *FIRST* unique items, to a team in a timely manner.

Ideally, chosen VENDORS should have national distributors (e.g. Home Depot, Lowes, MSC, McMaster-Carr, etc.). Remember, *FIRST* Robotics Competition events are not always near home – when parts fail, local access to replacement materials is often critical.

A FABRICATED ITEM is any COMPONENT or MECHANISM that has been altered, built, cast, constructed, concocted, created, cut, heat treated, machined, manufactured, modified, painted, produced, surface coated, or conjured partially or completely into the final form in which it will be used on the ROBOT.

Note that it is possible for an item (typically raw materials) to be neither COTS nor a FABRICATED ITEM. For example, a 120.0in (3.048m) length of aluminum which has been cut into 60.0in (1.52m) pieces by the team for storage or transport is neither COTS (it's not in the state received from the VENDOR), nor a FABRICATED ITEM (the cuts were not made to advance the part towards its final form on the ROBOT).

Teams may be asked to provide documentation proving the legality of non-REBUILT KOP items during inspection where a rule specifies limits for a legal part (e.g. pneumatic items, current limits, COTS electronics, etc.).

Some of these rules make use of English unit requirements for parts. If your team has a question about a metric-equivalent part's legality, please e-mail your question to the *FIRST* Robotics Competition Kit of Parts team at frcparts@firstinspires.org for an official ruling. To seek approval for alternate devices for inclusion in future *FIRST* Robotics Competition seasons, please contact the Kit of Parts team at frcparts@firstinspires.org with item specifications.

Teams should acknowledge the support provided by the corporate sponsors and mentors with an appropriate display of their school and sponsors names and/or logos (or the name of the supporting youth organization, if appropriate).

FIRST Robotics Competition can be a full-contact competition and may include rigorous game play. While the rules aim to limit severe damage to ROBOTS, teams should design their ROBOTS to be robust.


8.1 General ROBOT Design

R101 *ROBOT PERIMETER must be fixed. The ROBOT (excluding BUMPERS) must have a ROBOT PERIMETER, contained within the BUMPER ZONE and established while in the ROBOT'S STARTING CONFIGURATION, that is comprised of fixed, non-articulated structural elements of the ROBOT. Minor protrusions no greater than 0.25in (0.64cm) such as bolt heads, fastener ends, weld beads, and rivets are not considered part of the ROBOT PERIMETER.

To determine the ROBOT PERIMETER, wrap a piece of string around the outer most parts of the ROBOT (excluding BUMPERS) at the BUMPER ZONE described in [R405](#) and pull it taut. The string outlines the ROBOT PERIMETER.

Example: A ROBOT'S chassis is shaped like the letter 'U', with a large gap between chassis elements on the front of the ROBOT. When wrapping a taut string around this chassis, the string extends across the gap and the resulting ROBOT PERIMETER is a rectangle with 4 sides.

Figure 8-1 ROBOT PERIMETER example

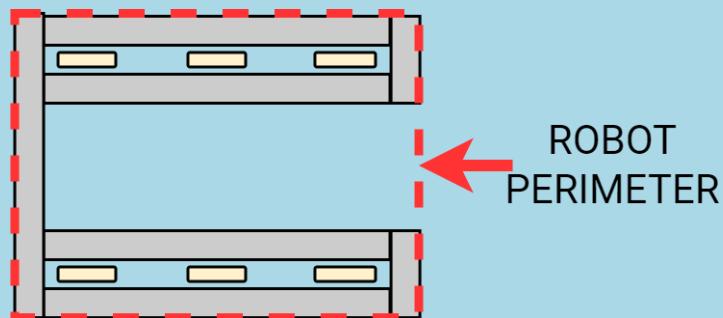

R102 *STARTING CONFIGURATION – no overhang. In the STARTING CONFIGURATION (the physical configuration in which a ROBOT starts a MATCH), no part of the ROBOT shall extend outside the vertical projection of the ROBOT PERIMETER, with the exception of its BUMPERS and minor protrusions such as bolt heads, fastener ends, rivets, cable ties, etc.

If a ROBOT is designed as intended and each side is pushed up against a vertical wall (in STARTING CONFIGURATION and with BUMPERS removed), only the ROBOT PERIMETER (or minor protrusions) will be in contact with the wall.

The allowance for minor protrusions in this rule is intended to allow protrusions that are both minor in extension from the ROBOT PERIMETER and cross-sectional area.

If a ROBOT uses interchangeable MECHANISMS per [I103](#), Teams should be prepared to show compliance with this rule and [R105](#) in all configurations.

R103 *ROBOT weight limit. The ROBOT weight must not exceed 115.0lb (52.16kg). When determining weight, the basic ROBOT structure and all elements of all additional MECHANISMS that might be used in a single configuration of the ROBOT shall be weighed together (see [I103](#)). For the purposes of determining compliance with the weight limitations, the following items are excluded:

- A. ROBOT BUMPERS,
- B. ROBOT battery and its associated half of the Anderson cable quick connect/disconnect pair (including wire, the associated cable lugs, connecting bolts, and insulation), and
- C. tags used for location detection systems if provided by the event.


R104 STARTING CONFIGURATION – max size. A ROBOT'S STARTING CONFIGURATION may not have a ROBOT PERIMETER greater than 110.0in (2.794m) and may not be more than 30in (76.2cm) tall.

Be sure to consider the size of the ROBOT on its cart to make sure it will fit through doors. Also consider the size of the ROBOT to ensure that it will fit into a shipping crate, vehicle, etc.

Note that rules contained in section [8.4 BUMPER Rules](#) may impose additional restrictions on ROBOT design.

R105 ROBOT horizontal extension limit. ROBOTS may not extend more than 12in (30.48cm) beyond the vertical projection of their ROBOT PERIMETER.

Figure 8-2 ROBOT PERIMETER extension

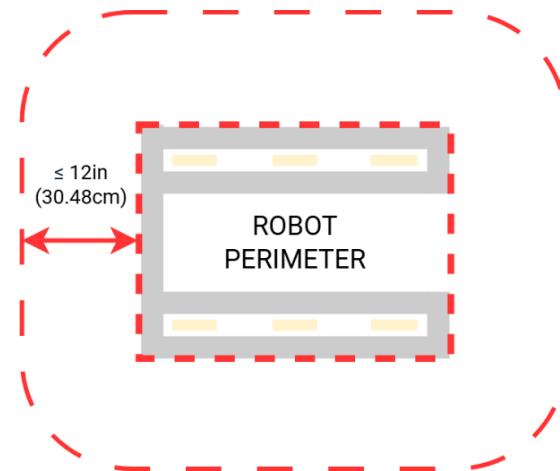

Teams should expect to have to demonstrate a ROBOT'S ability to constrain itself per above during inspection. Constraints may be implemented with either hardware or software.

R106 Horizontal extension – one direction at a time. ROBOTS may not extend beyond their ROBOT PERIMETER in more than one direction (i.e. over more than 1 side of the ROBOT) at a time. The extension may not reach outside the projection of that side of the ROBOT PERIMETER. For the purposes of this rule, a round or circular section of ROBOT PERIMETER is considered to have an infinite number of sides. Exceptions include:

- A. BUMPERS
- B. Minor protrusions excluded from the ROBOT PERIMETER per [R101](#)

Teams are responsible for maintaining compliance with expansion limits and subject to violations listed in [G413](#) for any violations during the MATCH.

[G413](#) includes an exception for MOMENTARY actions that are not used for strategic benefit such as a wire or cable tie swinging out of the ROBOT PERIMETER, including while an extension is deployed out a different side.


Examples of compliance and non-compliance of this rule are shown in [Figure 8-3](#).

Yellow bars represent the limits of the ROBOT PERIMETER and are drawn in the same orientation of the ROBOT'S PERIMETER.

Green bars represent a measured extension from the ROBOT PERIMETER that does not exceed the limit defined in [R105](#).

- ROBOT A violates this rule for extending in more than one direction
- ROBOT B violates this rule for extending in more than one direction
- ROBOT C does not violate this rule
- ROBOT D does not violate this rule as the additional extension is MOMENTARY and is not used for strategic benefit
- ROBOT E does not violate this rule
- ROBOT F violates this rule for extending in more than one direction by extending over a round segment of ROBOT PERIMETER.

Figure 8-3 Examples of compliance and non-compliance of this rule

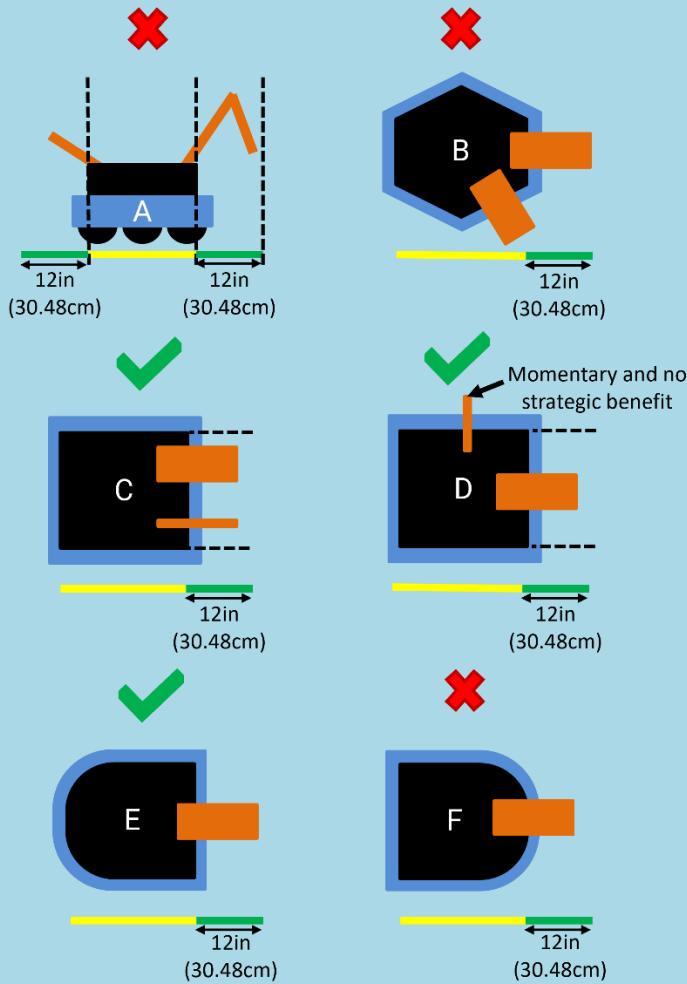

R107 ROBOT vertical extension limit. ROBOTS may not extend such that their total height exceeds 30.0in (76.2cm).

This measurement is intended to be made as if the ROBOT is resting on a flat floor (without changing the ROBOT configuration), not relative to the current height of the ROBOT from the FIELD carpet at any given time (i.e. the measurement is made perpendicular to the ROBOT PERIMETER polygon).

R108 ROBOT extension floor interaction ROBOT extensions may not interact with the carpet, BUMPS, or TOWER BASE such that the BUMPERS are lifted out of the BUMPER ZONE (see R405).

8.2 ROBOT Safety & Damage Prevention

R201 *No digging into carpet. Traction devices must not have surface features that could damage the ARENA (e.g. metal, sandpaper, inflexible studs, cleats, hook-loop fasteners or similar attachments). Traction devices include all parts of the ROBOT that are designed to transmit any propulsive and/or braking forces between the ROBOT and FIELD carpet.

R202 *No exposed sharp edges. Protrusions from the ROBOT and exposed surfaces on the ROBOT shall not pose hazards to the ARENA elements (including SCORING ELEMENTS) or people.

Note that the use of acrylic or other materials which may break into jagged pieces is not explicitly prohibited, but any such breakage must be corrected immediately to comply with this rule.

R203 *General safety. ROBOT parts shall not be made from hazardous materials, be unsafe, cause an unsafe condition, or interfere with the operation of other ROBOTS.

Examples of items that will violate this rule include (but are not limited to):

- A. shields, curtains, or any other devices or materials designed or used to obstruct or limit the vision of any DRIVE TEAM members and/or interfere with their ability to safely control their ROBOT,
- B. speakers, sirens, air horns, or other audio devices that generate sound at a level sufficient to be a distraction,
- C. any devices or decorations specifically intended to jam or interfere with the remote sensing capabilities of another ROBOT, including vision systems, acoustic range finders, sonars, infrared proximity detectors, etc. (e.g. including imagery on your ROBOT that utilizes or closely mimics 36h11 AprilTags),
- D. lasers other than those listed as IEC/EN 60825-1 "Class 1" or IEC/EN 62471 "Exempt,"
- E. flammable gasses,
- F. any device intended to produce flames or pyrotechnics,
- G. hydraulic fluids or hydraulic items,
- H. switches or contacts containing liquid mercury,
- I. circuitry used to create voltages in excess of 24 Volts,
- J. any ballast not secured sufficiently, including loose ballast e.g. sand, ball bearings, etc., such that it may become loose during a MATCH,

- K. hazardous materials (e.g. lead, whether encapsulated or not) used on the ROBOT,
- L. high intensity light sources used on the ROBOT (e.g. super bright LED sources marketed as 'military grade' or 'self-defense') may only be illuminated for a brief time while targeting and may need to be shrouded to prevent any exposure to participants. Complaints about the use of such light sources will be followed by re-inspection and possible disablement of the device, and
- M. Bright lights which flash more than approximately 5 times per second, per [E108](#).

R204 *Leave SCORING ELEMENTS at the FIELD. ROBOTS must allow removal of SCORING ELEMENTS from the ROBOT and the ROBOT from FIELD elements while DISABLED and powered off.

ROBOTS will not be re-enabled after the MATCH, so teams must be sure that SCORING ELEMENTS and ROBOTS can be quickly, simply, and safely removed.

Teams are encouraged to consider [G501](#) when developing their ROBOTS.

R205 *Don't contaminate the FIELD. Liquids, gels, greases and fine particles must not contaminate the FIELD or other ROBOTS.

R206 *Don't damage SCORING ELEMENTS. ROBOT elements likely to come in contact with a SCORING ELEMENT shall not pose a significant hazard to the SCORING ELEMENT.

SCORING ELEMENTS are expected to undergo a reasonable amount of wear and tear as they are handled by ROBOTS, such as scratching or marking. Gouging, tearing off pieces, or routinely marking SCORING ELEMENTS are violations of this rule.

8.3 Budget Constraints & Fabrication Schedule

R301 *Individual item cost limit. No individual, non-KOP item or software shall have a Fair Market Value (FMV) that exceeds \$600 USD. The total cost of COMPONENTS purchased in bulk may exceed \$600 USD as long as the cost of an individual COMPONENT does not exceed \$600 USD.

Teams should be ready to show INSPECTORS documentation of FMV for any COMPONENTS that appear to be in the range of the \$600 USD limit.

The Analog Devices IMU MXP Breakout Board, P/N ADIS16448, does not have a published FMV. This device is considered to comply with this rule regardless of its true FMV.

The FMV of a COTS item is its price defined by a VENDOR for the part or an identical functional replacement. This price must be generally available to all FIRST Robotics Competition teams throughout the build and competition season (i.e. short-term sale prices or coupons do not reflect FMV), however teams are only expected to make a good faith effort at determining the item price and are not expected to monitor prices of ROBOT items throughout the season. The FMV is the cost of the item itself and does not include any duties, taxes, tariffs, shipping, or other costs that may vary by locality.

The FMV of COTS software is the price, set by the VENDOR, to license the software (or piece of the software) that runs on the ROBOT for the period from Kickoff to the end of the *FIRST* Championship. The FMV of software licensed free-of-cost, including through the Virtual KOP, for use on the ROBOT is \$0.

The FMV of FABRICATED parts is the value of the material and/or labor, except for labor provided by team members (including sponsor employees who are members of the team), members of other teams, and/or event provided machine shops. Material costs are accounted for as the cost of any purchasable quantity that can be used to make the individual part (i.e. the purchasable raw material is larger than the FABRICATED part).

Example 1: A team orders a custom bracket made by a company to the team's specification. The company's material cost and normally charged labor rate apply.

Example 2: A team receives a donated sensor. The company would normally sell this item for \$450 USD, which is therefore its FMV.

Example 3: A team purchases titanium tube stock for \$400 USD and has it machined by a local machine shop. The machine shop is not considered a team sponsor but donates 2 hours of expended labor anyway. The team must include the estimated normal cost of the labor as if it were paid to the machine shop and add it to the \$400 USD.

Example 4: A team purchases titanium tube stock for \$400 USD and has it machined by a local machine shop that is a recognized sponsor of the team. If the machinists are considered members of the team, their labor costs do not apply. The total applicable cost for the part would be \$400 USD.

It is in the best interests of the teams and *FIRST* to form relationships with as many organizations as possible. Recognizing supporting companies as sponsors of, and members in, the team is encouraged, even if the involvement of the sponsor is solely through the donation of fabrication labor.

Example 5: A team purchases titanium tube stock for \$400 USD and has it machined by another team. The total applicable cost for the part would be \$400 USD.

Example 6: A team purchases a widget at a garage sale or online auction for \$300, but it's available for sale from a VENDOR for \$700. The FMV is \$700.

If a COTS item is part of a modular system that can be assembled in several possible configurations, then each individual module must fit within the price constraints defined in this rule.

If the modules are designed to assemble into a single configuration, and the assembly is functional in only that configuration, then the total cost of the complete assembly including all modules must fit within the price constraints defined in this rule.

In summary, if a VENDOR sells a system or a kit, a team must use the entire system/kit FMV and not the value of its COMPONENT pieces.

Example 7: VENDOR A sells a gearbox that can be used with a number of different gear sets, and can mate with 2 different motors they sell. A team purchases the gearbox, a gear set, and a motor, then assembles them together. Each part is treated separately for the purpose of determining FMV since the purchased pieces can each be used in various configurations.

Example 8: VENDOR B sells a robotic arm assembly that a team wants to use. However, it costs \$630 USD, so they cannot use it. The VENDOR sells the "hand", "wrist", and "arm" as separate assemblies, for \$210 USD each. A team wishes to purchase the 3 items separately, then reassemble them. This would not be legal, as they are really buying and using the entire assembly, which has a Fair Market Value of \$630 USD.

Example 9: VENDOR C sells a set of wheels or wheel modules that are often used in groups of 4. The wheels or modules can be used in other quantities or configurations. A team purchases 4 and uses them in the most common configuration. Each part is treated separately for the purpose of determining FMV, since the purchased pieces can be used in various configurations.

R302 *MAJOR MECHANISM, from this year only. MAJOR MECHANISMS, as defined in [I101](#), created before Kickoff are not permitted.

Neither this rule nor the language in this blue box define specific thresholds for how much of a MAJOR MECHANISM must be constructed after Kickoff. This rule expects and requires the team's honest assessment of whether they built the MAJOR MECHANISMS of their ROBOT after Kickoff.

Attempts to exploit loopholes in the definition of MAJOR MECHANISM in order to bypass this requirement are in the spirit of neither this rule nor FIRST Robotics Competition. Examples of exploitation include:

- Pre-assembling significant portions of a MAJOR MECHANISM prior to Kickoff and attaching those assemblies together post-Kickoff,
- Removing a small COMPONENT of a MAJOR MECHANISM prior to Kickoff such that it is no longer a MAJOR MECHANISM and replacing it after Kickoff.

R303 *Create new designs and software, unless they're public. ROBOT software and designs created before Kickoff are only permitted if the source files (complete information sufficient to produce the design) are available publicly prior to Kickoff.

Example 1: A team realizes that the transmission designed and built in the fall perfectly fits their need for a transmission to drive the ROBOT arm. They build an exact copy of the transmission from the original design plans and bolt it to the ROBOT. This would be prohibited, as the transmission – although made during the competition season – was built from detailed designs developed prior to Kickoff.

Example 2: A team developed an omni-directional drive system for the 2019 competition. In July 2019 they refined and improved the control software, written in C++, to add more precision and capabilities. They decided to use a similar system for the REBUILT competition. They copied large sections of unmodified code over into the control software of the new ROBOT, also written in C++. This would be a violation of the schedule constraint and is not allowed.

Example 3: The same team decides to use LabVIEW as their software environment for REBUILT. Following Kickoff, they use the previously developed C++ code as a reference for the algorithms and calculations required to implement their omni-directional control solution. Because they developed new LabVIEW code as they ported over their algorithms, this is permitted.

Example 4: A different team develops a similar solution during the fall and plans to use the developed software on their competition ROBOT. After completing the software, they post it in a generally accessible public forum and make the code available to all teams. Because they have made their software publicly available before Kickoff, they can use it on their ROBOT.

Example 5: A team develops a transmission prior to Kickoff. After completing the project, they publish the CAD files on a generally accessible public forum and make them available to all teams. Because they have made the design publicly available before Kickoff, they can use the design to create an identical transmission, fabricated after Kickoff, for use on their REBUILT ROBOT.

8.4 BUMPER Rules

A BUMPER is a required assembly which attaches to the ROBOT frame. BUMPERS protect ROBOTS from damaging/being damaged by other ROBOTS and FIELD elements.


A BUMPER guide providing additional information on materials and design based on historical best practices may be found under the Mechanical Resources section of the [Technical Resources page](#). Teams may also reference the [KitBot Instructions](#) for a detailed step-by-step on how to build bumpers for the KitBot.

All dimensions specified in this section are nominal and will be measured during inspection with a tolerance of 0.25in (0.63cm) unless otherwise specified. This means that maximums specified have a tolerance of +0.25in (0.63cm) and minimums specified have a tolerance of -0.25in (0.63cm). Teams are encouraged to design to the nominal dimension and reserve the tolerance for unexpected deviation such as manufacturing error or tolerance stack-up.

R401 *BUMPERS almost all around. ROBOTS are required to use BUMPERS to protect the entire ROBOT PERIMETER. Gaps of less than 1.25in (3.17cm) between adjacent segments are permitted as long as all corners are filled per R406. A single gap larger than 1.25in (3.17cm) is permitted, as long as at least 5.0in (12.7cm) of ROBOT PERIMETER on each side of each corner is protected by BUMPER.

An arc is considered to have infinite corners and therefore may not have a gap larger than 1.25in (3.17cm).

Figure 8-4 BUMPER coverage requirements

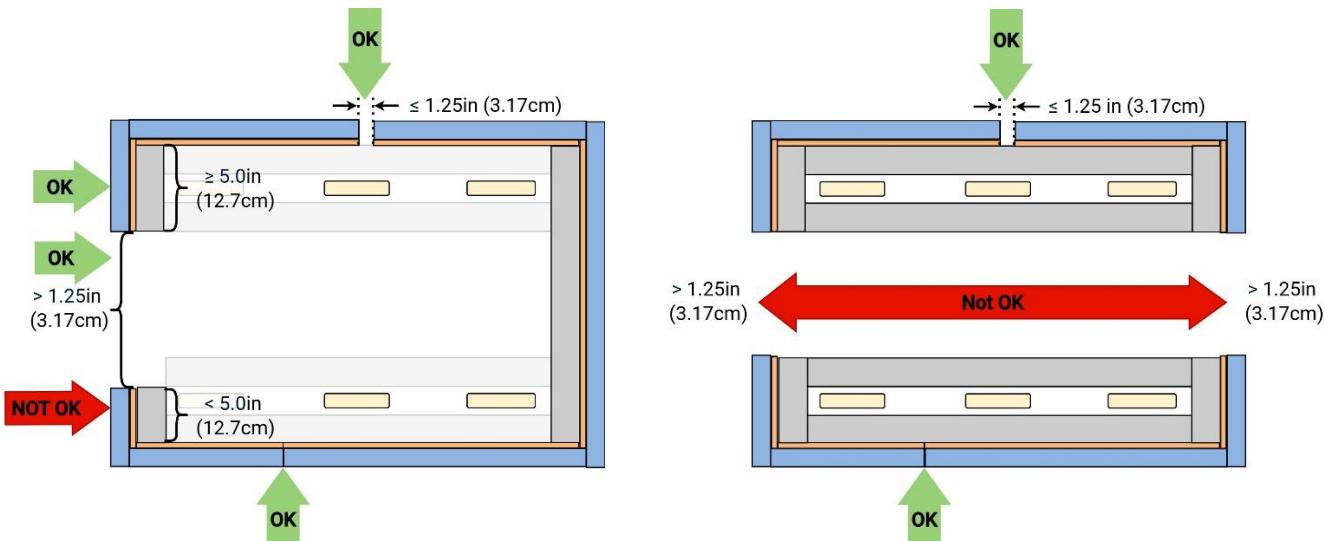

R402 *BUMPER construction. BUMPERS must consist of the following elements. With the exception of padding and cover extending into corners and cover wrapping around the end of segments, any vertical cross section of the BUMPER must include parts A, B, and C:


- A. **Padding** – A minimum of 2.25in (5.72cm) depth of foam padding, at least 4.5in (11.43cm) tall consisting of solid blocks, sheets, or stacked rods of one or more of the following materials:
 - i. Solid pool noodles or backer rod
 - ii. Solid polyethylene closed cell foam (including crosslinked) with density between 1.5 and 3.0lb/ft³ (24.03 to 48.05kg/m³)
 - iii. Solid EVA closed cell foam with density between 2.0 and 6.0lb/ft³ (32.04 to 96.11kg/m³)
 - iv. Foam floor tiles

Multiple types, shapes, and/or layers of foam may be used within a single BUMPER.

Teams should be prepared to provide information about the padding material used in their BUMPERS. Teams do not need to have a separate material sample or expose padding for direct inspection to show compliance with this rule.

- B. **Backing** – A backer at least 4.5in (11.43cm) tall which supports the padding (i.e. padding is not cantilevered other than in corners) and facilitates installation and removal of the BUMPER from the ROBOT (as noted in [R410](#)). Additional elements may be added to strengthen the backing, fill space between the BUMPER and ROBOT frame, serve as part of the attachment system, or for any other purpose.


Figure 8-5 BUMPER backing supporting padding (cross section)

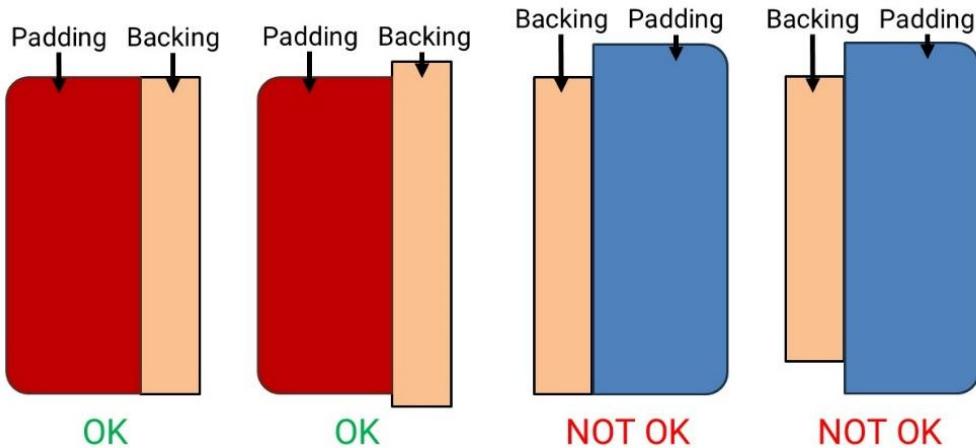

- C. **Cover** – Cloth (as noted in [R411](#)) which covers all outward, upward and downward facing surfaces of padding such that no padding is exposed to interaction with the FIELD or other ROBOTS.
- D. **Fastening System** – BUMPERS must attach to the ROBOT PERIMETER with a rigid fastening system to form a tight, robust connection to the main structure/frame (e.g. not attached with hook-and-loop tape, tape, or cable ties). The fastening system must be designed to withstand vigorous game play. All removable fasteners (e.g. bolts, locking pins, quick release pins, etc.) may be considered part of either the BUMPERS or ROBOT for determination of weight per [R103](#) and [R408](#).


The BUMPER Rules provide teams significant freedom in choosing designs and materials. For information on a reference design, see the Bumper Guide under the Mechanical Resources section of the [Technical Resources Page](#).

Figure 8-6 BUMPER Cross Section Example

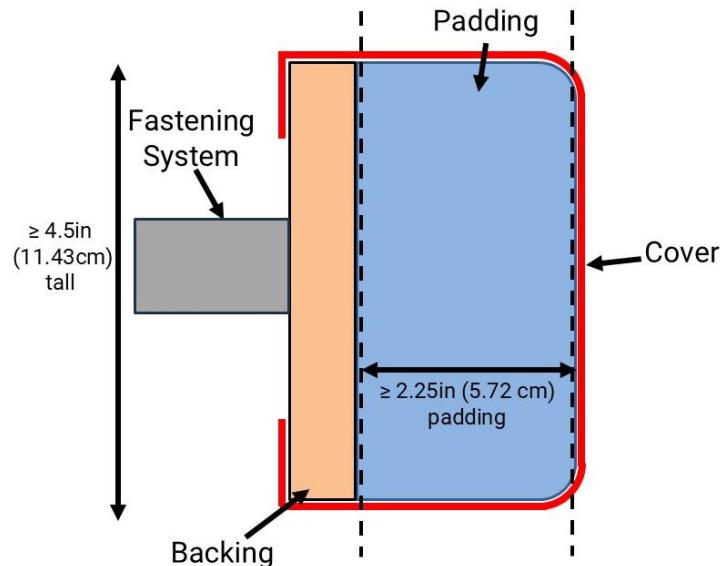


R403 *BUMPER extension limit. BUMPERS must not extend more than 4.0in (10.16cm) from the ROBOT PERIMETER.

Figure 8-7 BUMPER Extension Limit

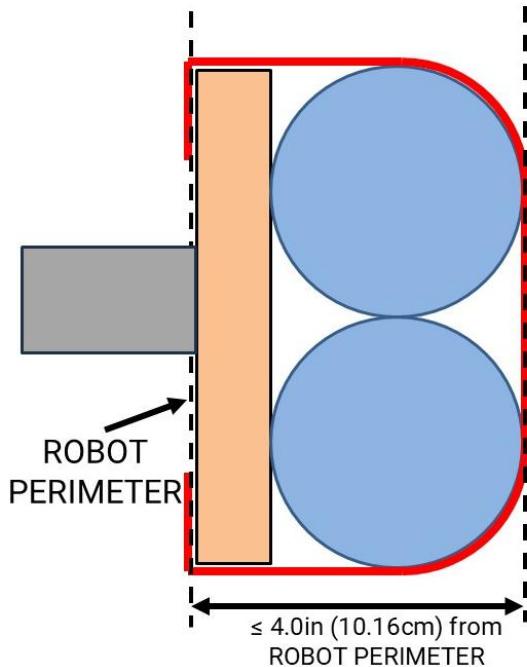

R404 *BUMPERS must be soft. Hard parts of BUMPERS must not extend more than 1.25in (3.17cm) out from the ROBOT PERIMETER. Only padding (per R402-A), cover (per R402-C, including any coatings or markings), and soft fasteners used to secure padding or cover are permitted beyond this limit. Padding must extend at least 2.0in (5.08cm) beyond any hard parts of the BUMPER. There is no limit on how far BUMPER hard parts may extend inside the ROBOT PERIMETER.


Figure 8-8 BUMPER Hard Parts Limit

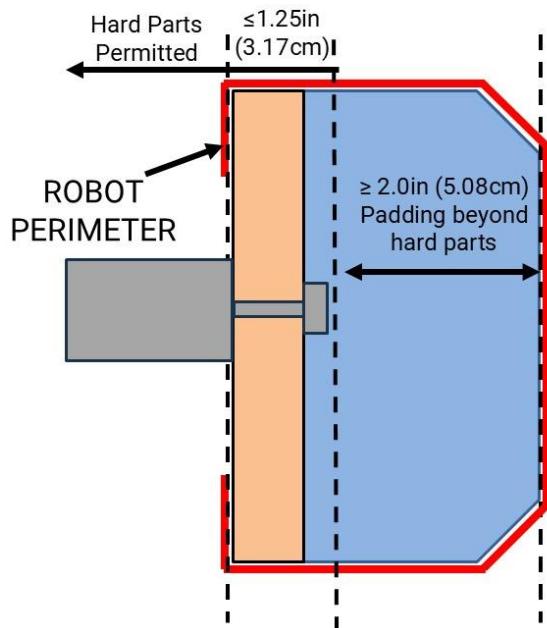

Hard parts include any items which are likely to cause damage to the cloth or padding of other BUMPERS such as nuts and bolts, cable ties, hard plastics, etc.

- R405 *BUMPERS interact with BUMPERS.** While navigating the FIELD normally, all BUMPERS must have padding (per [R402-A](#)) supported by backing (per [R402-B](#)) entirely filling the BUMPER ZONE, a space between 2.5in (6.35cm) and 5.75in (14.61cm) from the floor.


Figure 8-9 BUMPER ZONE examples

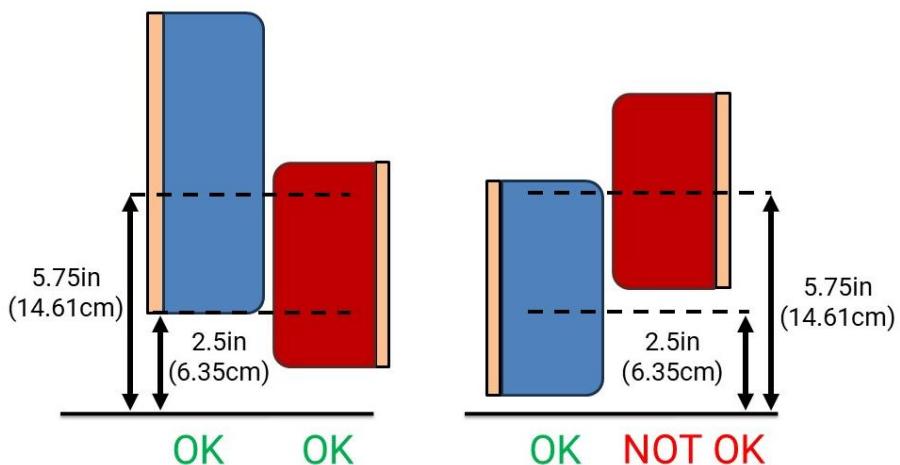

This measurement is intended to be made in a ROBOT'S expected configuration(s) while navigating the FIELD and is relative to whatever surface the ROBOT is currently driving on. BUMPERS leaving the BUMPER ZONE due to ROBOTS inadvertently tipping is not a violation of this rule.

- R406 *Fill BUMPER corners.** Corner joints between BUMPERS must be filled with uncompressed padding material extending at least 2.25in (5.72cm) from the corner with no gaps or voids. Examples of implementation are shown in [Figure 8-10](#).

Figure 8-10 Uncompressed corner padding

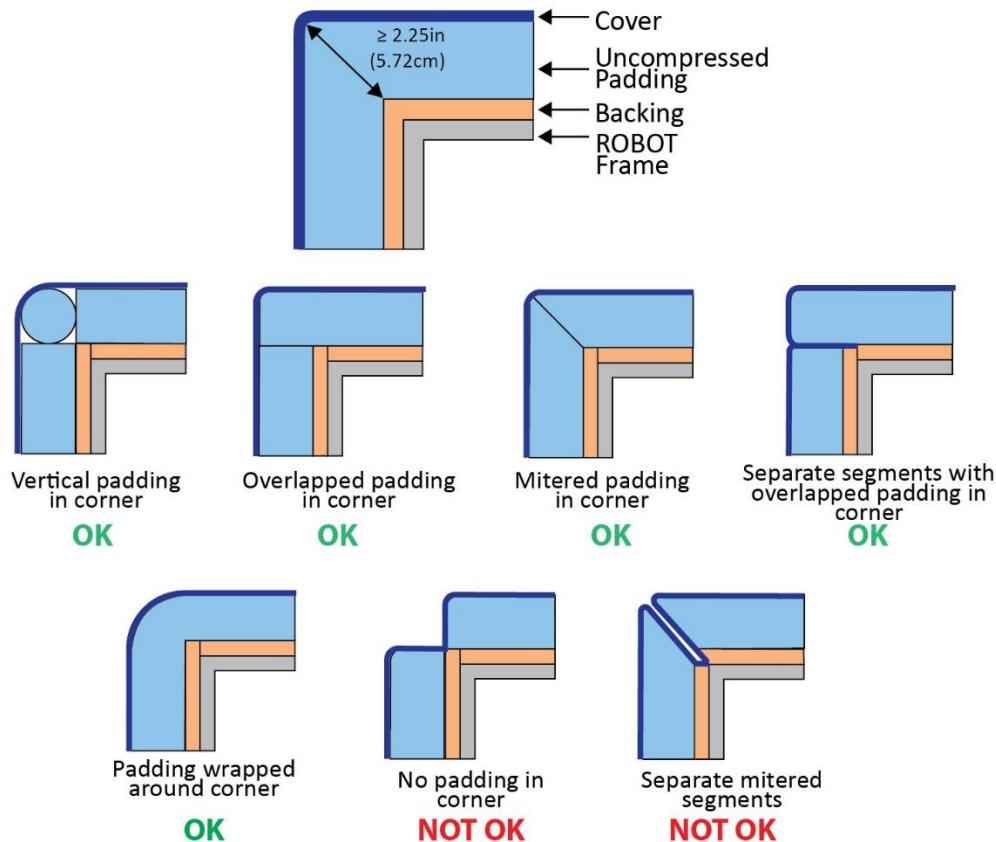

Separate bumper segments meeting at a miter in the corner are not considered to "fill" the corner due to the cloth covering and do not meet the requirements of this rule.

R407 *BUMPERS shouldn't be wedges. BUMPERS must not act as wedges when interacting with other BUMPERS.

Examples of BUMPERS which might act as a wedge, and may invite additional scrutiny, include:

- A. BUMPERS utilizing softer foam towards the top of a BUMPER profile,
- B. BUMPERS utilizing excessively rounded profiles such as a single semi-circle, and
- C. BUMPERS with tapered or stepped padding such that the padding is thinner or thicker towards the top or bottom.

R408 *Weight limit with BUMPERS. The total weight of the ROBOT (as described in [R103](#)) with BUMPERS must not exceed 135.0lb (61.23kg)

R409 *BUMPERS should be passive. BUMPERS must be fixed relative to the ROBOT PERIMETER. BUMPERS may not contain any elements which move during the MATCH or electrical elements.

Compression and flex of BUMPER covers and/or padding materials, and incidental, inconsequential compression and flex in backing and/or fastening systems are not considered violations of this rule.

R410 *BUMPERS must come off. BUMPERS must be designed for installation and removal to facilitate inspection and weighing.

As a guideline, BUMPERS should be able to be installed or removed by 2 people in fewer than 5 minutes.

R411 *BUMPERS indicate your ALLIANCE. Each ROBOT must be able to display red or blue BUMPER covers to reflect their ALLIANCE color, as assigned in the MATCH schedule distributed at the event (as described in section [10.1 MATCH Schedules](#)). Contrasting markings on outward, upward, or downward facing surfaces of the BUMPER cover, other than the following, are prohibited:

- those required per [R412](#),
- hook-and-loop tape, snap fasteners, or functional equivalents backed by the hard parts of the BUMPER,
- solid white FIRST logos between 4.75in (12.06cm) and 5.25in (13.33cm) wide (i.e. comparable to those available in the REBUILT Virtual Kit), and
- narrow areas of underlying cloth exposed at seams, corners, or folds.

R412 *Team number on BUMPERS. Team numbers must be displayed and positioned on the BUMPER cover in at least 3 locations approximately 90 degrees apart such that an observer walking around the perimeter of the ROBOT can unambiguously tell the team's number from most points of view, from as far as approximately 720.0in (18.29m). Team numbers must meet the following additional criteria:

- consist of only white Arabic numerals at least 3.75in (9.53cm) high, at least 0.5in (1.27cm) in stroke width,

The 0.5in (1.27cm) stroke width requirement applies to the majority of the stroke. Font elements less than 0.5in (1.27cm) such as serifs, rounded edges, small hairlines or gaps, etc. are permitted as long as the majority of the stroke meets the sizing requirement and the numbers are unambiguous.

- must not wrap around sharp corners (less than 135.0°) of the ROBOT PERIMETER,
- must not split individual digits such that the team number is ambiguous, and

As a guideline, spacing between digits or groups of digits which exceeds ~4.0in (10.16cm) may be ambiguous.

- may not substitute logos or icons for numerals.

There is no prohibition against splitting team numbers onto different sections of BUMPER. The intent is that the team's number is clearly visible and unambiguous so that Judges, REFEREES, Announcers, and other teams can easily identify competing ROBOTS.

This marking is intended to display the team number only, not to intentionally change the surface characteristics of the BUMPER. Excessive material usage as part of any team number marking will invite close scrutiny.

8.5 Motors & Actuators

R501 *Allowable motors. The only motors and actuators permitted include the following (in any quantity):

Table 8-1 Motor allowances

Motor Name	Part Numbers Available	
AndyMark 9015	am-0912	AndyMark 9015
AndyMark NeveRest	am-3104	
AndyMark PG	am-2161 (alt. PN am-2765)	am-2194 (alt. PN am-2766)
AndyMark RedLine Motor	am-3775	am-3775a
AndyMark Snow Blower Motor	am-2235	am-2235a
Banebots	am-3830 M7-RS775-18 RS775WC-8514	M5 – RS550-12 RS550VC-7527 RS550
CIM	FR801-001 M4-R0062-12 AM802-001A 217-2000 PM25R-44F-1005	PM25R-45F-1004 PM25R-45F-1003 PMR25R-45F-1003 PMR25R-44F-1005 am-0255
CTR Electronics Minion	24-777378	WCP-1691
CTR Electronics/VEX Robotics Falcon 500	217-6515 am-6515	19-708850 am-6515_Short
Current/former KOP automotive motors	Denso AE235100-0160 Denso 5-163800-RC1 Denso 262100-3030	Denso 262100-3040 Bosch 6 004 RA3 194-06 Johnson Electric JE-PLG-149 Johnson Electric JE-PLG-410
Playing with Fusion Venom	BDC-10001	
REV Robotics HD Hex	REV-41-1291	
REV Robotics NEO Brushless	REV-21-1650 (v1.0 or v1.1) REV-21-1653	am-4258 am-4258a

Motor Name	Part Numbers Available	
REV Robotics NEO 550	REV-21-1651	am-4259
REV Robotics NEO Vortex	REV-21-1652	am-5275
Thrifty Bot Pulsar 775	TTB-0350	
VEX BAG	217-3351	
VEX Mini-CIM	217-3371	
West Coast Products Kraken x44	WCP-0941	
West Coast Products Kraken x60	WCP-0940	am-5274
West Coast Products RS775 Pro	217-4347	
Fans, no greater than 120mm (nominal) size and rated electrical input power no greater than 10 watts (W) continuous duty at 12 volts (VDC)		
Hard drive motors part of a legal COTS computing device		
Factory installed vibration and autofocus motors resident in COTS computing devices (e.g. rumble motor in a smartphone).		
PWM COTS rotational servos with stall current ≤ 4A and mechanical output power ≤ 8W at 6V. PWM COTS linear servos with max stall current ≤ 1A at 6V.		
Motors integral to a COTS sensor (e.g. LIDAR, scanning sonar, etc.), provided the device is not modified except to facilitate mounting		
1 compressor compliant with R806 and used to compress air for the ROBOT'S pneumatic system		
COTS brushed motors, linear actuators, electrical solenoid actuators, or electromagnets rated for 12V and wired to an approved power regulating device downstream of a breaker 20A or less. Electrical solenoid actuators or electromagnets used at 24V must be rated for 24V.		

For servos, note that the roboRIO is limited to a max current output of 2.2A on the 6V rail (12.4W of electrical input power). Teams should make sure that their total servo power usage remains below this limit at all times.

Servo mechanical output power is approximated by the following formula (using 6V data reported by manufacturer): Mechanical Output Power (in W) = 0.25 x (Stall Torque in N·m) x (No Load Speed in rad/s). [This calculator from the FIRST Tech Challenge documentation](#) can be used to help calculate output power from inputs of various units.

Given the extensive amount of motors allowed on the ROBOT, teams are encouraged to consider the total power available from the ROBOT battery during the design and build of the ROBOT. Drawing large amounts of current from many motors at the same time could lead to drops in ROBOT battery voltage that may result in tripping the main breaker or trigger the brownout protection of the roboRIO. For more information about the roboRIO brownout protection and

measuring current draw using the PDP/PDH, see [roboRIO Brownout and Understanding Current Draw](#).

AndyMark PG Gearmotors are sold with labeling based on the entire assembly. Assemblies labeled am-3651 through am-3656 contain legal motors specified in [Table 8-1](#). These motors may be used with or without the provided gearbox.

R502 *Only 4 propulsion motors. A ROBOT may not have more than 4 propulsion motors. A propulsion motor is a motor that enables the ROBOT to move around the FIELD surface (i.e., carpet). Motors that generate small amounts of thrust as a secondary or incidental feature are not considered propulsion motors.

Examples that are not considered propulsion motors include:

- A. motors that primarily alter the alignment of a wheel in contact with the FIELD surface (such as a swerve steering motor),
- B. motors that run MECHANISM wheels (e.g. for SCORING ELEMENT manipulation) that occasionally happen to contact the carpet, but without enough force to generate significant thrust,
- C. motors that change the speed of the drive wheels using a shifting MECHANISM without significantly contributing to propulsion, and
- D. motors that enable the ROBOT to move via contact with non-carpeted surfaces of FIELD elements.

R503 *Don't modify motors (mostly). The integral mechanical and electrical system of any motor must not be modified. Motors, servos, and electric solenoids used on the ROBOT shall not be modified in any way, except as follows:

- A. The mounting brackets and/or output shaft/interface may be modified to facilitate the physical connection of the motor to the ROBOT and actuated part.
- B. The electrical leads may be trimmed to length as necessary and connectors or splices to additional wiring may be added.
- C. The locking pins on the window motors (P/N 262100-3030 and 262100-3040) may be removed.
- D. The connector housings on KOP automotive motors listed in [Table 8-1](#) may be modified to facilitate lead connections.
- E. Servos may be modified as specified by the manufacturer (e.g. re-programming or modification for continuous rotation).
- F. Minimal labeling may be applied to indicate device purpose, connectivity, functional performance, etc.
- G. Any number of #10-32 plug screws may be removed from the Falcon 500 and the Kraken X60.
- H. Insulation may be applied to electrical terminals.
- I. Repairs, provided the original performance and specifications are unchanged.
- J. Maintenance recommended by the manufacturer.

The intent of this rule is to allow teams to modify mounting tabs and the like, not to gain a weight reduction by potentially compromising the structural integrity of any motor.

R504 *Power (most) actuators off of approved devices. With the exception of servos, fans, or motors integral to sensors of COTS computing devices permitted in [R501](#), each actuator must be controlled by a power regulating device. The only power regulating devices for actuators permitted on the ROBOT include:

- A. motor controllers:
 - a. Koors40 Motor Controller (P/N am-5600),
 - b. Spark Flex Motor Controller (P/N REV-11-2159, am-5276)
 - c. Spark Motor Controller (P/N REV-11-1200, am-4260),
 - d. Spark MAX Motor Controller (P/N REV-11-2158, am-4261),
 - e. Talon FX Motor Controller (P/N 217-6515, 19-708850, am-6515, am-6515_Short, WCP-0940, WCP-0941) for controlling integral Falcon 500, Kraken X60, Kraken X44 only,
 - f. Talon FXS Motor Controller (P/N 24-708883, WCP-1692)
 - g. Talon Motor Controller (P/N CTRE_Talon, CTRE_Talon_SR, and am-2195),
 - h. Talon SRX Motor Controller (P/N 217-8080, am-2854, 14-838288),
 - i. Thrifty Nova (P/N TTB-0100),
 - j. Venom Motor with Controller (P/N BDC-10001) for controlling integral motor only,
 - k. Victor SP Motor Controller (P/N 217-9090, am-2855, 14-868380), and
 - l. Victor SPX Motor Controller (P/N 217-9191, 17-868388, am-3748).
- B. relay modules:
 - a. Spike H-Bridge Relay (P/N 217-0220 and SPIKE-RELAY-H),
 - b. Automation Direct Relay (P/N AD-SSR6M12-DC-200D, AD-SSRM6M25-DC-200D, AD-SSR6M40-DC-200D), and
 - c. Power Distribution Hub (PDH) switched channel (P/N REV-11-1850) for controlling non-actuator CUSTOM CIRCUITS only.
- C. pneumatics controllers:
 - a. Pneumatics Control Module (P/N am-2858, 217-4243) and
 - b. Pneumatic Hub (P/N REV-11-1852).
- D. servo controllers:
 - a. Servo Hub (P/N REV-11-1855)

Note: The Automation Direct Relays are single directional. Per [R504](#) they may not be wired together in an attempt to provide bi-directional control.

R505 *Don't overload controllers. Each power regulating device may control electrical loads per [Table 8-2](#). Unless otherwise noted, each power regulating device shall control 1 and only 1 electrical load.

Table 8-2 Power regulating device allotments

Electrical Load	Motor Controller	Relay Module	Pneumatics Controller
AndyMark RedLine Motor	Yes	No	No
Banebots			
CIM			
CTR Electronics Minion			
REV Robotics NEO Brushless			

Electrical Load	Motor Controller	Relay Module	Pneumatics Controller
REV Robotics NEO 550 REV Robotics NEO Vortex ThriftyBot Pulsar 775 VEX Mini-CIM WCP RS775 Pro			
AndyMark 9015 VEXpro BAG	Yes (up to 2 per controller)	No	No
AndyMark PG KOP Automotive Motors NeveRest Snow Blower Motor REV Robotics HD Hex	Yes (up to 2 per controller)	Yes	No
Other Brushed Motor Linear Actuator	Yes (20A breaker max)	Yes (20A breaker max)	No
CTR Electronics/VEX Falcon 500 Playing With Fusion Venom WCP Kraken X44 WCP Kraken X60	Yes (integrated controller only)	No	No
Compressor	No	Yes	Yes
Pneumatic Solenoid Valves	No	Yes (multiple)	Yes (1 per channel)
Electric Solenoids	Yes (multiple)	Yes (multiple)	Yes (1 per channel)
CUSTOM CIRCUITS	Yes (multiple)	Yes (multiple)	Yes (multiple)

R506 *Control servos safely. Servos must be connected to, and only to, 1 of the following:

- PWM ports on the roboRIO,
- PWM ports on a WCP Spartan Sensor Board (P/N WCP-0045),
- REV Robotics Servo Power Module (P/N REV-11-1144), or
- REV Robotics Servo Hub (P/N REV-11-1855).

8.6 Power Distribution

In order to maintain safety, the rules in this section apply at all times while at the event, not just while the ROBOT is on the FIELD for MATCHES.

R601 *Battery limit – everyone has the same power. The only legal source of electrical energy for the ROBOT during the competition, the ROBOT battery, must be 1 and only 1 non-spillable sealed lead acid (SLA) battery with the following specifications:

- A. Nominal voltage: 12V
- B. Nominal capacity at 20-hour discharge rate: minimum 17Ah, maximum 18.2Ah
- C. Shape: Rectangular
- D. Nominal Dimensions: 7.1in x 3.0in x 6.6in, +/- 0.1in for each dimension (18.03cm x 7.62cm x 16.76cm, +/-0.25cm for each dimension)
- E. Nominal weight: 11.0lb to 14.5lb (4.99kg to 6.57kg)
- F. Terminals: Nut and bolt style
- G. Battery vents must not be obstructed during charging.

"Nut and bolt style" refers to any style battery terminal where the connector is secured to the battery using a threaded fastener.

Examples of batteries which meet these criteria include:

- A. Enersys (P/N NP18-12, NP18-12B, NP18-12BFR),
- B. MK Battery (P/N ES17-12),
- C. Battery Mart (P/N SLA-12V18),
- D. Sigma (P/N SP12-18),
- E. Universal Battery (P/N UB12180),
- F. Power Patrol (P/N SLA1116),
- G. Werker Battery (P/N WKA12-18NB),
- H. Power Sonic (P/N PS-12180NB),
- I. Yuasa (P/N NP18-12B),
- J. Panasonic (P/N LC-RD-1217),
- K. Interstate Batteries (P/N BSL1116), and
- L. Duracell Ultra Battery (P/N DURA12-18NB).

Teams should be aware that they may be asked to provide documentation of the specifications of any battery not listed above.

Batteries should be charged in accordance with manufacturer's specification.
(Please see the [FIRST Safety Manual](#) for additional information.)

While teams should generally attempt to leave the battery vent (the inset rectangle on the top face of the battery) as unobstructed as possible during charging, as long as the short edges of the rectangle are not sealed or directly covered the vent will be considered not obstructed.

R602 *Other batteries for cameras or computers only. COTS USB battery packs with a capacity of 100Wh or less (27000mAh at 3.7V) with 5V/5A max output or 12V/5A max output using USB-PD per port, batteries integral to and part of a COTS computing device or self-contained camera (e.g. laptop batteries, GoPro style camera, etc.), or batteries used to power CMOS/RTC features may be used to power COTS computing devices and any peripheral COTS input or output devices connected to the COTS computing device provided they are:

- A. securely fastened to the ROBOT,
- B. connected only using unmodified COTS cables, and
- C. charged according to manufacturer recommendations.

A COTS computing device is a non-roboRIO device used to process or collect sensor information (e.g. a “smart flashlight” is not a COTS computing device).

- R603 *Charge batteries with safe connectors.** Any battery charger used to charge a ROBOT battery must have the corresponding Anderson SB connector installed.
- R604 *Charge batteries at a safe rate.** Any battery charger used to charge a ROBOT battery may not be used such that it exceeds 6-Amp average charge current.
- R605 *Batteries are not ballast.** No batteries other than those allowed per [R601](#) and [R602](#) are allowed on the ROBOT, whether or not they are being used to supply power.

For example, teams may not use additional batteries as extra weight on their ROBOTS.

- R606 *Secure the battery.** The ROBOT battery must be secured such that it will not dislodge during vigorous ROBOT interaction including if the ROBOT is turned over or placed in any arbitrary orientation.
- R607 *Insulate battery connections.** Each electrical terminal on the ROBOT battery, main breaker, and their connections (lugs, stripped wire ends, etc.) to the wire must be fully insulated at all times.
- R608 *Limit non-battery energy.** Non-electrical sources of energy used by the ROBOT (i.e., stored at the start of a MATCH) shall come only from the following sources:

- compressed air stored in the pneumatic system that has been charged in compliance with [R806](#) and [R807](#),
- a change in the altitude of the ROBOT center of gravity,
- storage achieved by deformation of ROBOT parts,
- closed-loop COTS pneumatic (gas) shocks, or
- air-filled (pneumatic) wheels.


- R609 *Connect main power safely.** The following devices shall be connected with 6 AWG (7 SWG or 16 mm²) copper wire or larger as shown in [Figure 8-11](#):

- 1 ROBOT battery
- a single pair of Anderson Power Products (or APP) 2-pole SB type connectors
- a single main 120-Amp (120A) surface mount circuit breaker (Cooper Bussman P/N CB185-120, CB185F-120, CB285-120 CB285F-120, CB285120F or Optifuse P/N 153120, 253120)
- a single main power distribution device (PD):
 - CTR Electronics Power Distribution Panel (PDP) P/N am-2856, 217-4244, 14-806880,
 - CTR Electronics Power Distribution Panel 2.0 (PDP 2.0) P/N 24-806880, WCP-1690
 - REV Robotics Power Distribution Hub (PDH) P/N REV-11-1850
 - AndyMark Power Distribution (AMPD) P/N am-5754

No additional devices or modifications shall be permitted with the following exceptions:

- Monitoring circuitry permitted by [R625](#)
- SB-50 to SB-120 adapters, provided they have been presented for Inspection
- Termination of wires with appropriate cable lugs

Figure 8-11 Electrical connection diagram

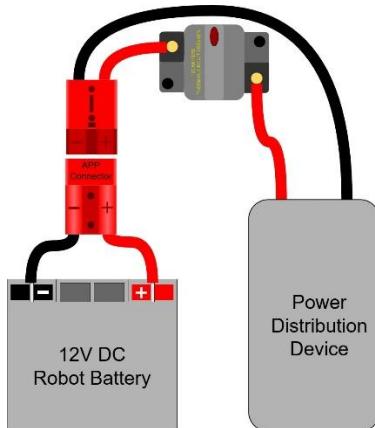

"SB type" refers to SB type only (e.g. SB-50, SB-120, etc.), not SBS or any other part type beginning with SB. All batteries supplied by FIRST (such as Spare Parts and international batteries) will have a red or pink SB50 connector installed which may not be removed.

The pink connectors included in the KOP mate with the red SB50 connector.

While pure copper wire is recommended, copper-clad aluminum wire is considered copper wire

- R610 ***1 breaker/fuse per circuit.** All circuits, with the exceptions of those listed in [R615](#) and [R617](#), must connect to, and have power sourced solely by, a single protected connector pair of the PD. Circuits must not connect to the main power input of the PD.
- R611 ***The ROBOT frame is not a wire.** All wiring and electrical devices shall be electrically isolated from the ROBOT frame. The ROBOT frame must not be used to carry electrical current.

Compliance with this rule is checked by observing a $>120\Omega$ resistance between either the (+) or (-) post within the APP connector that is attached to the PD and any point on the ROBOT.

All legal motor controllers with metal cases are electrically isolated. They may be mounted directly to ROBOT frame COMPONENTS.

Note that some cameras, decorative lights, and sensors (e.g. some encoders, some IR sensors, etc.) have grounded enclosures or are manufactured with conductive plastics. These devices must be electrically isolated from the ROBOT frame to ensure compliance with this rule.

- R612 ***Must be able to turn ROBOT on and off safely.** The 120A circuit breaker must be quickly and safely accessible from the exterior of the ROBOT. This is the only 120A circuit breaker allowed on the ROBOT.

Examples considered not "quickly and safely accessible" include breakers covered by an access panel or door, or mounted on, underneath or immediately adjacent to moving COMPONENTS.

It is strongly recommended that the 120A circuit breaker location be clearly and obviously labeled so it can be easily found by FIELD STAFF if needed.

While the main breaker must be accessible, consider positioning or shielding it such that it's protected from accidental actuation (e.g. it's unlikely to be hit by a SCORING ELEMENT during game play).


- R613 *Electrical system must be inspectable.** The PD, associated wiring, and all circuit breakers must be visible for inspection.

"Visible for inspection" does not require that the items be visible when the ROBOT is in STARTING CONFIGURATION, provided the team can make the items viewable during the inspection process.

- R614 *No high voltage allowed.** Any active electrical item that is not an actuator (specified in [R501](#)) or core control system item (specified in [R710](#)) is considered a CUSTOM CIRCUIT. CUSTOM CIRCUITS shall not produce measurable voltages exceeding 24V with the exception of COTS Power-over-Ethernet (PoE) injector devices used with COTS Ethernet cables and COTS receiving devices (i.e. not a breakout or adapter).
- R615 *Power roboRIO as specified.** The roboRIO power input must be connected directly to a non-switched pair of protected output terminals of a PD with a 10A fuse or circuit breaker installed. No other electrical load can be connected to the breaker or fuse supplying this circuit.
- R616 *Power radio as specified – Part 1.** The wireless bridge (radio) power must be connected based on the radio type:

- A. For VH-109 radios, radio power must be sourced from one or both of:
 - a. Injected into the "RIO" port of the radio using a passive injector or modified Ethernet cable connected directly to a PD, and/or
 - b. Wired directly to the 12V power input of the radio from a PD.
- B. For OM5P radios (China events only), radio power must be sourced from only one of:
 - a. the 12V/2A output of a CTR Electronics Voltage Regulator Module (VRM) (P/N am-2857, 217-4245), as shown in [Figure 8-12](#), and must be the only load connected to any of the 12V/2A terminals or

Figure 8-12 Radio power source from a VRM

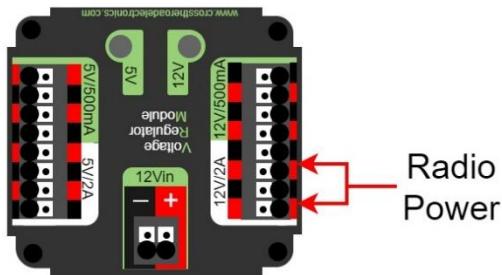

- b. using an Ethernet cable between a REV Radio Power Module (RPM) (P/N REV-11-1856) and the "18-24v PoE" port.

Note that this prohibits using any other active PoE injector device to power the radio but does not prohibit using any PASSIVE CONDUCTORS to inject the VRM power into an Ethernet cable plugged into the OM5P radio port labeled "18-24v PoE."

Please reference [How to Wire an FRC Robot](#) for wireless bridge wiring information.

R617 *Power radio as specified – Part 2. The device supplying power to the wireless bridge per [R616](#) must be connected directly to a non-switched pair of protected output terminals of a PD with a 10A fuse or circuit breaker installed with the exception of the PDP 1.0 shared VRM/PCM pairs which may be protected with a 20A fuse or circuit breaker. No other electrical load can be connected to the breaker or fuse supplying this circuit with the exception of a single PCM if using the shared VRM/PCM ports of a PDP 1.0.

R618 *Use PD terminals as designed. Only 1 wire shall be connected to each terminal on the PD.

If multi-point distribution of circuit power is needed (e.g. to provide power to multiple PCMs and/or VRMs from a single 20A circuit), then all incoming wires may be appropriately spliced into the main lead (e.g. using an insulated terminal block, crimped splice or soldered wire splice), and the single main lead inserted into the terminal to power the circuit.

R619 *Only use specified circuit breakers in a PD. The only circuit breakers permitted for use in the PD are:

- Snap Action VB3-A Series or AT2-A, terminal style F57, 40A rating or lower,
- Snap Action MX5-A or MX5-L Series, 40A rating or lower,
- REV Robotics ATO auto-resetting breakers 40A rating or lower,
- CTR Electronics ATO auto-resetting breakers 40A rating or lower, and
- Any ATM circuit breaker with value less than or equal to the fuses permitted per [R620](#).

R620 *Only use specified fuses in PD. The only fuses permitted for use in the PD are automotive blade fuses with the following values:

- for the PDP, ATM style fuses with values matching the value printed on the device's corresponding fuse holder,
- for all PDs ATC/ATO style fuses with values 10A or lower, and
- for the PDH, ATM style fuses with values 15A or lower with the exception of a single 20A fuse for powering a PCM or PH.

Note that these fuses must be pressed very firmly to seat properly. Improper seating can cause a device to reboot upon impact.

R621 *Protect circuits with appropriate circuit breakers. Each branch circuit must be protected by 1 and only 1 circuit breaker or fuse on the PD per [Table 8-3](#). No other electrical load can be connected to the breaker or fuse supplying this circuit with the exception of devices downstream of a permitted motor power adapter board placed between the PD and a motor controller (WCP-1380, WCP-1903, WCP-1904, RF-4003, RF-4004, RF-4005).

Table 8-3 Branch circuit protection requirements

Branch Circuit	Circuit Breaker/ Fuse Value	Quantity Allowed Per Breaker
Motor Controller	Up to 40A	1
CUSTOM CIRCUIT	Up to 40A	No limit
Automation Direct Relay 40A (*6M40*)	Up to 40A	1
Fans permitted per R501 and not already part of COTS computing devices.	Up to 20A	No limit
Spike Relay Module	Up to 20A	1
Automation Direct Relay 25A (*6M25*)	Up to 20A	1
PCM/PH – with compressor	Up to 20A	1
Servo Power Module/Servo Hub	Up to 20A	1
Additional VRM (non-radio)/Additional PCM/PH (non-compressor)	Up to 20A	3 total
Automation Direct Relay 12A (*6M12*)	Up to 10A	1

This rule does not prohibit the use of smaller value breakers in the PD or any fuses or breakers within CUSTOM CIRCUITS for additional protection.

Fans permitted per [R501](#) may also be included within CUSTOM CIRCUITS.

- R622** ***Use appropriately sized wire.** All circuits shall be wired with appropriately sized insulated copper wire (SIGNAL LEVEL cables don't have to be copper):

Table 8-4 Breaker and wire sizing

Application	Minimum Wire Size
31 – 40A breaker protected circuit	12 AWG (13 SWG or 4 mm ²)
21 – 30A breaker protected circuit	14 AWG (16 SWG or 2.5 mm ²)
6 – 20A breaker protected circuit	18 AWG
11-20A fuse protected circuit	(19 SWG or 1 mm ²)
Between the PDP dedicated terminals and the VRM/RPM or PCM/PH	
Compressor outputs from the PCM/PH	

Application	Minimum Wire Size
Motor power adapter board protected circuit	22 AWG (22 SWG or 0.5 mm ²)
≤5A breaker protected circuit	
≤10A fuse protected circuit	
VRM 2A circuits ≤2A fuse protected circuit VH-109 Passthrough per R626	24 AWG (24 SWG or .25 mm ²) Cat5e/6/7/8 cable, 2 pairs total (1 pair V+, 1 pair ground)
roboRIO PWM port outputs ≤1A fuse protected circuit	26 AWG (27 SWG or 0.14 mm ²) Cat5e/6/7/8 cable, single pair total
SIGNAL LEVEL circuits (i.e. circuits which draw ≤1A continuous and have a source incapable of delivering >1A, including but not limited to roboRIO non-PWM outputs, CAN signals, PCM/PH Solenoid outputs, VRM 500mA outputs, RPM outputs, and Arduino outputs)	28 AWG (29 SWG or .08 mm ²)

Wires that are recommended by the device manufacturer or originally attached to legal devices are considered part of the device and by default legal. Such wires are exempt from this rule, provided they are powered by the smallest value fuse or breaker which permits proper device operation.

In order to show compliance with these rules, teams should use wire with clearly labeled sizes if possible. If unlabeled wiring is used, teams should be prepared to demonstrate that the wire used meets the requirements of this rule (e.g. wire samples and evidence that they are the required size).

While pure copper wire is recommended, copper-clad aluminum wire is considered copper wire.

- R623 *Use only appropriate connectors.** Branch circuits may include intermediate elements such as COTS connectors, splices, COTS flexible/rolling/sliding contacts, and COTS slip rings, as long as the entire electrical pathway is via appropriately gauged/rated elements.

Slip rings containing mercury are prohibited per [R203](#).

- R624 *Use specified wire colors (mostly).** All non-SIGNAL LEVEL wiring with a constant polarity (i.e., except for outputs of relay modules, motor controllers, or sensors) shall be color-coded along their entire length from the manufacturer as follows:

- A. red, yellow, white, brown, or black-with-stripe on the positive (e.g. +24VDC, +12VDC, +5VDC, etc.) connections,

- B. black or blue for the common or negative side (-) of the connections

Exceptions to this rule include:

- C. wires that are originally attached to legal devices and any extensions to these wires using the same color as the manufacturer,
- D. Ethernet cable used in PoE cables.

R625 *Don't modify critical power paths. CUSTOM CIRCUITS shall not directly alter the power pathways between the ROBOT battery, PD, motor controllers, relays (per [R504-B](#)), motors and actuators (per [R501](#)), pneumatic solenoid valves, or other elements of the ROBOT control system (items explicitly mentioned in [R710](#)). Custom high impedance voltage monitoring or low impedance current monitoring circuitry connected to the ROBOT'S electrical system is acceptable, if the effect on the ROBOT outputs is inconsequential.

A noise filter may be wired across motor leads or PWM leads. Such filters will not be considered CUSTOM CIRCUITS and violate neither this rule nor [R712](#).

Acceptable signal filters must be fully insulated and must be 1 of the following:

- 1 microfarad ($1 \mu\text{F}$) or less, non-polarized, capacitor may be applied across the power leads of any motor on your ROBOT (as close to the actual motor leads as reasonably possible) or
- a resistor may be used as a shunt load for the PWM control signal feeding a servo.

R626 *VH-109 PoE passthrough. The VH-109 PoE output may be used only under the following conditions:

- A. The device being powered is a COTS device or COTS adapter connected to a single COTS device with current draw $\leq 2\text{A}$ at 12V.
- B. The connection is made using standard Cat5e/6/7/8 cable.
- C. The VH-109 is powered using the 12V input terminals with 18AWG wire or larger (it may additionally be powered using the PoE input if desired).

8.7 Control, Command & Signals System

R701 *Control the ROBOT with a roboRIO. ROBOTS must be controlled via 1 programmable NI roboRIO or roboRIO 2.0 (P/N am3000 or am3000a, both versions referred to throughout this manual as "roboRIO"), with image version 2026_v1.2 or later.

There are no rules that prohibit co-processors, provided commands originate from the roboRIO to enable and disable all power regulating devices. This includes motor controllers legally wired to the CAN bus.

R702 *Communicate with the ROBOT with the specified radio. 1 Vivid Hosting wireless bridge (P/N: VH-109, WCP-1538), that has been configured with the appropriate encryption key for your team number at each event, is the only permitted device for communicating to and from the ROBOT during the MATCH. Events held in China are the exceptions to this rule and must use an OpenMesh (P/N: OM5P-AN or OM5P-AC) radio.

R703 *Use specific Ethernet port for roboRIO. The roboRIO Ethernet port must be connected as specified:

- A. For VH-109 v1.5 radios: to the port labeled “RIO” either directly, via a Cat5 Ethernet pigtail, or via a passive PoE injector cable or adapter.
- B. For VH-109 v1.0 radios (either directly or via Cat5 Ethernet pigtail):
 - a. to the radio port labeled “RIO” via a passive PoE injector cable or adapter (whether or not it is used to power the radio), or an Ethernet cable with the appropriate wires removed on the roboRIO end. All wires or adapters used must be fully insulated, or
 - b. to the radio port labeled “AUX 1” or “AUX 2” with the corresponding DIP switch in the off (default) position.
- C. For OM5P radios (China events only): to the wireless bridge port labeled “18-24v PoE” (either directly, via a network switch, via an RPM, or via a Cat5 Ethernet pigtail).

Note: Placing a switch between the roboRIO and radio may impede the ability for FIELD STAFF to troubleshoot roboRIO connection issues on the FIELD. Teams may be asked to connect directly between the radio and the roboRIO as part of troubleshooting efforts.

If not using the “RIO” port of the VH-109 1.0, it is strongly recommended to cover the port to prevent accidental damage to devices such as laptops which may occur if attached to this port.

R704 *Only use allowed ports and bandwidth to communicate with the ROBOT. Communication between the ROBOT and the OPERATOR CONSOLE may not exceed the following and is restricted to network ports listed in [Table 8-5](#):

- A. 7.0Mbits/second for Vivid Hosting wireless bridge radios
- B. 4.0Mbits/second for OpenMesh radios

Table 8-5 Open FMS ports

Port	Designation	Bi-directional?
UDP/TCP 1180-1190	Camera data from the roboRIO to dashboard software when the camera is connected the roboRIO via USB	Yes
TCP 1735	SmartDashboard	Yes
UDP 1130	Dashboard-to-ROBOT control data	Yes
UDP 1140	ROBOT-to-Dashboard status data	Yes
HTTP 80	Camera connected via switch on the ROBOT	Yes
HTTP 443	Camera connected via switch on the ROBOT	Yes
UDP/TCP 554	Real-Time Streaming Protocol for h.264 camera streaming	Yes
UDP/TCP 1250	CTRE Diagnostics Server	Yes
UDP/TCP 5800-5810	Team use	Yes

Teams may use these ports as they wish if they do not employ them as outlined above (i.e. TCP 1180 can be used to pass data back and forth between the ROBOT and the Driver Station Software if the team chooses not to use the camera on USB).

Note that the 4.0Mbit limit will be strictly enforced by the wireless bridge.

The [FMS Whitepaper](#) has more details on how to check and optimize bandwidth usage.

While FIRST makes every effort to provide a wireless environment that allows teams access to a full 4.0Mbits/second data rate (with about 100.0Kbit used for ROBOT control and status), at some events wireless conditions may not accommodate this.

R705 *Configure devices for your team number. The roboRIO, Driver Station Software, and wireless bridge must be configured to correspond to the correct team number, per the procedures defined in the [FIRST Robotics Competition Control System documentation](#).

R706 *Don't bypass the ARENA network. All signals must originate from the OPERATOR CONSOLE and be transmitted to the ROBOT via the ARENA Ethernet network.

R707 *Limited wireless allowed. The only forms of wireless communication that may be used to communicate to, from, or within the ROBOT, include:

- those required per [R702](#) and [R706](#),
- tags used for location detection systems if provided by the event, and
- RFID or NFC systems used exclusively within the ROBOT.

Devices that employ signals in the visual spectrum (e.g. cameras) and non-RF sensors that don't receive human-originated commands (e.g. "beam break" sensors or IR sensors on the ROBOT used to detect FIELD elements) are not wireless communication devices and thus this rule doesn't apply.

R708 *Wireless bridge must be visible. The wireless bridge must be mounted on the ROBOT such that the diagnostic lights are visible to FIELD STAFF.

Teams are encouraged to mount the wireless bridge away from noise generating devices such as motors, PCM(s)/PH(s), and VRM(s)/RPM(s).


R709 *ROBOTS must have a signal light. ROBOTS must use at least 1, but no more than 2, diagnostic ROBOT Signal Light (RSL) (P/N 855PB-B12ME522 and/or am-3583).

Any RSL must be:

- mounted on the ROBOT such that it is easily visible while standing 36.0in (91.44cm) away from at least one side of the ROBOT,
- connected to the "RSL" supply terminals on the roboRIO, and
- if using the 855PB-B12ME522, wired for solid light operation, by placing a jumper between the "La" and "Lb" terminals on the light per [Figure 8-13](#).

Please see [How to Wire an FRC ROBOT](#) for connection details.

Figure 8-13 855PB-B12ME522 jumper wiring

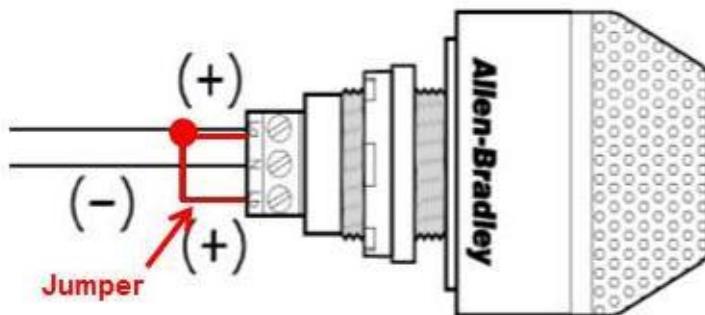

R710 *Only specified modifications to control system devices permitted. The Driver Station Software, roboRIO, PD, PCM(s)/PH(s), VRM(s)/RPM(s), RSL, 120A breaker, motor controllers, MXP devices used to control actuators per [R713-C](#), relay modules (per [R504-B](#)), wireless bridge, PD breakers and fuses, Servo Power Module, Servo Hub, motor power adapter boards, and batteries shall not be tampered with, modified, or adjusted in any way (tampering includes drilling, cutting, machining, rewiring, disassembling, painting, etc.), with the following exceptions:

Please note that the Driver Station Software is a separate application from the Dashboard. The Driver Station Software may not be modified, while teams are expected to customize their Dashboard code.

- A. User programmable code in the roboRIO may be customized.
- B. Motor controllers may be calibrated as described in owner's manuals.
- C. Fans may be attached to motor controllers and may be powered from the power input terminals.
- D. If powering the compressor, the fuse on a Spike H-Bridge Relay may be replaced with a VB3A-20A Snap-Action circuit breaker.
- E. Wires, cables, and signal lines may be connected via the standard connection points provided on the devices.
- F. Fasteners (including adhesives) may be used to attach the device to the OPERATOR CONSOLE or ROBOT or to secure cables to the device.
- G. Thermal interface material may be used to improve heat conduction.
- H. Labeling may be applied to indicate device purpose, connectivity, functional performance, etc.
- I. Jumpers may be changed from their default location.
- J. Limit switch jumpers may be removed from a Jaguar motor controller and a custom limit switch circuit may be substituted.
- K. Device firmware may be updated with manufacturer supplied firmware.
- L. Integral wires on motor controllers may be cut, stripped, and/or connectorized.
- M. Devices may be repaired, provided the performance and specifications of the device after the repair are identical to those before the repair.
- N. The cover may be removed from the Talon SRX or Talon FX data port.
- O. Electrical tape may be applied to the aluminum plate inside the wireless bridge.
- P. The input terminal cover from the PDP may be omitted (no other element may be installed using the threaded holes to install something in place of the PDP terminal cover).
- Q. The roboRIO 2.0 SD card may be replaced with an SD card of any capacity.
- R. adding insulating material to exposed conductors.

- S. replacing control system power terminal blocks (e.g. RSL power connector) with functional equivalents.
- T. tape may be applied for debris protection.
- U. VH-109 v1.0 may be upgraded to VH-109 v1.5 using manufacturer materials and instructions.

Please note that while repairs are permitted, the allowance is independent of any manufacturer's warranty. Teams make repairs at their own risk and should assume that any warranty or return options are forfeited. Be aware that diagnosing and repairing COMPONENTS such as these can be difficult.

For more information about modification O, please see [this OM5P-AC Radio Modification article](#).

R711 *Don't connect motor outputs to roboRIO. Neither 12VDC power nor relay module or motor controller outputs shall be directly connected to the roboRIO, with the exception of the designated 12VDC input.

R712 *Control PWM controllers from the roboRIO. Every relay module (per [R504-B](#)), servo, Servo Power Module, and PWM motor controller shall be connected to a corresponding port (relays to Relay ports, servos, and PWM controllers to PWM ports) on the roboRIO (either directly or through a WCP Spartan Sensor Board) or via a legal MXP connection (per [R713](#)). They shall not be controlled by signals from any other source.

R713 *Only approved MXP devices can control actuators. If a motor is controlled via the MXP, its power regulating device must be connected by 1 of the following methods:

- A. directly to any PWM pins,
- B. via a network of PASSIVE CONDUCTORS used to extend the PWM pins, or
- C. via 1 approved ACTIVE DEVICE:
 - a. Kauai Labs navX MXP
 - b. Kauai Labs navX2 MXP
 - c. RCAL MXP Daughterboard
 - d. REV Robotics RIOno
 - e. REV Robotics Digit Board
 - f. West Coast Products Spartan Sensor Board
 - g. Huskie Robotics HUSKIE 2.0 Board

A PASSIVE CONDUCTOR is any device or circuit whose capability is limited to the conduction and/or static regulation of the electrical energy applied to it (e.g. wire, splices, connectors, printed wiring board, etc.).

An ACTIVE DEVICE is any device capable of dynamically controlling and/or converting a source of electrical energy by the application of external electrical stimulus.

The "network of PASSIVE CONDUCTORS" only applies to the pins being used for PWM output to motors or servos. This means that connecting an ACTIVE DEVICE, such as a sensor to 1 MXP pin does not prevent other MXP pins from being used in accordance with B.

- R714 *Control CAN motor controllers from the roboRIO.** Each CAN motor controller must be controlled with enable/disable inputs sourced from the roboRIO and passed via either a PWM (wired per [R713](#)) or CAN bus (either directly or daisy-chained via another CAN bus device) signal, but both shall not be wired simultaneously on the same device.

As long as the CAN bus is wired legally so that the heartbeat from the roboRIO is maintained, all closed loop control features of the CAN motor controller may be used. (That is, commands originating from the roboRIO to configure, enable, and specify an operating point for all CAN motor controller closed loop modes fit the intent of [R701](#)).

"Wired directly" includes via any series of PASSIVE CONDUCTORS (i.e. star or hub configurations using only PASSIVE CONDUCTORS are permitted.)

- R715 *Control PCM, PH, and Servo Hub from roboRIO.** Each Pneumatic Control Module (PCM), Pneumatic Hub (PH), and Servo Hub must be controlled with signal inputs sourced from the roboRIO and passed via a CAN bus connection from the built-in CAN on the roboRIO (either directly or daisy-chained via another CAN bus device).

- R716 *Don't alter the CAN bus.** No device that interferes with, alters, or blocks communications among the roboRIO and the PCMs/PHs, and/or CAN motor controllers on the bus will be permitted.

Only 1 wire should be inserted into each Weidmuller CAN connector terminal. For documentation on how to wire the CAN bus connections see [How to Wire an FRC ROBOT](#).

- R717 *USB to CAN adapter permitted.** Additional CAN bus connections may be added to the roboRIO using the CTR Electronics CANivore™ (P/N 21-678682, WCP-1522) USB-to-CAN adapter.

Any additional CAN bus added in this manner satisfies the requirements of [R714](#) (i.e. you may connect motor controllers to this additional bus).

8.8 Pneumatic System

In order to maintain safety, the rules in this section apply at all times while at the event, not just while the ROBOT is on the FIELD for MATCHES.

- R801 *Only use explicitly permitted pneumatic parts.** To satisfy multiple constraints associated with safety, consistency, inspection, and constructive innovation, no pneumatic parts other than those explicitly permitted in this section shall be used on the ROBOT.

- R802 *No custom pneumatics and meet minimum pressure ratings.** All pneumatic items must be COTS pneumatic devices and either:

- rated by their manufacturers for pressure of at least 125.0psi (861.8kPa, 8.618Bar), or
- installed downstream of the primary relieving regulator (see [R809](#)), and rated for pressure of at least 70.0psi (482.6kPa, 4.826Bar).

Any pressure specification such as "working," "operating," "maximum," etc. may be used to satisfy the requirements of this rule.

It is recommended that all pneumatic items be rated by their manufacturers for a working pressure of at least 60.0psi (413.7kPa, 4.137Bar).

R803 *Don't modify pneumatics. All pneumatic COMPONENTS must be used in their original, unaltered condition. Exceptions are as follows:

- A. tubing may be cut,
- B. wiring for pneumatic devices may be modified to interface with the control system,
- C. assembling and connecting pneumatic COMPONENTS using the pre-existing threads, mounting brackets, quick-connect fittings, etc.,
- D. removing the mounting pin from a pneumatic cylinder, provided the cylinder itself is not modified, and
- E. labeling applied to indicate device purpose, connectivity, functional performance, etc.

Do not, for example, paint, file, machine, or abrasively remove any part of a pneumatic COMPONENT – this would cause the part to become a prohibited item.

R804 *Only use specific pneumatic devices. The only pneumatic system items permitted on ROBOTS include the following items:

- A. pneumatic pressure vent plug valves functionally equivalent to those provided in the KOP,

Examples of acceptable valves include Parker PV609-2 or MV709-2.

- B. pressure relief valves functionally equivalent to those provided in the KOP,

Examples of acceptable valves include Norgren 16-004-011, 16-004-003 or McMaster-Carr 48435K714.

To be considered functionally equivalent the valve must be preset or adjustable to 125.0psi (861.8kPa, 8.618Bar) and capable of relieving at least 1.0scfm (471.9cm³/s).

- C. solenoid valves with a maximum $\frac{1}{8}$ in (nominal, 0.31cm) NPT, BSPP, or BSPT port diameter or integrated quick connect $\frac{1}{4}$ in (nominal, 0.64cm) outside diameter tubing connection,
- D. additional pneumatic tubing, with a maximum $\frac{1}{4}$ in (nominal, 0.64cm) outside diameter,
- E. pressure transducers, pressure gauges, passive flow control valves (specifically “needle valve”), manifolds, and connecting fittings (including COTS pneumatic U-tubes),
- F. check and quick exhaust valves, provided that the requirements of [R813](#) are still met,
- G. shutoff valves which relieve downstream pressure to atmosphere when closed (may also be known as 3-way or 3-way exhausting valves),
- H. pressure regulators with the maximum outlet pressure adjusted to no more than 60.0psi (413.7kPa, 4.137Bar),
- I. pneumatic cylinders, pneumatic linear actuators, and rotary actuators,
- J. pneumatic storage tanks (with the exception of white Clippard tanks P/N AVT-PP-41),
- K. 1 compressor that is compliant with [R806](#),
- L. debris or coalescing (water) filters, and

- M. Venturi valves (note: the high-pressure side of a Venturi valve is considered a pneumatic device and must follow all pneumatic rules. The vacuum side of a Venturi valve is exempt from the pneumatic rules per “a” in the blue box below).


The following devices are not considered pneumatic devices and are not subject to pneumatic rules (though they must satisfy all other rules):

- a device that creates a vacuum,
- closed-loop COTS pneumatic (gas) shocks,
- air-filled (pneumatic) wheels, and
- pneumatic devices not used as part of a pneumatic system (i.e. used in a way that does not allow them to contain pressurized air)

- R805 *If using pneumatics, these parts are required.** If pneumatic COMPONENTS are used, the following items are required as part of the pneumatic circuit and must be used in accordance with this section, as illustrated in [Figure 8-14](#).

- 1 FIRST Robotics Competition legal compressor (per [R806](#)),
- a pressure relief valve (per [R804-B](#)) connected and calibrated (per [R811](#)),
- a Nason pressure switch (P/N SM-2B-115R/443) and/or REV Robotics Analog Pressure Sensor (P/N REV-11-1107) connected and wired per [R812](#),
- at least 1 pressure vent plug plumbed (per [R813](#)),
- stored pressure gauge and working pressure gauge (per [R810](#)), and
- 1 primary working pressure regulator (per [R808](#)).

Figure 8-14 Pneumatic circuitry

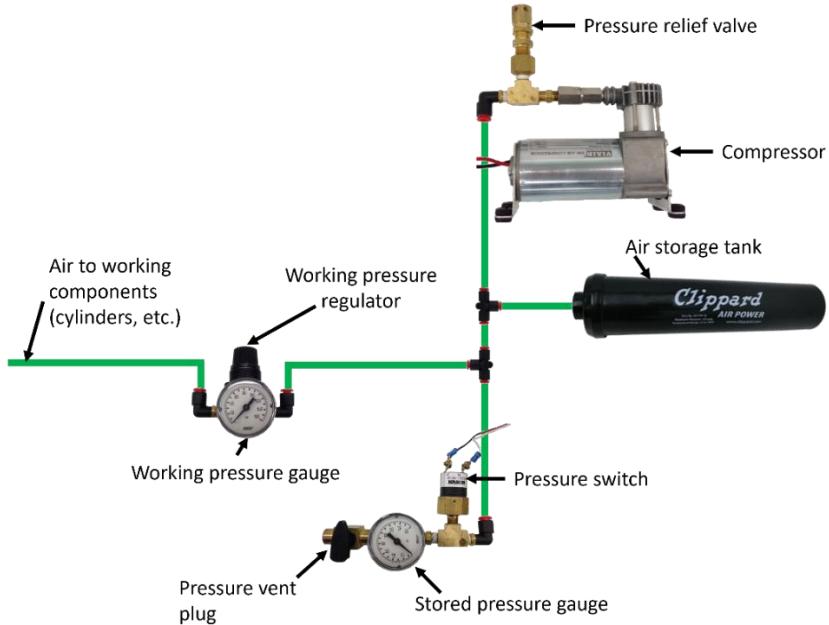

- R806 *Compressed air from ROBOT compressor only.** Throughout an event, compressed air on the ROBOT must be provided by its 1 onboard compressor only. Compressor specifications must not exceed nominal 1.1cfm (519.1cm³/s) flow rate @ 12VDC at any pressure.

A ROBOT'S compressor may be substituted by another compressor, but a ROBOT may only have 1 designated compressor at a time, and all compressed air on the ROBOT must be sourced from a single compressor.

Note: Viair C-series compressors, which have a max working pressure of 120.0psi, are rated for intermittent pressures greater than 125.0psi and therefore meet the requirements of this rule.

- R807 *Air storage pressure limit.** Stored air pressure on the ROBOT must be no greater than 120.0psi (~827 kPa, 8.2 Bar). No stored air pressure intended for the ROBOT may be located off-board the ROBOT.
- R808 *Working air pressure limit.** Working air pressure (air pressure used to actuate devices) on the ROBOT must be no greater than 60.0psi (413.7kPa, 4.137Bar) and must be provided through a single primary adjustable, relieving, pressure regulator. Additional regulators may be located downstream of the single primary regulator.

Examples of acceptable valves include Norgren regulator P/N R07-100-RNEA and Monnier P/N 101-3002-1.

- R809 *Limited devices at high pressure.** Only the compressor, relief valve, pressure switch, pressure vent plug, pressure gauge, storage tanks, tubing, pressure transducers, filters, and connecting fittings may be in the high-pressure pneumatic circuit upstream from the regulator.

It is recommended that all COMPONENTS in the high-pressure pneumatic circuit upstream from the regulator be rated for at least 115.0psi (792.9kPa, 7.929Bar) working pressure.

- R810 *Pressure gauges must be visible.** Pressure gauges must be placed in easily visible locations upstream and downstream of the regulator to display the stored and working pressures, respectively. Pressure gauges must show pressure in psi, kPa, or Bar.

- R811 *Relief valve requirements.** The relief valve must be attached directly to the compressor or attached by legal hard fittings (e.g. brass, nylon, etc.) connected to the compressor output port.

Teams are required to check and/or adjust the relief valve to release air at 125.0psi (861.8kPa, 8.618Bar). The valve may or may not have been calibrated prior to being supplied to teams.

Instructions for adjusting the pressure relief valve can be found in the [Pneumatic Manual](#).

- R812 *Pressure switch requirements.** The pressure switch must be connected to the high-pressure side of the pneumatic circuit (i.e. prior to the pressure regulator) to sense the stored pressure of the circuit. It must be either:

- A. Nason P/N SM-2B-115R/443 (wired as described) and/or

The 2 wires from the pressure switch must be connected directly to the pressure switch input of the PCM/PH controlling the compressor or, if controlled using the roboRIO and a relay, to the roboRIO. If connected to the roboRIO, the roboRIO must be programmed to sense the state of the switch and operate the relay module that powers the compressor to prevent over-pressuring the system.

- B. REV Robotics P/N REV-11-1107 (wired as described)

The analog output of the sensor must be connected directly to analog input 0 of the PH (with firmware version 22.0.2 or newer) controlling the compressor.

The REV Robotics Analog Pressure Sensor may only be used with PH compressor control and may not be used with PCM compressor control.

- R813 *Vent plug requirements.** Any pressure vent plug must be:

- A. connected to the pneumatic circuit such that, when manually operated, it will vent to the atmosphere to relieve all stored pressure in a reasonable amount of time and
- B. placed on the ROBOT so that it is visible and easily accessible.

- R814 *Don't connect solenoid outputs together.** The output air from multiple solenoid valves must not be combined.

Manifolds, shuttle valves, and other devices which do not combine output airflow, even though it may be plumbed into the same device, are not violations of this rule.

8.9 OPERATOR CONSOLE

- R901 *Use the specified Driver Station Software.** The Driver Station Software provided by National Instruments ([install instructions found here](#)) is the only application permitted to specify and communicate the operating mode (i.e. AUTO/TELEOP) and operating state (Enable/Disable) to the ROBOT. The Driver Station Software must be version 26.0 or newer.

Teams are permitted to use a portable computing device of their choice (laptop computer, tablet, etc.) to host the Driver Station Software while participating in MATCHES.

- R902 *The OPERATOR CONSOLE must have a visible display.** The OPERATOR CONSOLE, the set of COMPONENTS and MECHANISMS used by the DRIVERS and/or HUMAN PLAYERS to relay commands to the ROBOT, must include a graphic display to present the Driver Station Software diagnostic information. It must be positioned within the OPERATOR CONSOLE so that the screen display can be clearly seen during inspection and in a MATCH.

- R903 *Connect FMS Ethernet directly to the OPERATOR CONSOLE.** Devices hosting the Driver Station Software must only interface with the FMS via the Ethernet cable provided at the DRIVER STATION (e.g. not through a switch). Teams may connect the FMS Ethernet cable to the device running the Driver Station Software directly via an Ethernet pigtail, or with a single-port Ethernet converter (e.g. docking station, USB-Ethernet converter, Thunderbolt-Ethernet converter, etc.). The Ethernet port on the OPERATOR CONSOLE must be easily and quickly accessible.

Teams are strongly encouraged to use pigtails on the Ethernet port used to connect to the FMS. Such pigtails will reduce wear and tear on the device's port and, with proper strain relief employed, will protect the port from accidental damage.

R904 *OPERATOR CONSOLE physical requirements. The OPERATOR CONSOLE must not

- A. be longer than 60.0in (1.524m),
- B. be deeper than 16.0in (40.64cm) (excluding any items that are held or worn by the DRIVERS during the MATCH),
- C. extend more than 78.0in (1.981m) above the floor, or
- D. attach to the ARENA, except via the loop tape as described in section [5.9.1 DRIVER STATIONS](#) or clamping to the DRIVER STATION support shelf (as long as the shelf is not damaged).

There is a 54.0in (1.372m) long by 2.0in (nominal, 5.08cm) wide strip of hook-and-loop tape ("loop" side) along the center of the DRIVER STATION support shelf that should be used to secure the OPERATOR CONSOLE to the shelf. See section [5.9.1 DRIVER STATIONS](#) for details.

Please note that while there is no hard weight limit, OPERATOR CONSOLES that weigh more than 30lb (13.61kg) will invite extra scrutiny as they are likely to present unsafe circumstances.

R905 *FIELD wireless only. Other than the system provided by the FIELD, no other form of wireless communications shall be used to communicate to, from, or within the OPERATOR CONSOLE.

Examples of prohibited wireless systems include, but are not limited to, active wireless network cards and Bluetooth devices. For the case of the FIRST Robotics Competition, a motion sensing input device (e.g. Microsoft Kinect) is not considered wireless communication and is allowed.

R906 *No unsafe OPERATOR CONSOLES. OPERATOR CONSOLES shall not be made using hazardous materials, be unsafe, cause an unsafe condition, or interfere with other DRIVE TEAMS or the operation of other ROBOTS.

R907 *No AC inverters. OPERATOR CONSOLES must not contain AC inverters.



9 Inspection & Eligibility (I)

This section describes the rules governing MATCH participation. A team has participated in a MATCH if any member of their DRIVE TEAM is in the ALLIANCE AREA, with or without the ROBOT on the FIELD, at the start of the MATCH.

At each event, the Lead ROBOT INSPECTOR (LRI) has final authority on the legality of any COMPONENT, MECHANISM, or ROBOT. The LRI may consult with additional sources including the Global LRIs and/or FIRST personnel before making their final decision. INSPECTORS may re-inspect ROBOTS at any time to ensure compliance with the rules. Teams are encouraged to consult with INSPECTORS or the LRI if they have any questions regarding the legality of a ROBOT or about how to make a ROBOT legal.

The inspection process may progress in blocks, i.e. it may pause for a team's Practice MATCH, lunch break, etc. The process may employ various INSPECTORS throughout the process based on availability. At the team's discretion, they may request a different INSPECTOR or invite the Lead ROBOT INSPECTOR to participate in their ROBOT'S inspection.

ROBOTS may be modified after completing initial inspection; however, note that, per [I104](#), any modifications not specifically exempt must be re-inspected. Prior to the beginning of Playoff MATCHES, all ROBOTS wishing to participate will be re-weighed to help identify any modifications that should be re-inspected per [I104](#).

ROBOTS are permitted to participate in scheduled Practice MATCHES prior to passing inspection. However, the FTA, LRI, or Head REFEREE may determine at any time that the ROBOT is unsafe and may prohibit further participation in Practice MATCHES until the condition is corrected and/or the ROBOT passes inspection. A safe ROBOT has functional BUMPERS that approximately meet the required coverage ([R401](#)), height ([R402](#)), and cross section ([R408](#)) requirements.

Prior to the start of a MATCH, any ROBOT which is unable or ineligible to participate in that MATCH, as determined by the FTA, LRI, or Head REFEREE, is declared to be BYPASSED and is DISABLED. A team whose ROBOT is BYPASSED remains eligible to receive Qualification Ranking Points or Playoff MATCH points provided that its ROBOT has passed inspection, per [I102](#).

An [Inspection Checklist](#) is available to help teams self-inspect their ROBOT before their event. Teams are strongly encouraged to self-inspect prior to their event.

9.1 Rules

- I101 *It's your team's ROBOT.** The ROBOT and its MAJOR MECHANISMS must be built by the FIRST Robotics Competition team.

A MAJOR MECHANISM is a group of COMPONENTS and/or MECHANISMS assembled together to address at least 1 game challenge: ROBOT movement, SCORING ELEMENT manipulation, FIELD element manipulation, or performance of a scorable task without the assistance of another ROBOT.

This rule requires that the ROBOT and its MAJOR MECHANISMS were built by its team, but isn't intended to prohibit or discourage assistance from other teams

(e.g. fabricating elements, supporting construction, writing software, developing game strategy, contributing COMPONENTS and/or MECHANISMS, etc.)

Examples of MAJOR MECHANISMS include, but are not limited to, assemblies used to:

- A. manipulate SCORING ELEMENTS,
- B. manipulate a FIELD element, and
- C. move the ROBOT around the FIELD.

Examples that would generally not be considered MAJOR MECHANISMS, and thus probably aren't subject to this rule include, but are not limited to, the following:

- D. a gearbox assembly,
- E. a COMPONENT or MECHANISM that's part of a MAJOR MECHANISM, and
- F. COTS items.

Neither this rule nor the language in this blue box define specific thresholds for how much of a MAJOR MECHANISM must be the result of the team's effort. This rule expects and requires the team's honest assessment of whether they built the MAJOR MECHANISMS of their ROBOT.

Attempts to exploit loopholes in the definition of MAJOR MECHANISM in order to bypass this requirement are in the spirit of neither this rule nor the *FIRST* Robotics Competition. Examples of exploitation include:

- G. assembling pieces of a MAJOR MECHANISM provided by another team, except COTS kits and
- H. receiving a mostly complete MAJOR MECHANISM from another team and providing a small piece.

I102 *Get inspected before playing a Qualification MATCH. A team is only permitted to participate in a Qualification or Playoff MATCH and receive Ranking or MATCH Points if their ROBOT has passed an initial, complete inspection.

Violation: If prior to the start of the MATCH, the team is DISQUALIFIED and not eligible to participate in the MATCH. If after the MATCH, the team receives a RED CARD and the MATCH may be replayed per [T201](#).

I103 *Bring it all to inspection. At the time of inspection, the OPERATOR CONSOLE and the ROBOT must be presented with all MECHANISMS (including all COMPONENTS of each MECHANISM), configurations, and decorations that will be used on the ROBOT in MATCHES without re-inspection (per [I104](#)) and may not exceed 150.0lb (68.04kg) (note that while up to 150.0lb (68.04kg) of ROBOT MECHANISMS may be inspected together, the ROBOT configuration used in a MATCH may not violate [R103](#)). The OPERATOR CONSOLE and exceptions listed in [R103](#) are not included in this weight.

I104 *Unless the change is listed below, any change to a ROBOT must get re-inspected. A ROBOT may play MATCHES with a subset of the MECHANISMS that were present during inspection provided the reconfigured ROBOT still complies with all ROBOT Construction Rules. Only MECHANISMS that were present during the inspection may be added, removed, or reconfigured between MATCHES without re-

inspection per this rule. If a ROBOT is modified after its most recent passed inspection, it must be re-inspected before it is eligible to participate in a MATCH.

Exceptions are listed in A through F (unless they result in a significant change to the ROBOT'S size, weight, legality, or safety).

- A. addition, relocation, or removal of fasteners (e.g. cable ties, tape, and rivets),
- B. addition, relocation, or removal of labeling or marking,
- C. revision of ROBOT code,
- D. replacement of a COTS COMPONENT with an identical COTS COMPONENT,
- E. replacement of a MECHANISM with an identical MECHANISM (size, weight, material), and
- F. additions, removals, or reconfiguration of ROBOT with a subset of MECHANISMS already inspected per [I103](#).

I105 *Don't exploit re-inspection. Teams may not use the re-inspection process in [I104](#) to circumvent the weight limit in [I103](#).

This restriction is not intended to prevent a team from returning to a previous configuration (e.g. due to an unsuccessful upgrade or failure of a new COMPONENT). If a team is believed to be violating this rule, the LRI will discuss the situation with the team to understand the changes and, if appropriate, the LRI in conjunction with the team will select a single configuration with which the team will compete for the duration of the event.

Example 1: A ROBOT passes initial inspection (which includes MECHANISM A). Its team then decides they want to use MECHANISM B, which was not inspected. The weight of the ROBOT, A, and B is less than the weight limit in [I103](#), but more than that in [R103](#). [I104](#) requires the ROBOT be re-inspected, and this rule allows the ROBOT, A, and B to be inspected collectively. If passed, the ROBOT may then compete in subsequent MATCHES with A or B.

Example 2: A ROBOT passes initial inspection (which includes MECHANISM A). Its team then decides they want to use MECHANISM B, which was not inspected. The weight of the ROBOT, A, and B is greater than the weight limit in [I103](#). This requires re-inspection per [I104](#) and A is excluded to satisfy [I103](#). B breaks, and the team decides to switch back to A. The ROBOT must be re-inspected per [I104](#), and the team is not violating this rule.

Example 3: A team arrives at an event with a ROBOT, MECHANISM A, and MECHANISM B, which collectively weigh 175.0lb (79.38kg). The ROBOT passes initial inspection with A and plays a MATCH. The team switches to B, gets re-inspected, and plays again. The team switches back to A, gets re-inspected, and plays again. The team switches back to B and asks to be re-inspected. At this point, the LRI suspects the team may be violating this rule and has a discussion with the team to understand the changes being made. The team reveals that this rule has been violated, and the LRI works with them to select A or B for use for the remainder of the event.

I106 *ROBOTS are off for inspection (mostly). For the safety of all those involved, ROBOTS must be presented for inspection with the ROBOT powered off, pneumatics unpressurized, and springs or other stored energy devices in their lowest potential energy states (e.g. battery removed).


Power and air pressure should only be enabled on the ROBOT during those portions of the inspection process where it is absolutely required to validate certain system functionality and compliance with specific rules (firmware check, etc.). INSPECTORS may allow the ROBOT to be powered beyond the parameters above if both criteria below are met:

- A. the ROBOT design requires power or a charged stored energy device in order to confirm that the ROBOT meets volume requirements and
- B. the team has included safety interlocks that mitigate unexpected release of such stored energy.

The team may be asked to demonstrate these interlocks during the inspection process.

I107 *No STUDENT, no inspection. At least 1 STUDENT team member must accompany the ROBOT for any inspection efforts.

Exceptions may be made for major conflicts, e.g. religious holidays, major testing, transportation issues, etc.



10 Tournaments (T)

Each 2026 FIRST Robotics Competition event is played in a tournament format. Each tournament consists of 3 types of MATCHES: Practice MATCHES (not necessarily played at all District Events), Qualification MATCHES, and Playoff MATCHES.

Practice MATCHES provide each team with an opportunity to operate its ROBOT on the FIELD prior to the start of the Qualification MATCHES.

Qualification MATCHES allow each team to earn Ranking Points which determine their seeding position and may qualify them for participation in the Playoff MATCHES.

Playoff MATCHES determine the event Champions.

10.1 MATCH Schedules

A MATCH schedule is used to coordinate MATCHES at an Event. [Figure 10-1](#) details information shown on each schedule. SURROGATE MATCHES are described in section [10.5.2 MATCH Assignment](#).

Figure 10-1 Sample MATCH schedule

Qualification Match Schedule								
		Event Name						
Matches Per Team		10	Blue 1	Blue 2	Blue 3	Red 1	Red 2	Red 3
Time	Description	Match						
Thu 2:30	Qualification 1	1		1	2	3	4	5
Thu 2:37	Qualification 2	2		7	8	9	10	11*
Thu 2:44	Qualification 3	3		13	14	15*	16	17
								18

MATCH Start Time
MATCH Type
MATCH Number
ALLIANCE
Red or Blue
DRIVER STATION number
1, 2, or 3

Asterisk (*) indicates SURROGATE MATCH

10.2 MATCH Replays

Over the course of the tournament, it may be necessary for a MATCH to be replayed. Typical causes for replays are MATCHES that end in a tie during the Playoffs (due to criteria listed in [Table 10-3](#), or any Finals MATCH), MATCHES that are stopped because FIELD STAFF anticipated FIELD damage or personal injury, or if there is an ARENA FAULT.

An ARENA FAULT is an error in ARENA operation that includes, but is not limited to:

- A. broken FIELD elements due to
 - a. normal, expected game play or
 - b. ROBOT abuse of FIELD elements that affects the outcome of the MATCH for their opponents.

A broken FIELD element caused by ROBOT abuse that affects the outcome of the MATCH for their ALLIANCE is not an ARENA FAULT.

- B. power failure to a portion of the FIELD (tripping the circuit breaker in the DRIVER STATION is not considered a power failure),

- C. improper activation by the FMS,

It is not an ARENA FAULT if FMS Game Data is not sent, not received, or if delayed. Incorrect Game Data being sent would be considered an ARENA FAULT.

- D. errors by FIELD STAFF (except those listed in section [6.8 Other Logistics](#)), and
- E. a ROBOT radio disconnect that impairs operation of other ROBOTS on the FIELD for more than 8 seconds.

If, in the judgment of the Head REFEREE, an ARENA FAULT occurs that affects the outcome of the MATCH and any team on the affected ALLIANCE desires a replay, the MATCH will be replayed. FIRST Headquarters reserves the right to, with consultation of the Head REFEREE and the FTA, replay a MATCH in which an ARENA FAULT impacts the outcome of an event. Once a MATCH replay is granted, a team may not withdraw the request for the replay.

The outcome of the MATCH is affected if an error occurs that, in the judgement of the Head REFEREE, changes which ALLIANCE would have won the MATCH and/or the assignment of Ranking Points.

The outcome of an event is affected if an error occurs that, in the judgement of FIRST Headquarters, changes the assignment of Ranking Points or has a dramatic effect on points used for ranking criteria.

Note that an ARENA FAULT that does not affect MATCH outcome, in the judgement of the Head REFEREE, does not lead to a MATCH replay. Examples include, but are not limited to:

- A. a piece of FIELD plastic falls into the FIELD, far away from any human or ROBOT activity, and in such a way that it does not affect MATCH outcome,
- B. delay in the playing of an ARENA sound,
- C. mismatch between the timer on the audience screen and the ARENA timer,
- D. any adjustment or delay in assignment of a score or penalty (including those made after the MATCH), and

Examples of errors by FIELD STAFF include, but are not limited to:

- E. a gate being left open when the MATCH starts,
- F. mistakenly allowing a ROBOT in violation of [I102](#) that hasn't passed an initial, complete inspection to participate in the MATCH

T201 *Replays will be the same. All reasonable effort is made to create the same conditions when replaying a MATCH caused by an ARENA FAULT or FIELD damage. This means, for example, that a team that was BYPASSED prior to the start of the MATCH which is to be replayed is BYPASSED for the replay MATCH. ROBOT and DRIVE TEAM starting locations do not need to be replicated when replaying a MATCH.

Violation: MATCH will not start until the situation is corrected

Per section [6.6.1 YELLOW and RED CARDS](#), cards assigned in previous MATCHES, including prior instances of the MATCH to be replayed, are not cleared.

10.3 Measurement

At each event, the ARENA will be open for at least 30 minutes prior to the start of Qualification MATCHES, during which time teams may survey and/or measure the ARENA and bring ROBOTS on the FIELD to perform sensor calibration. Events may schedule additional measurement and calibration times. The specific time(s) that the FIELD is open will be communicated to teams at the event. Teams may bring specific questions or comments to the FTA.

T301 *Measurement, not practice. During the period when the ARENA is open for measurement:

- A. ROBOTS can be enabled, but may neither drive, extend outside their ROBOT PERIMETER, nor interact with (e.g. score, push, pickup, etc.) SCORING ELEMENTS (or anything resembling SCORING ELEMENTS), a HUB, BUMP, TRENCH, OUTPOST, or other FIELD elements.
- B. Humans may touch a SCORING ELEMENT but may not practice with it (e.g. throw FUEL, or anything resembling FUEL, or use the OUTPOST).

Violation: VERBAL WARNING, plus YELLOW CARD if subsequent violations at any point during the event or egregious.

10.4 Practice MATCHES

Practice MATCHES are played before Qualification MATCHES. The Practice MATCH schedule is available as soon as possible, but no later than the start of Practice MATCHES. For Regional events, it will also be published and available online on the [FRC-Events website](#), except during exceptional circumstances. Practice MATCHES are randomly assigned, and teams may not switch scheduled Practice MATCHES. Each team is assigned an equal number of Practice MATCHES unless the number of teams multiplied by number of Practice MATCHES is not divisible by 6. In this case, the FMS randomly selects some teams to play an extra Practice MATCH.

Practice MATCHES are not guaranteed at District Events due to event schedule constraints.

10.4.1 Filler Line

A Filler Line is used to fill open slots at events that employ scheduled Practice MATCHES or all slots at events with an open Practice MATCH schedule. Teams from the Filler Line are used on a first come, first served basis to fill empty spots in Practice MATCHES left by other teams that do not report to Queueing. The number of teams in the Filler Line is dependent upon space at venues.

Only teams that meet all criteria below qualify for the Filler Line:

- A. ROBOTS in the Filler Line must have passed inspection (this requirement may be waived for events with open Practice MATCH schedules),
- B. DRIVE TEAMS must join the Filler Line with their ROBOT,
- C. teams may not work on their ROBOT while in the Filler Line,
- D. teams may not occupy more than 1 spot in the Filler Line, and
- E. if a team is queued for their Practice MATCH, they may not also join the Filler Line.

10.5 Qualification MATCHES

10.5.1 Schedule

The Qualification MATCH schedule is made available as soon as possible, but no later than 30 minutes before Qualification MATCHES are scheduled to begin. Teams receive 1 hard copy and it is also available on the [FRC-Events website](#), except during exceptional circumstances. Each Qualification schedule consists of a series of rounds in which each team plays 1 MATCH per round.

10.5.2 MATCH Assignment

FMS assigns each team 2 ALLIANCE partners for each Qualification MATCH using a predefined algorithm, and teams may not switch Qualification MATCH assignments. The algorithm employs the following criteria, listed in order of priority:

1. ensure each team has at least the minimum required time between MATCHES (varies by event size)
2. minimize the number of times a team is allied with any team
3. minimize the number of times a team plays opposite any team
4. minimize the use of SURROGATES (teams randomly assigned by the FMS to play an extra Qualification MATCH)
5. provide even distribution of MATCHES played on blue and red ALLIANCE
6. provide even distribution of MATCHES played in each DRIVER STATION number

For more information about the MATCH scheduling algorithm, please see [Idle Loop software's website](#).

At events with fewer than 24 participating teams, the criteria are similar, except #5 is changed to minimize the number of times a team swaps between the blue and red ALLIANCE rather than an even distribution.

All teams are assigned the same number of Qualification MATCHES, equal to the number of rounds, unless the number of teams multiplied by number of MATCHES is not divisible by 6. In this case, the FMS randomly selects some teams to play an extra MATCH. For the purpose of seeding calculations, those teams are designated as SURROGATES for the extra MATCH. If a team plays a MATCH as a SURROGATE, it is indicated on the MATCH schedule, it is always their third Qualification MATCH, and the outcome of the MATCH has no effect on the team's ranking. YELLOW and RED CARDS assigned to SURROGATES, however, do carry forward to subsequent MATCHES.

10.5.3 Qualification Ranking

Ranking Points are units credited to a team based on their ALLIANCE'S performance in Qualification MATCHES. Ranking Points are awarded to each eligible team at the completion of each Qualification MATCH per [Table 6-4](#).

Exceptions to Ranking Point assignment are as follows:

- A. A SURROGATE receives 0 Ranking Points.
- B. A DISQUALIFIED team, as determined by the Head REFEREE, receives 0 Ranking Points.

- C. A “no-show” team is either DISQUALIFIED from or issued a RED CARD for that MATCH (see [G208](#)). A team is declared a no-show if no member of the DRIVE TEAM is in the ALLIANCE AREA at the start of the MATCH.

The total number of Ranking Points earned by a team throughout their Qualification MATCHES divided by the number of MATCHES they've been scheduled to play (minus any SURROGATE MATCH), then rounded to 2 decimal places, is their Ranking Score (RS).

All teams participating in Qualification MATCHES are ranked by Ranking Score. If the number of teams in attendance is ‘n’, they are ranked ‘1’ through ‘n’, with ‘1’ being the team with the highest-Ranking Score and ‘n’ being the team with the lowest Ranking Score.

Teams are ranked in order, using the sorting criteria defined in [Table 10-1](#).

Table 10-1 Qualification MATCH ranking criteria

Order Sort	Criteria
1 st	Ranking Score
2 nd	Average ALLIANCE MATCH points, not including MINOR FOULS and MAJOR FOULS
3 rd	Average FUEL scored in AUTO
4 th	Average TOWER points
5 th	Random sorting by the FMS

10.6 Playoff MATCHES

Playoff MATCHES follow the qualification MATCHES. In the Playoffs, teams play on set ALLIANCES, chosen during ALLIANCE selection, and advance through a double elimination bracket. Teams do not earn Ranking Points; they advance based on winning, losing, or tying a MATCH.

A DISQUALIFIED team, as determined by the Head REFEREE, causes their ALLIANCE to receive 0 MATCH points in a Playoff MATCH.

10.6.1 ALLIANCE Selection Process

At the end of the Qualification MATCHES, the top 8 ranked teams become the ALLIANCE Leads. The ranked ALLIANCES are designated, in order, ALLIANCE 1, ALLIANCE 2, etc., down to ALLIANCE 8. Using the ALLIANCE selection process described in this section, each ALLIANCE Lead chooses 2 other teams to join their ALLIANCE.

A break of 8 minutes (8:00) occurs between the posting of scores from the last qualification match (scheduled or replay, whichever comes later) and the start of the ALLIANCE Selection process for events that host Alliance Selection shortly after QUALIFICATION MATCHES. At the end of this break, ALLIANCE 1 is “on the clock” as defined below in [T605](#).

T601 *Send your STUDENT representatives. Each team must choose and send a minimum of one and a maximum of three STUDENT team representatives. Representative(s) must report to the ARENA before the start of ALLIANCE Selection.

Violation: Team is ineligible for the Playoff Tournament if they are not represented by the time they are announced.

If an absent team would have been an ALLIANCE Lead, all lower ranked ALLIANCE Leads are promoted 1 spot.

The designated STUDENT representative from each ALLIANCE Lead is called the ALLIANCE CAPTAIN (if the ALLIANCE has sent multiple STUDENT representatives, they must designate only one as the ALLIANCE CAPTAIN). This representative may change between ALLIANCE selection and Playoff MATCHES.

T602 *STUDENTS must outnumber adults. A non-STUDENT may additionally be a representative from a team if the team has exactly two STUDENT representatives.

Violation: Non-STUDENT must leave the ARENA

These are the possible combinations of ALLIANCE Selection representatives between [T601/T602](#):

- A. One STUDENT
- B. Two STUDENTS
- C. Three STUDENTS
- D. Two STUDENTS and one non-STUDENT

The ALLIANCE selection process consists of rounds during which each ALLIANCE CAPTAIN invites a team ranked below them in the standings to join their ALLIANCE. The invited team's representative must either accept or decline the invitation immediately. If the team accepts, it becomes a member of that ALLIANCE. This process results in 8 ALLIANCES of 3 teams.

Each round is complete when all ALLIANCES have added one additional team, and each round must be complete before the next round can begin. In round 1 selections are made in descending order (ALLIANCE 1 to ALLIANCE 8), whereas in round 2 selections are made in ascending order (ALLIANCE 8 to ALLIANCE 1).

T603 * Only STUDENTS may use the mic. Only a single STUDENT from the invited team is allowed to accept/decline.

Violation: The team is assumed to have declined.

T604 * Only the ALLIANCE CAPTAIN may invite an ALLIANCE. The ALLIANCE CAPTAIN is the only representative of the ALLIANCE who may approach the emcee and make a valid pick via the microphone.

Violation: Pick does not count, and pick timer continues to count down.

T605 * Picks are time limited. Once the emcee requests an ALLIANCE'S selection, the ALLIANCE is considered "on the clock" and the pick timer begins to countdown. In round 1, the timer begins at 45 seconds (0:45), in round 2 the timer begins at 1 minute and 30 seconds (1:30). A sound will play to indicate that there are 5 seconds left on the timer and a buzzer will go off to indicate the end of the time. The ALLIANCE CAPTAIN must make a good faith effort, as determined by the FTA or their designee, to state a valid team selection before the expiration of the pick timer.

Violation: The ALLIANCE is skipped, and the emcee moves to the next ALLIANCE, unless the selection is the last of a round in which case the ALLIANCE receives the next highest-ranked unselected team to the ALLIANCE.

The time remaining on the pick timer is displayed on the FIELD timers. Please note that audio cues are intended as a courtesy to participants and not intended as official markers.

A valid team selection includes any team who has not yet accepted or declined an invitation to join another ALLIANCE and is not an ALLIANCE Lead that has had a pick timer violation. If an ALLIANCE CAPTAIN attempts to select a team that is not valid, the pick timer continues to run until it either expires, or a different (valid) team is invited to join the ALLIANCE.

Examples of good faith efforts to state a valid team selection include but are not limited to:

- A. Walking safely towards the emcee when the clock hits zero
- B. Starting to state a team as the clock hits zero

Examples that are not considered good faith efforts to quickly state a valid team selection include but are not limited to:

- C. Continuing to talk with your ALLIANCE partners without moving towards the emcee
- D. Talking into the microphone for more than approximately 30 seconds without clearly stating a team number to invite

If an ALLIANCE CAPTAIN extends a valid invitation and the invited team declines, the pick clock resets to the time for the designated round and restarts immediately.

After each accepted ALLIANCE invitation or [T605](#) violation, the emcee invites any ALLIANCE CAPTAINS that received a [T605](#) violation in that round to make their selections. Each ALLIANCE CAPTAIN may either indicate that they are ready to make their selection (and immediately do so as determined by the FTA or their designee) or indicate that they are not yet ready, and they will be revisited after the next accepted invitation or [T605](#) violation. If a team with a [T605](#) violation extends a valid invitation and the invited team declines, they are allowed to make another selection immediately or else they are skipped and will be revisited as described above. If there are multiple ALLIANCE CAPTAINS that have received [T605](#) violations, they are revisited in the same order in which they received their violations. If all remaining teams in a round have received a [T605](#) violation, each team is revisited to either make a pick immediately or receive the next highest-ranked unselected team.

The ALLIANCE CAPTAIN with the last selection of a given round may not be the ALLIANCE CAPTAIN *scheduled* to have the final pick. For example, imagine in round 1 that ALLIANCES 1-6 have all made valid selections and ALLIANCE Lead 7 receives a [T605](#) violation. If ALLIANCE Lead 8 makes a valid selection, then ALLIANCE Lead 7 now has the final selection of round 1.

A break of 2 minutes (2:00) occurs between each round of selections. At the conclusion of the break, the ALLIANCE scheduled to make the next selection goes “on the clock” and their timer begins per [T605](#).

T606 *Declining teams can't be picked. An ALLIANCE CAPTAIN may not invite a team that has declined another ALLIANCE'S invitation to participate in the Playoff tournament. Declining teams are ineligible to be a BACKUP TEAM.

Violation: The ALLIANCE CAPTAIN must make another selection and pick timer continues to count down.

When a team has declined, the team will show with a strikethrough on the team number in the audience display.

Teams highlighted in orange (will become captain if not picked) will NOT get a strikethrough if they decline as they can still become captains.

An ALLIANCE Lead that declines an invitation from another ALLIANCE is able to invite teams to join their ALLIANCE but may not be invited to join another ALLIANCE.


At the conclusion of ALLIANCE selection, the highest ranked unselected teams are eligible to become a BACKUP TEAM, as defined in section [10.6.3 BACKUP TEAMS](#).

10.6.2 Playoff MATCH Bracket

The double elimination tournament consists of an Upper and Lower bracket as shown in [Figure 10-2](#). Each ALLIANCE begins with a slot in the Upper bracket. If an ALLIANCE wins a MATCH in the Upper bracket, they remain in the Upper bracket. If an ALLIANCE loses a MATCH in the Upper bracket, they transition to the Lower bracket. ALLIANCES in the Lower bracket must win any subsequent MATCHES (except for finals) to remain in the tournament, i.e. once they lose a MATCH, they're out of the tournament.

In Round 1, the higher ranked ALLIANCE is assigned to the red ALLIANCE. For subsequent rounds, ALLIANCE color is assigned as shown in [Figure 10-2](#), regardless of ALLIANCE rank at the start of the Playoff tournament.

Figure 10-2 Playoff MATCH bracket (Red ALLIANCE tops each pairing)

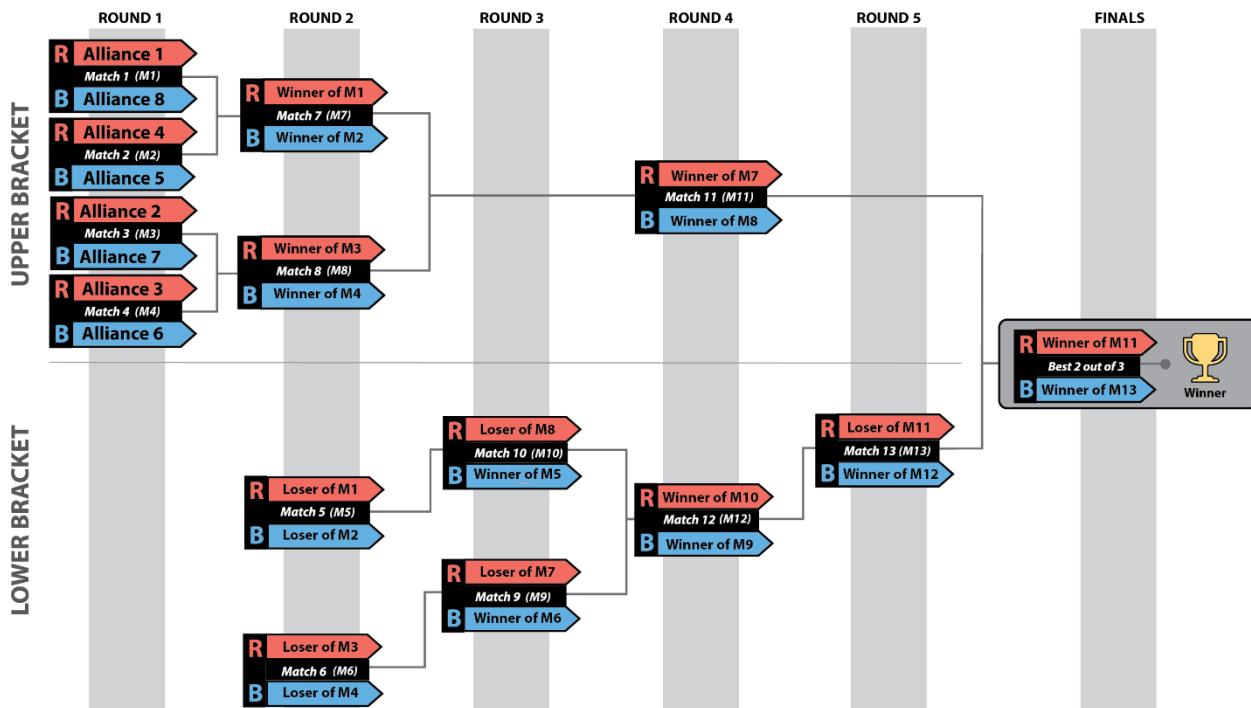

As shown in [Figure 10-2](#) and [Table 10-2](#), Playoff MATCHES consist of 6 rounds with breaks between later rounds and between Finals MATCHES. Breaks begin after the FIELD has been cleared from the previous MATCH. The Blue and Red Gap columns indicate the approximate time between each ALLIANCE'S MATCHES.

The expected start time of the scheduled MATCH is the time indicated on the MATCH schedule or 15 minutes from the end of either ALLIANCE'S previous MATCH, whichever is later. Occasionally, replayed MATCHES within a round may be played out of order; if MATCHES are played out of order, teams are informed by the emcee, FIELD STAFF, and/or queueing staff.

If a Playoff MATCH needs to be replayed as described in section [10.2 MATCH Replays](#), teams are notified of when the replay will occur. A minimum 10-minute delay is provided for teams to reset their ROBOTS prior to the replay unless all teams are ready sooner. The affected MATCH must be replayed before the next round begins.

Table 10-2 Typical Playoff MATCH schedule

Round	MATCH	Upper/ Lower	Gap (min)				Next MATCH (MATCH # (ALLIANCE color))			
			Blue	Red	Blue	Red	Winner	Loser		
1	1	Upper	8	1			M7 (R)	M5 (R)		
	2	Upper	5	4			M7 (B)	M5 (B)		
	3	Upper	7	2			M8 (R)	M6 (R)		
	4	Upper	6	3			M8 (B)	M6 (B)		
2	5	Lower	L2	L1	0:24	0:33	M10 (B)			
	6	Lower	L4	L3	0:15	0:24	M9 (B)			
	7	Upper	W2	W1	0:42	0:51	M11 (R)	M9 (R)		
	8	Upper	W4	W3	0:33	0:42	M11 (B)	M10 (R)		
3	9	Lower	W6	L7	0:24	0:15	M12 (B)			
	10	Lower	W5	L8	0:42	0:15	M12 (R)			
6-minute break										
4	11	Upper	W8	W7	0:27	0:36	M14 (R)	M13 (R)		
	12	Lower	W9	W10	0:27	0:18	M13 (B)			
15-minute awards break: Imagery, Gracious Professionalism, Team Spirit, and Rising All Star										
5	13	Lower	W12	L11	0:18	0:27	M14 (B)			
15-minute awards break: Autonomous, Creativity, Quality, and Industrial Design										
Finals	14		W13	W11	0:18	0:48	M15	M15		
15-minute awards break: Innovation in Control, Excellence in Engineering, Team Sustainability, Judges										
Finals	15		W13	W11	0:18	0:18	M16*	M16*		
15-minute awards break: Rookie All Star, FIRST Leadership Award, Engineering Inspiration**										
Finals	16*		W13	W11	0:18	0:18				
Awards: Remaining awards, Finalists, Winners, and FIRST Impact Award										

* if required

** Program Delivery Partners may choose to hold these awards until after all MATCHES are complete.

10.6.2.1 Playoff MATCH ties

If final MATCH scores for both ALLIANCES are equal, the win is awarded to the ALLIANCE per criteria listed in [Table 10-3](#).

Table 10-3 Playoff MATCH Tiebreaker Criteria

Order Sort	Criteria
1 st	Cumulative MAJOR FOUL points due to opponent rule violations
2 nd	ALLIANCE AUTO FUEL points
3 rd	ALLIANCE TOWER points
4 th	MATCH is replayed

10.6.2.2 Playoff Finals

Once a single ALLIANCE remains in each Upper and Lower bracket, those ALLIANCES proceed to the Finals round. The first ALLIANCE to win 2 MATCHES in the Finals becomes the event's Champions.

If a Finals MATCH ends in a tie score, the tie is not broken using the criteria in [Table 10-3](#), the MATCH remains a tie. In the case where an ALLIANCE hasn't won 2 MATCHES after 3 MATCHES have been played (because of tied MATCHES), the Playoffs proceed with up to 3 additional Finals MATCHES, called Overtime MATCHES, until an ALLIANCE has won 2 Finals MATCHES. In the case where the Overtime MATCH scores for both ALLIANCES are equal, the win for that Overtime MATCH is awarded based on the criteria listed in [Table 10-3](#).

10.6.3 BACKUP TEAMS

During the Playoff MATCHES an ALLIANCE CAPTAIN may elect to replace one of its ROBOTS. The team whose ROBOT and DRIVE TEAM replaces another ROBOT and DRIVE TEAM on an ALLIANCE during the Playoff MATCHES is called the BACKUP TEAM.

In this situation, the ALLIANCE CAPTAIN has the option to bring in the highest ranked team from the pool of available teams to join its ALLIANCE for the following MATCH. The resulting ALLIANCE is then composed of 4 teams.

ALLIANCES submit LINEUPS (as described in section [10.6.4 LINEUPS](#)) for each Playoff MATCH. After the BACKUP TEAM's first Playoff MATCH, the ALLIANCE'S LINEUP may consist of any 3 of the ALLIANCE'S 4 teams.

10.6.3.1 BACKUP TEAM Coupons

Each ALLIANCE is allotted 1 BACKUP TEAM coupon during the Playoff MATCHES. If two or more ROBOTS from the ALLIANCE become inoperable, then the ALLIANCE must play the following MATCHES with only 2 (or even 1) ROBOTS.

Example: 3 teams, A, B and C, form an ALLIANCE going into the Playoff MATCHES. The highest ranked team not on 1 of the 8 ALLIANCES is Team D. During 1 of the Playoff MATCHES, Team C's ROBOT suffers damage to its mechanical arm. The ALLIANCE CAPTAIN decides to bring in Team D to replace

Team C in the next MATCH. The new ALLIANCE of Teams A, B, C, and D are successful in advancing to the Finals and win the event. Teams A, B, C, and D are all recognized as members of the Winning ALLIANCE and receive awards.

The Head REFEREE will not accept the BACKUP TEAM coupon unless it lists the number of the team whose ROBOT is being replaced and is initialed by the ALLIANCE CAPTAIN. Once a BACKUP TEAM coupon is submitted and accepted by the Head REFEREE, the BACKUP TEAM coupon may not be withdrawn by the ALLIANCE.

- T607 *No BACKUP TEAM for replayed MATCHES.** An ALLIANCE may not request a BACKUP TEAM for a replayed MATCH. The sole exception is if, in the judgment of the Head REFEREE, the replay is due to an ARENA FAULT that rendered an ALLIANCE'S ROBOT inoperable.

Violation: The request is denied.

- T608 *No BACKUP TEAMS for 1st MATCH.** An ALLIANCE may not request a BACKUP TEAM until after their first Playoff MATCH.

Violation: The request is denied.

- T609 *BACKUP TEAMS play when called.** A BACKUP TEAM must be included in the LINEUP for the ALLIANCE'S next MATCH following their recruitment.

Violation: The LINEUP is denied.

If the Head REFEREE is busy, and there is no designee, the ALLIANCE CAPTAIN remains in the Question Box to report the LINEUP.

- T610 *BACKUP TEAMS due 2 minutes before the MATCH start time.** The BACKUP TEAM Coupon must be submitted to the Head REFEREE (or their designee) by the ALLIANCE CAPTIAN not later than 2 minutes before the expected MATCH start time in which the BACKUP TEAM is to play.

Violation: The request is denied

If the Head REFEREE is busy, and there is no designee, the ALLIANCE CAPTAIN remains in the Question Box to submit the BACKUP TEAM coupon.

10.6.3.2 BACKUP POOL

After the top ranked ALLIANCE has made their final pick during ALLIANCE Selection, the lead queuer (or their designee) polls the remaining eligible teams. In rank order, the lead queuer (or their designee) will invite remaining teams to accept or decline a position in the BACKUP POOL, i.e. the group of teams willing and able to join an ALLIANCE during the Playoff MATCHES, if needed, until up to 8 teams accept.

- T611 *Be there to be a BACKUP TEAM.** A team must be present after ALLIANCE Selection to accept the lead queuer's (or their designee) invitation to join the BACKUP POOL.

Violation: Team is ineligible to be a BACKUP TEAM.

- T612 *Send a BACKUP TEAM Representative.** The top 2 ranked BACKUP TEAMS must send at least 1 STUDENT representative (and optionally 1 additional STUDENT or mentor) to a designated area near the FIELD for the duration of the Playoff MATCHES.

These 2 representatives are available to answer questions and accept invitations to be a BACKUP TEAM from ALLIANCE CAPTAINS. If 1 of these 2 teams joins an ALLIANCE or excuses themselves from the BACKUP POOL, the next highest ranked team in the BACKUP POOL must provide their representative. Once a BACKUP TEAM has declined an invitation to join an ALLIANCE, it is no longer a member of the BACKUP POOL and ineligible to join another ALLIANCE.

Violation: VERBAL WARNING, plus the team is removed from BACKUP POOL if the situation cannot be corrected within a reasonable amount of time.

Some events may offer an area near the FIELD where the top 1 or 2 teams in the BACKUP POOL may choose to stage their ROBOT for quick and easy access to the FIELD if recruited.

10.6.4 LINEUPS

Each ALLIANCE competing in a Playoff MATCH has the option to submit a LINEUP, which lists the 3 teams participating in the MATCH and their selected DRIVER STATIONS.

The LINEUP is kept confidential until the FIELD is set for the MATCH at which point each ALLIANCE'S LINEUP appears on the Team Signs.

10.6.4.1 LINEUPS for 4-team ALLIANCES

If an ALLIANCE has 4 members (either because a 3-team ALLIANCE has called a BACKUP TEAM or the event is the FIRST Championship), a single representative from the team not on the LINEUP is allowed as a sixteenth ALLIANCE member but must be a member of that team's DRIVE TEAM. This additional representative may only serve as a DRIVE COACH.

10.6.4.2 Default LINEUP

T613 *LINEUPS due 2 minutes before the MATCH. The ALLIANCE CAPTAIN must submit their LINEUP in writing to the Head REFEREE (or their designee) 2 minutes before their expected MATCH start time.

Violation: Late LINEUPS are denied, and the ALLIANCE'S most recent LINEUP is applied.

If the Head REFEREE is busy, and there is no designee, the ALLIANCE CAPTAIN remains in the Question Box to report the LINEUP.

If no previous LINEUP exists, the ALLIANCE Lead is assigned DRIVER STATION 2, 1st team selected is assigned DRIVER STATION 1, and the 2nd team selected is assigned DRIVER STATION 3. If any of these 3 ROBOTS are unable to play, the ALLIANCE must play the MATCH with only 2 (or even 1) ROBOT(s).

Example: 3 teams, A, B, and C form an ALLIANCE going into the Playoff MATCHES. During one of the Playoff MATCHES, Team C's ROBOT becomes inoperable. The ALLIANCE decides to bring in Team D to replace Team C. Team C repairs their ROBOT and may play in any subsequent Playoff MATCHES replacing Team A, B, or D

If a BACKUP TEAM Coupon is accepted and the LINEUP for the next MATCH is not submitted or it omits the BACKUP TEAM, then the ALLIANCE'S most recent

LINEUP is used with the BACKUP TEAM in the position populated by the team for whom they're substituting.

- T614 *For replays, no changing LINEUPS (mostly).** If a MATCH must be replayed due to an ARENA FAULT, the LINEUP for the replayed MATCH is the same as the original MATCH. The sole exception is if, in the opinion of the Head REFEREE, the ARENA FAULT rendered a ROBOT inoperable, in which case the LINEUP can be changed.

Violation: The new LINEUP is denied.

10.6.5 Pit Crews

During the Playoff MATCHES and because of the distance between the FIELD and the pit area, extra team members may be needed to maintain and otherwise assist with the ROBOT between MATCHES. Each team is permitted to have up to 3 additional pit crew members to help with needed ROBOT repairs/maintenance.

10.6.6 Small Event Exceptions

The scheduling algorithm described in section [10.5.2 MATCH Assignment](#) works to minimize teams playing in back-to-back MATCHES. However, at events with fewer than 24 teams, back-to-back plays may occur.

Multi-day events with 24 teams or fewer employ a modified Playoff MATCH format. Instead of 8 ALLIANCES, these events proceed through ALLIANCE SELECTION and the Playoff Tournament with the maximum number of complete 3-team ALLIANCES that can be formed while leaving at least 1 BACKUP TEAM (e.g. a 24-team event creates 7 ALLIANCES, a 20-team event creates 6 ALLIANCES).

$$\text{ALLIANCE count} = \frac{\text{team count} - 1 \text{ BACKUP TEAM}}{3}, \text{rounded down}$$

The Playoff Bracket remains as shown in [Figure 10-2](#) with any matchup against a non-existent ALLIANCE resulting in a bye (i.e. automatic advancement to the next round). An ALLIANCE assigned a bye-MATCH is invited, though not required, to practice together in a null MATCH (i.e. it has no bearing on the Playoff tournament) during the designated time in the Playoff schedule.

District points for Draft Order Acceptance (per section [11.1.2 ALLIANCE Selection Results](#)) are awarded as if a full set of ALLIANCES was selected (i.e. the 2nd selection of the 3-seed ALLIANCE still receive 3 points regardless of how many ALLIANCES are formed).



11 District Tournaments

Teams advance through the season depending on the events at which they compete: Regional or District. This section details how District teams advance from District qualifying events to their District Championship.

11.1 District Events

District teams are ranked throughout the season based on the points they earn at the first 2 home District events they attend, as well as at their District Championship. Points are awarded to teams as follows:

Table 11-1 District Point Assignment

Category	Points
Qualification Round Performance	Normal distribution of points from 22 to 4 across the highest ranked team to the lowest based on an equation. See section 11.1.1 Qualification Round Performance for details. For a typically sized District event, this will result in a minimum of 4 points being awarded for Qualification round performance. For events of all sizes, a maximum of 22 points will be awarded.
ALLIANCE CAPTAINS	Equal to 17 minus the ALLIANCE CAPTAIN number (e.g. 14 points for ALLIANCE #3 Captain)
Draft Order Acceptance	Equal to 17 minus the Draft Order Acceptance Number (e.g. 12 points for the team that accepts the fifth draft position, regardless of whether it was delayed per T605 .)
Playoff Advancement	Points awarded based on team participation in individual playoff rounds, and whether or not the ALLIANCE advances. See section 11.1.3 Playoff Performance for details.
Team Judged Awards	10 points for FIRST Impact Award 8 points each for Engineering Inspiration and Rookie All Star Awards 5 points each for all other team judged awards
Team Age	10 points for 2026 rookie teams 5 points for 2025 rookie teams

Points earned at District Championships are multiplied by 3 and then added to points earned at District events, to determine the final season point total for the team.

If there is a tie in the season point total between teams, the higher ranked team will be determined using the following additional sorting criteria:

Table 11-2 District Team Sort Criteria

Order Sort	Criteria
1 st	Total Playoff Performance Points
2 nd	Best Playoff Points at a single event
3 rd	Total ALLIANCE Selection Results Points
4 th	Highest Qualification Round Seed or Draft Order Acceptance (i.e. Highest ALLIANCE Selection points at a single event)
5 th	Total Qualification Round Performance Points
6 th	Highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
7 th	Second highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
8 th	Third highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
9 th	Random Selection

11.1.1 Qualification Round Performance

The calculation of Qualification performance points is done using the equation below. This equation is an inverse error function which utilizes the following variables:

- R – the qualification rank of the team at the event at the conclusion of Qualification MATCHES (as reported by FMS)
- N – the number of FIRST Robotics Competition teams participating in the Qualification rounds at the event
- Alpha (α) – a static value (1.07) used to standardize the distribution of points at events

$$\text{QualificationPoints}(R, N, \alpha) = \left[\text{InvERF} \left(\frac{N - 2R + 2}{\alpha N} \right) \left(\frac{10}{\text{InvERF} \left(\frac{1}{\alpha} \right)} \right) + 12 \right]$$

This formula generates an approximately normal distribution of Qualification Round Performance points at an event, based on rank, with most teams getting a moderate number of points, and fewer teams getting the highest or lowest numbers of points available.

[Table 11-3](#) displays sample Qualification Round Performance points for variously ranked teams at a 40-team event. The system will automatically generate the appropriate points for each team based on their rank and the number of teams at the event.

Table 11-3 Sample Qualification Round Point Assignments

Rank	1	2	3	4	...	19	20	21	...	37	38	39	40
Points	22	21	20	19	...	13	13	12	...	6	6	5	4

11.1.2 ALLIANCE Selection Results

This attribute measures both individual team qualification round seeding performance and recognition by peers.

ALLIANCE CAPTAINS are recognized based on their qualification round seeding rank. This rank is a result of the rules of the game, which typically incorporate several team performance attributes, and are designed to eliminate ties in rank. ALLIANCE partners are rewarded based on peer recognition. To be invited to join an ALLIANCE, a team's peers have decided that the team has attributes that are desirable. Giving points for ALLIANCE selection also supports come-from-behind teams. A team taking several MATCHES to optimize their performance may be recognized as a late bloomer by a top seeded team, even if that performance isn't reflected in the rankings because of poor performance in early MATCHES. These points also have the potential to recognize teams employing a unique strategy with their ROBOT. Teams with unique or divergent ROBOT capabilities that complement the strengths of other ALLIANCE members may be selected to fill a strategic niche.

Note also that ALLIANCE CAPTAINS are given the same number of points as the team drafted in the same sequence. For example, the team who accepts the pick from the third ALLIANCE CAPTAIN receives the same number of points as the third ALLIANCE CAPTAIN. Numerical analysis supports the idea that ALLIANCE CAPTAINS are about as strong in ROBOT performance as equivalently drafted teams. An additional minor benefit to this system is that it allows teams who would traditionally not be a top ranked team the opportunity to be an ALLIANCE CAPTAIN.

11.1.3 Playoff Performance

This attribute measures team performance as part of an ALLIANCE.

Teams that advance to at least MATCH 12 earn Double Elimination (DE) Points per the formula below, where β is defined in [Table 11-4](#).

$$DE\ Points = \frac{\# \ of \ DE \ MATCHES \ in \ which \ ALLIANCE \ won \ \& \ team \ participated}{\# \ of \ DE \ MATCHES \ the \ ALLIANCE \ won} \times \beta$$

Table 11-4 Double Elimination Points, β values

ALLIANCE Finish	β
1 st Place (Winners)	20
2 nd Place (Finalists)	20
3 rd Place (loser of MATCH 13)	13
4 th Place (loser of MATCH 12)	7

In most cases, unless a BACKUP is recruited, a team plays 100% of the DE MATCHES won by their ALLIANCE, thus their DE Points simply equal β . If a team does not play 100% of the DE MATCHES won by their ALLIANCE,

their DE Points equal their β value multiplied by the percentage of DE MATCHES won by their ALLIANCE in which that team participated. If the result is not a whole number, the value is rounded up to the nearest integer.

Teams on the winning ALLIANCE are awarded additional Finals Points, which are 5 points for each Finals MATCH won and in which the team participated, up to a maximum of 10 points.

For example, if Team X's ALLIANCE wins the event, but Team X only played in 2 MATCHES won by their ALLIANCE, MATCH 13 and Final 1, Team X's Playoff Performance points are $20 * (1/5) + 5 = 9$ points.

The maximum number of Playoff Performance Points a team can earn is 30 (20 DE points + 10 Finals Points).

11.1.4 Team Judged Awards

This attribute measures team performance with respect to team awards judged at the event.

The points earned for team awards in this system are not intended to capture the full value of the award to the team winning the award, or to represent the full value of the award to *FIRST*. In many ways, the team's experience in being selected for awards, especially the *FIRST* Impact Award, the Engineering Inspiration Award, and the Rookie All Star Award (which is optional for District Championship events), is beyond measure, and could not be fully captured in its entirety by any points-based system. Points are being assigned to awards in this system only to help teams recognize that *FIRST* continues to be "*More than Robots*®," with the emphasis on our cultural awards, and to assist in elevating award-winning teams above non-award-winning teams in the ranking system.

Teams only receive points for team awards judged at the event. If an award is not judged, is not for a team (e.g. the *FIRST* Leadership Award) or is not judged at the event (e.g. Safety Animation Award, sponsored by UL), no points are earned.

11.1.5 Team Age

This attribute recognizes the difficulty in being a rookie or relatively new team.

Points are awarded to 2025 and 2026 rookie teams in recognition of the unique challenges teams face in those early years, and to increase the chance that they will make it to the District Championship to compete with their ROBOTS. Like our dedicated Rookie awards, these additional points are intended to recognize and motivate newer participants in *FIRST* Robotics Competition. These points are awarded once at the beginning of the season. Rookie year is calculated based on the year in which *FIRST* recognizes the team as a rookie.

11.1.6 Regional Participation

District teams neither earn points for their actions at any Regionals, nor are eligible for any *FIRST* Championship qualifying benefits at that Regional (awards, etc.).

11.2 District Championship Eligibility

A team competing in a District qualifies for their District Championship by meeting 1 of the following criteria:

- District *FIRST* Impact Award Winner,
- District Ranking (based on total points earned at their first 2 home District events as detailed in section [11.1 District Events](#)),

Teams do not earn points at third or subsequent District events, nor at any inter-district or Regional events at which they compete during the season.

If a team declines an invitation to the District Championship, the next highest uninvited team on the list is invited, and so on, until the event capacity is filled.

- C. District Engineering Inspiration winner (qualifies to compete for the award only), and
- D. District Rookie All Star winner (qualifies to compete for the award only).

The capacity of each District Championship is shown in [Table 11-5](#). Each District determines the number of teams that qualify for their District Championship. These limits are based on factors including but not limited to the total number of teams in the District, available venue capacity, etc.

Table 11-5 2026 District Championship Capacities

District Championship	Capacity	Divisions
<i>FIRST</i> California – Northern California*	60	1
<i>FIRST</i> California – Southern California*	60	1
<i>FIRST</i> Chesapeake District Championship	54	1
<i>FIRST</i> in Michigan State Championship	160	4
<i>FIRST</i> in Texas District Championship	90	2
<i>FIRST</i> Indiana State Championship	38	1
<i>FIRST</i> Israel District Championship	42	1
<i>FIRST</i> Mid-Atlantic District Championship	66	1
<i>FIRST</i> North Carolina State Championship	50	1
<i>FIRST</i> Ontario Provincial Championship	100	2
<i>FIRST</i> South Carolina State Championship	32	1
<i>FIRST</i> Wisconsin District Championship	36	1
New England District Championship	100	2
Pacific Northwest District Championship	50	1
Peachtree District State Championship	45	1

* Due to the strong geographic concentration of teams in two main regions of California, there are two separate District Championships, but California will remain as one district. Teams in California can compete and earn points in any District Qualifier event in California. Teams are ranked based on the region they are located in (Northern or Southern California) and advance to one of two District Championships. The top 60 teams in each area (North and South) advance to their District Championship.

11.3 District Championships with Multiple Divisions

If a District Championship has too many teams to allow all teams 12 Qualification MATCHES, then the event hosts multiple divisions. These events have 2 or 4 divisions (based on the number of teams participating, see [Table 11-5](#)) with approximately 40–60 teams in each division. Teams are assigned divisions by FIRST using a process developed by FIRST in Michigan and balances need for accessible seating between Divisions.

The process employs a “brute force iterative randomizer” and is executed as follows:

1. The district team list is sorted in order of cumulative district points earned as described in section [11.1 District Events](#).
2. The list is divided into quartiles based on rank (e.g. the first quartile has the top 25% ranked teams). If the total number of teams is not evenly divisible by 4 times the number of divisions, additional teams are distributed to quartiles 4, then 2, then 3.
3. Division assignments are randomly generated using equal contributions from each quartile.
4. 3 criteria are calculated for each division:
 - a. average strength: the arithmetic mean of the district point values of teams in a division
 - b. distribution of strength: the Signal to Noise Ratio (SNR) of the district point values of teams in a division. SNR is calculated as follows:

$$SNR = 10 \left(\log_{10} \frac{\bar{x}^2}{\sigma^2} \right)$$

\bar{x} = arithmetic mean of the district points in a division

σ = standard deviation of the district points in a division

- c. distribution of strength for “top” teams: The SNR of the district point values of teams in the first quartile of a division
5. The 3 criteria for each division are compared to the other division(s). If the difference between the division’s value and any other division’s value exceeds the limits in [Table 11-6](#), the criteria is not met.

Table 11-6 District Championship division evaluation limits

	2 divisions	4 divisions
Average strength	1	2
Distribution of strength	1	2.5
Distribution of strength for “top” teams	1.5	2

6. If all 3 criteria met, event organizers publish the assignments. If any of the 3 criteria are not met, assignments are rejected, and the process returns to Step 3.

11.4 District Championship Playoffs

In these cases:

- Division winning ALLIANCES play each other in District Championship Playoffs, employing the brackets shown in [Figure 11-1](#) and [Figure 11-2](#) (and detailed in [Table 11-7](#)) that corresponds to their District, until a winning ALLIANCE for the event is determined.

Figure 11-1 4-division District Championship Playoff Bracket

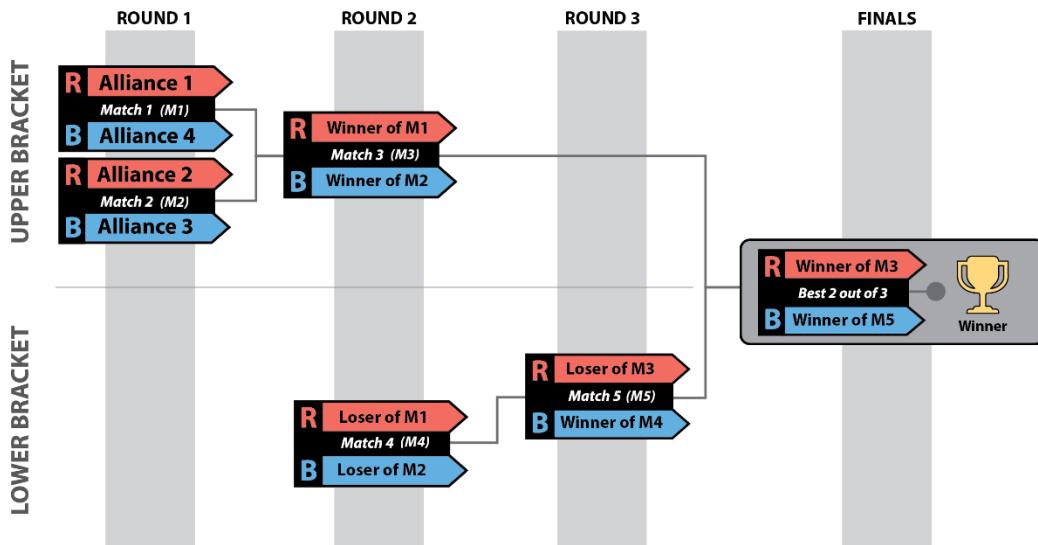


Figure 11-2 2-division District Championship Playoff Bracket

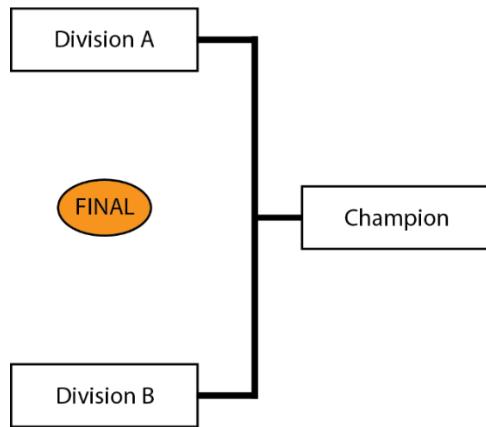


Table 11-7 District Championship 4-ALLIANCE Playoff MATCH schedule

Round	MATCH	Upper/ Lower			Gap (min)		Next MATCH (MATCH # (ALLIANCE color))	
1	1	Upper	B	A			M3 (R)	M4 (R)
	2	Upper	D	C			M3 (B)	M4 (B)
15-minute break								
2	3	Upper	W2	W1	17m	24m	M6 (R)	M5 (R)
	4	Lower	L2	L1	24m	31m	M5 (B)	
15-minute break								
3	5	Lower	W4	L3	17m	24m	M6 (B)	
15-minute break								
Finals	6		W5	W3	17m	44m	M7	M7
15-minute break								
Finals	7		W5	W3	17m	17m	M8*	M8*
15-minute break								
Finals	8*		W5	W3	17m	17m		

* if required

- Each team on a Champion ALLIANCE of a 2-Division District Championship Playoff tournament earns 10 points.
- For a 4-Division District Championship Playoff tournament, each team on a Champion ALLIANCE earns 20 points and each team on a Finalist ALLIANCE receives 10 points.
- If any of these ALLIANCES has recruited a BACKUP TEAM, these points are divided amongst the teams as described in section [11.1.3 Playoff Performance](#).
- If an ALLIANCE in a District Championship Playoff has not yet recruited a BACKUP TEAM per section [10.6.3 BACKUP TEAMS](#), the ALLIANCE CAPTAIN may bring in only the highest ranked team from their division's BACKUP POOL to join its ALLIANCE.

11.5 FIRST Championship Eligibility

Each District determines the number of *FIRST* Leadership Award, *FIRST* Impact Awards, Rookie All Star Awards, and Engineering Inspiration Awards to present at their District Championship, within a range established by *FIRST*. The team counts are based on the team representation of the respective District at the Championship. For the awards, ranges are developed by using ratios agreed upon by *FIRST* and District Leadership. These ranges allow each District to represent their own community as they see fit.

- For the *FIRST* Impact Award, the ratios range from one *FIRST* Impact Award team for every 18 Championship District teams to one *FIRST* Impact Award team for every nine Championship District teams.

- For the *FIRST* Leadership Award Finalist, the ratios range from one *FIRST* Leadership Award Finalist for every nine Championship District teams to one *FIRST* Leadership Award Finalist for every six Championship District teams.
- All Districts, regardless of *FIRST* Championship Slot allocation, may award one or two Engineering Inspiration and Rookie All-Star Awards.

The following teams competing in the District model earn a Merit-Based Qualifying slot:

- District Championship
 - *FIRST* Impact Award Winners
 - Engineering Inspiration Award Winners
 - Rookie All-Star Winners (the judges can decide if they present this award or not)
 - Winning Alliance members
- as many teams in District-points total order to fill the Allocated *FIRST* Championship slots granted per the table below.

Districts receive the percentage of 'available slots' at *FIRST* Championship, rounded up to the nearest whole slot, equal to the percentage of teams they have in their District compared to the total of all *FIRST* Robotics Competition teams. 'Available slots' are calculated by taking the total number of slots at *FIRST* Championship and subtracting the number of pre-qualified teams. This overall calculation uses a 'snapshot' of teams that have registered and paid as of three weeks after initial season payment was due.

Table 11-8 District FIRST Championship and awards allocations

District	Allocated <i>FIRST</i> Championship Slots	<i>FIRST</i> Impact Award Winners	<i>FIRST</i> Leadership Award Finalists	Engineering Inspiration Award Winners	Rookie All- Star Award Winners	Woodie Flowers Award Finalists
<i>FIRST</i> California	46*	2 per DCMP	4 per DCMP	1 per DCMP	1 per DCMP	1 per DCMP
<i>FIRST</i> Chesapeake	19	2	3	1	1	2
<i>FIRST</i> in Michigan	83	5	14	1	2	3
<i>FIRST</i> in Texas	28	2	5	2	2	2
<i>FIRST</i> Indiana Robotics	12	1	2	2	0	1
<i>FIRST</i> Israel	12	1	2	1	1	1
<i>FIRST</i> Mid- Atlantic	23	2	4	2	1	2
<i>FIRST</i> North Carolina	15	1	3	2	2	1
<i>FIRST</i> South Carolina	7	1	2	1	1	1
<i>FIRST</i> Wisconsin	12	1	2	1	1	1
NE FIRST	32	4	6	2	1	2
Ontario	21	2	3	1	1	2
Pacific Northwest	21	2	4	2	1	2
Peachtree	13	2	2	2	1	1

* Due to the strong geographic concentration of teams in two main regions of California, there are two separate District Championships, but California will remain as one district. Teams in California can compete and earn points in any District Qualifier event in California. Teams are ranked based on the region they are located in (Northern or Southern California) and advance to one of two District Championships. The top 46 teams from the entire District advance to *FIRST* Championship.



12 Regional Tournaments

Teams advance through the season depending on the events at which they compete: Regional or District. This section details how Regional teams advance from Regional events to *FIRST* Championship.

12.1 Regional Events

Regional teams are ranked throughout the season based on the points they earn at the first 2 Regional events they attend. Points are awarded to teams as follows:

Table 12-1 Regional Point Assignment

Category	Points
Qualification Round Performance	Normal distribution of points from 22 to 3 across the highest ranked team to the lowest based on an equation. See section 11.1.1 Qualification Round Performance for details.
ALLIANCE CAPTAINS	Equal to 17 minus the ALLIANCE CAPTAIN number (e.g. 14 points for ALLIANCE #3 Captain.) See section 11.1.2 ALLIANCE Selection Results for details.
Draft Order Acceptance	Equal to 17 minus the Draft Order Acceptance Number (e.g. 12 points for the team that accepts the fifth draft position, regardless of whether it was delayed per T605 .)
Playoff Advancement	Points awarded based on team participation in individual playoff rounds, and whether or not the ALLIANCE advances. See section 11.1.3 Playoff Performance for details.
Team Judged Awards	45 points for <i>FIRST</i> Impact Award 28 points for Engineering Inspiration Award 8 points for Rookie All Star Award 5 points each for all other team judged awards See section 12.1.1 Team Judged Awards for full details.
Team Age	10 points for 2026 rookie teams 5 points for 2025 rookie teams See section 12.1.2 Team Age for full details.

If there is a tie in the event point total between teams, the higher ranked team will be determined using the following additional sorting criteria:

Table 12-2 Regional team sort criteria

Order Sort	Criteria
1 st	Best Playoff Points at a single event
2 nd	Highest Qualification Round Seed or Draft Order Acceptance (i.e. Highest ALLIANCE Selection points at a single event)
3 rd	Best Qualification Round Performance Points
4 th	Highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
5 th	Second highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
6 th	Third highest Individual MATCH Score, regardless of whether that score occurred in a Qualification or Playoff MATCH
7 th	Random Selection

12.1.1 Team Judged Awards

This attribute measures team performance with respect to team awards judged at the event.

Much of what is stated in section [11.1.4 Team Judged Awards](#) is also relevant to Regional events. Points are assigned to awards to recognize that *FIRST* continues to be “More than Robots®” and to elevate award-winning teams above non-award-winning teams in the ranking system. These points are not intended to capture the true value of these awards as that value is truly immeasurable.

Point values for some culture awards (*FIRST* Impact Award, Engineering Inspiration) are higher for Regional events than District events because Districts reward those teams with slots at an intermediate level of competition: their District Championship. Regional teams do not have an intermediate competition level and *FIRST* wants those teams to have an opportunity to share their stories and celebrate their success outside of their regional event.

12.1.2 Team Age

This attribute recognizes the difficulty in being a rookie or relatively new team.

Much of what is stated in section [11.1.5 Team Age](#) is also relevant to Regional events. Points are awarded to 2025 and 2026 rookie teams. Unlike in the District events where these points are awarded once per season, for Regional events these points are awarded at each event they attend. Awarding these points at every event will assist rookies with earning one of the three per-event qualification slots starting in 2026. Rookie year is calculated based on the year in which *FIRST* recognizes the team as a rookie.

12.2 FIRST Championship Eligibility

Regional teams can qualify for FIRST Championship in one of two ways:

1. Direct Event Qualification
2. Regional Pool

12.2.1 Direct Event Qualification

At every regional event, teams earn points based on the point system. Regional teams can earn points from and qualify directly for the FIRST Championship at any Regional event they attend. The top x number of teams who earned the most points at each event and who have not already qualified for the FIRST Championship qualify for the FIRST Championship.

- Each International event will advance 4 teams.
- Each US event will advance 3 teams.

Any team who wins the FIRST Impact Award at a Regional event and does not qualify for FIRST Championship via a direct slot or from the Regional Pool will be offered a remote interview to be eligible to win at FIRST Championship. Teams who win the award and qualify for the FIRST Championship must still attend the event in order to receive an interview.

12.2.2 Regional Pool

All Regional event teams not already qualified for the FIRST Championship are ranked together in the "Regional Pool" based on the points earned from their first two regional events. The top ranked teams from this pool earn FIRST Championship qualification spots on a weekly basis beginning after week 2. This list helps ensure the top performing teams across events qualify for the FIRST Championship and allows for the consideration of performance across multiple events for teams. Awarding points at the first two events, with a projection if a team has only played one event, rewards consistent performance over the season without being punitive to single-event teams.

The global [Regional Rankings webpage](#) shows all regional teams in rank order by their assigned points. Teams are invited to the FIRST Championship from the Regional Pool on a weekly basis beginning after Week 2.


Our goal is to release enough slots each week so that the same proportion of Championship slots have been filled as events have been completed. For example, if 35 of 56 (~68%) Regional Events are completed after Week 4, we plan to have approximately the same percentage of Regional slots filled by that point.

12.2.2.1 Single-event team points calculation

If a team has only played one event at the end of the interval, they are awarded second event points using this formula:

$$\text{Second event points} = 0.6 * (\text{first event points}) + 14$$

This model is based on a regression of Event 1 vs Event 2 points in 2023 and 2024. This calculation projects how many points would be earned by the average team who earned X points at their first event. If the result is not a whole number, the value is rounded to the nearest integer.



13 FIRST Championship Tournament (C)

At the 2026 FIRST Championship presented by BAE Systems, teams are split into 8 divisions. The process used to assign teams to their division is as follows:

1. Teams requesting accessible seating are split amongst the divisions.
2. Rookies are randomized and then assigned sequentially to divisions, skipping a division for each rookie assigned in Step 1 (i.e. a team in Division 1, a team in Division 2, a team in Division 3, a team in Division 4, a team in Division 5, a team in Division 6, a team in Division 7, a team in Division 8, then back to Division 1 again, until Rookies are all assigned to a division).
3. Step 2 is repeated with veteran teams, with additional assignments as necessary to balance the total teams in each division.

Each division plays a standard tournament as described in section [10.5 Qualification MATCHES](#) and section [10.6 Playoff MATCHES](#) to produce the division Champions. Those 8 division Champions proceed to the Championship Playoffs, on the Einstein FIELDS, to determine the 2026 FIRST Robotics Competition Championship Winners, per section [13.4 FIRST Championship Playoffs](#).

13.1 Advancement to the FIRST Championship

Details on how teams earn eligibility to attend the FIRST Championship can be found in section [11.5 FIRST Championship Eligibility](#) and section [12.2 FIRST Championship Eligibility](#). Teams that are pre-qualified can be found on the [FIRST Championship eligibility webpage](#).

13.2 4-ROBOT ALLIANCES

There is no provision for BACKUP TEAMS at the FIRST Championship.

Instead, before each division Playoff Tournament, ALLIANCES are selected per the process as described in section [10.6.1 ALLIANCE Selection Process](#), however the process continues with a third round of selection as follows.

Round 3: The same method is used for each ALLIANCE CAPTAIN'S third choice except the selection order is reversed again, with ALLIANCE 1 picking first and ALLIANCE 8 picking last. This process results in 8 ALLIANCES of 4 teams each.

ALLIANCES may start with any 3 of the 4 ROBOTS on their ALLIANCE during division Playoff MATCHES and during the Championship Playoffs. ALLIANCES submit LINEUPS for their MATCHES as described in section [10.6.4 LINEUPS](#).

13.3 FIRST Championship Pit Crews

FIRST distributes buttons to the ALLIANCE CAPTAINS during the ALLIANCE CAPTAIN meeting, which takes place on the division FIELDS. These buttons provide the necessary access to the ARENA for pit crew members.

C301 *Wear your buttons. Only team members wearing proper buttons are allowed on the ARENA floor during division and Playoff MATCHES.


Violation: MATCH won't start until the situation is corrected. Those not displaying identification must leave the ARENA.

Teams should assume they may be chosen for an ALLIANCE and think about the logistics of button distribution and set a plan prior to the ALLIANCE selection process. It is each ALLIANCE CAPTAIN'S responsibility to distribute buttons to their pit crew members.

13.4 FIRST Championship Playoffs

The 8 division Champions play a Double Elimination style tournament as described in section [10.6 Playoff MATCHES](#) to determine the 2026 FIRST Robotics Competition Champions. Exact MATCH timing is provided to FIRST Championship Playoff teams. ALLIANCES are paired as shown in [Figure 13-1](#).

Figure 13-1 FIRST Championship playoff bracket

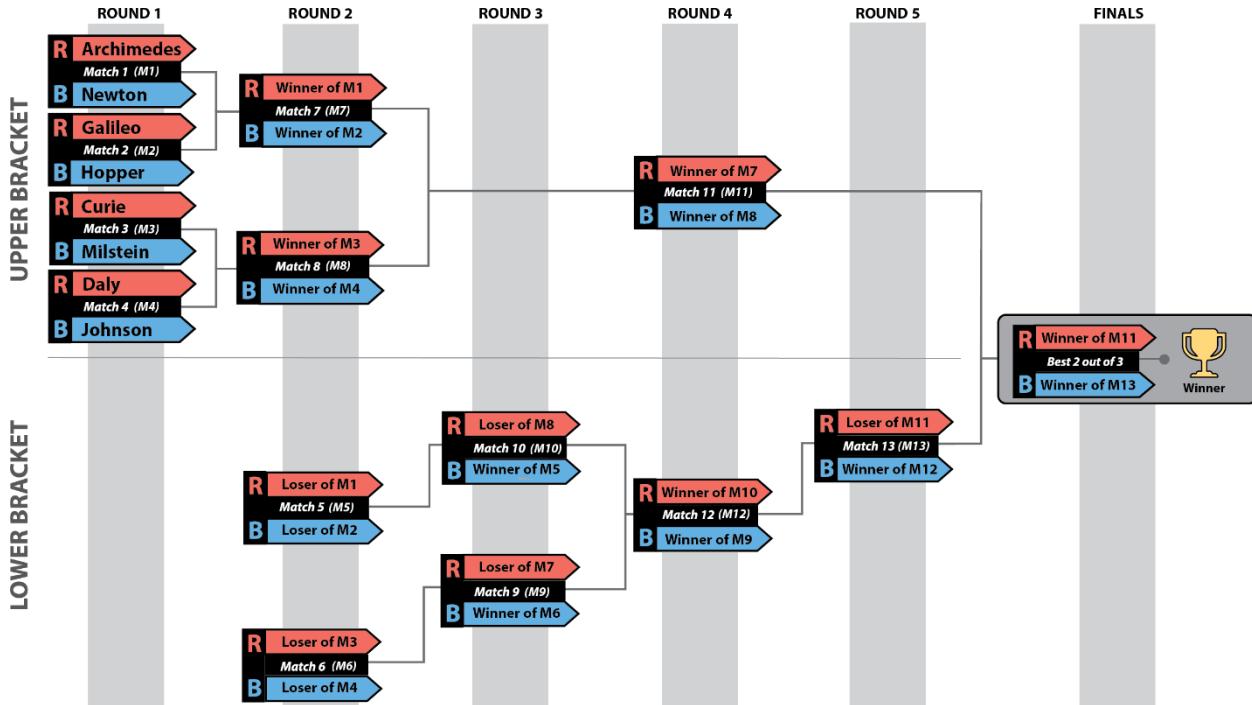

During the Einstein Finals, if the MATCH score of each ALLIANCE is equal, the MATCH is replayed. In this circumstance, the LINEUP may be changed.



14 Event Rules (E)

The rules below apply throughout an event, i.e. from when Load-In begins to when Load-Out is complete.

Additional rule specific violations, if applicable, are listed with their corresponding rule.

Universal Violation Note: A violation of any Event Rule will result in a VERBAL WARNING. Egregious or subsequent violations will be addressed by the Head REFEREE, the Lead Robot INSPECTOR (LRI) and/or Event Management. Teams should note that egregious and frequent violations may be shared with the Judge Advisor which could lead to disqualification from awards.

FIRST is committed to [STEM for Everyone™](#) and as such, *FIRST* strives to make reasonable accommodations for persons with disabilities that request accommodation. If a participant needs an accommodation for an event, we ask that they talk to a volunteer at the event or contact their [local leadership](#) before the event so they can ensure the request is addressed. Accommodations are considered reasonable if they do not create an undue hardship, cause safety concerns, or fundamentally alter the nature of the event.

Rules around safety and security within this section are minimum requirements, and Program Delivery Partners are able to implement increased restrictions due to local or venue requirements (e.g. requiring badging for all attendees, reserving seating for accessibility, etc.). Partners should communicate additional local requirements early enough to allow teams to plan.

Safety is always paramount, and many rules are intended to establish norms at each event that will mitigate injury risk to all participants.

Event staff have the final decision authority for all safety-related issues within a venue.

14.1 General Rules

E101 *Personal safety comes first. All team members must observe the following safety practices throughout the event:

- A. wear safety glasses (only ANSI-approved, UL Listed, CE EN166 rated, AS/NZS certified, or CSA rated non-shaded) while in and around the playing FIELD and in the pit area. Lightly tinted lenses are permitted provided eyes are clearly visible to others, but reflective lenses are prohibited. Accommodations will be made for participants that require tinted safety glasses. The only exception is for teams in their first 10 minutes of their load in and for the first 10 minutes pits are open each day of the event as long as they're not working on the ROBOT or setting up their pit.
- B. wear closed toed/heeled shoes.
- C. tie back long hair while working on or around a ROBOT or ROBOT related materials.
- D. wear appropriate clothing.
- E. walk in the venue
- F. health and safety requirements in place for that event (e.g. mask wearing).

For more information about safety at *FIRST* Robotics Competition events, please reference the [Safety Manual](#).

E102 *Be nice. All participants must be gracious and professional at all times while attending *FIRST* Robotics Competition events. Uncivil behavior toward any participants is not tolerated.

Examples of inappropriate behavior include, but are not limited to

- A. use of offensive language or other uncivil conduct,
- B. intentionally blocking the view of other participants or spectators for an extended period (team members momentarily holding up team signs while directly supporting their team is not considered a violation of this rule.), and
- C. jamming or interfering with the remote sensing capabilities of a ROBOT or the FIELD while in open-access spectator seating areas.

Examples of remote sensing capabilities include, but are not limited to, vision systems, acoustic range finders, sonars, and infrared proximity sensors.

Use of imagery that, to a reasonably astute observer, mimics the AprilTags employed on the FIELD is a violation of this rule.

Examples of particularly contemptible behavior that may result in ejection from the event include, but are not limited to, the following:

- A. assault, e.g. throwing something that hits another person (even if unintended),
- B. threat, e.g. saying something like "if you don't reverse that call, I'll make you regret it,"
- C. harassment, e.g. badgering someone with no new information after a decision's been made or a question's been answered,
- D. bullying, e.g. using body or verbal language to cause another person to feel inadequate,
- E. insulting, e.g. telling someone they don't deserve to be on a team,
- F. swearing at another person (versus swearing under one's breath or at oneself), and
- G. yelling at another person(s) in anger or frustration.

E103 *Children with adults, please. Children under 12 must be accompanied in the pits by an adult at all times.

E104 *Respect the venue. Teams may not damage the venue, including but not limited to bleachers, floors, walls, railings, etc., in any way.

E105 *Teams must check in. An adult team member must check in at the Pit Administration station no later than 90 minutes before Qualification MATCHES are scheduled to start.

Violation: Teams will be contacted in their pit. Failure to Check-In may result in a team not participating in the event.

Event check-in takes place at the Pit Administration station the evening before and/or the first morning of each event.

Once a team's consent and release forms are submitted at Pit Administration, each team will receive their DRIVE TEAM & Safety Captain buttons.

E106 ***Some event resources for event teams only.** Only teams registered for an event may use that event's Competition FIELD, Practice Areas, Spare Parts, Machine Shop, and Inspection. Host teams supplying TEST/PRACTICE AREA elements and/or Machine Shop resources may use them, however teams registered for that event must be granted priority.

E107 ***Work in designated areas only.** At the event venue, teams may only produce FABRICATED ITEMS as follows:

- A. in their pit area,
- B. in another team's pit area with permission from that team,
- C. while queued for a MATCH or TEST/PRACTICE AREA (given space constraints, extra scrutiny regarding safety is required),
- D. any area designated by Event Staff (e.g. Playoff Pit Area, etc.), or
- E. as permitted at provided machine shops that are available to all teams.

ROBOTS are permitted to be powered on while in queue. ROBOTS which are powered on, but not enabled, such as to deploy code, require minimal additional precautions. Teams enabling their ROBOT, such as to charge pneumatics or test system functions, should ensure that they are maintaining safe space for any mechanism on the ROBOT to move unexpectedly to its full extent.

E108 ***Some things don't belong at events.** Do not bring or use the following:

- A. skateboards
- B. 'hoverboards'
- C. drones
- D. bottled gas tanks (e.g. helium)
- E. noisy devices or noisemakers, such as floor stompers, whistles and/or air horns
- F. walkie-talkies
- G. scooters, except for those used for accommodations
- H. any item with bright lights which flash faster than approximately 5 times per second

E109 ***Don't arrange for additional utilities.** Do not arrange for power, internet access, or phone lines from venue service providers or attempt to use venue internet connections reserved for event purposes (e.g. the FIELD Management System or web casting).

E110 ***Don't sell stuff.** Teams may not conduct sales at an event. This includes, but is not limited to, raffle tickets, food, hats, shirts, candy, water, soft drinks, fruit, or any promotional products.

E111 ***Don't give out food.** Teams may not distribute food to others at an event.

E112 ***Make FIRST loud, but with restrictions.** Do not invite or bring live bands to play in the audience. Do not play loud music.

E113 *Hang banners with care. Be respectful when hanging your banners.

- A. Do not cover or move other team or sponsor signs already in place.
- B. Share the available space fairly with other teams.
- C. Do not obstruct the view of spectators.
- D. Get permission from the Event Coordinator before hanging banners outside of your pit.
- E. Hang signs and banners in a safe manner.
- F. Banners hung outside team pits must not be larger than 25ft² (2.3m²).

We encourage teams to bring team flags and/or signs for display in their pits and/or the playing FIELD area.

To find your Event Coordinator, inquire at the Pit Administration desk.

Respect venue-specific rules regarding sign location and hanging methods. At the end of the event, safely remove all signs and anything used to hang the signs (tape, string, etc.).

E114 *Limit flag and flagpole size. Flags and flagpoles may not be of unreasonable size and weight.

As a guideline, reasonable flags are less than 36.0in by 60.0in (91.44cm by 1.524m) in size and weigh less than 2.0lb (0.91kg). Reasonable flagpoles may not be more than 96.0in (2.438m) long and weigh less than 3.0lb (1.4kg).

E115 *No firearms. Firearms are prohibited at all FIRST events for all FIRST programs, including without limitation, [all official FIRST Events posted here](#). This policy does not apply to law enforcement or venue security personnel.

E116 *Only COTS batteries allowed. Teams may only bring COTS batteries to events. Output wires or connectors may be modified as long as no safety systems are compromised.

Violation: Teams will be asked to remove or not bring in the batteries.

E117 *Do not record anyone at the event without their consent. Do not record interactions with anyone at an event, without the person's consent. FIRST event staff and volunteers are empowered to excuse themselves from an interaction in which they are being recorded after declining consent.

Please note that many FIRST events are livestreamed and FIRST participants have given permission to appear in footage from FIRST. This does not mean that people can record specific interactions without additional consent.

Laws regarding recording of conversations vary state-to-state and country-to country, and, in some cases, recording without consent may be criminal.

Introducing the idea of recording a conversation with an implied reason of proving someone's error can escalate a discussion and is likely to increase its adversarial nature.

- E118 *Enter only 1 ROBOT.** Each registered *FIRST* Robotics Competition team may enter only 1 ROBOT (or “robot,” a ROBOT-like assembly equipped with most of its drive base, i.e. its MAJOR MECHANISM that enables it to move around a FIELD) into a 2026 *FIRST* Robotics Competition Event.

“Entering” a ROBOT (or robot) into a *FIRST* Robotics Competition means bringing it to or using it at the event such that it’s an aid to your team (e.g. for spare parts, judging material, or for practice).

While “most of its drive base” is a subjective assessment, for the purposes of this rule, an assembly whose drive base is missing all wheels/treads, gearboxes, and belts/chains is not considered a “ROBOT.” If any of those COMPONENTS are incorporated, the assembly is now considered a “ROBOT.”

This rule does not prohibit teams from bringing in ROBOTS from other *FIRST* programs for the purposes of awards presentations or pit displays.

14.2 Machine Shops

Some events host a machine shop, open during specific hours (see the event’s agenda), to help teams with repair and fabrication of their ROBOT. Machine shops are typically sponsored by NASA or local organizations. While the machine shops vary, *FIRST* strives to have welding and a variety of high-powered tools available at all events.

In most cases, the machine shop is on site and readily accessible to all teams. If a team attends an event where the Machine Shop is off-site, volunteers are in place to transport the ROBOT or parts to and from the machine shop. In this case, a team fills out a Machine Shop Request Form that travels with the ROBOT or parts, so the machine shop staff and volunteers can follow their directions. The event should set up a method of communication between the venue and off-site machine shop in case there are any questions.

- E201 *The ROBOT goes alone to off-site machine shops.** Team members may not travel to off-site machine shops with the ROBOT being transported by volunteers.

Teams may travel to the off-site machine shop on their own, either by walking or using their own vehicle, but all STUDENT team members must be accompanied by an adult at all times. Teams should strongly consider including a third team member per the *FIRST* Youth Protection Program guidelines.

14.3 Wireless Rules

- E301 *No wireless communication.** Teams may not set up their own 802.11a/b/g/n/ac/ax/be wireless communication (e.g. access points or ad-hoc networks) in the venue.

A wireless hot spot created by a cellular device, camera, smart TV, etc. is considered an access point.

Some smart TVs have access points enabled by factory default. Please make sure that functionality is disabled for any TVs brought to the event.

- E302 *Don't interfere with wireless networks.** Participants may not interfere, attempt to interfere, or attempt to connect with any other team or FIRST wireless communication except as expressly allowed for purposes of communicating with their team's ROBOT on the FIELD or TEST/PRACTICE AREA.

Teams are encouraged to report suspected wireless security vulnerabilities to the FIRST Technical Advisor (FTA) if at the event or to FIRST via customerservice@firstinspires.org.

Violation: Subsequent violations may lead to dismissal from event and/or legal action based on applicable laws.

- E303 *Tethered operation outside FIELDS/PRACTICE AREAS.** ROBOTS may only be operated by tether when outside the FIELD or PRACTICE AREA.

14.4 Load-In

Events set specific time frames, published on the event's schedule, in which teams are invited to load their ROBOT and equipment into their pit areas before pits officially open. At a typical District qualifier, events have pits open and load in marked as the same time on the public agenda and thus some of these rules will not apply. At most District Championships and most Regionals, there are typically load in periods without pits being opened and thus these rules do apply.

Load-In can be stressful for teams and volunteers, which can be mitigated by preparation and planning. Unanticipated factors, like traffic or weather, can change a team's scheduled arrival time, making the process difficult. The most important things a team should remember are to be safe, gracious, and professional.

- E401 *Load in during Load-In.** Teams must load in the ROBOT and all ROBOT elements into the event by the end of the last designated Load-In period on the Public Schedule. ROBOT and all ROBOT elements that are loaded in, may not be brought back out until Load-Out. Exceptions are as follows:

- raw stock
- OPERATOR CONSOLES, BUMPERS, battery assemblies
- COTS items with minor modifications (attachment of connectors, assembly of COTS items per manufacturer instructions, labeling or decoration, etc.)
- 3D printed parts
- gearboxes attached to associated motor(s)
- exceptional circumstances that result in a team not being able to make the Load-In time and has made arrangements with Event Management.

Public Schedules can be found in the additional info section via the [Team & Event Search](#).

There are no rules that explicitly restrict items that may be brought into the venue during the designated Load-In period. During Load-In, teams are not limited to a single trip, and are encouraged to be as efficient and safe as possible.

Violation: Item will not be permitted into venue.

- E402 *Load-In person limit is 6.** Only 6 team members (one of which must be an adult) may be in the pit area during any Load-In period prior to pits opening.

Violation: Extra team members must leave the venue.

E403 *Load-In Restrictions. The only team permitted activities during load in periods prior to pits opening are:

- A. bringing materials into their pit area.,
- B. ROBOT and BUMPER weighing (if available at your event), including any necessary BUMPER installation or removal,
- C. Early Pit Setup (if available at your event), and
- D. District Championships and FIRST Championship may allow inspection during load-in which will be announced in the public schedule.

Violation: Teams will be asked to leave the pit area.

E404 *Pit must be left in a safe state. Teams must have their pits in a safe state by the time pits close (even if some tasks are left undone).

E405 *Once done, head out. Unless assisting other teams, teams must leave the venue once finished delivering materials (or, in the case of Early Pit Setup, when setup is complete) prior to pits opening.

If an event has designated Early Pit Setup times both the evening before and the morning before pits officially open, a team may use both periods for Load-In and setup, but per this rule must leave once pit setup is complete.

Violation: Teams will be asked to leave the pit area.

14.5 Pits

A team pit is the designated space, usually 120.0in by 120.0in by 120.0in (3.048m x 3.048m x 3.048m), where a team may work on their ROBOT. Each team is assigned a pit space marked with their team number. This helps team members, judges, and visitors find teams easily. Each team pit has a power outlet and a table may be provided.

Teams, volunteers, FIRST staff, and guests spend a lot of time in the pits. Get to know other teams and help each other when you can. Time is short and help is very often right "next door" in the adjacent team pits.

Small, bench-top machinery, with appropriate guards, is permitted in team pits. 'Small' machinery is machinery that can be easily lifted by one person and examples include, but are not limited to, small band saws, drill presses, desktop CNC mills, and sanders.

E501 *Pits are unavailable if closed. Teams may not be in their team pit outside the designated pit hours.

E502 *Stay in your pit. Teams should set up their allowed equipment fully within their assigned pit space. Teams may not:

- A. run power or internet lines from their team pit to any other area except as instructed or allowed by the event,
- B. swap team pits with other teams, or
- C. move themselves to empty team pits without approval.

E503 *Keep aisles clear. Aisles must be kept clear.

E504 *No sparks or flames. Tools that throw sparks or produce open flames are prohibited.

Examples of tools that violate this rule include, but are not limited to, welders, bench and angle grinders, gas torches, etc.

- E505 *Nothing too big.** Floor standing power tools are prohibited.

Examples include but are not limited to full-size drill presses, band saws, and table saws.

Violation: Teams will be asked to remove or not bring in floor standing power tools. Any items that are deemed unsafe or outside specifications by FIRST personnel, event management, and/or local committee members must be removed.

- E506 *No brazing or welding.** Brazing/welding is prohibited.

Violation: Teams will be asked to remove or not bring in brazing/welding tools. Any items that are deemed unsafe or outside specifications by FIRST personnel, event management, and/or local committee members must be removed.

- E507 *Solder with specific tools only.** Soldering may be done using an electric iron/gun only.

Violation: Any items that are deemed unsafe or outside specifications by FIRST personnel, event management, and/or local committee members must be removed.

- E508 *Structures must be safe.** Teams may not build any structure that supports people or stores items overhead.

Violation: Any pit structures that is deemed unsafe or outside specifications by FIRST personnel, event management, and/or local committee members must be removed.

- E509 *Secure team identification assets.** Team signs, flags, and displays must be securely mounted to the pit structure.

Violation: Any pit structures that is deemed unsafe or outside specifications by FIRST personnel, event management, and/or local committee members must be removed.

- E510 *No automated tools overnight.** Teams may not run a 3D printer or other automated manufacturing process overnight in the pit.

- E511 *Pit Power Limit.** Power to team pits is often shared between multiple teams. Team pits that are causing breakers to trip may be asked to reduce power consumption.

14.6 TEST AREAS and PRACTICE AREAS

FIRST Robotics Competition events have TEST AREAS. TEST AREAS are areas at events where teams can test their ROBOT with representative FIELD elements. Teams may also be able to test their starting AUTO modes but TEST AREAS are not designed for full FIELD play such as AUTO modes that traverse larger areas of the FIELD or interact with multiple FIELD elements. TEST AREAS are tether-only. FUEL is not provided and if a team wishes to practice with FUEL, they must bring their own.

FIRST provides a recommended layout, but events may need to tweak exact placement depending on the space available in the venue. Teams may not relocate elements from their original locations. The layout is specifically intended to discourage testing of complex AUTO routines.

FIRST provides a small set of production run AprilTags for the TEST AREAS. The tags provided for the 2026 TEST AREA will include tags 2, 5, 8, 9, 10, 11, 13, 14, 15, and 16. Teams that wish to use other AprilTag IDs for the TEST AREA may print copies of other tags to bring to events but should not remove the provided tags. Printable copies of the field AprilTags can be found on the [Playing FIELD webpage](#). Teams may temporarily cover up the provided tags (e.g. with a blank sheet of paper) to prevent their vision systems from reading nearby tags unintentionally.

HUMAN PLAYERS are welcome to practice throwing FUEL into the TEST AREA HUB as long as the area around the HUB is clear of other ROBOTS and humans to avoid missed shots hitting people or interfering with ROBOT testing. Priority is given to ROBOT practice over HUMAN PLAYER practice. Teams choosing to practice throwing FUEL must bring their own FUEL.

Although some events may also provide PRACTICE AREAS, many do not have the space or resources to provide long full FIELD interactions. PRACTICE AREAS are defined as areas with a full FIELD. Some District Championships and *FIRST* Championship may choose to run a full Field Management System on the PRACTICE AREA which allows them to connect robots wirelessly. For events that have full FIELDS but are using tether, teams should expect that 2 teams are allowed on half the field at a time. Practice Attendants may allow additional teams provided teams are a safe distance from one another.

- E601 *Inspection for TEST & PRACTICE AREAS.** A team may only use the designated TEST AREAS and PRACTICE AREAS with a ROBOT that has passed an initial, complete inspection.
- E602 *Practice only when/where permitted.** Teams may only practice with their ROBOT in their pit space, in the designated event TEST AREAS, PRACTICE AREAS, or while in a Practice MATCH.

Teams may not set up their own practice equipment outside their pit. When practicing in their pit, safety must remain the top priority. If Event Management determines a pit practice setup is unsafe or interferes with activity in adjacent pits or aisles, the team must discontinue the activity.

- E603 *TEST/PRACTICE AREA attendance is limited.** Only team members actively working on the ROBOT are allowed to be at the TEST/PRACTICE AREA.

The intent of this rule is to limit the number of people directly next to ROBOTS that are enabled. The recommendation is no more than 5 members per team, but some events may limit further due to available space.

Teams may have additional team members watching from a distance, provided the venue has space, but those members should be a safe distance from all ROBOTS operating at the TEST/PRACTICE AREA.

- E604 *Give ROBOTS space.** When using a tether on TEST AREAS and PRACTICE AREAS, teams must keep a safe distance from all ROBOTS and moving elements and must not interact directly with the ROBOT when it is enabled.

Generally, a safe distance is ~72.0in (~1.83m) from the ROBOT.

E605 ***Be ready to DISABLE.** Teams must be ready to DISABLE their ROBOT if the ROBOT does not move in the desired direction or in case of safety.

E606 ***Be safe.** [G102](#) and [G103](#) also apply at the TEST AREAS and PRACTICE AREAS.

Violation: VERBAL WARNING. TEST/PRACTICE AREA suspension if subsequent violations during the event.

14.7 ROBOT Carts

Most teams use carts to transport their ROBOT throughout an event. Carts are not required but are strongly recommended (to minimize risk of muscle strains, dropped ROBOTS, and other hazards). In addition to the rules listed below, teams are strongly encouraged to put the team's number on the cart, refer to the [FIRST Safety Manual](#) for ROBOT lifting techniques, and practice putting the ROBOT on and off the cart to develop a safe, quick, fluid routine.

E701 ***Carts must be safe and easy to use.** Carts must be easy to control, maneuver, and pose no risk to bystanders.

E702 ***Carts shouldn't be too big.** Carts must fit through a standard 30.0in (76.2cm) door.

E703 ***Carts can't park anywhere.** Carts must remain in the team pit (or cart staging area if during a MATCH) when not in use.

E704 ***No noisy carts.** Carts may not be equipped with music or other sound-generating devices, except for devices of reasonable volume used for safety purposes (e.g. to make others in the vicinity aware that a ROBOT is on the move).

E705 ***No motor driven carts.** ROBOT carts may not use powered propulsion.

E706 ***Small ROBOT carts are allowed on the FIELD.** ROBOT carts smaller than 30.0in (76.2cm) by 36.0in (91.4cm) may be brought onto the FIELD to aid in staging and retrieving the ROBOT provided they are not left unattended and do not pose any other safety hazards.

14.8 Ceremonies

At every event, there are Opening and Closing Ceremonies to show honor and respect for represented countries, sponsors, teams, mentors, volunteers, and award winners. Ceremonies provide everyone with the opportunity to collectively applaud the successes of all participants. They also give teams a chance to "meet" the volunteers and other people and sponsors involved with the event. Closing Ceremony elements at the end of the event are integrated into and presented between Playoff Matches.

At the Awards Ceremony, FIRST presents trophies and medallions to outstanding teams. All team members are encouraged to attend the ceremonies, be punctual, and show appreciation to volunteers that staffed the event.

E801 ***If in the pits during Ceremonies, shhhhhh.** During Ceremonies outside of Playoff MATCHES, team members may not:

- A. use power tools,
- B. use loud hand tools (hammers, saws, etc.), or
- C. shout, yell, or use loud voices, unless as a demonstration of approval during a ceremonial activity.

- E802** ***Pit person limit during Ceremonies is 5.** No more than 5 team members may be in the pits during Ceremonies outside of Playoff MATCHES.
- E803** ***Be respectful during anthems.** Team members, including any remaining in the pits, should exhibit peaceful behavior during the presentation of all national anthems. Traditionally, team members stand to face the flag, remove hats, and either sing along or maintain a respectful silence during the anthems of all nations present at the event. If team members wish to abstain, they have a right to do so, as long as they remain silent and non-disruptive.


14.9 In the Stands

- E901** ***No saving seats.** Teams are not permitted to save or designate seats for team members that are not present.

Teams may not hang banners or ribbons or otherwise designate seating. (Event staff will remove and discard any banners, roping, etc., used to designate seating.) Please take turns sitting in the bleachers/stands if seating is limited. If there is a crowding problem, we ask that you kindly leave after your team's MATCH and return later, if possible.

Event management may reserve seats for attendees who require accommodations.

- E902** ***Don't throw items from the stands.** Items may not be thrown from audience seating.



15 Glossary

Term	Definition
ACTIVE DEVICE	any device capable of dynamically controlling and/or converting a source of electrical energy by the application of external electrical stimulus
ALLIANCE	a cooperative of up to 4 FIRST Robotics Competition teams
ALLIANCE AREA	an approximately 360in wide by 134in deep (~9.14m by 3.4m) infinitely tall volume formed by, and including the ALLIANCE WALL, OUTPOST, TOWER WALL, the edge of the carpet, and ALLIANCE colored tape
ALLIANCE CAPTAIN	The designated STUDENT representative from each ALLIANCE Lead
ALLIANCE SHIFT	One of four SHIFTS (SHIFT 1, SHIFT 2, SHIFT 3, and SHIFT 4) during the TELEOP Period
ALLIANCE WALL	A FIELD structure that separates ROBOTS from DRIVE TEAM members in the ALLIANCE AREA
ALLIANCE ZONE	A 158.6in deep by 317.7in long (~4.03m by 8.07m), infinitely tall volume formed by an ALLIANCE WALL, TOWER WALL, and guardrails
ARENA	includes all elements of the game infrastructure that are required to play REBUILTTM presented by Haas: the FIELD, SCORING ELEMENTS, queue area, team media area (when available), designated TECHNICIAN area, and all equipment needed for FIELD control, ROBOT control, and scorekeeping
ARENA FAULT	an error in ARENA operation
AUTO	the first 20 seconds of the MATCH, and the FMS blocks any DRIVER control, so ROBOTS operate with only their pre-programmed instructions
BACKUP POOL	the group of teams willing and able to join an ALLIANCE during the Playoff MATCHES
BACKUP TEAM	The team whose ROBOT and DRIVE TEAM replaces another ROBOT and DRIVE TEAM on an ALLIANCE during the Playoff MATCHES
BONUS RP	ENERGIZED RP, SUPERCHARGED RP, and TRAVERSAL RP.
BUMP	73.0in (1.854m) wide, 44.4in (1.128m) deep, and 6.513in (16.54cm) tall structures on either side of the HUB that ROBOTS drive over
BUMPER	a required assembly which attaches to the ROBOT frame. BUMPERS protect ROBOTS from damaging/being damaged by other ROBOTS and FIELD elements.
BUMPER ZONE	a space between 2.5in (6.35cm) and 5.75in (14.61cm) from the floor.

BYPASSED	any ROBOT which is unable or ineligible to participate in that MATCH, as determined by the FTA, LRI, or Head REFEREE
CENTER LINE	a white line that spans the width of the FIELD that bisects the NEUTRAL ZONE in half
CHUTE	15.0° sloped tunnel that leads to the upper opening in the
CHUTE DOOR	an HDPE arm on a pivot that can be rotated approximately 90 degrees by the HUMAN PLAYER to open or close the CHUTE
COMPONENT	any part in its most basic configuration, which cannot be disassembled without damaging or destroying the part or altering its fundamental function
CONTINUOUS	describes durations that are more than approximately 10 seconds
CONTROL	an action by a ROBOT in which a SCORING ELEMENT is fully supported by or stuck in, on, or under the ROBOT
CORRAL	8.13in (20.6cm) tall polycarbonate panels that create a 35.8in (90.8cm) wide, 37.6in (95.5cm) deep area on the floor in which FUEL can be stored
COTS	a standard (i.e. not custom order) part commonly available from a VENDOR for all teams for purchase
CUSTOM CIRCUIT	Any active electrical item that is not an actuator (specified in R501) or core control system item (specified in R710)
DEPOT	a 42.0in (1.07m) wide, 27.0in (68.6cm) deep structure located along the ALLIANCE WALL
DISABLED	the state in which a ROBOT is commanded to deactivate all outputs, rendering the ROBOT inoperable for the remainder of the MATCH
DISQUALIFIED	the state of a team in which they receive 0 MATCH points and 0 Ranking Points in a Qualification MATCH or causes their ALLIANCE to receive 0 MATCH points in a Playoff MATCH
DRIVE COACH	a guide or advisor
DRIVE TEAM	a set of up to 5 people from the same FIRST Robotics Competition team responsible for team performance for a specific MATCH
DRIVER	an operator and controller of the ROBOT
DRIVER STATION	1 of 3 assemblies within an ALLIANCE WALL behind which a DRIVE TEAM operates their ROBOT
END GAME	SHIFT during the TELEOP Period where both HUBS return to active.
ENERGIZED RP	BONUS RP earned when the amount of FUEL scored in an active HUB is at or above threshold

FABRICATED ITEM	any COMPONENT or MECHANISM that has been altered, built, cast, constructed, concocted, created, cut, heat treated, machined, manufactured, modified, painted, produced, surface coated, or conjured partially or completely into the final form in which it will be used on the ROBOT
FIELD	an approximately 317.7in (~8.07m) by 651.2in (~16.54m) carpeted area bounded by inward facing surfaces of the ALLIANCE WALLS, OUTPOSTS, TOWER WALLS, and guardrails
FIELD STAFF	the collective group of people working on or near the FIELD responsible for making sure the MATCHES are cycled through efficiently, fairly, safely, and with a spirit of cooperation, Gracious Professionalism, and generosity of spirit
FMS	the FIELD Management System
FTA	<i>FIRST</i> Technical Advisor
FUEL	a 5.91in (15.0cm) diameter, high density foam ball
HIGH RUNG	A RUNG 63.0in (1.6m) from the floor
HUB	one of two 47in by 47in (~1.19m by 1.19m) rectangular prism structures with an extended opening at the top surface
HUMAN PLAYER	a SCORING ELEMENT manager
HUMAN STARTING LINE	a white line spanning the ALLIANCE AREA up to the OUTPOST AREA a white line spanning the ALLIANCE AREA up to the OUTPOST AREA
INSPECTOR	a person determined by <i>FIRST</i> to accurately and efficiently assess the legality of a given part of a ROBOT
KOP	the Kit of Parts
LINEUP	the 3 teams participating in the MATCH and their selected DRIVER STATIONS
LEVEL	Criteria required to qualify for TOWER points
LOW RUNG	A RUNG located 27.0in (68.58cm) from the floor
LRI	the Lead ROBOT INSPECTOR
MAJOR FOUL	a credit of 15 points towards the opponent's MATCH point total
MAJOR MECHANISM	a group of COMPONENTS and/or MECHANISMS assembled together to address at least 1 game challenge: ROBOT movement, SCORING ELEMENT manipulation, FIELD element manipulation, or performance of a scorable task without the assistance of another ROBOT.
MATCH	the 2-minute and 40-second in which a ROBOT is enabled to play REBUILT

MECHANISM	an assembly of COMPONENTS that provide specific functionality on the ROBOT. A MECHANISM can be disassembled (and then reassembled) into individual COMPONENTS without damage to the parts.
MID RUNG	A RUNG located 45.0in (114.3cm) from the floor
MINOR FOUL	a credit of 5 points towards the opponent's MATCH point total
MOMENTARY	describes durations that are fewer than approximately 3 seconds
MXP	myRIO Expansion port, the expansion port on the roboRIO
NEUTRAL ZONE	A 283in deep by 317.7in long (7.19m by 8.07m), infinitely tall volume formed by the BUMPS, TRENCHES, HUBS, and guardrails
OPERATOR CONSOLE	the set of COMPONENTS and MECHANISMS used by the DRIVERS and/or HUMAN PLAYERS to relay commands to the ROBOT
OUTPOST	an assembly through which HUMAN PLAYERS feed FUEL into the FIELD and ROBOTS can deliver FUEL to their HUMAN PLAYERS
OUTPOST AREA	a 71.0in wide by 134in deep (1.8m by 3.4m) infinitely tall volume bounded by the OUTPOST, edge of carpet, and ALLIANCE and white colored tape
PASSIVE CONDUCTOR	any device or circuit whose capability is limited to the conduction and/or static regulation of the electrical energy applied to it (e.g. wire, splices, connectors, printed wiring board, etc.)
PCM	Pneumatic Control Module
PDH	Power Distribution Hub
PDP	Power Distribution Panel
PH	Pneumatic Hub
PIN	an action by a ROBOT that is preventing the movement of an opponent ROBOT by contact, either direct or transitive (such as against a FIELD element)
RED CARD	issued by the Head REFEREE for egregious ROBOT or team member behavior or rule violations which results in a team being DISQUALIFIED for the MATCH.
REFEREE	an official who is certified by FIRST to enforce the rules of REBUILT
REPEATED	describes actions that happen more than once within a MATCH
ROBOT	an electromechanical assembly built by the FIRST Robotics Competition team to play the current season's game and includes all the basic systems required to be an active participant in the game –power, communications, control, BUMPERS, and movement about the FIELD

ROBOT PERIMETER	the part of a ROBOT contained within the BUMPER ZONE and established while in the ROBOT'S STARTING CONFIGURATION, that is comprised of fixed, non-articulated structural elements of the ROBOT
ROBOT STARTING LINE	an ALLIANCE colored line that spans the width of the FIELD at the edge of an ALLIANCE ZONE in front of two BUMPS and an ALLIANCE HUB
RP	Ranking Points
RPM	Radio Power Module
RS	Ranking Score
RSL	ROBOT Signal Light
RUNG	One of the 1-1/4in Sch 40 (1.66in (4.216cm) OD) pipes centered between the UPRIGHT and extend 5.875in (14.92cm) from the outer face of the UPRIGHT on either sides located on the TOWER
SCORING ELEMENT	a FUEL
SHIFT	see ALLIANCE SHIFT, TRANSITION SHIFT
SIGNAL LEVEL	a term used to characterize circuits which draw $\leq 1A$ continuous and have a source incapable of delivering $>1A$, including but not limited to roboRIO non-PWM outputs, CAN signals, PCM/PH Solenoid outputs, VRM 500mA outputs, RPM outputs, and Arduino outputs
STARTING CONFIGURATION	the physical configuration in which a ROBOT starts a MATCH
STUDENT	a person who has not completed high-school, secondary school, or the comparable level as of September 1 prior to Kickoff
SUPERCHARGED RP	BONUS RP earned when the amount of FUEL scored in an active HUB is at or above threshold
SURROGATE	a team randomly assigned by the FMS to play an extra Qualification MATCH
TECHNICIAN	a resource for ROBOT troubleshooting, setup, and removal from the FIELD
TELEOP	the Teleoperated Period
TOWER	a 49.25in (1.251m) wide, 45.0in (1.143m) deep, and 78.25in (1.988m) tall structure made up of the TOWER WALL, TOWER BASE, UPRIGHTS, RUNGS and supporting structures
TOWER BASE	a 39.0in (99.06cm) wide by 45.18in (1.148m) deep plate that sits on the floor and extends from the TOWER WALL
TOWER WALL	Part of the TOWER integrated into each ALLIANCE WALL
TRANSITION SHIFT	Segment of TELEOP prior to the ALLIANCE SHIFTS

TRAVERSAL RP	BONUS RP earned when the amount of TOWER points scored during the MATCH is at or above threshold
TRENCH	are a 65.65in (1.668m) wide, 47.0in (1.194m) deep, and 40.25in (1.022m) tall structure that ROBOTS drive underneath
UPRIGHTS	72.1in (1.831m) tall, 1.5in (3.81cm) thick, 3.5in (8.89cm) deep sheet metal box frames that extend vertically up from the TOWER BASE
VENDOR	a legitimate business source for COTS items that satisfies criteria defined in Section 8 ROBOT Construction Rules
VERBAL WARNING	a warning issued by event staff or the Head REFEREE.
VRM	Voltage Regulator Module
YELLOW CARD	issued by the Head REFEREE for egregious ROBOT or team member behavior or rule violations

