




U1
XIAO_ESP32S3
MCU_D0
RGB_DATA
MCU_D2
MCU_D3
MCU_D4
MCU_D5
MCU_D6
D0_GPIO1
D1_GPIO2
D2_GPIO3
D3_GPIO4
D4_GPIO5_SDA
D5_GPIO6_SCL
D6_GPIO43
5V_VBUS
GND
3V3
D10_GPIO9
D9_GPIO8
D8_GPIO7
D7_GPIO44
VBUS
+3V3
ENC2_B
ENC2_A
ENC1_B
ENC1_A
BAT+
BAT-
VBAT
GND
SW1
SW2
SW3
SW4
SW5
SW6
COL0
COL1
COL2
MX_KEY_1
MX_KEY_2
MX_KEY_3
MX_KEY_4
MX_KEY_5
MX_KEY_6
D1
D2
D3
D4
D5
D6
1N4148
ROW0
ROW1
SW7
VBAT_SWITCH_CTRL
JS102011SAQN
J1
VBAT_RAW
PROTECTED_1S_LIPO_3.7V
Q1
VBAT_GATE
VBAT_SWITCH_SOURCE
AO3401A
R9 100k
C1 100n
VBAT_GATE
R10 1k
ENC1
ENC1_A
ENC1_B
ENC1_SW
COL3
A0376011
ENC2
ENC2_A
ENC2_B
ENC2_SW
EC11
D7
D8
R1 4.7k
R2 4.7k
SDA
SCL
Input_Expansion
RGB_Power
RGB_LEDs
File: Input_Expansion.kicad_sch
File: RGB_Power.kicad_sch
File: RGB_LEDs.kicad_sch
Build_Options
File: Build_Options.kicad_sch
Sheet: /
File: Fabricate_Wireless_Macropad.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.6
Id: 1/5

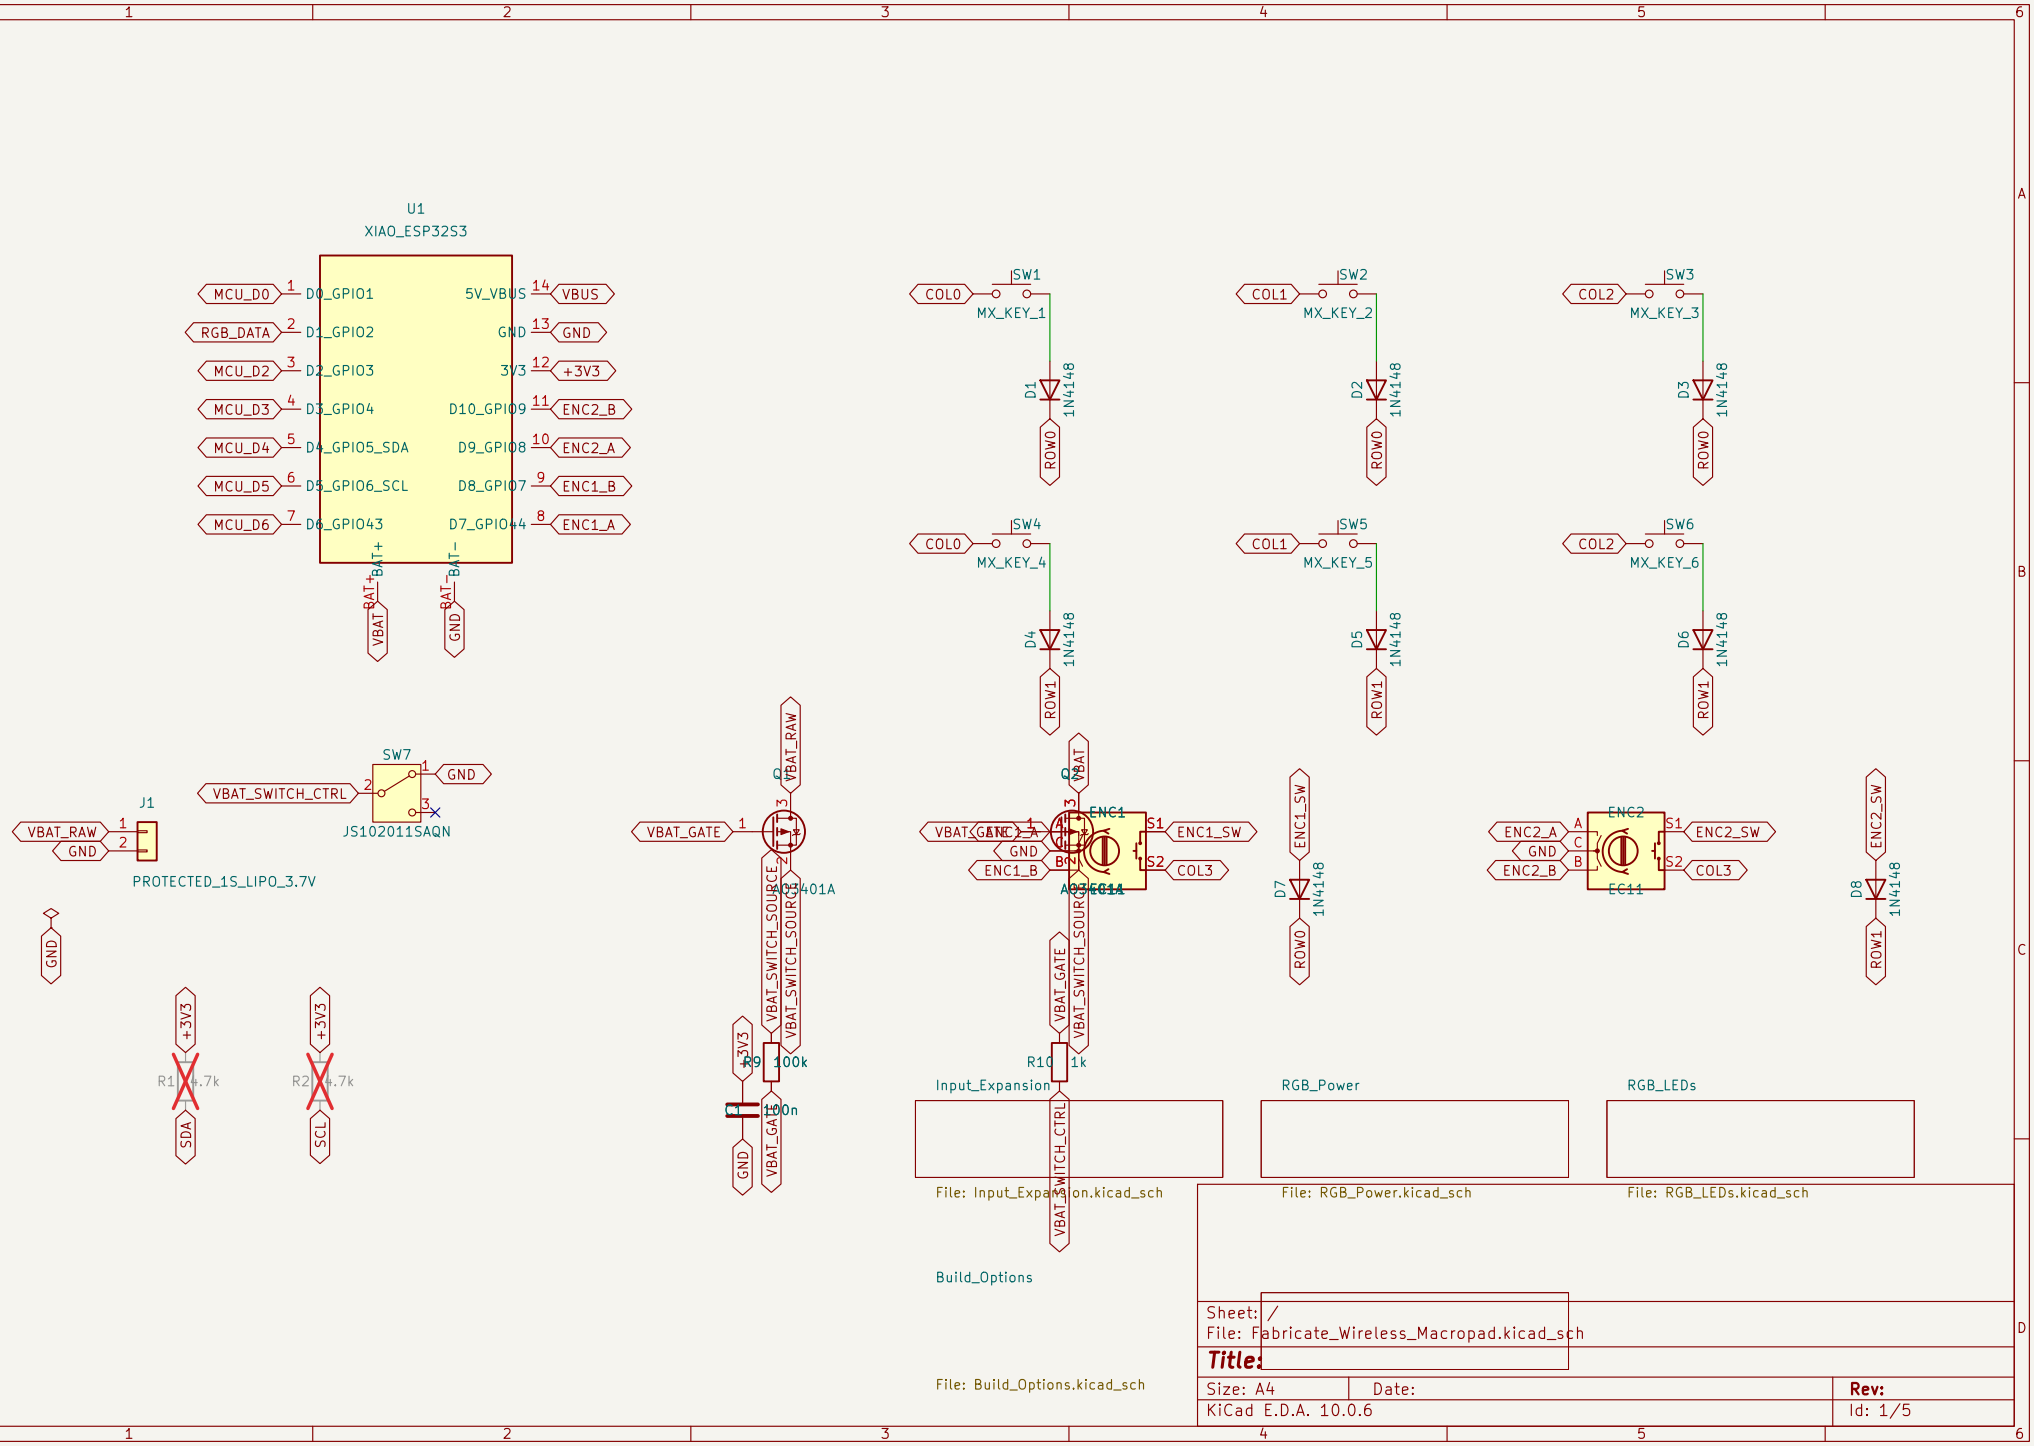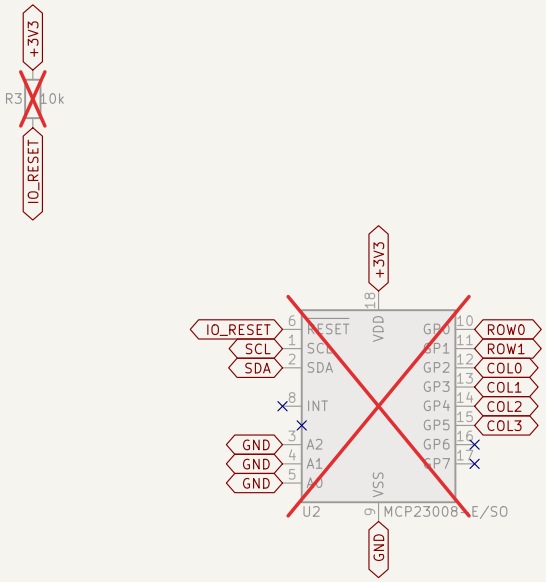



Sheet: /Input_Expansion/		
File: Input_Expansion.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 2/5

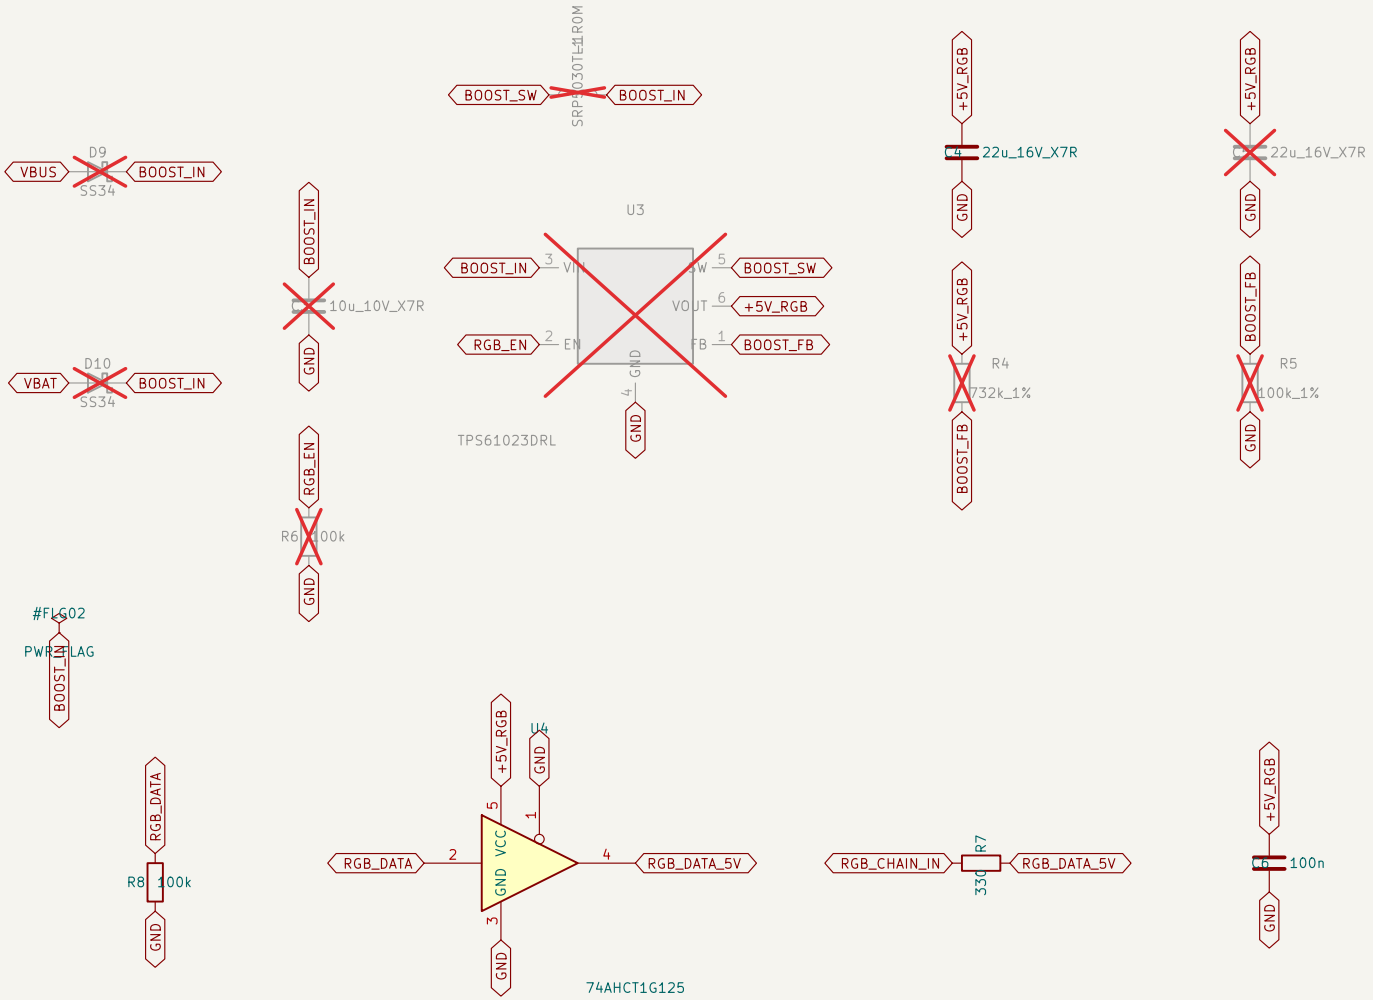



Sheet: /RGB_Power/		
File: RGB_Power.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 3/5

























































Sheet: /RGB_LEDs/
File: RGB_LEDs.kicad_sch


Title:


Size: A3	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 4/5

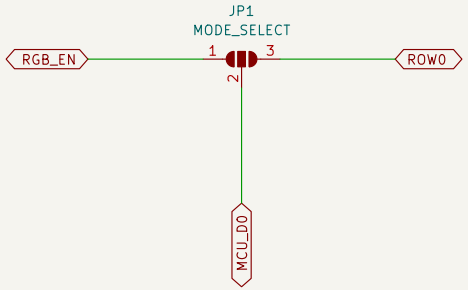





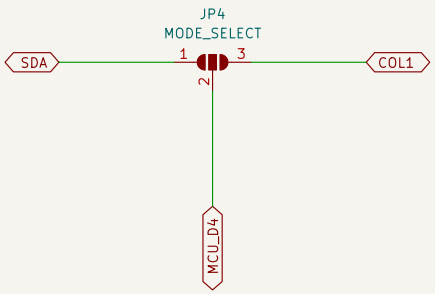

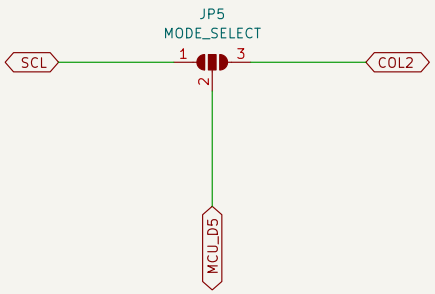





SIMPLE: JP1/4/5 bridge 2–3; JP2/3/6/7 closed.
UPGRADE: JP1/4/5 bridge 1–2; JP2/3/6/7 OPEN.
Do not bridge USB bypass JP7 with the boost converter populated.

Sheet: /Build_Options/
File: Build_Options.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 5/5