

Review on Evapotranspiration estimation by Deep Learning

LORENZO CAVALLARO

Abstract—This study investigates deep learning techniques employed to estimate the Evapotranspiration—the process by which water is transferred from the soil and plants to the atmosphere through evaporation or transpiration. In agriculture accurate estimation of evapotranspiration can help to determine optimal irrigation levels and reduce water waste. The research reviews commonly used prediction algorithms, performance metrics, and details about datasets and study areas. Subsequently, a personal implementation of a Long Short-Term Memory (LSTM) model was developed and tested to perform predictions of the actual evapotranspiration in the Piedmont region in Italy.

I. INTRODUCTION

AGRICULTURE is a critical sector with specific optimization needs to enhance crop yields and minimize water consumption. Evapotranspiration (ET) is a key component of the water cycle, it quantifies the volume of water vapor transferred from the Earth's surface to the atmosphere through evaporation and transpiration in a specific period of time [1]. Accurate estimation of ET is therefore essential for improving irrigation scheduling and helping in the early detection of drought conditions [2]. Additionally, in climate science and meteorology, ET plays a critical role in enhancing weather prediction models and monitoring the impacts of climate change [3].

However, directly measuring ET can be challenging because it necessitates the application of specific models that integrate various climatological and soil parameters.

Traditional ET estimation are primarily based on physical principles, such as the FAO-56 Penman-Monteith model, which integrates physiological characteristics to the FAO-24 Penman.

However, these methods frequently fail to capture the nonlinear relationships of the meteorological data and have significant limitations on performing ET estimations in absence of some of these data. For this reason, deep learning algorithms can be employed due to its ability to handle non-linear relationships and spot complex patterns [1].

II. BACKGROUND

There are several different types of Evapotranspiration, each of these needs a different model to be estimated:

A. Reference Evapotranspiration (ET_0)

Represents the evapotranspiration from a standardized reference surface, like well-watered grass, and it serves as a benchmark for estimating crop water requirements.

The most widely used technique to evaluate ET_0 is the Penman-Monteith equation (FAO-56). This method depends on meteorological variables, as air temperature, relative humidity, solar radiation, and wind speed. Moreover, it does

not require any local calibration because it incorporates both physiological and aerodynamic parameters [4].

However, these climatological data are not always available in all the study areas. Therefore, alternative approaches are available and can be classified in three types, namely, radiation-based models (Priestley–Taylor), temperature-based models (Hargreaves and Samani, Trajkovic), and combination models (Penman) [5] [6] [7].

B. Potential Evapotranspiration (PET)

Measures the maximum evapotranspiration possible from a surface, assuming unlimited water availability.

To evaluate PET , the same models used for ET_0 can be applied, but with surface parameters adapted to the actual vegetation and land cover.

C. Actual Evapotranspiration (AET)

Describes the real amount of water lost from a surface to the atmosphere, considering the limited water availability in the soil. Since it depends on water availability, AET is more complex to estimate and measuring it over large areas can be difficult and costly.

Lysimeters, which are sensors that accurately quantify water loss by tracking variations in the water volume contained in the soil, can be used to directly measure AET in a specific location. Although this method is precise and reliable, it is also quite expensive and labor-intensive [8].

Another direct measurement technique is the Eddy Covariance (EC) method, which captures water vapor fluxes above the canopy through high-frequency measurements. While EC provides detailed insight into evapotranspiration dynamics, it requires sophisticated instrumentation and advanced data processing [9].

Other solutions, for broader spatial coverage and with less complexity, are based on satellite remote sensing [10]. Satellites collect various spectral indices that provides insights into vegetation condition, surface temperature, and energy balance components—such as NDVI, EVI, LST, LAI, SPI, and SPEI (see table I) [11]. These indices can be used as input to specific models that can measure the AET , such as the Surface Energy Balance (SEB) model [12].

Another commonly used approach is the crop coefficient method, which estimates AET by adjusting reference evapotranspiration ET_0 with coefficients that account for the crop type, growth stage, and water stress conditions.

TABLE I
DESCRIPTION OF SPECTRAL AND CLIMATIC INDICES USED FOR *AET* ESTIMATION

Acronym	Full Name
NDVI	Normalized Difference Vegetation Index
EVI	Enhanced Vegetation Index
LST	Land Surface Temperature
LAI	Leaf Area Index
SPI	Standardized Precipitation Index
SPEI	Standardized Precipitation Evapotranspiration Index

III. MACHINE LEARNING AND NEURAL NETWORK APPROACHES FOR EVAPOTRANSPIRATION ESTIMATION

Machine learning (ML) and neural networks (NN) are powerful tools for *ET* estimations due to their ability to handle complex, non-linear relationships in the data. Traditional *ET* estimation models often rely on meteorological parameters, that might be unavailable in some areas and can be costly to be measured. ML and NN approaches can address these limitations by performing pattern recognition, and accurate predictions even with incomplete data [13].

A. Traditional ML

1) *Random Forests (RF)*: Widely utilized for regression tasks, RF constructs an ensemble of decision trees, each trained on a randomly sampled subset extracted from the training set. To compose the final prediction, the outputs of all individual trees are aggregated, typically using methods like majority voting. RF models are known for their strong generalization capabilities, robustness to outliers, and ease of hyperparameter optimization, making them effective for a wide range of prediction tasks [14].

2) *Support Vector Machine (SVM)*: Transforms the input vector into an higher-dimensional feature space, and finds the optimal hyperplane that separate these points. Generally, SVM can be mathematically explained with the Eq. 1

$$Y = w\varphi(X) + b \quad (1)$$

where Y is the output vector, w is the weight vector, φ is the kernel function, X is the input vector, and b is the bias term [15].

3) *Gradient Boosting Machine (GBM)*: Starts from a simple model and then adds new decision trees to correct previous errors and improve the final prediction. XGBoost (Extreme gradient boosting) and LightGBM (Light gradient boosting machine) models are newer version that improves the overall performance of the traditional GBM [14].

B. Neural Networks

1) *Multilayer Perceptrons (MLP)*: Composed by layers of connected nodes (neurons) that transform inputs through

weighted connections and non-linear activation functions. During the training, MLP learns to approximate complex relationships between inputs and outputs by adjusting the weights.

2) *Recurrent Neural Network (RNN)*: A version of the standard artificial neural network (ANN) that process sequential data by maintaining a memory of previous inputs through internal states. This architecture permits RNN to learn temporal dependencies, making them effective for modeling time series data, where the order and timing of observations matter.

3) *Long Short-Term Memory (LSTM)*: Enhanced type of RNN designed to capture long-term dependencies in sequential data. LSTM consists of layers of memory cells, each cell contains three gates: forget, input, and output. The forget gate controls the information coming from the previous state that will no longer be stored, the input gate specifies the input features that will be stored in the next state, and the output gate specifies the information from the new state that will be output. This gated architecture enables LSTMs to effectively retain relevant information over long sequences, making them particularly suitable for modeling temporal patterns [3].

4) *Convolutional Neural Network (CNN)*: Evolution of standard artificial neural network (ANN), CNN are distinguished by their use of convolutional layers inspired by the mathematical operation of convolution. These layers scan the input by applying a learnable filter to extract features and detect local patterns. In 1D CNNs, this mechanism is applied to analyze time series data and extract meaningful features representing temporal variations. Moreover, 2D CNN are widely used for image processing tasks due to their ability to identify spatial hierarchies and complex visual patterns [1].

IV. STATE OF THE ART

The goal of the study is to conduct a review of recent research that employs machine learning (ML) and deep learning (DL) techniques for the estimation of evapotranspiration (*ET*). The review has analyzed 160 papers, focusing on classifying each of these depending on the model applied, performance metrics adopted, dataset used, and geographic areas covered. The objective is to highlight the most commonly used approaches and emerging trends in this field.

A. Machine Learning and Deep Learning Models for *ET* Estimation

As shown in the figure 1, the classification reveals that Recurrent Neural Networks (RNN) models are the most frequently employed for *ET* estimation, due for their ability to understand temporal dependencies and seasonal patterns of the meteorological data that affects *ET* values.

This category includes several variants such as BiRNN, LSTM, BiLSTM, ConvLSTM, GRU, and BiGRU. Among these, the Long Short-Term Memory (LSTM) architecture is the most widely adopted, appearing in 75 studies (Table II).

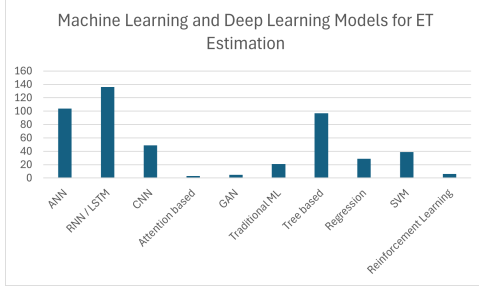


Fig. 1. Summary of algorithms used in the reviewed studies

TABLE II
RNN-BASED ALGORITHMS USED IN THE REVIEWED STUDIES

Algorithm	No. of Studies	Algorithm	No. of Studies
RNN	14	BiGRU	3
BiRNN	2	SSR-LSTM	3
LSTM	75	ConvLSTM	5
BiLSTM	18	NARX	1
GRU	15		

Other popular solutions are the standard Artificial Neural Networks (ANNs) (Table III), such as the Multi-Layer Perceptron (MLP) and Deep Belief Networks (DBN), as well as Tree based machine learning models like Random Forests (RF), M5Tree, and Gradient Boosting methods, including its optimized variants LightGBM and XGBoost (Table IV); see Figure 1.

These models can be useful for understanding complex patterns in the spatial data, so they can learn to understand the relationship between the *ET* value and the location.

TABLE III
ANN-BASED ALGORITHMS USED IN THE REVIEWED STUDIES

Algorithm	No. of Studies	Algorithm	No. of Studies
DNN	52	DBN	7
MLP	6	DL	34
DeepFM	1	GRNN	2
BPNN	2		

TABLE IV
TREE BASED ALGORITHMS USED IN THE REVIEWED STUDIES

Algorithm	No. of Studies	Algorithm	No. of Studies
DT	5	GB	15
CART	1	XGB	14
BCART	1	LightGB	4
M5Tree	5	AdaBoost	1
RF	45	DRF	1
BT	1		

B. Performance Metrics Used

Figure 2 illustrates a classification of the performance metrics used in the reviewed papers.

The most common class is the Squared Error metrics, which includes Mean Squared Error (MSE), Root Mean Squared

Error (RMSE), and Root Mean Square Deviation (RMSD); see Table V.

These metrics are particularly sensitive to large errors, making them valuable for penalizing significant deviations between predicted and observed *ET* values.

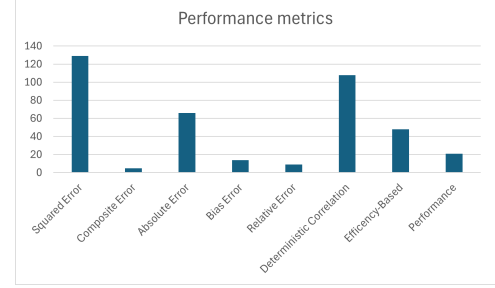


Fig. 2. Summary of performance metrics used in the reviewed studies

TABLE V
SQUARED ERROR METRICS USED IN THE REVIEWED STUDIES

Metric	No. of Studies
RMSE	100
MSE	28
RMSD	1

Another widely implemented class of metrics is the Deterministic Correlation, which refers to the correlation coefficient (R), the coefficient of determination (R^2), and Variance Accounted For (VAF); see Table VI.

These metrics are widely implemented to evaluate how well the predicted trends match the observed patterns.

TABLE VI
DETERMINISTIC CORRELATION METRICS USED IN THE REVIEWED STUDIES

Metric	No. of Studies
R	21
R^2	85
VAF	1

Additionally, several studies employed Absolute Error metrics, such as Mean Absolute Error (MAE) and Mean Absolute Percentage Error (MAPE), since their interpretability and robustness to outliers; see Table VII.

TABLE VII
EFFICIENCY-BASED METRICS USED IN THE REVIEWED STUDIES

Algorithm	No. of Studies	Algorithm	No. of Studies
MAE	52	MADE	1
MAPE	9	MdAPE	3
WAPE	1	AARE	1
MAD	1		

Lastly, Efficiency-Based metrics, as the Nash–Sutcliffe Efficiency (NSE), the Kling–Gupta Efficiency (KGE), and the

Index of Agreement (IOA), were also frequently used due to their ability to assess how well the model predicts relative to the mean of the observed data; see Table VIII.

TABLE VIII
EFFICIENCY-BASED METRICS USED IN THE REVIEWED STUDIES

Algorithm	No. of Studies	Algorithm	No. of Studies
NSE	38	NNSE	1
KGE	6	IOA	3

C. Input Data Sources

ET prediction relies on a combination of meteorological data (e.g., temperature, humidity, solar radiation), ground measurements (e.g., water, energy, gas flux), and satellite derived surface indices (e.g., NDVI, EVI, LST).

Figure 3 shows that the primary source of data comes from ground based measurements and weather station observations. This source of data provide highly accurate and high frequency data, but their spatial coverage is limited to the locations where the measurements are taken, for this reason they are most useful in studies where the coverage area is local or regional (see figure 4 and figure 5).

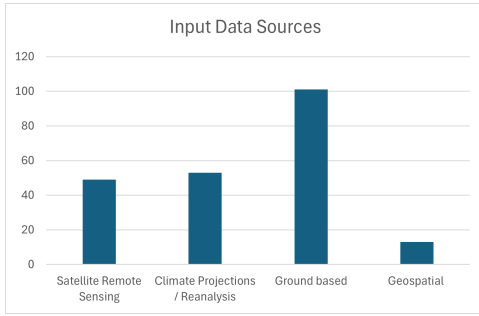


Fig. 3. Summary of data sources used in the reviewed studies

1) *Ground based measurements*: 101 papers over 160 have used ground based data to feed their prediction algorithms. Between them, the most commonly used dataset is FLUXNET, a global network of micrometeorological tower sites distributed worldwide, where each uses the eddy covariance technique to measure exchanges of carbon dioxide, water vapor, and energy between terrestrial ecosystems and the atmosphere.

Weather stations collect meteorological data, mostly used to feed traditional reference methods (e.g. FAO-56 Penman-Monteith, Hargreaves-Samani) and provide standard *ET* estimates.

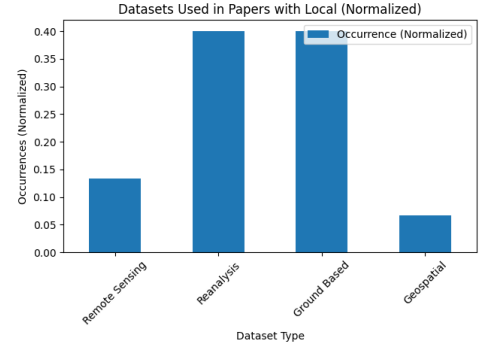


Fig. 4. Datasets Used in Papers with Local study areas

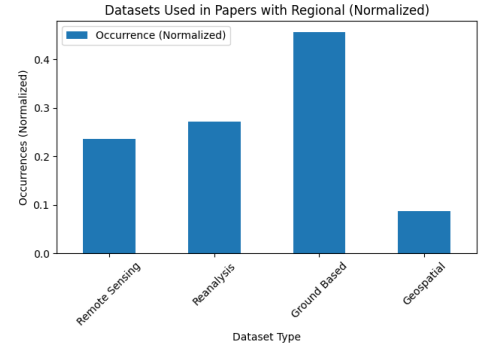


Fig. 5. Datasets Used in Papers with Regional study areas

In studies with a global study area, the most common choice is to use remote sensing based datasets or reanalysis datasets (see figure 6).

2) *Satellite remote sensing datasets*: Satellite products such as MODIS (Moderate Resolution Imaging Spectroradiometer), Copernicus, GRACE (Gravity Recovery and Climate Experiment), HyTES, and GLASS provide observations related to land surface temperature, vegetation indices, and water storage changes. These datasets enable *ET* estimation over large and remote areas but often at lower temporal or spatial resolutions.

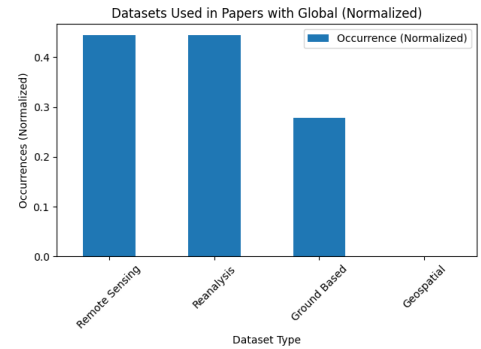


Fig. 6. Datasets Used in Papers with Global study areas

When the goal of the study is a long-term projection, it is important to rely on consistent, temporally extensive, and spatially comprehensive representations of atmospheric and surface conditions. For these studies the most convenient choice is to use climate model projections or reanalysis datasets (see figure 7).

3) Climate model projections and reanalysis datasets:

Climate models, as CMIP6 (Coupled Model Intercomparison Project Phase 6), simulate future climate scenarios and provide projections of meteorological variables influencing *ET*.

Reanalysis datasets such as ERA5, GLDAS (Global Land Data Assimilation System), and CHIRPS (Climate Hazards Group InfraRed Precipitation with Station data) integrate observations and model outputs to produce consistent, gridded climate and hydrological variables over extended periods.

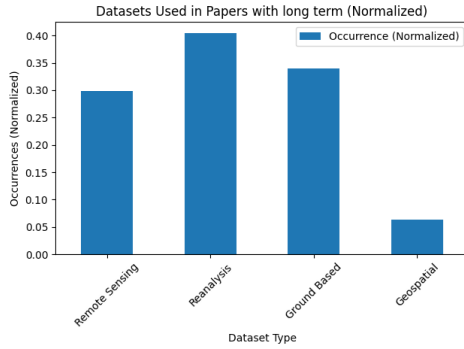


Fig. 7. Datasets Used in Papers with Long Term Projection

For local and regional studies, geospatial datasets could be a suitable choice as they provide information directly tied to the specific referred area.

4) *Geospatial datasets*: In this review only few studies have been found using these datasets. The reason is that, even if they are reliable and consistent, they are available only for some specific areas.

For example, some of these datasets found during the review are CAMELS (provides climate, land cover, soil, topography data for U.S. basins), CANOPEX (contains hydrological information about Canadian river basins), and TAMARACK (long-term hydrometeorological dataset used to support ecohydrological and snow process studies in cold regions).

D. Geographic and Temporal Distribution

The review highlights that the majority of evapotranspiration studies are located in Asia (see figure 8).

Particularly, the Asian countries that appeared the most are China and India, due to their vast agricultural regions stressed by the high demand and by the different climatological conditions.

Outside the Asiatic continent, other popular countries found during the review are the United States and Australia. Both cover a wide geographic area characterized by significant climatic variability and high agricultural water requirements.

Only few studies have been found focusing over European and Mediterranean regions. The reason is that in these regions is difficult to perform *ET* prediction due to several environmental factors, as the intense seasonal droughts, fragmented land cover, and heterogeneous climatic patterns.

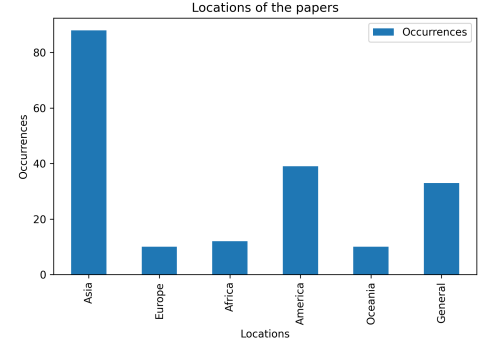


Fig. 8. Summary of locations of the studies

E. Preprocessing and Feature Engineering Techniques

A common issue in *ET* prediction datasets used to train a neural network, is the presence of relationships among the input variables, that can cause the model to overfit and have bad prediction performances. These datasets contains directly related features as meteorological values, vegetation indices and surface attributes.

Therefore, it is common to reduce collinearity, presence of linear relationships among input variables, using preprocessing algorithms such as Principal Component Analysis (PCA). Independent Component Analysis (ICA) may also be used to extract statistically independent components.

Other relevant algorithms found are the PSO (Particles Swarm Optimization), used to find the best hyperparameters for the neural network, and SHAP (SHapley Additive exPlanations) that interprets model predictions and the importance of each feature.

V. MATERIALS AND METHODS

After the review, a personal implementation of a neural network to perform *ET* predictions has been developed and tested.

The goal was to use all the knowledge obtained during the review to implement a reliable and efficient model to predict the actual evapotranspiration (*AET*) over the Piedmont region in Italy.

A. Dataset and Study Area

The development of the neural network started by finding the best dataset to perform *AET* estimations in Italy. As the review shows, few studies have implemented evapotranspiration model in Italy due to the climatological complexity of the mediterranean area.

Moreover, evapotranspiration (*ET*) trend in the Piedmont region, located in the northern Italy, is characterized by high

spatial and temporal variability influenced by its position between Mediterranean warm areas and more temperate alpine zones [16] [17]. To address this challenge, two preprocessed datasets have been used, the first contains climatological variables used to perform regression, and the second for the target AET values. These two dataset have been aligned in space and time, to then obtain a unique dataset that for each pixel (longitude, latitude) of Italy contains 8 climatological features (minimum, average, and maximum air temperature, minimum and maximum relative humidity, wind speed, surface solar radiation, precipitation) and the related AET value for each day. The study focused only on the positions of the Piedmont region and in a time period that elapse from 01-01-2019 to 01-01-2022.

1) *MADIA - Meteorological variables for agriculture: A dataset for the Italian area:* This dataset provides a comprehensive, high-resolution series of agro-meteorological variables across Italy, gridded at a 0.25-degree resolution, and derived from ERA5 reanalysis data for the period 1981–2022. It contains daily time series of minimum, average, and maximum air temperature, minimum and maximum relative humidity, wind speed, surface solar radiation, precipitation, and the reference evapotranspiration (ET_0) calculated using the FAO Penman-Monteith method.

The MADIA dataset is owned and maintained by the Council for Agricultural Research and Economics (CREA), an Italian public research institution focused on agriculture and environment.

The dataset is described and available in the paper [18].

2) *GLEAM (Global Land Evaporation Amsterdam Model):* GLEAM is a satellite-based modeling framework designed to estimate terrestrial evapotranspiration (ET) and its components globally, providing continuous, gap-free, and spatially explicit data. The dataset offers daily estimates at approximately 0.25° spatial resolution, widely used in climate, hydrology, and ecological research.

It calculates potential evapotranspiration (PET) using a physically based Priestley–Taylor equation (or Penman in newer versions), which estimates the maximum possible ET assuming unlimited water availability.

To account for water limitations, PET is scaled by an evaporative stress factor that reflects vegetation water stress and soil moisture constraints. This stress factor is derived from satellite observations of vegetation optical depth (VOD), an index for vegetation water content where lower VOD indicates higher stress, and a multi-layer soil water balance model simulating root-zone soil moisture dynamics driven by precipitation and meteorological inputs. Surface soil moisture observations from microwave satellites are assimilated to improve soil moisture estimates.

GLEAM separately estimates the main components of terrestrial evaporation and transpiration, and then sums them to provide total actual evaporation, which in vegetated areas corresponds to actual evapotranspiration (AET).

The dataset is publicly available at <https://www.gleam.eu/> (accessed May 25, 2025), where registered users can

download data via SFTP.

3) *Datasets Alignment:* MADIA dataset was downloaded as a zip folder from <https://zenodo.org/records/7252361> (accessed May 27, 2025), as referenced in the related publication [18]. The folder contains a CSV file for each year from 1981 to 2022, and each file provides daily records for multiple spatial grid points across Italy, with 8 meteorological features and auxiliary information for each date and location (see Table IX).

TABLE IX
MADIA DATASET DESCRIPTION

Acronym	Description
longitude	longitude coordinate
latitude	latitude coordinate
time	date of the day
tasmin	mean of daily minimum near-surface air temperature
tasmax	mean of daily maximum near-surface air temperature
tasmean	mean of daily average near-surface air temperature
rhmin	mean of daily minimum near-surface relative air humidity
rhmax	mean of daily maximum near-surface relative air humidity
ws10	mean of daily wind speed
ssrd	mean of daily surface solar radiation (shortwave radiation)
ppn	sum of daily water precipitation
pev	sum of daily crop ET_0 estimated by FAO Penman-Monteith
expver	code which identifies temporary data when expver=5
mask	boolean code to identify cells belonging to the Italian country

This dataset is optimal due to its wide spatial and temporal coverage. However, since this study focuses exclusively on the Piedmont region, a spatial filter was applied to select only the grid points located within the area bounded by latitudes 44.0° to 46.5° and longitudes 6.5° to 9.0°.

Figure 9 displays all the spatial points available in the dataset, highlighting in red those corresponding to the Piedmont region. Additionally, the dataset was temporally filtered to include data only from the period 2019 to 2022.

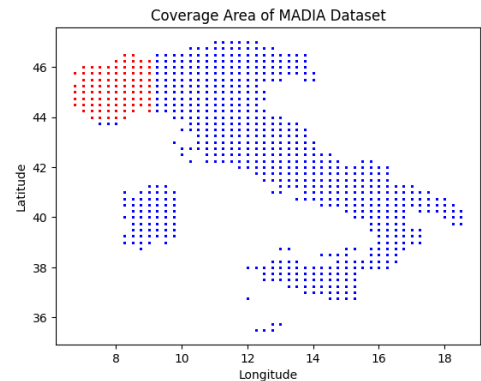


Fig. 9. Spatial Points of the filtered MADIA Dataset

GLEAM dataset was obtained via an SFTP connection, through which annual NetCDF (NC) files can be downloaded, each containing daily values for a specific variable. For this study, the NC files corresponding to daily *AET* values from 2019 to 2022 were downloaded.

However, a challenge emerged due to the global spatial coverage of the dataset. As a result, each NC file was heavy to be downloaded and handled, so the same spatial filter used for MADIA dataset was applied to extract only the grid points related to Piedmont.

Figure 10 shows the *AET* values contained in the extracted grid points over the Piedmont region in the first day of the dataset. Red pixels highlights Null values corresponding to the sea.

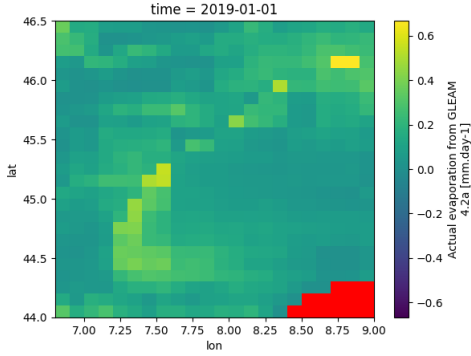


Fig. 10. Spatial Points of the Filtered GLEAM Dataset

Although the two datasets now refer to the same geographic area and time period, their spatial grids are not perfectly aligned. To construct an unified dataset, each pixel in the MADIA dataset was matched, for each day, with the *AET* value of the nearest spatial point in the GLEAM dataset. As a result, the MADIA dataset has a new feature representing the daily *AET* value for each pixel. Table X summarized the minimum, average, and maximum spatial shifts applied during the alignment.

TABLE X
MINIMUM, MEAN, AND MAXIMUM SPATIAL SHIFT (IN DEGREES)
APPLIED DURING DATASET ALIGNMENT

Distance	Degrees
Min.	0.0
Max.	0.112
Mean	0.049

Figure 11 illustrates the final dataset, composed by the same grid points of the MADIA dataset but with the associated *AET* value.

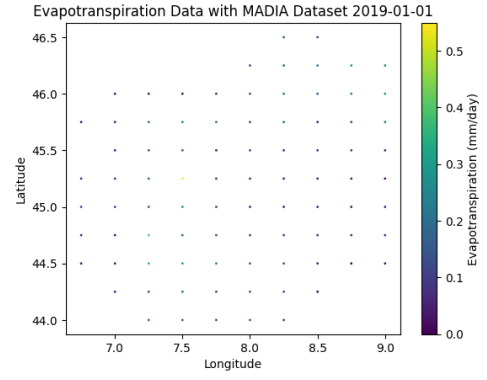


Fig. 11. Spatial Points of the Final Dataset

B. Data Preprocessing

Before training the neural network, several preprocessing steps were applied to enhance data quality, reduce redundancy, and address missing values.

1) *Handling Missing Values*: The dataset may contain missing (Null) values in the *AET* field, particularly in pixels located near coastal areas or where GLEAM does not provide data. To ensure consistent input across the entire study area, all records with missing *AET* values were removed from the dataset (see Table XI).

TABLE XI
SAMPLE COUNT BEFORE AND AFTER REMOVING MISSING *AET* VALUES

Dataset Status	Number of Samples
Before Removing Missing Values	128,568
After Removing Missing Values	127,107

2) *Normalization*: Normalization is a crucial preprocessing step when training neural networks. It ensures that each feature contributes equally to the learning process, prevents numerical instability, and improves convergence speed during optimization.

In this study, both the input features and the target variable (*AET*) were normalized using the Standard Scaler. This method transforms each feature to have zero mean and unit variance according to the formula 2:

$$x' = \frac{x - \mu}{\sigma} \quad (2)$$

where:

- x is the original feature value,
- μ is the mean of the feature,
- σ is the standard deviation of the feature.

The final set of input features and the target variable used in the regression task is listed in Table XII.

TABLE XII
FINAL DATASET STRUCTURE

Feature	Description
day_of_year	Integer (1–365/366)
tasmin	Daily minimum temperature [°C]
tasmean	Daily mean temperature [°C]
tasmax	Daily maximum temperature [°C]
rhmin	Daily minimum relative humidity [%]
rhmax	Daily maximum relative humidity [%]
ws10	Wind speed at 10 meters [m/s]
ssrd	Surface solar radiation [W/m ²]
ppn	Precipitation [mm/day]
E	Actual Evapotranspiration [mm/day] (target variable)

3) *Feature Correlation Analysis*: The initial experiments revealed an unexpected behavior during the training phase of the neural network, the loss function (evaluated using both Mean Squared Error and Huber loss) dropped to very small values after just a single epoch, indicating potential overfitting or a simplistic learning scenario.

To investigate the cause, a correlation analysis was performed using a correlation matrix (see Figure 12). This matrix measures the linear relationships between pairs of features, with values close to 1 or -1 indicating strong positive or negative correlations. High correlation among input features can reduce the model’s generalization capability, as the network might redundantly learn the same patterns and so cause overfitting.

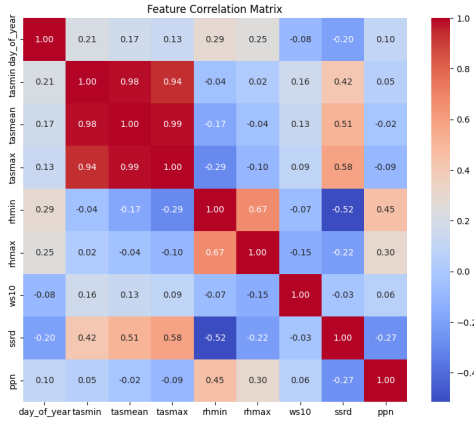


Fig. 12. Features Correlation Matrix

To address this issue, Principal Component Analysis (PCA) algorithm has been used to transform the original set of correlated features into a new set of uncorrelated components called principal components (see Table XIII).

TABLE XIII
SAMPLE COUNT BEFORE AND AFTER REMOVING MISSING *AET* VALUES

Dataset Status	Number of Features
Before PCA	9
After PCA	6

C. Neural Network Architecture

The goal of the predictions is to understand temporal relationships between daily climatological variables and *AET* values, to then predict the *AET* of the following day. The model is designed to rely only on temporal sequences of past days data, and excluding spatial information that would bring the model to learn location specific *AET* patterns. By training exclusively on temporal trends, the model learns to predict future *AET* values based on the climatological evolution over previous days—without access to the next day’s meteorological inputs.

To perform this task, a Long Short-Term Memory (LSTM) network was developed, a type of Recurrent Neural Network (RNN) particularly effective in modeling temporal dependencies and sequential patterns. The LSTM architecture was implemented using the TensorFlow library and developed in Python, with the source code publicly available at <https://github.com/CavaWasTaken/InnovativeWirelessPlatformsForIoT>.

The final network is composed by five layers, totaling 121,753 trainable parameters. Given that the input dataset consists of numerical climatological indices, a lightweight architecture was sufficient to achieve optimal performance. Training was performed on a personal computer and completed in just over two minutes.

The five layers architecture is:

- **First Layer:** An LSTM layer that receives a batch of sequences, each consisting of 30 days of climatological data (sequence length defined as a hyperparameter). The features of each day in the sequence is processed by an LSTM cell, and each cell (except the first) also receives input from the previous cell to model temporal dependencies. This layer uses 128 units and is configured with `return_sequences=True`, meaning that its output will be composed by the outputs of each cell, and its shape is (batch_size, 30, 128).
- **Second Layer:** A second LSTM layer that processes the sequence output from the first layer. This layer uses 64 units and has `return_sequences=False`, so it returns only the output of the final cell, with shape (batch_size, 64).
- **Third Layer:** A Dropout layer with a dropout rate of 0.1. This layer randomly disables 10% of the neurons during training to help prevent overfitting.
- **Fourth Layer:** A Dense (fully connected) layer with 64 units and ReLU activation, which transforms the input from the previous layer into a higher-level representation.
- **Fifth Layer:** A final Dense layer with 1 unit, which performs the regression task and outputs the predicted *AET* value.

The full architecture is illustrated in Figure 13.

Layer (type)	Output Shape	Param #
lstm (LSTM)	(None, 30, 120)	59,120
lstm_1 (LSTM)	(None, 64)	49,408
dropout (Dropout)	(None, 64)	0
dense (Dense)	(None, 64)	4,160
dense_1 (Dense)	(None, 1)	65
Total params: 122,753 (479.50 KB)		
Trainable params: 122,753 (479.50 KB)		
Non-trainable params: 0 (0.00 B)		

Fig. 13. LSTM Architecture

VI. EXPERIMENTS AND EVALUATION

A. Sequence Construction

To prepare the data for input into the LSTM model, the dataset was segmented into sequences of 30 consecutive days of daily climatological variables. Each sequence is paired with the *AET* value of the following day, forming the target for the regression task.

The sequences were randomly shuffled to prevent the model from overfitting seasonal trends. An 80%–20% train-test split was applied to the sequences (see Table XIV).

TABLE XIV
TRAIN AND TEST SET SPLITTING

Set	Features Shape	Target Variable Shape
Original	(14,310, 30, 6)	(14,310,)
Train	(11,448, 30, 6)	(11,448,)
Test	(2,862, 30, 6)	(2,862,)

B. Training Phase

The model was trained over 50 epochs using a batch size of 32. A validation split of 20% of the training data was used to monitor the model's performance during training. The optimization was performed using the Adam optimizer, and the Mean Squared Error (MSE) was used as the loss function. Each epoch involved 287 iterations and required approximately 3 seconds, totaling around 166 seconds for the full training phase.

C. Testing Phase and Results

Testing was carried out on the remaining 20% of the dataset. Since the model was trained on normalized data, the predicted *AET* values were rescaled back to their original range for evaluation.

Figure 14 presents a scatter plot comparing the predicted *AET* values to the true values. The red line indicates the ideal 1:1 regression line, helping visualize the goodness of fit.

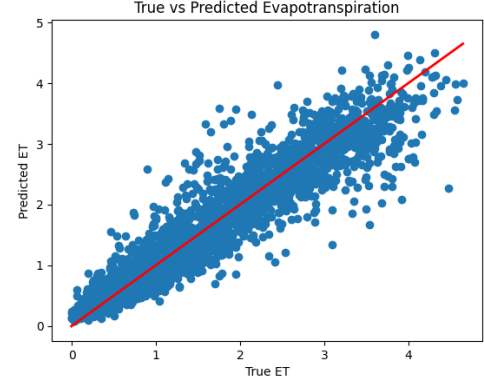


Fig. 14. LSTM Regression Predictions vs. Ground Truth

Three metrics were used to assess prediction performance:

- **R^2 (Coefficient of Determination)** – Indicates how well the predicted values replicate the observed outcomes. A value of 1.0 denotes perfect prediction.
- **MAPE (Mean Absolute Percentage Error)** – Measures average absolute prediction error as a percentage, sensitive to small values in the target variable.
- **SMAPE (Symmetric Mean Absolute Percentage Error)** – A scale-independent metric that balances over- and under-predictions more effectively, especially when true values are near zero.

The values obtained from the evaluation offer a clear view of the model's performance. The R^2 value of 0.8974 indicates that nearly 90% of the variance in the actual *AET* values is explained by the model's predictions, which is a strong result for a regression task on environmental data. The relatively high R^2 confirms that the model has learned to capture the underlying temporal patterns effectively.

The MAPE of 42.33% is moderately high and suggests that, on average, the absolute percentage error is significant. However, this should be interpreted carefully, as MAPE tends to be inflated when true values are small—a common occurrence in daily *AET* data.

The SMAPE of 24.11% provides a more balanced measure of error, particularly when actual values are low or zero. This value indicates moderate predictive error, which, while not ideal, is acceptable in the context of noisy and spatially heterogeneous climatological data. The results are summarized in Table XV.

TABLE XV
EVALUATION METRICS ON TEST SET

Metric	Value
R^2	0.8974
MAPE (%)	42.33
SMAPE (%)	24.11

VII. CONCLUSIONS

This study presents a temporal deep learning approach to predict daily Actual Evapotranspiration (*AET*) using historical climatological sequences. By leveraging an LSTM network trained only on past daily meteorological variables—excluding spatial location—the model is encouraged to learn generalizable patterns rather than region-specific ones.

The approach achieves strong predictive performance, with an R^2 value close to 0.9 and reasonable error rates, demonstrating the feasibility of modeling *AET* based on temporal dynamics alone.

Future improvements could include multi-year generalization validation, seasonal robustness checks, and exploring hybrid models that integrate spatial features without compromising generalizability.

REFERENCES

- [1] U. Baishnab, M. S. H. Sajib, A. Islam, S. Akter, A. Hasan, T. Roy, and P. Das, “Deep learning approaches for short-crop reference evapotranspiration estimation: a case study in southeastern australia,” *EARTH SCIENCE INFORMATICS*, vol. 18, no. 1, JAN 2025.
- [2] H. Alkubaisi, A. D. Mehr, S. Adarsh, and M. M. H. Khan, “Drought modelling and forecasting using shallow and deep machine learning techniques,” *MODELING EARTH SYSTEMS AND ENVIRONMENT*, vol. 11, no. 1, FEB 2025.
- [3] E. Babaeian, S. Paheding, N. Siddique, V. K. Devabhaktuni, and M. Tuller, “Short- and mid-term forecasts of actual evapotranspiration with deep learning,” *JOURNAL OF HYDROLOGY*, vol. 612, no. A, SEP 2022.
- [4] J. Hernandez-Bedolla, A. Solera, S. T. Sanchez-Quispe, and C. Dominguez-Sanchez, “Comparative analysis of 12 reference evapotranspiration methods for semi-arid regions (spain),” *JOURNAL OF WATER AND CLIMATE CHANGE*, vol. 14, no. 9, pp. 2954–2969, SEP 2023.
- [5] S. Trajkovic, M. Gocic, R. Pongracz, and J. Bartholy, “Adjustment of thornthwaite equation for estimating evapotranspiration in vojvodina,” *THEORETICAL AND APPLIED CLIMATOLOGY*, vol. 138, no. 3-4, pp. 1231–1240, NOV 2019.
- [6] I. Ghat, H. R. Mackey, and T. Al-Ansari, “A review of evapotranspiration measurement models, techniques and methods for open and closed agricultural field applications,” *WATER*, vol. 13, no. 18, SEP 2021.
- [7] L. Dai, R. Fu, Z. Zhao, X. Guo, Y. Du, Z. Hu, and G. Cao, “Comparison of fourteen reference evapotranspiration models with lysimeter measurements at a site in the humid alpine meadow, northeastern qinghai-tibetan plateau,” *FRONTIERS IN PLANT SCIENCE*, vol. 13, APR 27 2022.
- [8] K. B. Behura, S. K. Raul, J. C. Paul, S. Mohanty, P. P. Jena, S. K. Dwibedi, S. Ghosh, L. K. Singh, S. R. Devi, A. K. Singha, and A. K. Mohanty, “Comprehensive analysis of methods for estimating actual paddy evapotranspiration-a review,” *FRONTIERS IN WATER*, vol. 7, MAR 4 2025.
- [9] I. A. Lakhari, H. Yan, C. Zhang, J. Zhang, G. Wang, S. Deng, T. N. Syed, B. Wang, and R. Zhou, “A review of evapotranspiration estimation methods for climate-smart agriculture tools under a changing climate: vulnerabilities, consequences, and implications,” *JOURNAL OF WATER AND CLIMATE CHANGE*, vol. 16, no. 2, pp. 249–288, FEB 2025.
- [10] P. Bai, “Comparison of remote sensing evapotranspiration models: Consistency, merits, and pitfalls,” *JOURNAL OF HYDROLOGY*, vol. 617, no. A, FEB 2023.
- [11] A. Marquez-Grajales, R. Villegas-Vega, F. Salas-Martinez, H.-G. Acosta-Mesa, and E. Mezura-Montes, “Characterizing drought prediction with deep learning: A literature review,” *METHODS*, vol. 13, DEC 2024.
- [12] B. N. Aryalekshmi, R. C. Biradar, K. Chandrasekar, and J. M. Ahamed, “Analysis of various surface energy balance models for evapotranspiration estimation using satellite data,” *EGYPTIAN JOURNAL OF REMOTE SENSING AND SPACE SCIENCES*, vol. 24, no. 3, 2, pp. 1119–1126, DEC 2021.
- [13] G. Wang, X. Zhao, Z. Zhang, S. Song, and Y. Wu, “Machine learning-based estimation of evapotranspiration under adaptation conditions: a case study in heilongjiang province, china,” *INTERNATIONAL JOURNAL OF BIOMETEOROLOGY*, vol. 68, no. 12, pp. 2543–2564, DEC 2024.
- [14] S. Acharki, A. Raza, D. K. Vishwakarma, M. Amharref, A. S. Bernoussi, S. K. Singh, N. Al-Ansari, A. Z. Dewidar, A. A. Al-Othman, and M. A. Mattar, “Comparative assessment of empirical and hybrid machine learning models for estimating daily reference evapotranspiration in sub-humid and semi-arid climates,” *SCIENTIFIC REPORTS*, vol. 15, no. 1, JAN 20 2025.
- [15] M. Y. Chia, Y. F. Huang, and C. H. Koo, “Support vector machine enhanced empirical reference evapotranspiration estimation with limited meteorological parameters,” *COMPUTERS AND ELECTRONICS IN AGRICULTURE*, vol. 175, AUG 2020.
- [16] E. Mombrini, S. Tamea, A. Viglione, and R. Revelli, “A 60-year drought analysis of meteorological data in the western po river basin,” *HYDROLOGY AND EARTH SYSTEM SCIENCES*, vol. 29, no. 10, pp. 2255–2273, MAY 19 2025.
- [17] E. Brussolo, E. Palazzi, J. von Hardenberg, G. Masetti, G. Vivaldo, M. Prevati, D. Canone, D. Gisolo, I. Bevilacqua, A. Provenzale, and S. Ferraris, “Aquifer recharge in the piedmont alpine zone: historical trends and future scenarios,” *HYDROLOGY AND EARTH SYSTEM SCIENCES*, vol. 26, no. 2, pp. 407–427, JAN 26 2022.
- [18] B. Parisse, R. Alilla, A. G. Pepe, and F. De Natale, “Mediterranean meteorological variables for agriculture: A dataset for the italian area,” *DATA IN BRIEF*, vol. 46, FEB 2023.