METRIC FITTING SPACER - 2 HOLE

GLOBAL STANDARD COMPONENTS
NAAMS™

Assembly 02/04/20


B
A


NOTE:

1) ETCH DIM A ON EDGE OF SPACER
2) ALL DIMENSIONS ARE METRIC
3) BLACK OXIDE FINISH
4) SURFACE TO BE FLAT AND PARALLEL TO WITHIN 0.015 T.I.R.
5) METRIC TOLERENCES: UNLESS OTHERWISE SPECIFIED
   1 PLACE ± 0.3mm
   2 PLACE ± 0.03mm

BLACK OXIDE

MATERIAL: S.A.E. 1020 HRS
SEE PAGE B-1.1 FOR GLOBAL MATERIALS CHART

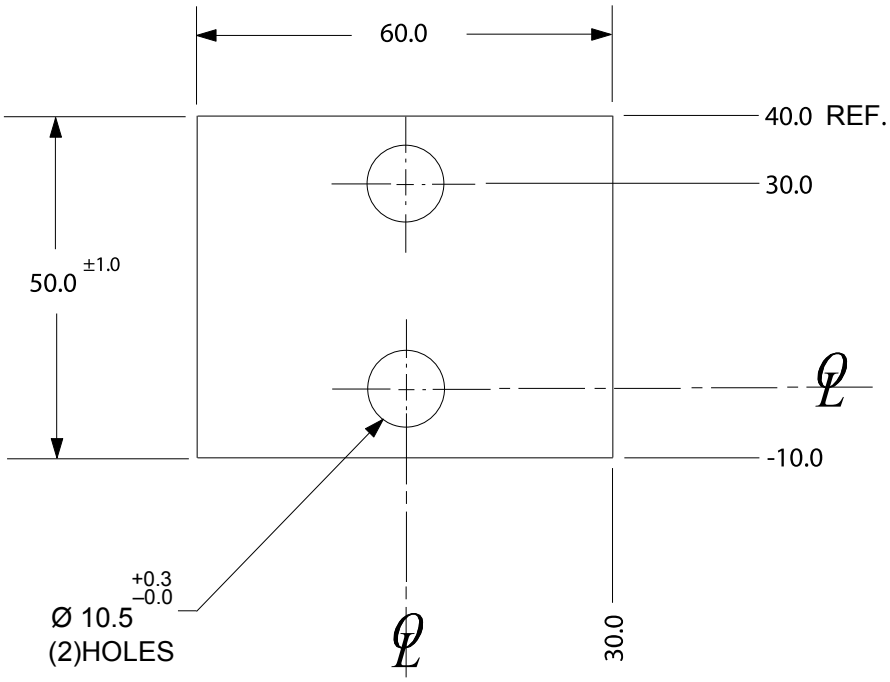

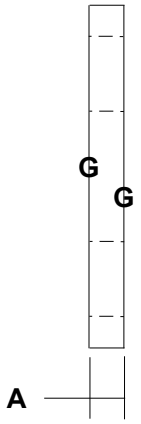

NAAMS CODE	A
ASP230	3.00
ASP232	3.20
ASP234	3.40
ASP236	3.60
ASP238	3.80
ASP240	4.00
ASP242	4.20
ASP244	4.40
ASP246	4.60
ASP248	4.80
ASP250	5.00
ASP252	5.20
ASP254	5.40
ASP256	5.60
ASP258	5.80
ASP260	6.00
ASP262	6.20
ASP264	6.40
ASP266	6.60
ASP268	6.80
ASP270	7.00

©1997 Auto/Steel Partnership