



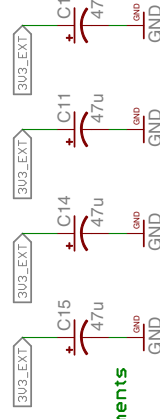

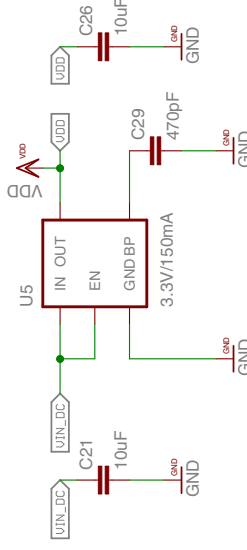
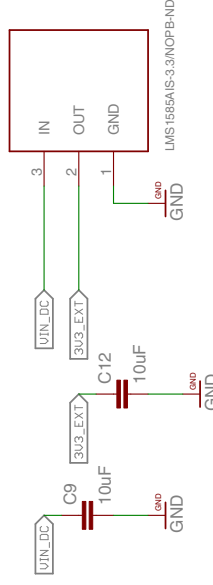











**NOTE :**  
There are no pullup resistors on the downstream hub lines---  
You are depending on having them on the downstream devices!

NSUR - Control Board	
TITLE: NS_ARM_Control_07_17_2017	
Document Number:	REV:
Date: 7/17/2017 10:56:29 PM	Sheet: 1/1



### Notes:

1) Trace width calculated for 5A maximum = 110mils @ 1oz copper  
4" trace approx = 0.02 Ohms

## NSUR - Control Board

TITLE: NS\_ARM\_Control\_07\_17\_2017

Document Number:	REV:
------------------	------

REV

Confidential and Proprietary Information

All Rights Reserved

Confidential and Proprietary Information

Date: 7/17/2017 10:56:29 PM

Sheet: 1/1



