




NJM5532x SPICE Modeling Report

■ TERMINAL INFORMATION

Device Pin No.	Device Pin Name	Description	Model Symbol
DIP8 DMP8 SIP8			
1	A OUTPUT	Output channel A	OUT1
2	A -INPUT	Inverting input channel A	-IN1
3	A +INPUT	Non-inverting input channel A	+IN1
4	V ⁻	Negative supply	V-
5	B +INPUT	Non-inverting input channel B	+IN2
6	B -INPUT	Inverting input channel B	-IN2
7	B OUTPUT	Output channel B	OUT2
8	V ⁺	Positive supply	V+


CHARACTERISTIC DATA

Input Offset Voltage

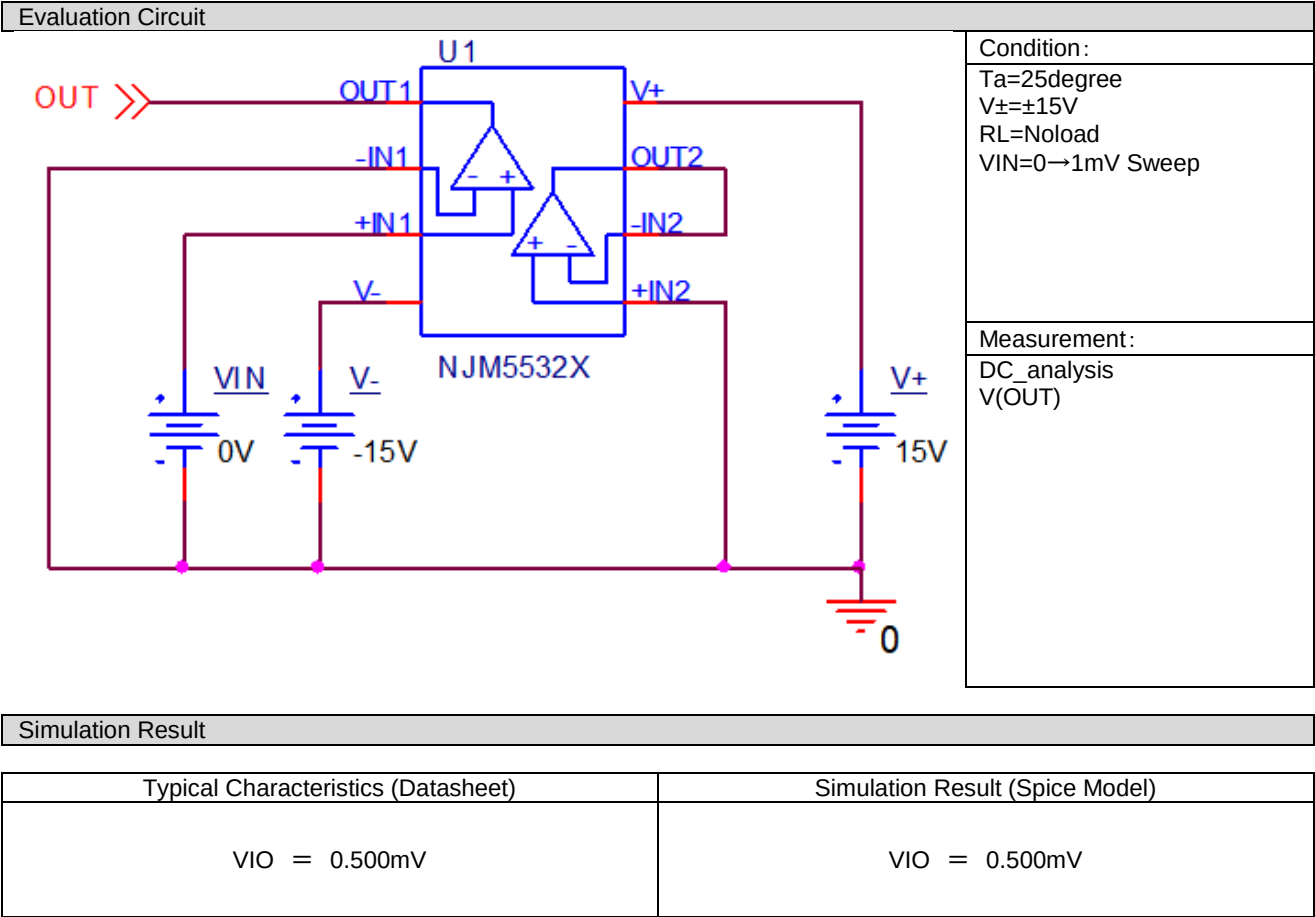

CHARACTERISTIC DATA



Input Bias Current

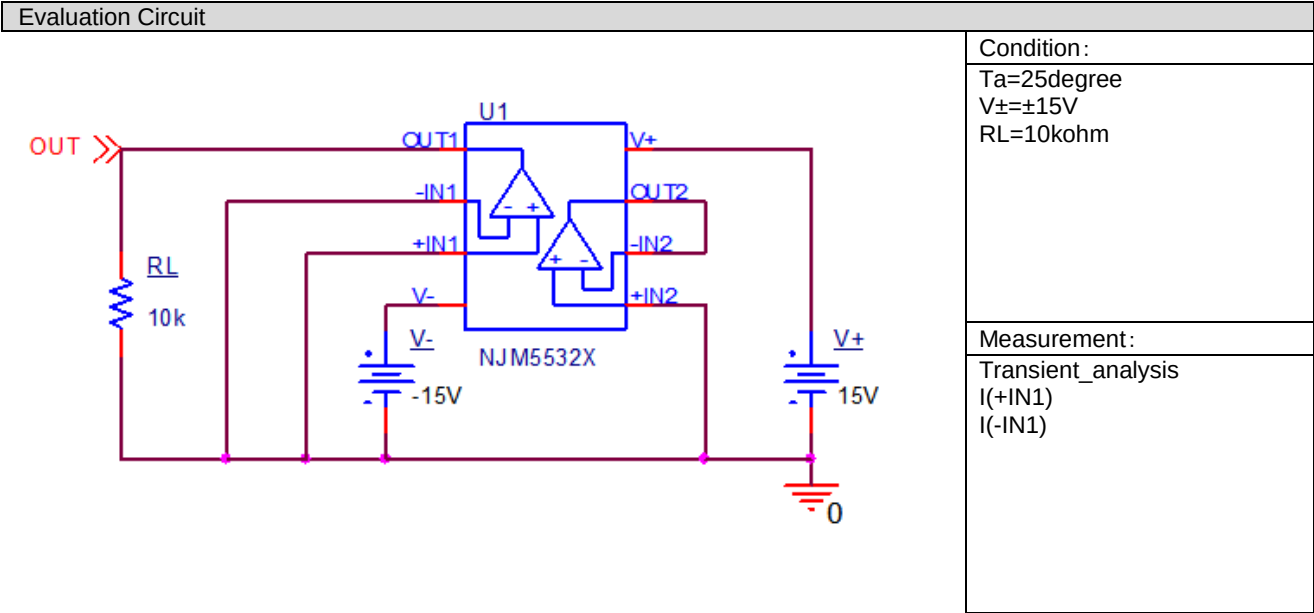

Simulation Result	
Typical Characteristics (Datasheet)	Simulation Result (Spice Model)
+IB = 200nA	+IB = 205nA
-IB = 200nA	-IB = 195nA



CHARACTERISTIC DATA

Supply Current vs. Supply Voltage

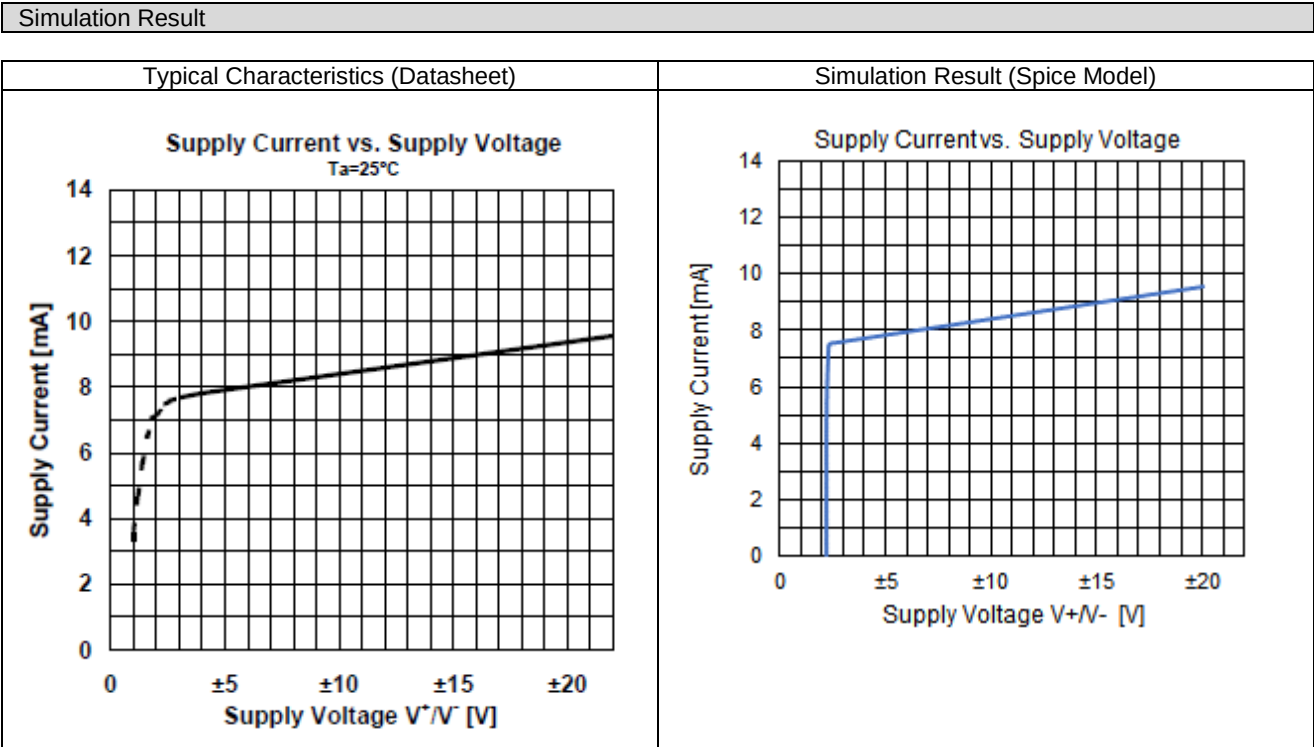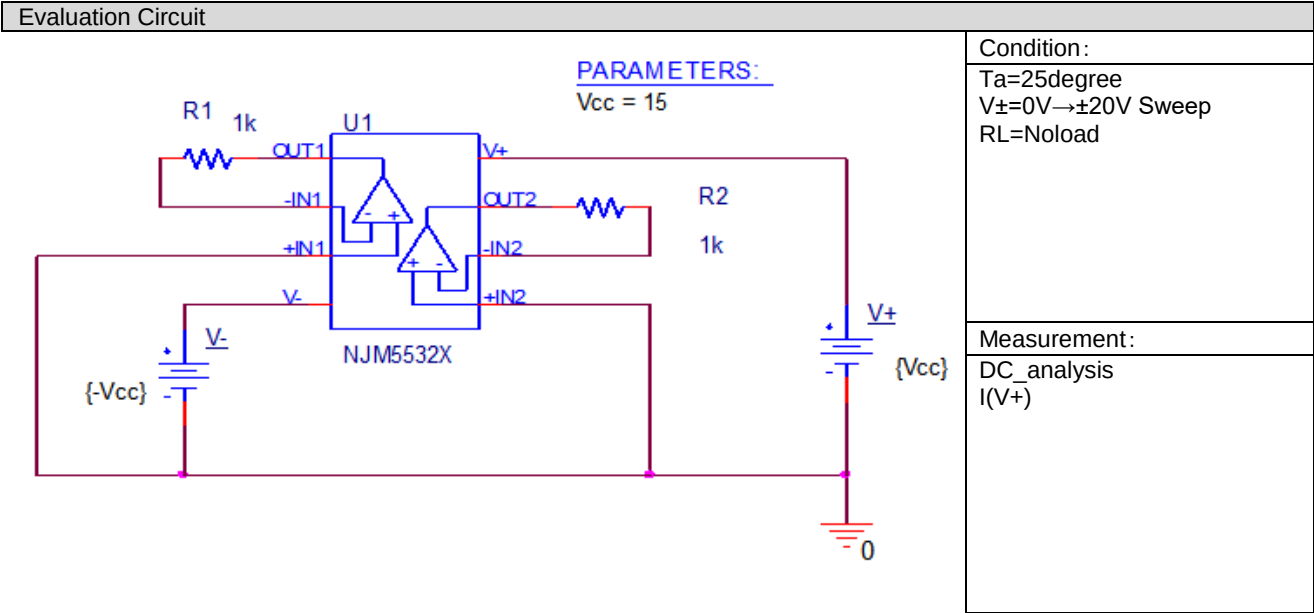


■ CHARACTERISTIC DATA

Maximum Output Voltage vs. Supply Voltage

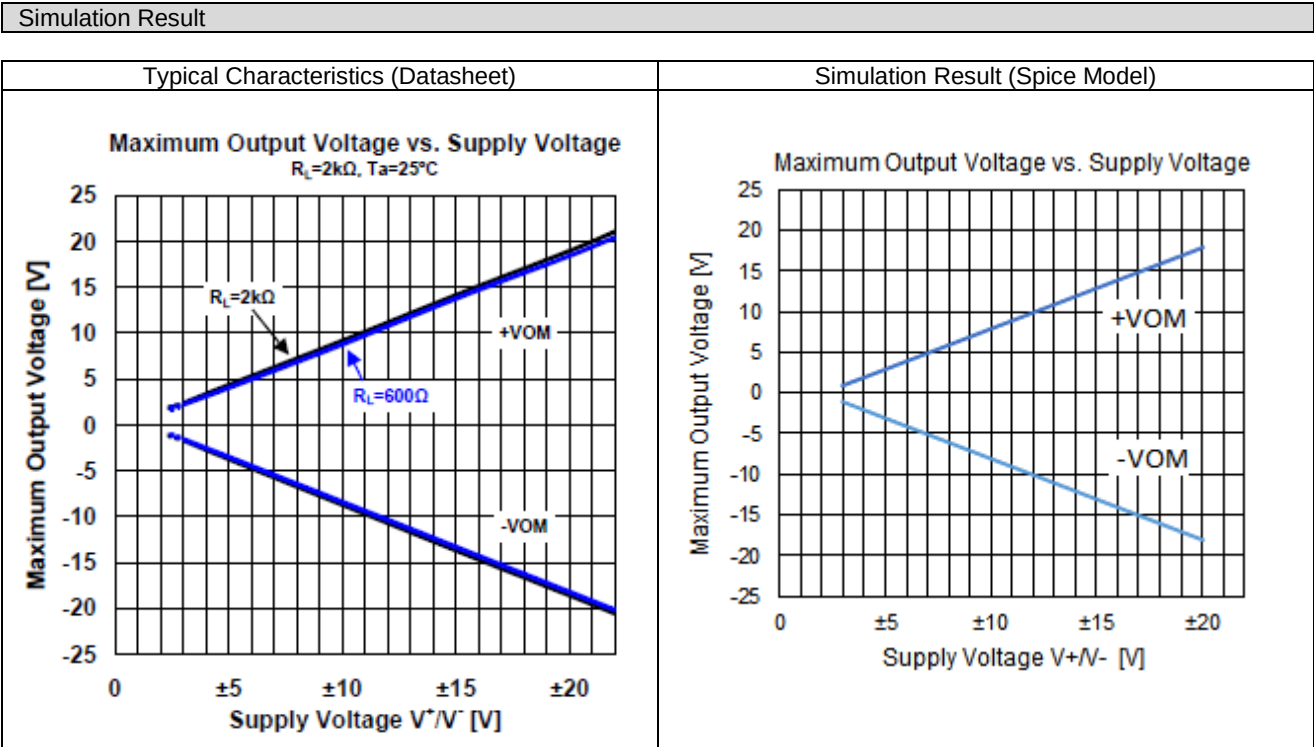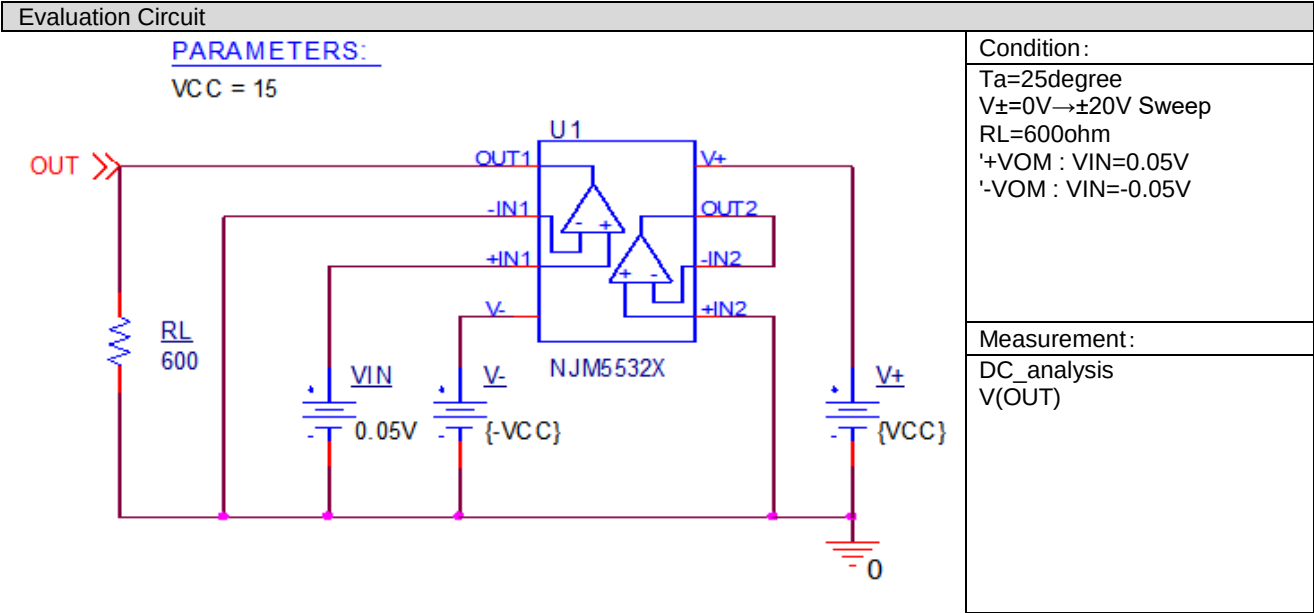

CHARACTERISTIC DATA


Voltage Gain_dc

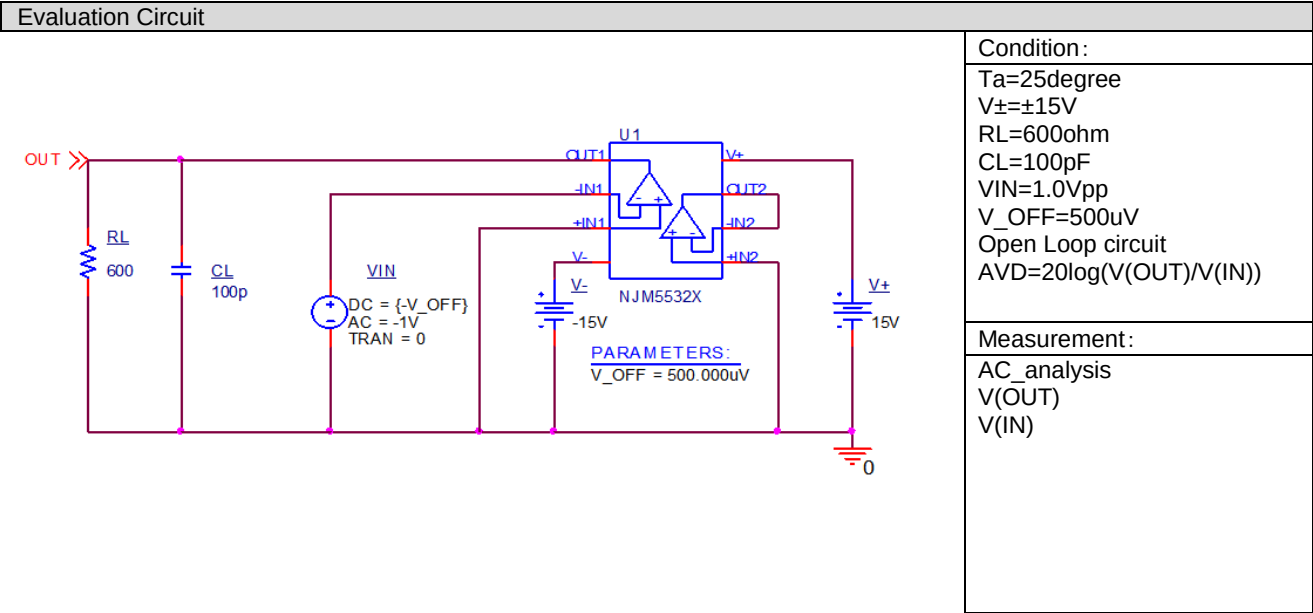

Simulation Result	
Typical Characteristics (Datasheet)	Simulation Result (Spice Model)
AV2_dc = 94.0dB	AV2_dc = 94.0dB

CHARACTERISTIC DATA


Voltage Gain_ac

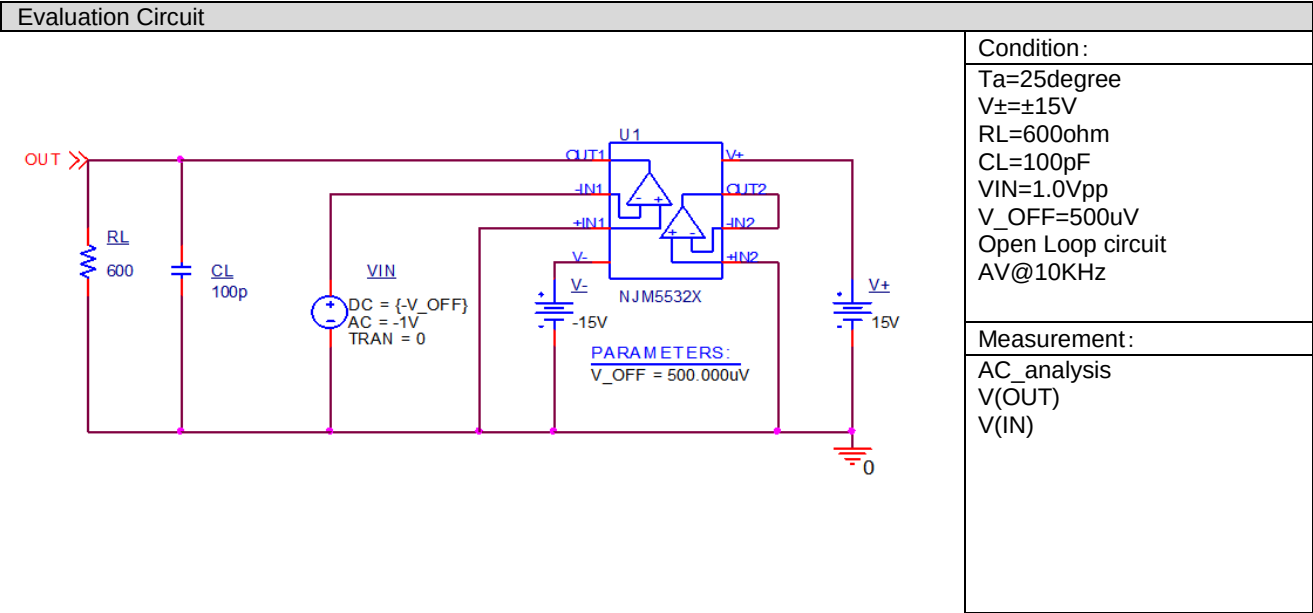

Simulation Result	
Typical Characteristics (Datasheet)	Simulation Result (Spice Model)
AV_ac@10kHz = 67.0dB	AV_ac@10kHz = 65.5dB

CHARACTERISTIC DATA

Gain/Phase vs. Frequency

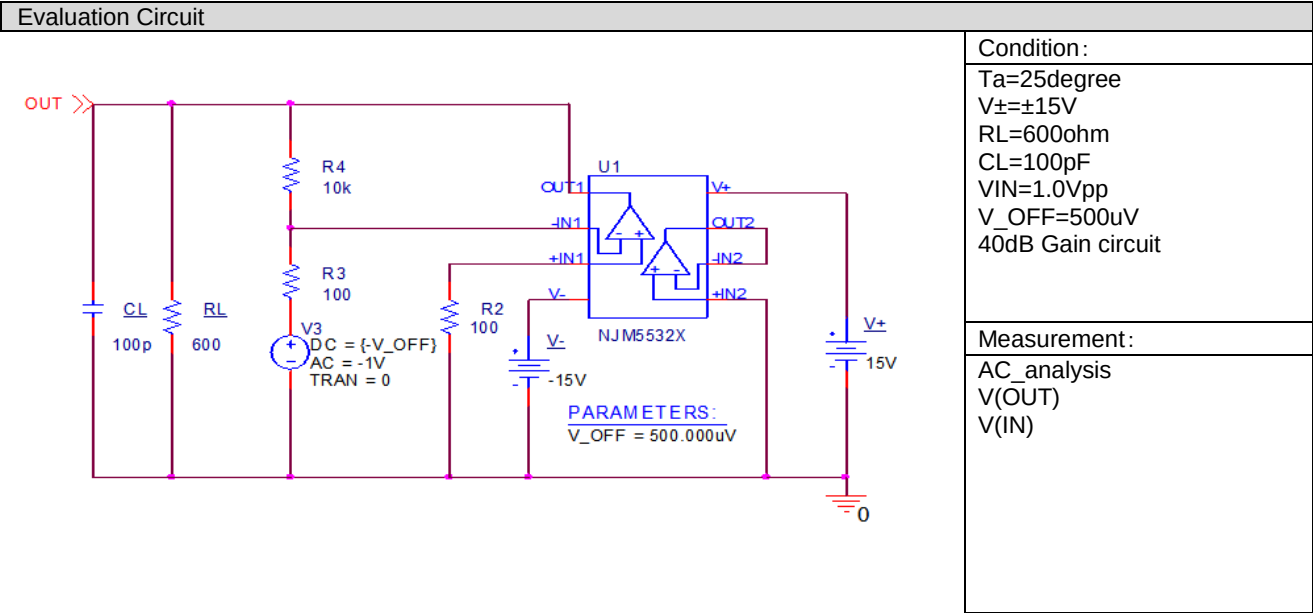

Simulation Result

