


L1 is a Bead to be mounted if the regulator U2 is not mounted,
CC1120 ref des will default not use regulator
CC1120/CC1125: do not mount: U2, C12, C41, C53
TG5021CG is optional: do not mount L1 if regulator is mounted

CC1120/25 using XTAL: do not mount: X2, C321, C322, R321, R322
CC1120/25 using TCXO: do not mount: R12, R321, C311, X1. C301: mount 0 Ohm resistor

X1: CC1120:32MHz and CC1125:40MHz

R12 is a 0ohms shunt resistor that ground
the EXT_XOSC pin when TCXO is not mounted.

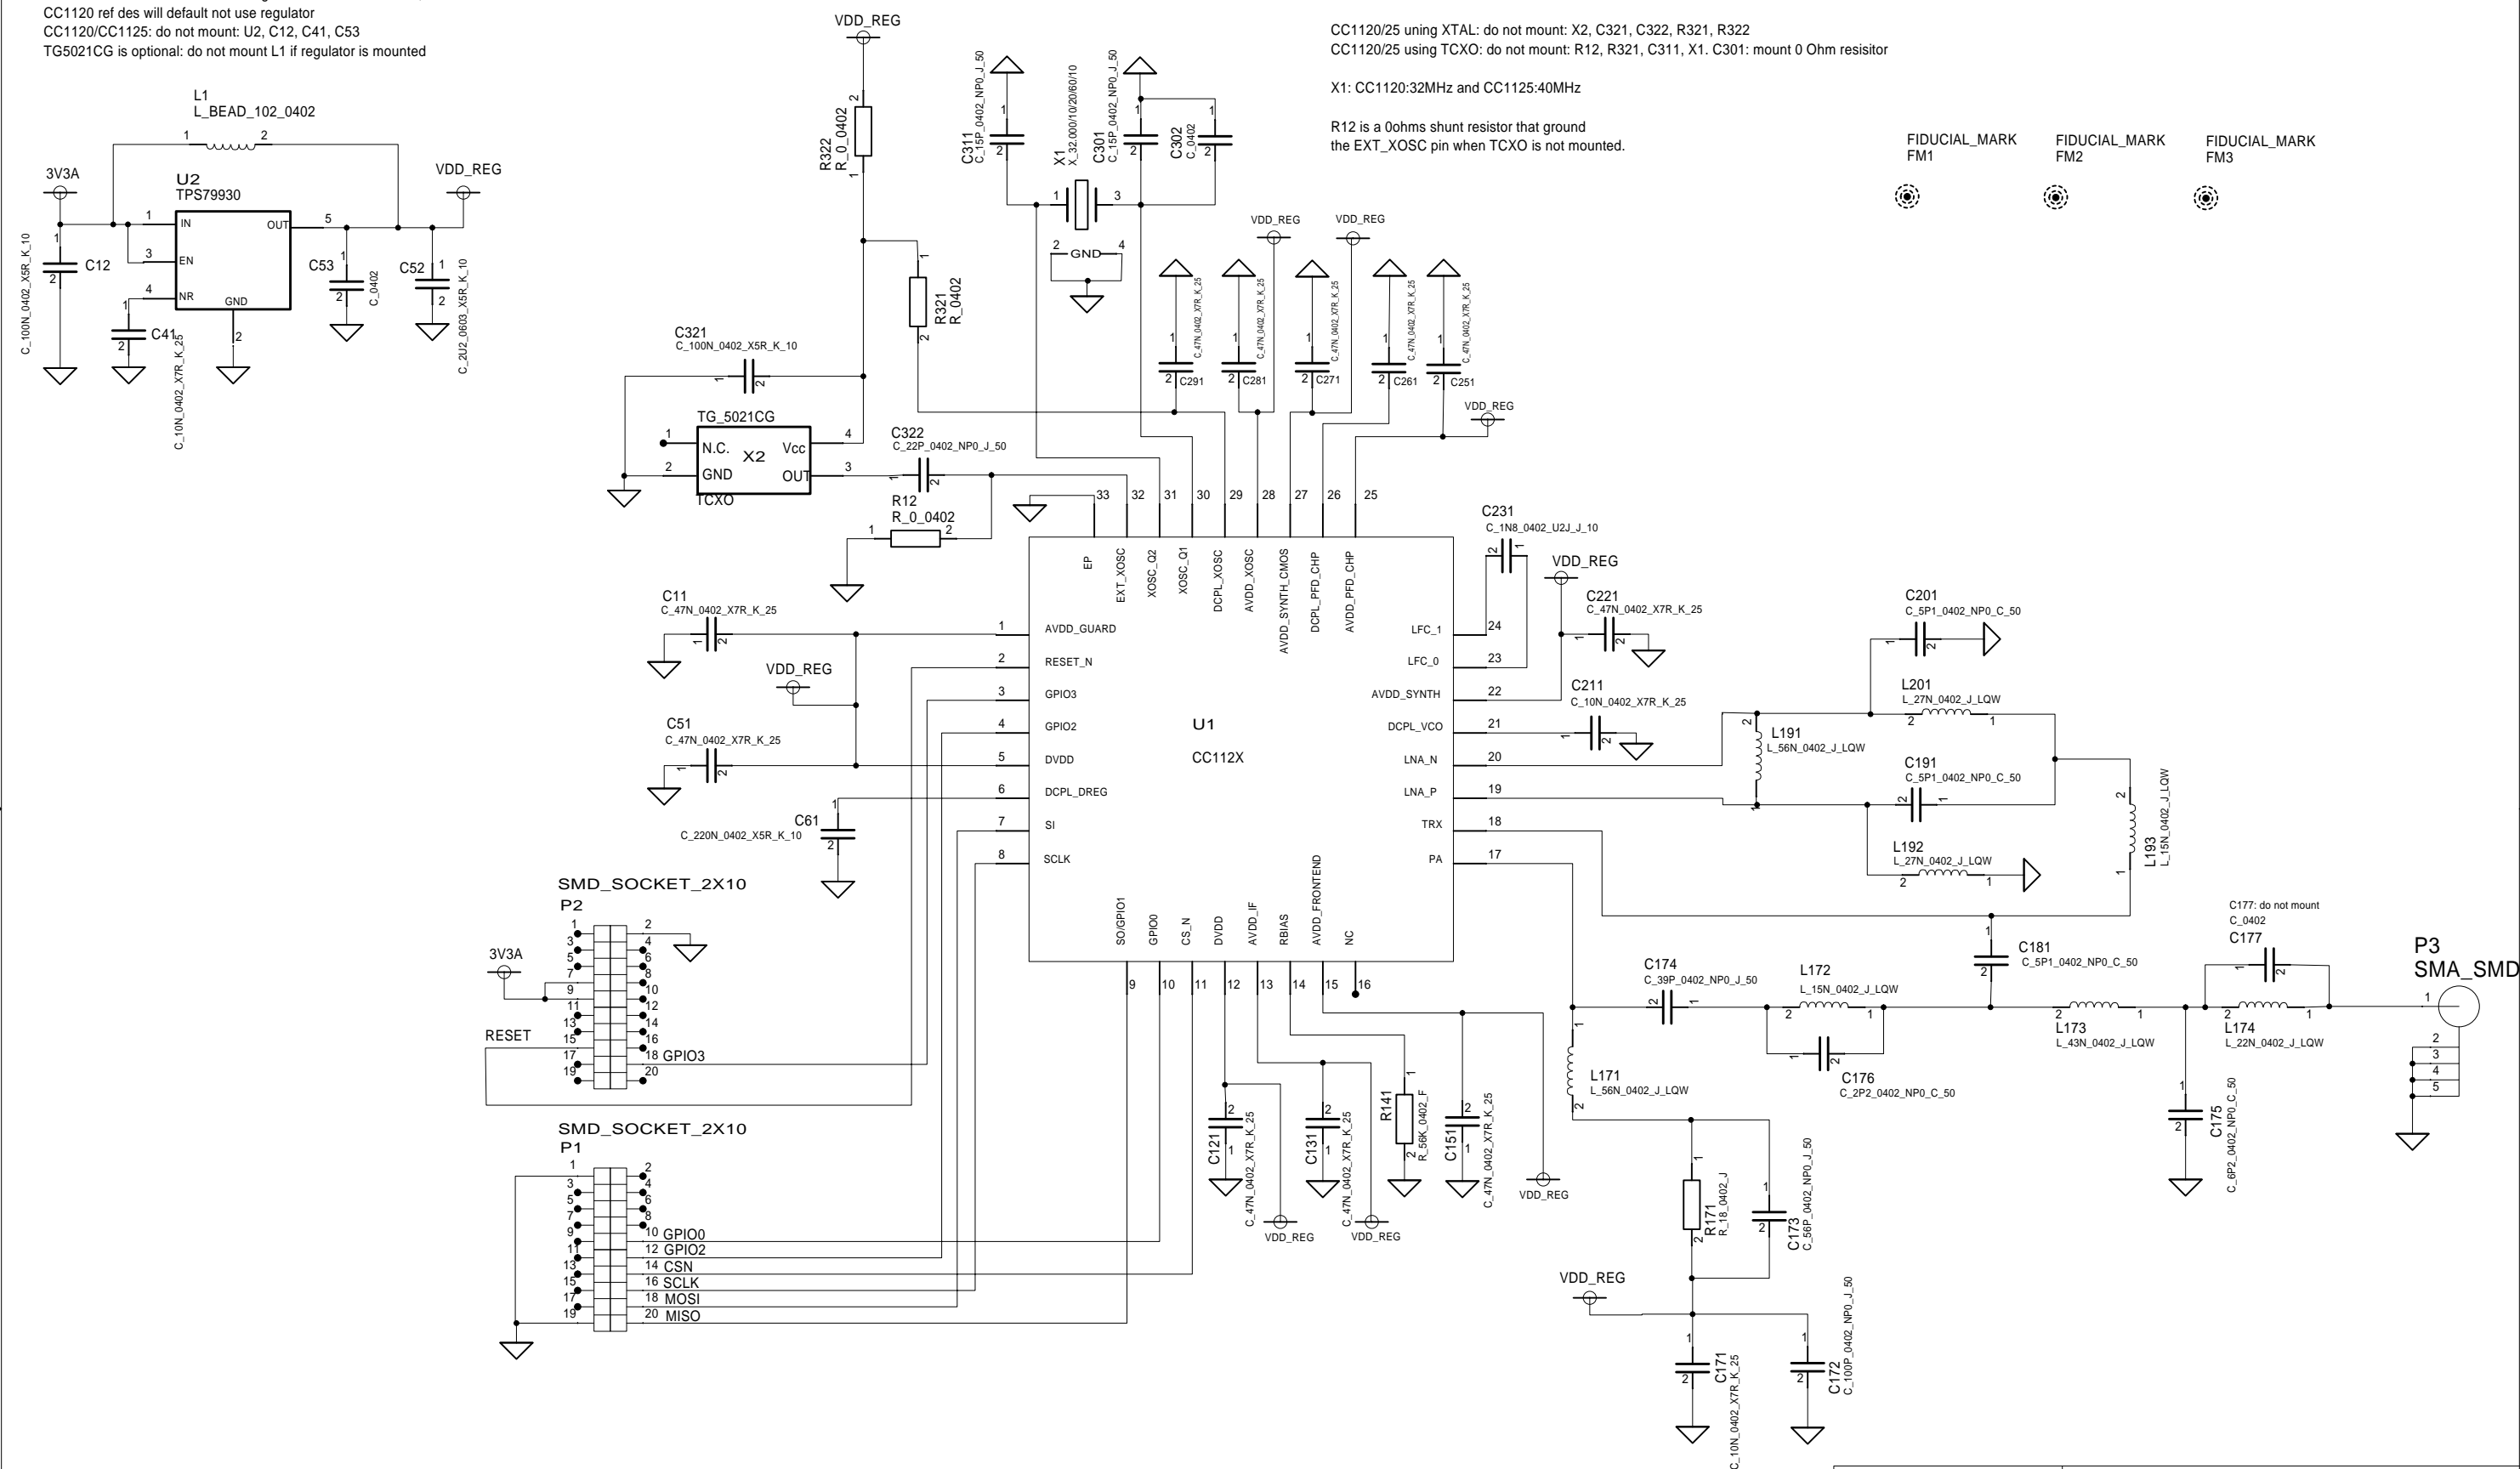

CONTRACT NO.		COMPANY NAME			
03236		Texas Instruments			
APPROVALS	DATE	DWG			
DRAWN	FRS	SIZE	FSCM NO.	DWG NO.	REV.
CHECKED		A3			1.0.1
ISSUED		SCALE		SHEET 1 of 1	