

1 Wishlist

The purpose of this wishlist is to collect ideas on the implementation of usefull features in ACHP.

1.1 Frontend//GUI

1.1.1 Display of the length of the different sections of the evaporator

It would be nice to have a graph illustrating the length of the different sections (subcooled, two-phase, superheated) of evaporator and condenser. Ideally it would be possible to have 2 or 3 runs with different parameters plot into it to illustrate the influence of e.g. an increase of charge.

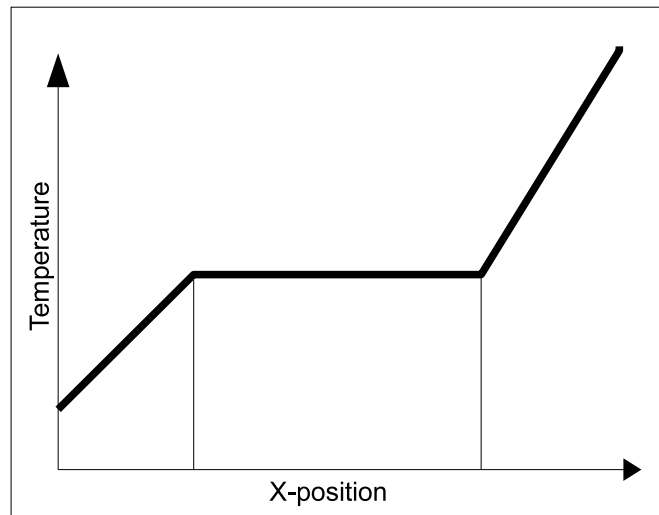


Figure 1: Graph showing sections of the evaporator

1.2 Backend

- The current circuitry complexity assumption is neglected. It is wished to include the effect of different circuitry configuration on the performance of heat exchanger.
- The assumption of laminar flow and internal roughness of zero is used for the calculation of friction factor in the single phase flow ([Reference](#)). Therefore, it is desired to create a library with all different materials and their corresponding roughness, and the user have the option to pick the material for each component as an input. Otherwise, the default material, for example Copper, will be selected.

- The viscosity at wall temperature need to be updated for the single-flow in PHE. ([Reference](#))
- The relative roughness is assumed to be 1 which yield to laminar flow. I think the material roughness of PHE need to be implemented. ([Reference](#))
- In PHE, the bounding can be saturated state if hot stream is condensing ([Reference](#))
- Claesson suggested a constant = 1.5 to adjust Copper's boiling correlation. It is suspect that better results with the 1.0. Therefore, it is better to make it an adjustable parameter ([Reference 1](#), [Reference 2](#))