

# GPAAtlasRRT: A probabilistic next-best tactile action strategy for object shape modelling and exploration

Carlos J. Rosales · Claudio Zito · Federico Spinelli ·  
Marco Gabiccini · Jeremy L. Wyatt

Received: date / Accepted: date

**Abstract** Information on object shape is a fundamental parameter for robot grasps to be successful. However, incomplete perception and noisy measurements impede obtaining accurate models of novel objects. Especially when vision and touch simultaneously are envisioned for learning object models, a representation able to incorporate prior shape knowledge and heterogeneous uncertain sensor feedback is paramount to fusing them in a coherent way. Moreover, by embedding a notion of uncertainty in shape representation allows to more effectively bias the active search for new tactile cues. In this paper, we firstly represent the shape of an object as a Gaussian Process (GP). Then, using the concept that the 0-levelset of the GP — the surface of the approximated object — is an implicitly defined manifold, we extend the AtlasRRT algorithm to simultaneously: (i) build an atlas via continuation methods that locally parameterizes the object and that is used to select the next-best touch, and (ii) use an RRT-like strategy to devise directions for the expansion of the atlas to trade completeness in the exploration for efficiency. We integrate this strategy in a framework for iterative learning the object shape and implement a tactile exploration scenario in the bimanual setting of our Vito robot. The experimental results confirm that the devised methodology yields better models and does it with a reduced number of touches.

**Keywords** Active exploration · Next-best tactile action · Shape modelling

## 1 Introduction

One of the main reasons that makes autonomous grasping tasks very challenging is that object properties required for grasp planning like shape and friction are not known in advance. This requires robots to perceive objects around them based on sensory information. However, sensory systems are prone to errors. As an example, when considering vision, some sources of noise are imperfect scene segmentation, occlusions, and poor lighting conditions.

Although for robotic grasp planning the use of vision has been studied more in depth by Kragic and Christensen (2002), the outperforming capabilities of humans in interacting with the environment come from rich sensory information where both visual and haptic modalities contribute to the combined percept. Working toward this ability in robots, the goal of our work is to complement visual information with tactile sensing in order to acquire 3D object models.

Even if tactile perception needs have been authoritatively spelled out in Bajcsy (1988) in the 1980's and early perception algorithms date back to the same years Grimson and Lozano-Perez (1984), Faugeras and Hebert (1983), Shekhar et al (1986), Bajcsy et al (1989), touch-based perception has lagged behind vision for two main reasons. The first is technological: standardized touch sensors are not easily available and have to be hand crafted for the specific robot and task. The second is intrinsic to the perception modality which requires the mechanical interaction of the sensor with the object being perceived with its inevitable perturbation and, to

---

This work is supported by EC-FP7-ICT-600918, PacMan.

C. J. Rosales, F. Spinelli, and M. Gabiccini  
Centro di Ricerca “E. Piaggio”, Univ. di Pisa, Italy.  
Tel.: +39 (050) 2217050  
E-mail: carlos.rosales@for.unipi.it

C. Zito and J. L. Wyatt  
Intelligent Robotics Laboratory, Univ. of Birmingham, UK.  
Tel.: +44 (0) 121 415 8722  
E-mail: cxz004@cs.bham.ac.uk

minimize this effect, calls for a complex control of the ongoing movement of the sensor: requirement which is completely absent, e.g., in vision.

The scenario we pursue is motivated by tactile exploration when other sensor modalities, like vision, already provided initial and incomplete information on object shape. More in details, we provide a systematic methodology to plan the next-best tactile exploration action. This is intrinsically a contact hypothesis that needs to be accepted or discarded after execution. Despite being the hypothesis verified or falsified, it helps to improve the object shape prediction up to a pre-specified variability.

The object shape representation we employ is a probabilistic one and it is based on Gaussian Process (GP), a machine learning formalism for nonlinear function estimation that naturally provides a quantification of the uncertainty about object point estimates, i.e. the variance of the estimate. Being the 0-levelset of the approximating function an implicitly defined surface that represents the outer surface of an object, it comes handy to interpret it as a manifold and build on recent results on sample-based exploration of general manifolds to extend such algorithms to define hypotheses on where to sample next — next-best touch — to reduce uncertainty. More in details, without the need to embed the manifold in its ambient space, we build a set of charts (atlas) that locally parameterizes it, and select among the points on the current atlas the one associated to the maximum variance: this represents the location where the next touch will be directed. Then, the growth of the atlas itself does not follow a predefined sequence of steps, but an RRT-like strategy is employed to devise random direction of expansions for the atlas. The process is then repeated until the maximum variance is below a predefined threshold. This trades completeness in the exploration for efficiency: RRT drives the growth of the atlas toward regions of the object surface that are more uncertain, delaying the refinement of areas that have been already explored.

The structure of the paper is described in the following: in Sec. 2 we first review previous work related to tactile exploration and object shape representations. In Sec. 3.3 we clearly state the problem we aim to solve and in Sec. 4 we present the envisioned approach for its solution. The experimental results and their discussion are presented in Sec. 5. Finally, conclusions and points deserving further attention are given in Sec. 6.

## 2 Related work

### 2.1 State of the art

**Early work** The early work by Allen and Bajcsy (1987) presents a hierarchical representation of the object. The tactile exploration strategy to refine is driven by local geometry features. This is engaged by using surface tracing algorithms. In that work, it is literally said: “Given a starting and ending point on a surface, the sensor traces along the surface reporting its contact positions and normals as it moves along.” However, no indication is given in how to determine those starting and ending points on the surface. Allen and Michelman (1990) blah blah

**Exploration for reducing uncertainty in the object pose only**

Petrovskaya and Khatib (2011)

**Exploration for estimating the object shape**

Bjorkman et al (2013) follow the covariance function derived by Williams and Fitzgibbon (2007). However, they have a predefined set of tactile glances that are not updated as the object model gets refined as successive touches are performed. They are more interested in object categorization than in having the object surface represented precisely.

This is the closest work to ours among the references. The main difference being the space in which the best-next exploratory action is computed and the terminal condition for the overall algorithm, and the descriptor. The Zernike moments imply an extra computation time, and lack of a probabilistic interpretation, which it is one of the good things about using Gaussian Process in first place. The exploratory actions are searched in a discrete space in the vertical direction and the approach angle, which seem extrinsic to the shape model. Using this space does not guarantee that the new observations will be on the desired shape region to be explored. Finally, the number of actions, or touches in this case, are limited to a certain number, and then ordered according to the closest point on the implicit function with higher variance. In contrast, we set the highest expected variance in the shape prediction, so we explore until, probabilistically speaking, that goal is achieved.

**Exploration for estimating the object shape and grasping**

Dragiev et al (2011) first work that used GPIS representation and employed the representation also to guide grasping actions. However, this work concentrates only on the mean of the shape distribution, i.e. the maximum a posteriori (MAP) estimate of the shape and that practically ignores one of the gains of the GP — the error bars.

Dragiev et al (2013) offers also a way to give preference to regions of the model with particular certainty

level and introduce the notion of explore-grasp and exploit-grasp primitives.

**Tactile shape reconstruction based on Kalman filter**

Meier et al (2011)

**Tactile exploration based on Dynamic Potential Fields**

Bierbaum et al (2008)

**Bimanual compliant tactile exploration** Sommer et al

(2014) uses GP representation to smooth noisy point data but does not exploit the GP representation to define specific exploratory strategies.

## 2.2 Background

Regarding the shape representation...

Faria et al (2010) probabilistic representations of shapes

Using Gaussian Process for shape modelling is having an intensive development in recent years (Mahler et al 2015; Rosales et al 2014; Bjorkman et al 2013; Dragiev et al 2011), due to its versatility to accommodate noisy information, provide smooth regression of data, and a natural way to fuse different sources of information (Rasmussen and Williams 2006).

Manifold gaussian process: Calandra et al (2014) “The quality of a Gaussian Process model strongly depends on an appropriate covariance function.”

The tree is constructed incrementally from samples drawn randomly from the search space and is inherently biased to grow towards large unsearched areas of the problem Space-filling trees are Rapidly-exploring random trees LaValle (2011)

Continuation method for implicitly defined surfaces Henderson (1993)

More general continuation method used in a more complex scenario combined with rapidly-exploring random trees (LaValle 2011) by Jaillet and Porta (2013), where the idea is to explore the part of the manifold defined by several kinematic loop constraints that solves the motion planning query.

Zhu et al (2009) successfully recover non-rigid shape, means that gaussian processes can be used

Dragiev et al (2011) uses a squared-exponential-like covariance function. This is selection seems to be in agreement with the use is given to the shape estimation as a gradient field that drives the reach-to-grasp controller in a smooth way.

Rosales et al (2014) exploits the Gaussian Process modelling the object shape to find geodesic trajectories on the surface that are later followed by an exploratory probe to gather frictional properties. However, no further use of that property is given.

Mahler et al (2015) proposes similar ideas as those given in Dragiev et al (2011), in fact they follow the

same covariance function for the shape modelling, but adds a local optimization step to have a more elaborated grasp controller that drives the hand to the most-likely successful object grasp using a metric that involves the well-known Ferrari-Canny measure.

Williams and Fitzgibbon (2007) derives the thin-plate covariance function for 3D shapes represented by implicit functions. The property of the thin-plate function to keep the tendency outside the training data is ideal for tactile exploration (Williams and Fitzgibbon 2007, Fig. 2)

Still not sure whether it should go in intro, soa, or background. Li et al (2016)

## 3 Scope

We rely on previous works that have proved useful object shape representations via Gaussian Processes in the derivation of grasp controllers.

### 3.1 Equipment specification

The vision system should be able to provide an initial guess on the object location and observation points on the surface. This is not an strict requirement, since one might be completely blind and still recognize objects around (Petrovskaya and Khatib 2011, e.g.). However, the use of an initial set of observation can be done quickly using RGBD sensors to speed up the overall process.

It is true that mounting the camera as the end-effector of a robot might allow a full object scanning, but there might be cases where this might not be possible either due to reaching limitations or even sensing capabilities on reduced spaces.

### 3.2 Assumptions

We assume that a point cloud of a segmented object is provided. However, we provide an optional pre-processing step that shows a reasonably way to do it when the object model is unknown.

Workspace. This is not to be thought as the workspace of a robot, but of the strategy algorithm that works on top of the object shape model. That is, we assume that we are modelling and exploring household objects that can be grasped and manipulated using a human-sized hand. This is specially useful in cases where the predicted shape is not bounded using the given observations, so this workspace will shrink the predicted shape

to prevent the robot from going to an empty space, or worst, hitting undesirebly.

We consider contact to appear when the force torque sensor measures a value higher than 1N. The robot motion is set slow such that inertial forces are not reflected on the measurements. This is done for safety reasons, since in the phase when the robot is approaching, there is a stop signal if this threshold is superated.

### 3.3 Problem statement

Considering the equipment limitations 3.1 and the assumptions 3.2, the problem for which we propose a solution can be stated as:


Given a point cloud of an object,  $\mathcal{O}$ , find a suitable representation for the shape that can be exploited for tasks such as object identification and grasping, and a coherent strategy to improve the representation independent of external references, i.e. intrinsic or exploiting the representation, and flexible enough to generate different exploratory actions such as poking points and sliding paths.

## 4 Solution

First, we provide a pre-processing step with the objective of having a segmented point set of the object  $??$ . This is then used to create the probabilistic shape representation  $??$ . This is then exploited in

### 4.1 Object Segmentation

(Hudson et al 2012, Sec. III.A) provides good candidates for object segmentation that are well oriented to object grasp, manipulation, and for our purposes, exploration. In fact, the combination of their “Table Plane Estimation” with their “Volume-Based Segmentation” yields the ubiquitous tabletop object segmentation (Muja and Ciocarlie 2014). However, to improve the rechability of the exploration, we prefer to hold the object in one hand-arm system and explore with another, as described in Sec. 3. Thus, our selected approach for object segmentation is simpler than those approaches. The difficulties is in measuring the configuration of a soft and adaptable gripper that keeps the object in position to filter out the points belonging to the hand-arm system. For this purpose, one can rely in body-type measurements instead of traditional encoders, as described by Santaera et al (2015). Once the hand-arm system pose is measured, then a trivial passthrough filter with slightly scaled bounding boxes

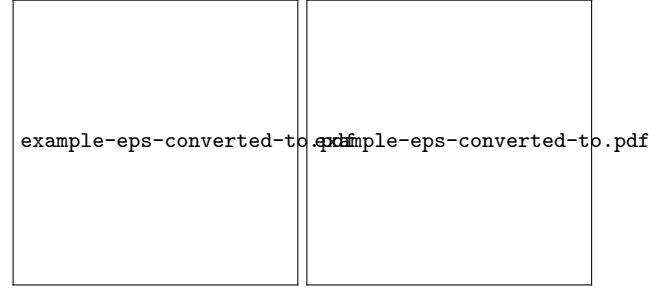

**Fig. 1** A picture of the in-hand object segmentation using a soft-adaptive hand on a 7-dof arm in the real scene (left) and the resulting point cloud (right).

of the robot geometry is used to obtain a point cloud of the object isolated from the scene. Algorithm 1 shows the pseudo-code of this procedure, indicating the actual. Additionally,

It is worth noting, that this module is here just to show how visual and tactile data might be merged into a single shape model. But as a matter of fact, the initial training point set can be empty and start by simply probing naively towards the gripper to initialize the training set.

---

#### Algorithm 1: In-hand object segmentation.

---

**segmenInHand**( $\mathcal{R}, \kappa, \delta$ )

**input** : The point cloud of the scene  $\mathcal{P}$ , the robot model,  $\mathcal{R}$ , its visual geometry inflation factor,  $\kappa$ , and the downsampling resolution,  $\delta$ .

**output**: The point cloud of the object isolated from the scene,  $\mathcal{O}$ .

```

1  $\mathbf{s} \leftarrow \text{LISTENTOROBOTSTATE}(\mathcal{R})$ 
2  $\mathcal{B} \leftarrow \text{COMPUTEBOUNDINGBOXES}(\mathcal{R}, \mathbf{s}, \kappa)$ 
3  $\mathcal{O} \leftarrow \text{APPLYPASSTROUGHFILTER}(\mathcal{P}, \mathcal{B})$ 
4  $\mathcal{O} \leftarrow \text{APPLYDOWNSAMPLEFILTER}(\mathcal{O}, \delta)$ 
5 return  $\mathcal{O}$ 
```

---

The `LISTENTOROBOTSTATE( $\cdot$ )` method considers the measurement of soft-adaptive mechanism

### 4.2 Shape modelling

What makes a good surface representation?

- Accurate (we handle this with probability)
- Concise (we might want this)
- Intuitive specification (we don’t need this)
- Local support
- Affine invariant
- Arbitrary topology (we need this)
- Guaranteed continuity (we need this)
- Natural parameterization (we don’t need this)
- Efficient display (we shouldn’t need this)



**Fig. 2** Different shape representations

- Efficient intersections (we could need this)  
Looks like implicitly defined surfaces are the best...  
How do we define implicit function?
- Algebraics
- Blobby models
- Skeletons
- Procedural
- Samples
- Variational
- Gaussian Process !  
Variational surfaces:
- Advantages:
  - Easy to test if point is on surface
  - Easy to compute intersections/unions/differences
  - Easy to handle topological changes
- Disadvantages:
  - Indirect specification of surface
  - Hard to describe sharp features
  - Hard to enumerate points on surface !
  - Slow rendering !

Except from rendering and surface explicit related things... but we don't actually need that except from debug.

#### 4.3 Exploration strategy

We don't need all the conditions described in Jaillet and Porta (2013, Fig. 8).

A chart, for us, contains the center  $\mathbf{x}_c$ , such that  $\mathbb{E}(\mathcal{S}(\mathbf{x}_c)) \approx 0$ , the size  $R = \mathbb{V}(\mathcal{S}(\mathbf{x}_c))$  and the gradient information at the center  $\frac{\partial \mathcal{S}}{\partial \mathbf{x}} \approx$ .

---

#### Algorithm 2: Gaussian Process regression

---

**createGaussianProcess**( $X$ )  
**input** : The training data,  $\mathcal{X}$ , in the form of a point cloud.  
**output**: The Gaussian Process that models the object shape.  
1  $\mathcal{D} \leftarrow \text{DEMEANNORMALIZEANDLABEL}(\{\mathcal{X}, \mathbf{0}_{\text{sizeOf}(\mathcal{X})}\})$   
2 **ADDLABELEDPOINT**( $\{\mathbf{0}_3, -1\}, \mathcal{D}$ )  
3 **ADDLABELEDPOINTS**( $\{\text{SPHERE}(\mathbf{0}_3, 1.1, N), +\mathbf{1}_N\}, \mathcal{D}$ )  
4  $\mathcal{G} \leftarrow \text{DOREGRESSION}(\mathcal{D})$   
5 **return**  $\mathcal{G}$

---



---

#### Algorithm 3: Best-next tactile action planner

---

**exploreGPAtlasRRT**( $\mathcal{M}, \mathbb{V}_{max}, \Omega$ )  
**input** : A Gaussian Process model,  $\mathcal{M}$ , the variance threshold,  $\mathbb{V}_{max}$ , and the set of criteria to decide how to search and end the exploration,  $\Omega$ .  
**output**: The best next action,  $\mathcal{P}$ , in the form of a path, if any, or  $\emptyset$  otherwise.  
1  $\mathcal{P} \leftarrow \emptyset$   
2  $\mathcal{A} \leftarrow \text{INITGPATLAS}(\mathcal{M})$   
3  $\mathcal{T} \leftarrow \text{INITRRTs}(\mathcal{M})$   
4 **while**  $\text{ISENDCONDITIONMET}(\mathcal{A}, \Omega)$  **do**  
5    $\mathcal{T}_i \leftarrow \text{SELECTTREETOEXPAND}(\mathcal{T}, \Omega \rightarrow \text{policy})$   
6    $\mathcal{C}_{i,k} \leftarrow \text{SELECTCHART}(\mathcal{T}_i, \Omega)$   
7    $\chi_{i,k} \leftarrow \text{SAMPLECHART}(\mathcal{C}_{i,k}, \Omega)$   
8    $\mathbf{x}_{i,k} \leftarrow \text{SELECTCANDIDATE}(X_{i,k})$   
9    $\mathbf{x}_{i,k} \leftarrow \text{GENERATE}(\mathbf{x}_{i,k}, \mathcal{M})$   
10 **return**  $\emptyset$

---

The validity of each chart is defined as  $\Phi^T \Phi \leq \cos(\alpha) \|\mathbf{u}_{j,k}\| \leq \mathbb{V}(\mathcal{S}_{j,k})$

The area covered by a given chart on the surface is never empty, and it always includes the center of the chart,  $\mathbf{x}_i$ , but its shape depends on the local shape. However, in this work, we are not interested in computing this area, since we will be traversing trees using compliance control to compensate for the errors between linear interpolation between  $\mathbf{x}_i$  and  $\mathbf{x}_j$  in 3D and actual arbitrary shape countour joining them.

A chart is selected at random with uniform distribution among the all charts in the leafs

#### 4.4 Solution in a nutshell

The methods from the previous sections are independent from each other, being the last one, Algorithm 4, our main contribution. Here, we show an example of how these methods intercommunicate to estimate the shape of an unknown object.

During the **APPROACHTo** (line 12) (**MOVEAWAY**, line 20) phases, the robot uses position control and standard motion planning techniques with collision avoidance. Since we are modelling the shape, we need to en-

---

**Algorithm 4:** Probabilistic object shape modelling

---

**ObjectShapeExploration**( $P, \mathbb{V}_{des}$ )

**input** : An initial point cloud of the scene,  $P$ , if any, for instance from visual object segmentation, and the desired variance,  $\mathbb{V}_{des}$ , for the overall shape estimation.

**output**: The estimated object shape,  $\mathcal{S}$ 

```

1  $\mathcal{S} \leftarrow \emptyset$ 
2 if ISEMPTY( $P$ ) then
3    $\chi \leftarrow \text{NAIVEPROBE}()$ 
4 else
5    $\chi \leftarrow \text{SEGMENTOBJECT}(P)$ 
6  $\mathcal{S} \leftarrow \text{CREATEGAUSSIANPROCESS}(\chi)$ 
7 while true do
8    $\Gamma \leftarrow \text{EXPLOREGPATLASRRT}(\mathcal{S}, \mathbb{V}_{des})$ 
9   if  $\Gamma = \emptyset$  then
10    return  $\mathcal{S}$ 
11  else
12    APPROACHTO( $\Gamma$ )
13     $\tilde{\chi} \leftarrow \text{PROBEOBJECT}(\Gamma)$ 
14    if WASCONTACTDETECTED() then
15       $v \leftarrow \mathbf{0}_{\text{sizeOf}(\tilde{\chi})}$ 
16    else
17       $v \leftarrow \mathbf{1}_{\text{sizeOf}(\tilde{\chi})}$ 
18    ADDLABELPOINTS( $\{\tilde{\chi}, v\}, \chi$ )
19     $\mathcal{S} \leftarrow \text{CREATEGAUSSIANPROCESS}(\chi)$ 
20    MOVEAWAY()
```

---

sure that everytime the robot moves close (away) from the object, it does not collide with the object. It is tentative to use the current estimated shape, but since we are not actually computing it explicitly in our approach, we choose the bounding sphere as the collision geometry of the object. Thus the robot moves towards (away from) the surface at the contact location in the normal direction until reaching the bounding sphere. After that, a standard motion planning is used to approach the object (get to the rest position).

The PROBEOBJECT (line 13) phase is engaged once the robot is within the bounding sphere. The robot uses Cartesian impedance control, with the Cartesian force, pose and impedance set properly for the given setup. These implementation details are given in the next section. Since we don't actually know where the surface is, we need to whether the robot actually touched something or not, in order to properly label the acquisition (lines 15 and 17)

The method finishes when EXPLOREGPATLASRRT (line 8) described in Algorithm 2 has explore sufficiently the estimated shape and could not find an exploratory action  $\Gamma$  (line 10), i.e. the object shape is probabilistically estimated within the 95% of the confidence interval computed from  $\mathbb{V}_{des}$ .

The complete solution of the problem as stated in 3 is depicted in Algorithm 4.

#### 4.5 Parameters and probabilistic completeness

We can safely assume that the surface has only one component when seen as a manifold.

### 5 Experiments

#### 5.1 Apparatus

We repeat the exploratory probe given in Rosales et al (2014). The probe is composed of a semispherical tip (radius 2cm) on top of an ATI Nano 17 and an in-parallel passive compliant coupler to safely attach it as the end-effector of the 7 degrees of freedom KUKA LWR 4+ robot arm.

The object is grasped by a soft-hand. The assumption that the object is unknown holds to the adaptability of the hand. There is no need to have a precise model of the object, but a rough approximation of the shape. The hand softness will do the rest. This setup complies with the specifications given in Sect. 3.1.

#### 5.2 Results

### 6 Conclusions and future directions

We have developed...

As an immediate future research is the study of manifold Gaussian Process as presented by Calandra et al (2014), so the application of the AtlasRRT as presented by Jaillet and Porta (2013) can be applied in a more precise manner.

**Acknowledgements** The authors would like to thank E. Farnioli for the fruitful discussions and initial matlab implementations about Gaussian Processes, as well as to G. Santaera for the support with the sensorized glove.

### References

- Allen P, Bajcsy R (1987) Robotic object recognition using vision and touch. In: Proceedings of the 9th International Joint Conference on Artificial Intelligence, pp 1131–1137
- Allen PK, Michelman P (1990) Acquisition and interpretation of 3-D sensor data from touch. IEEE Transactions on Robotics and Automation 6(4):397–404
- Bajcsy R (1988) Active perception. Proceedings of the IEEE 76(8):966–1005
- Bajcsy R, Lederman S, Klatzky RL (1989) Machine systems for exploration and manipulation a conceptual framework and method of evaluation. Tech. Rep. MS-CIS-89-03

- Bierbaum A, Rambow M, Asfour T, Dillmann R (2008) A potential field approach to dexterous tactile exploration of unknown objects. In: 8th IEEE-RAS International Conference on Humanoid Robots, pp 360–366
- Bjorkman M, Bekiroglu Y, Hogman V, Kragic D (2013) Enhancing visual perception of shape through tactile glances. In: IEEE/RSJ International Conference on Intelligent Robots and Systems, pp 3180–3186
- Calandra R, Peters J, Rasmussen CE, Deisenroth MP (2014) Manifold gaussian processes for regression. URL <http://arxiv.org/abs/1402.5876>
- Dragiev S, Toussaint M, Gienger M (2011) Gaussian process implicit surfaces for shape estimation and grasping. In: Proceedings of the IEEE International Conference on Robotics and Automation, pp 2845–2850
- Dragiev S, Toussaint M, Gienger M (2013) Uncertainty aware grasping and tactile exploration. In: IEEE International Conference on Robotics and Automation, pp 113–119
- Faria DR, Martins R, Lobo J, Dias J (2010) Probabilistic representation of 3D object shape by in-hand exploration. In: IEEE/RSJ International Conference on Intelligent Robots and Systems, IEEE, pp 1560–1565
- Faugeras O, Hebert M (1983) A 3-d recognition and positioning algorithm using geometrical matching between primitive surfaces. In: Proc. 8th Int. Joint Conf. Artif. Intell., pp 996–1002
- Grimson WEL, Lozano-Perez T (1984) Model-based recognition and localization from sparse range or tactile data. *J Robot Res* 3(3):3–35
- Henderson ME (1993) Computing implicitly defined surfaces: Two parameter continuation. Tech. Rep. 18777, T. J. Watson Research Center, IBM Research Division
- Hudson N, Howard T, Ma J, Jain A, Bajracharya M, Myint S, Kuo C, Matthies L, Backes P, Hebert P, Fuchs T, Burdick J (2012) End-to-end dexterous manipulation with deliberate interactive estimation. In: IEEE International Conference on Robotics and Automation, pp 2371–2378
- Jaillet L, Porta JM (2013) Path planning under kinematic constraints by rapidly exploring manifolds. *IEEE Transactions on Robotics* 29(1):105–117
- Kragic D, Christensen HI (2002) Survey on visual servoing for manipulation. Tech. Rep. ISRN KTH/NA/P-02/01-SE, Stockholm, Sweden
- LaValle SM (2011) Motion planning. *IEEE Robotics & Automation Magazine* 18(1):79–89
- Li M, Hang K, Kragic D, Billard A (2016) Dexterous grasping under shape uncertainty. *Robotics and Autonomous Systems* 75
- Mahler J, Patil S, Kehoe B, van den Berg J, Ciocarlie M, Abbeel P, Goldberg K (2015) GP-GPIS-OPT: Grasp planning with shape uncertainty using gaussian process implicit surfaces and sequential convex programming. In: 2015 IEEE International Conference on Robotics and Automation, IEEE, pp 4919–4926
- Meier M, Schöpfer M, Haschke R, Ritter H (2011) A probabilistic approach to tactile shape reconstruction. *IEEE Transactions on Robotics* 27(3):630–635
- Muja M, Ciocarlie M (2014) Tabletop object perception ros package. URL <http://www.github.com/ros-interactive-manipulation/tabletop-object-perception>, last commit on Mar 19, 2014
- Petrovskaya A, Khatib O (2011) Global localization of objects via touch. *IEEE Transactions on Robotics* 27(3):569–585
- Rasmussen CE, Williams CKI (2006) Gaussian Processes for Machine Learning. The MIT Press
- Rosales C, Ajoudani A, Gabiccini M, Bicchi A (2014) Active gathering of frictional properties from objects. In: 2014 IEEE/RSJ International Conference on Intelligent Robots and Systems, pp 3982–3987
- Santaera G, Luberto E, Serio A, Gabiccini M, Bicchi A (2015) Low-cost, fast and accurate reconstruction of robotic and human postures via IMU measurements. In: IEEE International Conference on Robotics and Automation, pp 2728–2735
- Shekhar S, Khatib O, Shimojo M (1986) Sensor fusion and object localization. In: IEEE International Conference on Robotics and Automation, pp 1623–1628
- Sommer N, Li M, Billard A (2014) Bimanual compliant tactile exploration for grasping unknown objects. In: IEEE International Conference on Robotics and Automation, IEEE, pp 6400–6407
- Williams O, Fitzgibbon A (2007) Gaussian process implicit surfaces. In: PASCAL - Pattern Analysis, Statistical Modelling and Computational Learning - Gaussian Processes in Practice Workshop
- Zhu J, Hoi SCH, Lyu MR (2009) Nonrigid shape recovery by gaussian process regression. In: IEEE Conference on Computer Vision and Pattern Recognition, pp 1319–1326