

GPAAtlasRRT: A probabilistic next-best tactile action strategy for object shape modelling and exploration

Carlos J. Rosales · Claudio Zito · Federico Spinelli ·
Marco Gabiccini · Jeremy L. Wyatt

Received: date / Accepted: date

Abstract Information on object shape is a fundamental parameter for robot grasps to be successful. However, incomplete perception and noisy measurements impede obtaining accurate models of novel objects. Especially when vision and touch simultaneously are envisioned for learning object models, a representation able to incorporate prior shape knowledge and heterogeneous uncertain sensor feedback is paramount to fusing them in a coherent way. Moreover, by embedding a notion of uncertainty in shape representation allows to more effectively bias the active search for new tactile cues. In this paper, we firstly represent the shape of an object as a Gaussian Process (GP). Then, using the concept that the 0-levelset of the GP — the surface of the approximated object — is an implicitly defined manifold, we extend the AtlasRRT algorithm to simultaneously: (i) build an atlas that locally parameterizes the object via continuation, and (ii) use the atlas to devise directions for its expansion that maximize information gain suggesting the next best touch. We integrate this strategy in a framework for iterative learning the object shape and implement a tactile exploration scenario in a bimanual setting. The experimental results confirm that the devised methodology yields better models and does it with a reduced number of touches.

Keywords Active exploration · Next-best tactile action · Shape modelling

1 Introduction

One of the main reasons that makes autonomous grasping tasks very challenging is that object properties required for grasp planning like shape and surface properties

8 < - - - - 8 < - - - - 8 < - - - - 8 < - - - -

General guidelines : Bajcsy et al (1989)

Active visual perception: Bajcsy (1988)

Vision-based exploration is the most studied, perhaps due to its non-invasive nature, which avoids the contact between rigid bodies which is the cause of most headaches in physics modelling, simulation and control.

As very well said by Petrovskaya and Khatib (2011), even when initial works date back to the 80's, tactile perception has not been addressed as deeply as the non-invasive counterpart, visual perception. Besides the need of being actively controlled, tactile sensors typically required ad-hoc mechanical devices.

“Touch-based perception has not been studied in as much depth as vision because standardized touch sensors are not as easily available. In many situations, tactile sensors have to be hand crafted specifically for the robot and the task. This complicates comparisons between methods and slows progress in tactile perception. However, recently there has been a surge of interest in the field due to the necessity of touch-based perception in service applications”

Whereas Petrovskaya and Khatib (2011) is more interested in the object pose estimation problem, here we are more interested in the object shape modelling, sort

This work is supported by EC-FP7-ICT-600918, PacMan.

C. J. Rosales, F. Spinelli, and M. Gabiccini
Centro di Ricerca “E. Piaggio”, Univ. di Pisa, Italy.
Tel.: +39 (050) 2217050
E-mail: carlos.rosales@for.unipi.it

C. Zito and J. L. Wyatt
Intelligent Robotics Laboratory, Univ. of Birmingham, UK.
Tel.: +44 (0) 121 415 8722
E-mail: cxz004@cs.bham.ac.uk

of in the mapping of rather than localization in a SLAM problem.

On active touch sensing Prescott et al (2011)

Differentiate from active touch for localization, here another example: Hebert et al (2013).

Justify the use of a intrinsic tactile sensor over a tactile array.

ITS are more precise and less noisy. It provides the contact normal directly in sensor frame.

Tactile arrays provide multiple-point measurements. They do not provide directly the normal in sensor frame. forward kinematics is required over noisy joint measurements, or in fixed configurations that limit exploration mobility. Up to a point that a typically a complex framework is needed to exploit its grasping and touching properties

With ITS, the computation will be trivial. The disadvantage is that it is a single-point measurement. Poking strategies, like in Petrovskaya and Khatib (2011), or trajectories strategies like in Rosales et al (2014).

On how to do classification...

Shape representation and descriptor review Zhang and Lu (2004)

In this work, we provide a systematic methodology to plan the next-best tactile exploratory action. The tactile exploratory action is intrinsically a contact hypothesis that need to be accepted or discarded after execution. Should the result be any of the two, it helps to improve the object shape prediction up to a pre-specified variability. In contrast to Bjorkman et al (2013), we propose the same shape representation as descriptor for classification purposes using shape matching techniques (Belongie et al 2002). The scope and problem statement is detailed in Sect. 3. The proposed solution is broaden in Sect. 4. The experimental results and discussion is presented in Sect. 5. Finally, the conclusions and points deserving further attention as given in Sect. 6.

2 Related work

2.1 State of the art

The early work by Allen and Bajcsy (1987) presents a hierarchical representation of the object. The tactile exploration strategy to refine is driven by local geometry features. This is engaged by using surface tracing algorithms. In that work, it is literally said: “Given a starting and ending point on a surface, the sensor traces along the surface reporting its contact positions and normals as it moves along.” However, no indication is given in how to determine those starting and ending

points on the surface. Allen and Michelman (1990) blah blah

Bjorkman et al (2013) follows the covariance function derived by Williams and Fitzgibbon (2007). This is the closest work to ours among the references. The main difference being the space in which the best-next exploratory action is computed and the terminal condition for the overall algorithm, and the descriptor. The Zernike moments imply an extra computation time, and lack of a probabilistic interpretation, which it is one of the good things about using Gaussian Process in first place. The exploratory actions are searched in a discrete space in the vertical direction and the approach angle, which seem extrinsic to the shape model. Using this space does not guarantee that the new observations will be on the desired shape region to be explored. Finally, the number of actions, or touches in this case, are limited to a certain number, and then ordered according to the closes point on the implicit function with higher variance. In contrast, we set the highest expected variance in the shape prediction, so we explore until, probabilistically speaking, that goal is achieved.

These two works, Bjorkman et al (2013) and Dragiev et al (2013) are very very similar to our approach.

More similar works, Bierbaum et al (2008), Meier et al (2011), Sommer et al (2014)

2.2 Background

Regarding the shape representation...

Faria et al (2010) probabilistic representations of shapes

Using Gaussian Process for shape modelling is having an intensive development in recent years (Mahler et al 2015; Rosales et al 2014; Bjorkman et al 2013; Dragiev et al 2011), due to its versatility to accommodate noisy information, provide smooth regression of data, and a natural way to fuse different sources of information (Rasmussen and Williams 2006).

Manifold gaussian process: Calandra et al (2014) “The quality of a Gaussian Process model strongly depends on an appropriate covariance function.”

The tree is constructed incrementally from samples drawn randomly from the search space and is inherently biased to grow towards large unsearched areas of the problem Space-filling trees are Rapidly-exploring random trees LaValle (2011)

Continuation method for implicitly defined surfaces Henderson (1993)

More general continuation method used in a more complex scenario combined with rapidly-exploring random trees (LaValle 2011) by Jaillet and Porta (2013),

where the idea is to explore the part of the manifold defined by several kinematic loop constraints that solves the motion planning query.

Zhu et al (2009) successfully recover non-rigid shape, means that gaussian processes can be used

Dragiev et al (2011) uses a squared-exponential-like covariance function. This is selection seems to be in agreement with the use is given to the shape estimation as a gradient field that drives the reach-to-grasp controller in a smooth way.

Rosales et al (2014) exploits the Gaussian Process modelling the object shape to find geodesic trajectories on the surface that are later followed by an exploratory probe to gather frictional properties. However, no further use of that property is given.

Mahler et al (2015) proposes similar ideas as those given in Dragiev et al (2011), in fact they follow the same covariance function for the shape modelling, but adds a local optimization step to have a more elaborated grasp controller that drives the hand to the most-likely succesful object grasp using a metric that involves the well-known Ferrari-Canny measure.

Williams and Fitzgibbon (2007) derives the thin-plate covariance function for 3D shapes represented by implicit functions. The property of the thin-plate function to keep the tendency outside the training data is ideal for tactile exploration (Williams and Fitzgibbon 2007, Fig. 2)

Still not sure whether it should go in intro, soa, or background. Li et al (2016)

3 Scope

We rely on previous works that have proved useful object shape representations via Gaussian Process in the derivation of grasp controllers.

3.1 Equipment specification

The vision system should be able to provide an initial guess on the object location and observation points on the surface. This is not an strict requirement, since one might be completely blind and still recognize objects around (Petrovskaya and Khatib 2011, e.g.). However, the use of an initial set of observation can be done quickly using RGBD sensors to speed up the overall process.

It is true that mounting the camera as the end-effector of a robot might allow a full object scanning, but there might be cases where this might not be possible either due to reaching limitations or even sensing capabilities on reduced spaces.

3.2 Assumptions

We assume that a point cloud of a segmented object is provided. However, we provide an optional pre-processing step that shows a reasonably way to do it when the object model is unknown.

Workspace. This is not to be thought as the workspace of a robot, but of the strategy algorithm that works on top of the object shape model. That is, we assume that we are modelling and exploring household objects that can be grasped and manipulated using a human-sized hand. This is specially useful in cases where the predicted shape is not bounded using the given observations, so this workspace will shrink the predicted shape to prevent the robot from going to an empty space, or worst, hitting undesirebly.

We consider contact to appear when the force torque sensor measures a value higher than 1N. The robot motion is set slow such that inertial forces are not reflected on the measurements. This is done for safety reasons, since in the phase when the robot is approaching, there is a stop signal if this threshold is superated.

3.3 Problem statement

Considering the equipment limitations 3.1 and the assumptions 3.2, the problem for which we propose a solution can be stated as:

Given a point cloud of an object, \mathcal{O} , find a suitable representation for the shape that can be exploited for tasks such as object identification and grasping, and a coherent strategy to improve the representation independent of external references, i.e. intrinsic or exploiting the representation, and flexible enough to generate different exploratory actions such as poking points and sliding paths.

4 Solution

First, we provide a pre-processing step with the objective of having a segmented point set of the object \mathcal{P} . This is then used to create the probabilistic shape representation \mathcal{P} . This is then exploited in

4.1 Object Segmentation

(Hudson et al 2012, Sec. III.A) provides good candidates for object segmentation that are well oriented to object grasp, manipulation, and for our purposes, exploration. In fact, the combination of their “Table

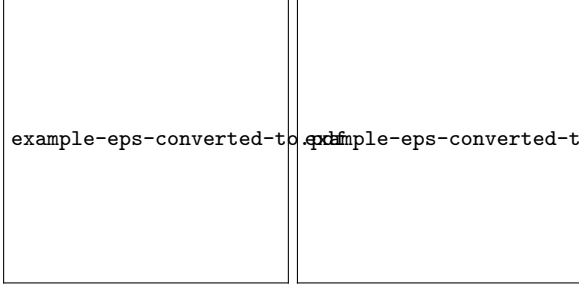


Fig. 1 A picture of the in-hand object segmentation using a soft-adaptive hand on a 7-dof arm in the real scene (left) and the resulting point cloud (right).

Plane Estimation” with their “Volume-Based Segmentation” yields the ubiquitous tabletop object segmentation (Muja and Ciocarlie 2014). However, to improve the reliability of the exploration, we prefer to hold the object in one hand-arm system and explore with another, as described in Sec. 3. Thus, our selected approach for object segmentation is simpler than those approaches. The difficulties is in measuring the configuration of a soft and adaptable gripper that keeps the object in position to filter out the points belonging to the hand-arm system. For this purpose, one can rely in body-type measurements instead of traditional encoders, as described by Santaera et al (2015). Once the hand-arm system pose is measured, then a trivial passthrough filter with slightly scaled bounding boxes of the robot geometry is used to obtain a point cloud of the object isolated from the scene. Algorithm 1 shows the pseudo-code of this procedure, indicating the actual. Additionally,

It is worth noting, that this module is here just to show how visual and tactile data might be merged into a single shape model. But as a matter of fact, the initial training point set can be empty and start by simply probing naively towards the gripper to initialize the training set.

Algorithm 1: In-hand object segmentation.

segmenInHand($\mathcal{R}, \kappa, \delta$)
input : The point cloud of the scene \mathcal{P} , the robot model, \mathcal{R} , its visual geometry inflation factor, κ , and the downsampling resolution, δ .
output: The point cloud of the object isolated from the scene, \mathcal{O} .

- 1 $\mathbf{s} \leftarrow \text{LISTENTOROBOTSTATE}(\mathcal{R})$
- 2 $\mathcal{B} \leftarrow \text{COMPUTEBOUNDINGBOXES}(\mathcal{R}, \mathbf{s}, \kappa)$
- 3 $\mathcal{O} \leftarrow \text{APPLYPASSTROUGHFILTER}(\mathcal{P}, \mathcal{B})$
- 4 $\mathcal{O} \leftarrow \text{APPLYDOWNSAMPLEFILTER}(\mathcal{O}, \delta)$
- 5 **return** \mathcal{O}

The `LISTENTOROBOTSTATE(\cdot)` method considers the measurement of soft-adaptive mechanism

4.2 Shape modelling

What makes a good surface representation?

- Accurate (we handle this with probability)
- Concise (we might want this)
- Intuitive specification (we don’t need this)
- Local support
- Affine invariant
- Arbitrary topology (we need this)
- Guaranteed continuity (we need this)
- Natural parameterization (we don’t need this)
- Efficient display (we shouldn’t need this)
- Efficient intersections (we could need this)

Looks like implicitly defined surfaces are the best...

How do we define implicit function?

- Algebraics
- Blobby models
- Skeletons
- Procedural
- Samples
- Variational
- Gaussian Process !

Variational surfaces:

- Advantages:
 - Easy to test if point is on surface
 - Easy to compute intersections/unions/differences
 - Easy to handle topological changes
- Disadvantages:
 - Indirect specification of surface
 - Hard to describe sharp features
 - Hard to enumerate points on surface !
 - Slow rendering !

Except from rendering and surface explicit related things... but we don’t actually need that except from debug.

Algorithm 2: Gaussian Process regression

createGaussianProcess(X)
input : The training data, \mathcal{X} , in the form of a point cloud.
output: The Gaussian Process that models the object shape.

- 1 $\mathcal{D} \leftarrow \text{DEMEANNORMALIZEANDLABEL}(\{\mathcal{X}, \mathbf{0}_{\text{sizeOf}(\mathcal{X})}\})$
- 2 $\text{ADDLABELEDPOINT}(\{\mathbf{0}_3, -1\}, \mathcal{D})$
- 3 $\text{ADDLABELEDPOINTS}(\{\text{SPHERE}(\mathbf{0}_3, 1.1, N), +\mathbf{1}_N\}, \mathcal{D})$
- 4 $\mathcal{G} \leftarrow \text{DOREGRESSION}(\mathcal{D})$
- 5 **return** \mathcal{G}



Fig. 2 Different shape representations

4.3 Exploration strategy

We don't need all the conditions described in Jaillet and Porta (2013, Fig. 8).

Algorithm 3: Best-next tactile action planner

exploreGPAtlasRRT($\mathcal{M}, \mathbb{V}_{max}, \Omega$)
input : A Gaussian Process model, \mathcal{M} , the variance threshold, \mathbb{V}_{max} , and the set of criteria to decide how to search and end the exploration, Ω .
output: The best next action, \mathcal{P} , in the form of a path, if any, or \emptyset otherwise.

```

1  $\mathcal{P} \leftarrow \emptyset$ 
2  $\mathcal{A} \leftarrow \text{INITGPATLAS}(\mathcal{M})$ 
3  $\mathcal{T} \leftarrow \text{INITRRTs}(\mathcal{M})$ 
4 while  $\text{ISENDCONDITIONMET}(\mathcal{A}, \Omega)$  do
5    $\mathcal{T}_i \leftarrow \text{SELECTTREETOEXPAND}(\mathcal{T}, \Omega \rightarrow \text{policy})$ 
6    $\mathcal{C}_{i,k} \leftarrow \text{SELECTCHART}(\mathcal{T}_i, \Omega)$ 
7    $\chi_{i,k} \leftarrow \text{SAMPLECHART}(\mathcal{C}_{i,k}, \Omega)$ 
8    $\mathbf{x}_{i,k} \leftarrow \text{SELECTCANDIDATE}(X_{i,k})$ 
9    $\mathbf{x}_{,k} \leftarrow \text{GENERATE}(\mathbf{x}_{i,k}, \mathcal{M})$ 
10  return  $\emptyset$ 
```

A chart, for us, contains the center \mathbf{x}_c , such that $\mathbb{E}(\mathcal{S}(\mathbf{x}_c)) \approx 0$, the size $R = \mathbb{V}(\mathcal{S}(\mathbf{x}_c))$ and the gradient information at the center $\frac{\partial \mathcal{S}}{\partial \mathbf{x}} \approx$.

The validity are of each chart is defined as $\Phi^T \Phi \leq \cos(\alpha) \|\mathbf{u}_{j,k}\| \leq \mathbb{V}(\mathbb{S}_{j,k})$

The area covered by a given chart on the surface is never empty, and it always includes the center of the chart, \mathbf{x}_i , but its shape depends on the local shape. However, in this work, we are not interested in computing this area, since we will be traversing trees us-

ing compliance control to compensate for the errors between linear interpolation between \mathbf{x}_i and \mathbf{x}_j in 3D and actual arbitrary shape countour joining them.

A chart is selected at random with uniform distribution among the all charts in the leafs

4.4 Solution in a nutshell

The methods from the previous sections are independent from each other, being the last one, Algorithm 4, our main contribution. Here, we show an example of how these methods intercommunicate to estimate the shape of an unknown object.

Algorithm 4: Probabilistic object shape modelling

ObjectShapeExploration(P, \mathbb{V}_{des})

input : An initial point cloud of the scene, P , if any, for instance from visual object segmentation, and the desired variance, \mathbb{V}_{des} , for the overall shape estimation.

output: The estimated object shape, \mathcal{S}

```

1  $\mathcal{S} \leftarrow \emptyset$ 
2 if  $\text{ISEMPTY}(P)$  then
3    $\chi \leftarrow \text{NAIVEPROBE}()$ 
4 else
5    $\chi \leftarrow \text{SEGMENTOBJECT}(P)$ 
6  $\mathcal{S} \leftarrow \text{CREATEGAUSSIANPROCESS}(\chi)$ 
7 while true do
8    $\Gamma \leftarrow \text{EXPLOREGPATLASRRT}(\mathcal{S}, \mathbb{V}_{des})$ 
9   if  $\Gamma = \emptyset$  then
10    return  $\mathcal{S}$ 
11  else
12     $\text{APPROACHTO}(\Gamma)$ 
13     $\bar{\chi} \leftarrow \text{PROBEOBJECT}(\Gamma)$ 
14    if  $\text{WASCONTACTDETECTED}()$  then
15       $v \leftarrow \mathbf{0}_{\text{sizeOf}(\bar{\chi})}$ 
16    else
17       $v \leftarrow \mathbf{1}_{\text{sizeOf}(\bar{\chi})}$ 
18     $\text{ADDLABELPOINTS}(\{\bar{\chi}, v\}, \chi)$ 
19     $\mathcal{S} \leftarrow \text{CREATEGAUSSIANPROCESS}(\chi)$ 
20     $\text{MOVEAWAY}()$ 
```

During the **APPROACHTO** (line 12) (**MOVEAWAY**, line 20) phases, the robot uses position control and standard motion planning techniques with collision avoidance. Since we are modelling the shape, we need to ensure that everytime the robot moves close (away) from the object, it does not collide with the object. It is tentative to use the current estimated shape, but since we are not actually computing it explicitly in our approach, we choose the bounding sphere as the collision geometry of the object. Thus the robot moves towards (away

from) the surface at the contact location in the normal direction until reaching the bounding sphere. After that, a standard motion planning is used to approach the object (get to the rest position).

The PROBEOBJECT (line 13) phase is engaged once the robot is within the bounding sphere. The robot uses Cartesian impedance control, with the Cartesian force, pose and impedance set properly for the given setup. These implementation details are given in the next section. Since we don't actually know where the surface is, we need to know whether the robot actually touched something or not, in order to properly label the acquisition (lines 15 and 17)

The method finishes when EXPLOREGPATLASRRT (line 8) described in Algorithm 2 has explored sufficiently the estimated shape and could not find an exploratory action Γ (line 10), i.e. the object shape is probabilistically estimated within the 95% of the confidence interval computed from \mathbb{V}_{des} .

The complete solution of the problem as stated in 3 is depicted in Algorithm 4.

4.5 Parameters and probabilistic completeness

We can safely assume that the surface has only one component when seen as a manifold.

5 Experiments

5.1 Apparatus

We repeat the exploratory probe given in Rosales et al (2014). The probe is composed of a semispherical tip (radius 2cm) on top of an ATI Nano 17 and an in-parallel passive compliant coupler to safely attach it as the end-effector of the 7 degrees of freedom KUKA LWR 4+ robot arm.

The object is grasped by a soft-hand. The assumption that the object is unknown holds to the adaptability of the hand. There is no need to have a precise model of the object, but a rough approximation of the shape. The hand softness will do the rest. This setup complies with the specifications given in Sect. 3.1.

5.2 Results

6 Conclusions and future directions

We have developed...

As an immediate future research is the study of manifold Gaussian Process as presented by Calandra

et al (2014), so the application of the AtlasRRT as presented by Jaillet and Porta (2013) can be applied in a more precise manner.

Acknowledgements The authors would like to thank E. Farnioli for the fruitful discussions and initial matlab implementations about Gaussian Processes, as well as to G. Santaera for the support with the sensorized glove.

References

- Allen P, Bajcsy R (1987) Robotic object recognition using vision and touch. In: Proceedings of the 9th International Joint Conference on Artificial Intelligence, pp 1131–1137
- Allen PK, Michelman P (1990) Acquisition and interpretation of 3-D sensor data from touch. *IEEE Transactions on Robotics and Automation* 6(4):397–404
- Bajcsy R (1988) Active perception. *Proceedings of the IEEE* 76(8):966–1005
- Bajcsy R, Lederman S, Klatzky RL (1989) Machine systems for exploration and manipulation a conceptual framework and method of evaluation. Tech. Rep. MS-CIS-89-03
- Belongie S, Malik J, Puzicha J (2002) Shape matching and object recognition using shape contexts. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 24(4):509–522
- Bierbaum A, Rambow M, Asfour T, Dillmann R (2008) A potential field approach to dexterous tactile exploration of unknown objects. In: 8th IEEE-RAS International Conference on Humanoid Robots, pp 360–366
- Bjorkman M, Bekiroglu Y, Hogman V, Kragic D (2013) Enhancing visual perception of shape through tactile glances. In: IEEE/RSJ International Conference on Intelligent Robots and Systems, pp 3180–3186
- Calandra R, Peters J, Rasmussen CE, Deisenroth MP (2014) Manifold gaussian processes for regression. URL <http://arxiv.org/abs/1402.5876>
- Dragiev S, Toussaint M, Gienger M (2011) Gaussian process implicit surfaces for shape estimation and grasping. In: Proceedings of the IEEE International Conference on Robotics and Automation, pp 2845–2850
- Dragiev S, Toussaint M, Gienger M (2013) Uncertainty aware grasping and tactile exploration. In: IEEE International Conference on Robotics and Automation, pp 113–119
- Faria DR, Martins R, Lobo J, Dias J (2010) Probabilistic representation of 3D object shape by in-hand exploration. In: IEEE/RSJ International Conference on Intelligent Robots and Systems, IEEE, pp 1560–1565
- Hebert P, Howard T, Hudson N, Ma J, Burdick JW (2013) The next best touch for model-based localization. In: IEEE International Conference on Robotics and Automation, IEEE, pp 99–106
- Henderson ME (1993) Computing implicitly defined surfaces: Two parameter continuation. Tech. Rep. 18777, T. J. Watson Research Center, IBM Research Division
- Hudson N, Howard T, Ma J, Jain A, Bajracharya M, Myint S, Kuo C, Matthies L, Backes P, Hebert P, Fuchs T, Burdick J (2012) End-to-end dexterous manipulation with deliberate interactive estimation. In: IEEE International Conference on Robotics and Automation, pp 2371–2378
- Jaillet L, Porta JM (2013) Path planning under kinematic constraints by rapidly exploring manifolds. *IEEE Transactions on Robotics* 29(1):105–117

- LaValle SM (2011) Motion planning. *IEEE Robotics & Automation Magazine* 18(1):79–89
- Li M, Hang K, Kragic D, Billard A (2016) Dexterous grasping under shape uncertainty. *Robotics and Autonomous Systems* 75
- Mahler J, Patil S, Kehoe B, van den Berg J, Ciocarlie M, Abbeel P, Goldberg K (2015) GP-GPIS-OPT: Grasp planning with shape uncertainty using gaussian process implicit surfaces and sequential convex programming. In: 2015 IEEE International Conference on Robotics and Automation, IEEE, pp 4919–4926
- Meier M, Schöpfer M, Haschke R, Ritter H (2011) A probabilistic approach to tactile shape reconstruction. *IEEE Transactions on Robotics* 27(3):630–635
- Muja M, Ciocarlie M (2014) Tabletop object perception ros package. URL http://www.github.com/ros-interactive-manipulation/tabletop_object_perception, last commit on Mar 19, 2014
- Petrovskaya A, Khatib O (2011) Global localization of objects via touch. *IEEE Transactions on Robotics* 27(3):569–585
- Prescott TJ, Diamond ME, Wing AM (2011) Active touch sensing. *Philosophical transactions of the Royal Society of London Series B, Biological sciences* 366(1581):2989–2995
- Rasmussen CE, Williams CKI (2006) *Gaussian Processes for Machine Learning*. The MIT Press
- Rosales C, Ajoudani A, Gabiccini M, Bicchi A (2014) Active gathering of frictional properties from objects. In: 2014 IEEE/RSJ International Conference on Intelligent Robots and Systems, pp 3982–3987
- Santaera G, Luberto E, Serio A, Gabiccini M, Bicchi A (2015) Low-cost, fast and accurate reconstruction of robotic and human postures via IMU measurements. In: IEEE International Conference on Robotics and Automation, pp 2728–2735
- Sommer N, Li M, Billard A (2014) Bimanual compliant tactile exploration for grasping unknown objects. In: IEEE International Conference on Robotics and Automation, IEEE, pp 6400–6407
- Williams O, Fitzgibbon A (2007) Gaussian process implicit surfaces. In: *PASCAL - Pattern Analysis, Statistical Modelling and Computational Learning - Gaussian Processes in Practice Workshop*
- Zhang D, Lu G (2004) Review of shape representation and description techniques. *Pattern Recognition* 37(1):1–19
- Zhu J, Hoi SCH, Lyu MR (2009) Nonrigid shape recovery by gaussian process regression. In: *IEEE Conference on Computer Vision and Pattern Recognition*, pp 1319–1326