


HIGH TORQUE HYBRID STEPPING MOTOR SPECIFICATIONS


General specifications		Electrical specifications	
Step Angle (°)	1.8	Rated Voltage (V)	1.652
Temperature Rise (°C)	80 Max (rated current, 2 phase on)	Rated Current (A)	5.9
Insulation Resistance (°C)	-20~+50	Resistance Per Phase (±10%Ω)	0.28 (25°C)
Number of Phase	2	Inductance Per Phase (±20% mH)	1.7
Insulation Resistance (MΩ)	100 Min (500VDC)	Holding Torque (N.m)	3.4
Insulation Class	Class B	Detent Torque (N.m)	0.08
Max.radial force (N)	220 (20mm from the flange)	Rotor Inertia (g.cm ²)	1000
Max.axial force (N)	60	Weight (Kg)	1.7

Wiring Diagram:




Pull out torque curve:

VOLTAGE: 110VAC, CONSTANT CURRENT:5.9A,WZM-ZH110MS HLAIF STEP

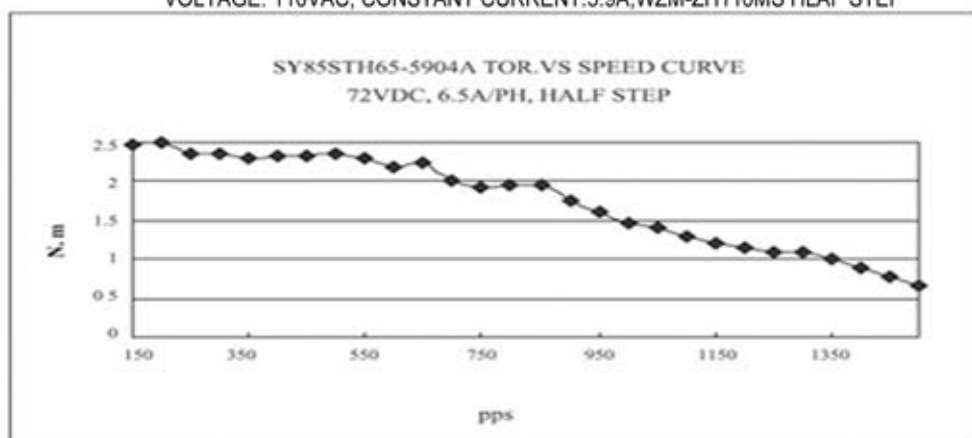

Dimensions: (unit=mm)

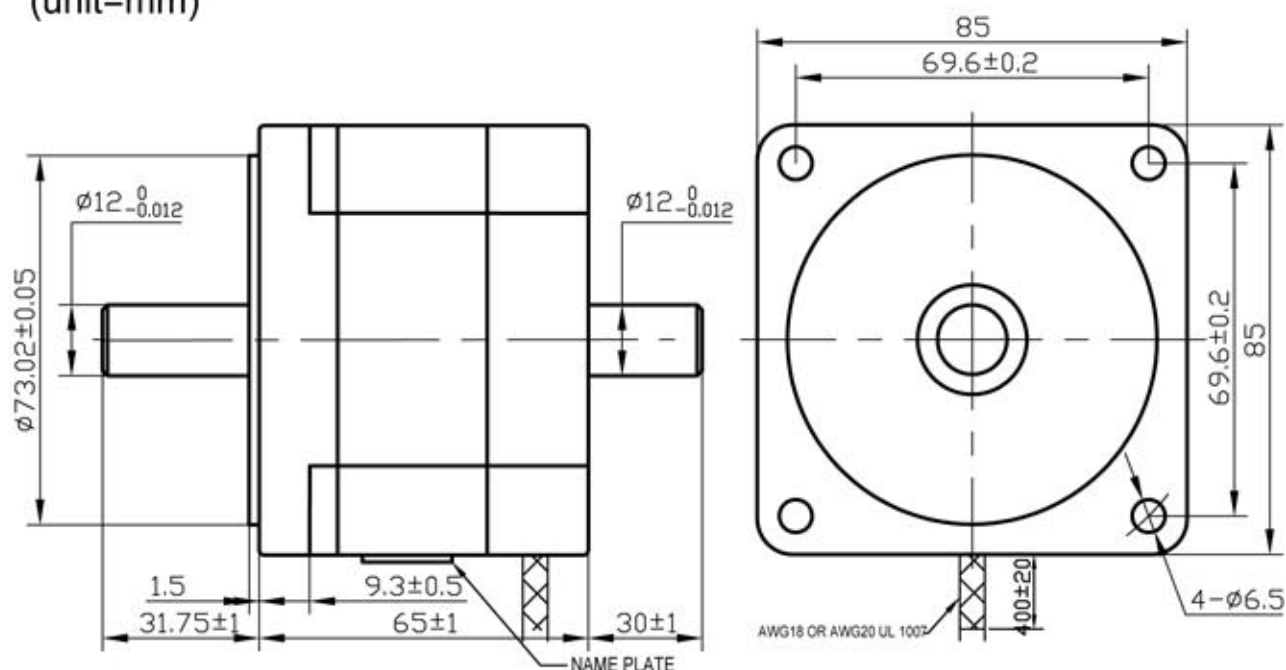

△					SY85STH65-5904B	TECHNICAL CONDITIONS
△						
REV	REVISIONS	DESCRIPTION	BY	DATE	CHANGZHOU SONGYANG MACHINERY & ELECTRONICS NEW TECHNIC INSTITUTE	
DRAW	董宝军					
CHECK						
APPROVE						