

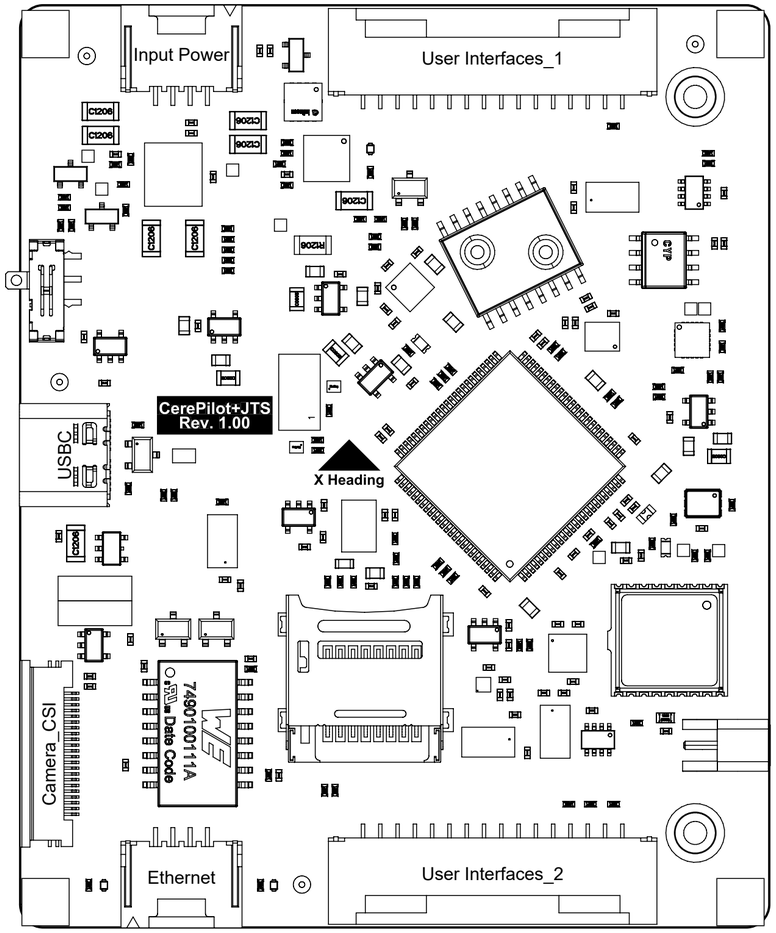


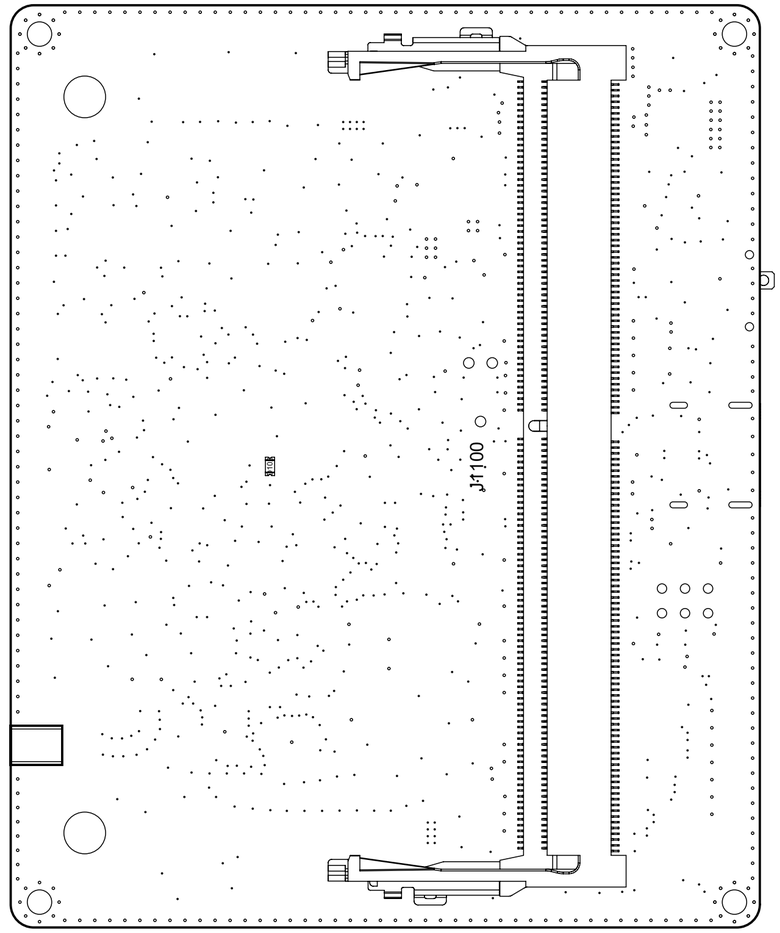

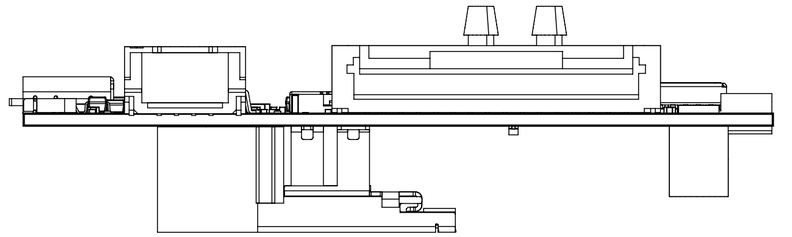

Input Power Connector	
1	Input power positive
2	Input power positive
3	Input power ground
4	Input power ground

10/100BASE-TX Ethernet Connector	
1	MTR0_P
2	MTR0_N
3	MTR1_P
4	MTR1_N

User Interface_1 Connector	
1	FDCAN2_L
2	FDCAN2_H
3	UART_SBUS_RX
4	UART_SBUS_TX
5	USART_RX_TEL
6	USART_TX_TEL
7	USART/RS232_RX_EXT
8	USART/RS232_TX_EXT
9	USB_DC_N
10	USB_DC_P
11	GND/Reserve
12	GND/Reserve
13	GND/Reserve
14	GND/Reserve
15	GND/Reserve
16	GND/Reserve

User Interface_2 Connector	
1	GND
2	PWM/AUX_1
3	PWM/AUX_2
4	PWM/AUX_3
5	PWM/AUX_4
6	PWM/AUX_5
7	PWM/AUX_6
8	PWM/AUX_7
9	PWM/AUX_8
10	PWM/AUX_9
11	USART_TX_JTS
12	USART_RX_JTS
13	I2C_SDA
14	I2C_SCL
15	FDCAN1_L
16	FDCAN1_H

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Cerepi. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF

PROPRIETARY AND CONFIDENTIAL

NEXT ASSY	USED ON	
APPLICATION		

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL±
ANGULAR: MACH± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±
INTERPRET GEOMETRIC TOLERANCING PER:
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME	DATE
DRAWN		10/17/2026
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

COMMENTS:

Cerepi

TITLE
CerePilot+Jetson Nano Orin

SIZE	DWG. NO.	
	V1.00	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1