Redbird Flight Simulations
Qualification and Approval Guide (QAG)

LD, SD, FMX, MCX Advanced Aviation Training Devices
Amended Qualification and Approval Guide
VERSION 4.4



FAA APPROVED QAG
Date 2/13/2013

Signature

Jeffrey Smith

Manager, Airmen Certification and Training Branch AFS-810

2301 East St. Elmo Rd., Suite 100
Austin, Texas 78744
(512) 301-0718 Phone
(512) 301-0770 Fax
info@redbirdflight.com

Contents

Section 1: Device Overview 9

List of Previously Approved Configurations: 9

Additional configurations included in this version (4.4): 14

Section 2: Description of Hardware and Software Components 16

Statements of Compatibility of Software and Hardware 17

Section 3: Statements of Compliance 19

a. Controls: 19

b. Control Requirements: 19

c. Control Inputs: 19

d. Display Requirements: 20

e. Flight Dynamics Requirements: 20

f. Instructional Management Requirements: 20

All configurations 20

a. AATD Design Criteria – All Configurations 20

Approved Configuration: RB10-S1 22

b. Control Requirements: 22

d. Display Requirements: 22

a. AATD Design Criteria 23

Approved Configuration: C172-S1 24

b. Control Requirements: 24

d. Display Requirements: 24

a. AATD Design Criteria 25

Approved Configuration: C172-G1 26

b. Control Requirements: 26

d. Display Requirements: 26

a. AATD Design Criteria 27

Approved Configuration: C182-S1 28

b. Control Requirements: 28

d. Display Requirements: 28

a. AATD Design Criteria 29

Approved Configuration: C182-G1 30
b. Control Requirements: 30
d. Display Requirements: 30
a. AATD Design Criteria 31
Approved Configuration: PA28-60-S2 32
b. Control Requirements: 32
d. Display Requirements: 32
a. AATD Design Criteria 33
Approved Configuration: PA28-2R-S1 34
b. Control Requirements: 34
d. Display Requirements: 34
a. AATD Design Criteria 35
Approved Configuration: SR20-G1 36
b. Control Requirements: 36
d. Display Requirements: 36
a. AATD Design Criteria 37
Approved Configuration: SR22-G1 38
b. Control Requirements: 38
d. Display Requirements: 38
a. AATD Design Criteria 39
Approved Configuration: BE58-S1 40
b. Control Requirements: 40
d. Display Requirements: 40
a. AATD Design Criteria 41
Approved Configuration: PA34-S1 42
b. Control Requirements: 42
d. Display Requirements: 42
a. AATD Design Criteria 43
Approved Configuration: PA44-S1 44
b. Control Requirements: 44
d. Display Requirements: 44

a. AATD Design Criteria 45
Approved Configuration: C172-G2 46
b. Control Requirements: 46
d. Display Requirements: 46
a. AATD Design Criteria 47
Approved Configuration: C182-G2 48
b. Control Requirements: 48
d. Display Requirements: 48
a. AATD Design Criteria 49
Approved Configuration: PA28-60-G1 50
b. Control Requirements: 50
d. Display Requirements: 50
a. AATD Design Criteria 51
Approved Configuration: PA28-80-S1 52
b. Control Requirements: 52
d. Display Requirements: 52
a. AATD Design Criteria 53
Approved Configuration: PA28-2R-G1 54
b. Control Requirements: 54
d. Display Requirements: 54
a. AATD Design Criteria 55
Approved Configuration: DA20-S1 56
b. Control Requirements: 56
d. Display Requirements: 56
a. AATD Design Criteria 57
Approved Configuration: DA40-G1 58
b. Control Requirements: 58
d. Display Requirements: 58
a. AATD Design Criteria 59
Approved Configuration: SR22-G2 60
b. Control Requirements: 60

d. Display Requirements: 60
a. AATD Design Criteria 61
Approved Configuration: BE55-S1 62
b. Control Requirements: 62
d. Display Requirements: 62
a. AATD Design Criteria 63
Approved Configuration: BE58-G1 64
b. Control Requirements: 64
d. Display Requirements: 64
a. AATD Design Criteria 65
Approved Configuration: BE76-S1 66
b. Control Requirements: 66
d. Display Requirements: 66
a. AATD Design Criteria 67
Approved Configuration: PA30-S1 68
b. Control Requirements: 68
d. Display Requirements: 68
a. AATD Design Criteria 69
Approved Configuration: DA42-G1 70
b. Control Requirements: 70
d. Display Requirements: 70
a. AATD Design Criteria 71
Approved Configuration: GA7-S1 72
b. Control Requirements: 72
d. Display Requirements: 72
a. AATD Design Criteria 73
Approved Configuration: C172-S2 74
b. Control Requirements: 74
d. Display Requirements: 74
a. AATD Design Criteria 75
Approved Configuration: C182-S2 76

b. Control Requirements: 76
d. Display Requirements: 76
a. AATD Design Criteria 77
Approved Configuration: C206-S1 78
b. Control Requirements: 78
d. Display Requirements: 78
a. AATD Design Criteria 79
Approved Configuration: C206-G1 80
b. Control Requirements: 80
d. Display Requirements: 80
a. AATD Design Criteria 81
Approved Configuration: C206-G2 82
b. Control Requirements: 82
d. Display Requirements: 82
a. AATD Design Criteria 83
Approved Configuration: BE36-S1 84
b. Control Requirements: 84
d. Display Requirements: 84
a. AATD Design Criteria 85
Approved Configuration: BE36-G1 86
b. Control Requirements: 86
d. Display Requirements: 86
a. AATD Design Criteria 87
Approved Configuration: LXL2-S1 88
b. Control Requirements: 88
d. Display Requirements: 88
a. AATD Design Criteria 89
Approved Configuration: LXL2-S2 90
b. Control Requirements: 90
d. Display Requirements: 90
a. AATD Design Criteria 91

Approved Configuration: SR20-G2 92
b. Control Requirements: 92
d. Display Requirements: 92
a. AATD Design Criteria 93
Approved Configuration: C206-S2 94
b. Control Requirements: 94
d. Display Requirements: 94
a. AATD Design Criteria 95
Approved Configuration: PA28-60-S1 96
b. Control Requirements: 96
d. Display Requirements: 96
a. AATD Design Criteria 97
Approved Configuration: PA28-80-S2 98
b. Control Requirements: 98
d. Display Requirements: 98
a. AATD Design Criteria 99
Approved Configuration: PA28-2R-S2 100
b. Control Requirements: 100
d. Display Requirements: 100
a. AATD Design Criteria 101
Approved Configuration: PA34-G1 102
b. Control Requirements: 102
d. Display Requirements: 102
a. AATD Design Criteria 103
Approved Configuration: PA44-G1 104
b. Control Requirements: 104
d. Display Requirements: 104
a. AATD Design Criteria 105
Approved Configuration: P2006-G1 106
b. Control Requirements: 106
d. Display Requirements: 106

a. AATD Design Criteria 107
Approved Configuration: BE58-S2 108
b. Control Requirements: 108
d. Display Requirements: 108
a. AATD Design Criteria 109
Section 4: Figures 110
Group 1: Virtual Instrument Controls Overlay 110
Group 2: Yoke 125
Group 3: Throttle Quadrant 127
Group 4: Switch Panel 130
Group 5: Other 133
Appendix 1: Advanced ATD Checklist 138

Section 1: Device Overview

The Redbird LD, SD, FMX, MCX family of simulators are versatile, expandable and affordable devices that have been designed to be representative of popular single and twin-engine piston aircraft. They offer the user the ability to change the cockpit controls and aircraft models to represent a wide range of popular training aircraft. The line is equipped with the following notable features:

- 3-axis electric motion platform providing pitch, roll and yaw motions on FMX and MCX configurations
- Wrap-around exterior visuals provided by 6 LCD screens
- Single or dual pilot controls with optional 2-axis control-loaded yoke and interconnected rudder pedals
- Realistic switches, buttons, knobs, circuit breakers and other cockpit controls that are designed to represent the family of aircraft.
- A interchangeable instrument panel, throttles and yokes to allow a quick-change configuration options to the end user.
- Closed Circuit intercom system, allowing for communication between the pilot, co-pilot and instructors using standard aviation headsets
- A portable instructors station, allowing the instructor to operate from inside or outside the simulator

List of Previously Approved Configurations:

RB10-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530,Redbird 140 Autopilot. See Figure— 1.1

C172-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Vernier. See Figure— 3.1
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.2

C172-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Vernier. See Figure— 3.1
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Redbird 140 Autopilot. See Figure—1.3

C182-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4

Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530,Redbird 140 Autopilot. See Figure— 1.5

C182-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Redbird 140 Autopilot. See Figure—1.6

PA28-60-S2: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.8

PA28-2R-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex “Boat Style”. See Figure— 3.4
Virtual Instrument Controls Overlay: Traditional Round Gauges, Dual Redbird 430, Redbird 55 Autopilot. See Figure— 1.11

SR20-G1: Approved Configuration
Yoke: Side Yoke. See Figure— 2.2
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot. See Figure— 1.15

SR22-G1: Approved Configuration
Yoke: Side Yoke. See Figure— 2.2
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot. See Figure— 1.16

BE58-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.19

PA34-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.23

PA44-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4

Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.24

C172-G2: Approved Configuration

Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Vernier. See Figure— 3.1
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.4

C182-G2: Approved Configuration

Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.7

PA28-60-G1: Approved Configuration

Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot. See Figure— 1.9

PA28-80-S1: Approved Configuration

Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Traditional Round Gauges, Dual Redbird 430, Redbird 55 Autopilot. See Figure— 1.10

PA28-2R-G1: Approved Configuration

Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex “Boat Style”. See Figure— 3.4
Virtual Instrument Controls Overlay: Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot. See Figure—1.12

DA20-S1: Approved Configuration

Yoke: Center Stick. See Figure— 2.3
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430, Redbird 140 Autopilot. See Figure— 1.13

DA40-G1: Approved Configuration

Yoke: Center Yoke. See Figure— 2.3
Throttle Quadrant: Single Engine Complex “Boat Style”. See Figure— 3.4
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.14

SR22-G2: Approved Configuration
Yoke: Side Yoke. See Figure— 2.2
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Glass Cockpit Redbird Perspective PFD & MFD with Redbird FMS Keypad and Redbird Perspective Autopilot. See Figure— 1.17

BE55-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine Reverse “Boat Style”. See Figure— 3.6
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.18

BE58-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.20

BE76-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.21

PA30-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.22

DA42-G1: Approved Configuration
Yoke: Center Stick. See Figure— 2.3
Throttle Quadrant: Twin Engine FADEC “Boat Style”. See Figure— 3.7
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.25

GA7-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.26

C172-S2: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Vernier. See Figure— 3.1
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird KLN94, Redbird 140 Autopilot. See Figure— 1.27

C182-S2: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird KLN94, Redbird 140 Autopilot. See Figure— 1.28

C206-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530,Redbird 140 Autopilot. See Figure— 1.29

C206-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Redbird 140 Autopilot. See Figure— 1.30

C206-G2: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.31

BE36-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex “Boat Style”. See Figure— 3.4
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.32

BE36-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex “Boat Style”. See Figure— 3.4
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.33

LXL2-S1: Approved Configuration
Yoke: Center Stick. See Figure— 2.3
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 530/430, Redbird 55 Autopilot. See Figure— 1.34

LXL2-S2: Approved Configuration
Yoke: Center Stick. See Figure— 2.3
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird EFD1000, Redbird 430, Redbird SL40, Redbird 55 Autopilot. See Figure— 1.35

Additional configurations included in this version (4.4):

SR20-G2: Approved Configuration
Yoke: Side Yoke. See Figure— 2.2
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Glass Cockpit Redbird Perspective PFD & MFD with Redbird FMS Keypad and Redbird Perspective Autopilot. See Figure— 1.36

C206-S2: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex Vernier. See Figure— 3.2
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird KLN94, Redbird 140 Autopilot. See Figure— 1.37

PA28-60-S1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Traditional Round Gauges, Dual Redbird 430, Redbird 55 Autopilot. See Figure— 1.38

PA28-80-S2: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine “Boat Style”. See Figure— 3.3
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140 Autopilot. See Figure— 1.39

PA28-2R-S2: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Single Engine Complex “Boat Style”. See Figure— 3.4
Virtual Instrument Controls Overlay: Traditional Round Gauges, Dual Redbird 430, Redbird 140 Autopilot. See Figure— 1.40

PA34-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.41

PA44-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Integrated Redbird 700 Autopilot. See Figure— 1.42

P2006-G1: Approved Configuration
Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4

Throttle Quadrant: Twin Engine “Boat Style” Type 3. See Figure— 3.6
Virtual Instrument Controls Overlay: Glass Cockpit Redbird 1000 PFD & MFD with Redbird 55
See Figure— 1.43

BE58-S2: Approved Configuration

Yoke: Standard yoke - Single or Dual. See Figures— 2.1, 2.4
Throttle Quadrant: Twin Engine “Boat Style”. See Figure— 3.5
Virtual Instrument Controls Overlay: Traditional Round Gauges, Redbird 430/530, Redbird 140
Autopilot. See Figure— 1.19

Section 2: Description of Hardware and Software Components

All Configurations Include:

Qty	Type	Manufacturer	Name	Description/Function	Configuration
1	Software	Microsoft	Windows XP or 7	Operating system. (depending on serial number)	All
1	Software	Microsoft	ESP or FSX	Simulation engine. (depending on serial number)	All
1	Software	Lockheed Martin	Prepar3D	Simulation engine. (depending on serial number)	All
1	Software	Redbird Flight Simulations	RB Sim	Simulation control and component integration.	All
1	Software	Redbird Flight Simulations	FMX Control	Motion system control and component integration.	FMX only
1	Software	Redbird Flight Simulations	Instructors Station	Environmental, location and failure controls with map, track and glideslope display.	All
1	Software	Redbird Flight Simulations	Parrot and Cygnus	Optional software providing ATC and location services	All
1	Software	Mindstar Aviation	Redbird 1000	Virtual flight instruments, GPS, radios, gauges, indicators, alerts, misc. instruments and logic controls for simulated systems.	See Configuration
1	Software	Mindstar Aviation	Redbird 430/ 530	Virtual GPS and radios	See Configuration
1	Software	Mindstar Aviation	Redbird KLN94	Virtual GPS	See Configuration
1	Software	Mindstar Aviation	Redbird EFD1000	Virtual EFD	See Configuration
1	Software	Mindstar Aviation	Redbird Entegra	Virtual flight instruments, radios, gauges, indicators, alerts, misc. instruments and logic controls for simulated systems.	See Configuration
1	Software	Mindstar Aviation	Redbird Autopilot	Virtual Autopilot (Redbird 140, 55, or 700)	See Configuration
1	Software	Mindstar Aviation	Redbird Radios	Virtual Radios (KX155, SL40)	See Configuration
1	Software	Mindstar Aviation	Miscellaneous Gauges	Virtual Miscellaneous Gauges	See Configuration
1	Software	Flight 1	Compass	Virtual Compass	All
1	Software	Redbird Flight Simulations	Analog Gauges	Virtual Airspeed, Attitude, Altimeter, Turn and Bank, Heading, HSI, VSI, RMI, CDI, and ADF Gauges , Radios	See Configuration
1	Software	Redbird Flight Simulations	Miscellaneous Gauges	Virtual Miscellaneous Gauges	All
1	Hardware	Redbird Flight Simulations	Simulation Computer	Host computer for flight simulation engine, simulation control software, airplane systems and instruments.	All
1	Hardware	Redbird Flight Simulations	Motion Control Computer	Host computer for FMX Control.	FMX, MCX
1	Hardware	Industry Standard	Instructors Station Computer	Host computer for Instructors Station.	All
1	Hardware	Redbird Flight Simulations	Motion Platform: Type 1	Gimbaled, steel motion platform with movement in pitch, roll and yaw. Includes all motors, sensors and safety controls.	FMX and MCX configuration - See Figure 5.9
1	Hardware	Redbird Flight Simulations	Cockpit Enclosure	Cockpit enclosure to exclude distractions.	All- See Figure 5.7, 5.8,5.9
6	Hardware	22” Industry Standard	LCD	Flat Panel displays for exterior views.	FMX, MCX, SD, LD
2	Hardware	19” Industry Standard	LCD	Flat Panel displays for virtual instruments.	All

1	Hardware	Redbird Flight Simulations	Yoke, Side Yoke, Center Stick	Pitch and roll controller with switches and buttons for airplane systems operation. As required for each configuration.	FMX, SD, LD – See Configuration
1	Hardware	Redbird Flight Simulations	Dual Yoke	Dual pitch and roll controller with switches and buttons for airplane systems operation. As required for each configuration.	MCX- See Configuration
1	Hardware	Redbird Flight Simulations	Throttle Quadrant	As required for each configuration.	All- See Configuration
1	Hardware	Redbird Flight Simulations	Rudder Pedals - Single	Rudder control pedals with toe brakes.	FMX, SD, LD
1	Hardware	Redbird Flight Simulations	Rudder Pedals - Dual	Dual Rudder control pedals with toe brakes.	MCX
1	Hardware	Redbird Flight Simulations	Switch Panel: Type 1	Lower switch panel with airplane configuration and systems controls.	FMX, MCX, SD, LD
1	Hardware	Redbird Flight Simulations	Switch Panel: Type 2	Lower switch panel with airplane configuration and systems controls.	MCX
1	Hardware	Redbird Flight Simulations	Instrument Controls Overlay	Flight instruments, radios, airplane configuration and systems controls as required for each configuration.	All- See Configuration

Statements of Compatibility of Software and Hardware

AC61-136, Appendix 2, 4. b.:

The device and all configurations included in this Qualification and Approval Guide (QAG) meet the requirements for the Compatibility of Software and Hardware.

Microsoft Windows XP or 7 (Operating System)

This is to certify that Microsoft Corporation, the owner and developer of the Windows 7 operating system, has evaluated that their operating system works with industry standard PC's and USB flight control devices. Redbird Flight Simulations, Inc., utilizes industry standard USB flight control devices for all pilot input. All input control devices meet the USB 2.0 industry standard specified interfaces. Redbird Flight Simulations, Inc., the component integrator, has determined that the transport delay time is less than 300 milliseconds, and that all analog and digital input signals meet the performance criteria established for the software.

Microsoft ESP or FSX (Simulation Engine)

This is to certify that Microsoft Corporation, the owner and developer of the ESP and FSX Simulator Engine, has evaluated that their software application works with industry standard PC's and USB flight control devices. Redbird Flight Simulations, Inc., utilizes industry standard USB flight control devices for all pilot input. All input control devices meet the USB 2.0 industry standard specified interfaces. Redbird Flight Simulations, Inc., the component integrator, has determined that the transport delay time is less than 300 milliseconds, and that all analog and digital input signals meet the performance criteria established for the software.

Lockheed Martin Prepar3D (Simulation Engine)

This is to certify that Lockheed Martin, the owner and developer of the Prepar3D Simulator Engine, has evaluated that their software application works with industry standard PC's and USB flight control devices. Redbird Flight Simulations, Inc., utilizes industry standard USB flight control devices for all pilot input. All input control devices meet the USB 2.0 industry standard specified interfaces. Redbird Flight Simulations, Inc., the component integrator, has determined

that the transport delay time is less than 300 milliseconds, and that all analog and digital input signals meet the performance criteria established for the software.

Mindstar Aviation Redbird Virtual Instrument Suite

This is to certify that Mindstar Aviation, the owner and developer of the Redbird Virtual Instrument Suite, including the Redbird 1000, Redbird 430/530, Redbird KLN94, Redbird 140 Autopilot, Redbird 55 Autopilot, Redbird Radios, Redbird Entegra and Redbird Perspective and Redbird Flight Simulations, the hardware manufacturer and component integrator, have demonstrated that the Redbird Virtual Instrument Suite software package is fully compatible with the Redbird Flight Simulations LD, SD, FMX 1000 and all configurations of that model. Mindstar Aviation and Redbird Flight Simulations can assure that the communications/transport data delay is not greater than 300 milliseconds and all analog and digital input signals meet the performance criteria established for the software performance by Redbird Flight Simulations The device and all configurations included in this Qualification and Approval Guide (QAG) meet the requirements for the Compatibility of Software and Hardware.

Flight 1 Compass

"This is to certify that Flight 1, the owner and developer of the Compass and Redbird Flight Simulations, the hardware manufacturer and component integrator, have demonstrated that the Compass software is fully compatible with the Redbird Flight Simulations LD, SD, FMX 1000 and all configurations of that model. Redbird Flight Simulations can assure that the communications/transport data delay is not greater than 300 milliseconds and all analog and digital input signals meet the performance criteria established for the software performance by Redbird Flight Simulations."

Section 3: Statements of Compliance

All Configurations, as noted, meet AC 61-136, Appendix 2, Paragraph 8 BATD Design Criteria:

a. Controls:

(1) Meets Requirements: Physical flight and aircraft system controls are recognizable as to their function and how they are manipulated solely from their appearance. There is no keyboard, mouse, or gaming joystick inside the LD/SD/FMX/MCX Cockpit. See Figures— 5.5, 5.6

(2) Meets Requirements: Virtual controls are limited to the initialization of the device and instructor input. Avionics are virtually displayed but are operated with physical buttons and knobs that closely represent the configuration of the aircraft. See Figures— 4.1-4.6, 5.5, 5.6

(3) Meets Requirements: No keyboard or mouse is used to set or position any feature of the device. The required and additional equipment is operated in the same manner in which it would be operated in the represent aircraft.

(4) Meets Requirements: The arrangement, appearance, and operation of controls, instruments, and switches closely represent the aircraft, including: master/battery, magnetos, alternators, fuel boost pumps, avionics master, pitot heat, and required lights. See Figures— 4.1-4.6, 5.5, 5.6

(5) Meets Requirements: During start-up of the device the PC configuration and file inventory is examined to ensure only tested software is installed. In the event additional files are found, an initialization error will be displayed and logging of the flight training data to the student key will not be allowed.

b. Control Requirements:

(1)(a): Meets Requirements: See individual configuration.
(1)(b): Meets Requirements: See Figures— 5.3, 5.11
(1)(c): Meets Requirements: See Figures— 3.1-3.8
(1)(d): Meets Requirements: See individual configuration.
(1)(e): Meets Requirements: See individual configuration.

c. Control Inputs:

(1) Meets Requirements: The transport delay for all control inputs is 300 milliseconds or less. The required transport delay is tested at system start-up by internal start/stop timers. Redbird Flight Simulations is the manufacturer of all control inputs and uses USB 2.0 which exceeds this requirement.

(2) Meets Requirements: Each control input is tested at training session start-up. If any device fails to meet the requirements of Appendix 2, Paragraph 8, Section c, item (1) a warning message is displayed and the device will not start a training session.

d. Display Requirements:

(1) Meets Requirements: See individual configuration.
(2) Meets Requirements: All instrument displays included in each individual configuration are visible during all flight operations. The displays are updated at rate that insures that the image of the instrument does not appear to: be out of focus, illegible, jump, step, jagged, nor is it distracting.
(3) Meets Requirements: Display updates exceed 60Hz. All replicated instruments display changes equal or greater than the values required by this item.
(4) Meets Requirements: Displays reflect the dynamic behavior of an actual aircraft in flight.

e. Flight Dynamics Requirements:

(1) Meets Requirements: All simulated aircraft flight dynamics are comparable to the way an actual aircraft performs and handles.
(2) Meets Requirements: All simulated aircraft performance parameters are comparable to the aircraft being represented.
(3) Meets Requirements: Vertical lift component changes as a function of bank, comparable to the aircraft being represented.
(4) Meets Requirements: Changes in aircraft configuration are accompanied by changes in flight dynamics, comparable to the aircraft being represented.
(5) Meets Requirements: The handling and performance qualities of the simulated aircraft are affected by the presence and intensity of wind and turbulence in manner comparable to the aircraft being represented.

f. Instructional Management Requirements:

(1) Meets Requirements: The instructor has the ability to pause the system at any time using either the buttons on the instructor's console or the buttons on the instrument panel. See Figures— 5.1, 5.2
(2) Meets Requirements: The instructor as the ability to manipulate the parameters listed in this item independently of the simulation.
(3) Meets Requirements: The system records both the horizontal and vertical track of the aircraft movement and this can be view in real-time or at a later time.
(4) Meets Requirements: The instructor is able to disable instruments prior to or during a training session and simulate failure of the instruments without stopping or freezing the simulation to affect the failure.
(5) Meets Requirements: The device includes a navigational data base that covers all of North America and is based on procedures as published per 14 CFR part 97.

All configurations

as noted meet AC 61-136, Appendix 3, Paragraph 3 AATD Design Criteria:

a. AATD Design Criteria – All Configurations

(1) Meets Requirements: The device enclosure and cockpit design and instrument panel arrangement represent a generic aircraft commonly used by flight training operations. See Figures— 5.5
(2) Meets Requirements: Cockpit knobs/system controls/switches/switch panels are realistic in size and design appropriate to each intended function, in the proper

position and distance from the pilot's seated position, and representative of the category and class of the aircraft being represented. See individual configuration.

(3) Meets Requirements: Primary flight and navigation instruments are life size and exhibit neither stepping nor excessive transport delay. They are arranged so as to observe trends and provide a realistic scan pattern. See individual configuration.
(4) Meets Requirements: See individual configuration.
(5) Meets Requirements: See individual configuration.
(6) Meets Requirements: See individual configuration.
(7) Meets Requirements: Manual pitch trim is provided via a trim wheel on all configurations. Individual configurations may have electric trim as well. See individual configuration. See Figures— 4.3, 4.5
(8) Meets Requirements: All visual cues for both day and night, VFR and IFR are provided. See Figure— 5.4
(9) Meets Requirements: Instructors station is run from a "tablet" style or laptop PC from inside or outside the device. The instructor can oversee the pilot's horizontal and vertical flight profiles in real time and space. The instructor has the ability to complete all functions listed in this item without interrupting the flight. See Figure— 5.2
(10) Cockpit seat is fully adjustable.

Approved Configuration: RB10-S1

This configuration represents a generic, high wing, complex, single engine land, airplane.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4
(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.2
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.1

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.1
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels.
See Figure— 1.1

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated.
See Figure— 1.1

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot.
See Figure— 1.1

(5) Redbird 430/530. See Figure— 1.1

(6) Redbird 140 Autopilot. See Figure— 1.1

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.1

Approved Configuration: C172-S1

This configuration represents a single engine land, fixed gear, fixed pitch propeller, high wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.1

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.2

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.2
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item. Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.2

(3) Life sized traditional “round” gages and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.2

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.2

(5) Redbird 430/530. See Figure— 1.2

(6) Redbird 140 Autopilot. See Figure—1. 2

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5,1.2

Approved Configuration: C172-G1

This configuration represents a single engine land, fixed gear, fixed pitch propeller, high wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and a Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.1

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.
This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.3

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.3
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item. Gyroscopic rate-of-turn indicator that meets the requirements listed in this item. Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item. Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.3

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.3

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Redbird 140 Autopilot. See Figure— 1.3

(5) Glass Cockpit Redbird 1000 PFD & MFD . See Figure—1.3

(6) Redbird 140 Autopilot. See Figure— 1.3

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.3

Approved Configuration: C182-S1

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.5

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.5
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.5

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.5

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.5

(5) Redbird 430/530. See Figure— 1.5

(6) Redbird 140 Autopilot. See Figure— 1.5

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.5

Approved Configuration: C182-G1

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and a Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.6

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.6
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.6

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.6

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Redbird 140 Autopilot. See Figure— 1.6

(5) Glass Cockpit Redbird 1000 PFD & MFD . See Figure— 1.6

(6) Redbird 140 Autopilot. See Figure— 1.6

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.6

Approved Configuration: PA28-60-S2

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.8

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.8
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.8

(3) Life sized traditional “round” gages and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.8

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.8

(5) Redbird 430/530. See Figure— 1.8

(6) Redbird 140 Autopilot. See Figure— 1.8

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.8

Approved Configuration: PA28-2R-S1

This configuration represents a single engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird Dual 430, and Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.4

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Dual Redbird 430).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.11

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.11
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item(Dual Redbird 430).
Navigation radio that meets the requirements listed in this item (Dual Redbird 430).

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure—1.11

(3) Life sized traditional “round” gauges and Redbird Dual 430 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.11

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 55 Autopilot. See Figure— 1.11

(5) Redbird 430/530. See Figure— 1.11

(6) Redbird 55 Autopilot. See Figure— 1.11

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.11

Approved Configuration: SR20-G1

This configuration represents a single engine land, fixed gear, constant speed propeller, low wing, airplane with Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering side yoke. See Figure— 2.2
(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Dual Redbird 430).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.15

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird Entegra PFD & MFD with standby instruments. See Figure-1.15
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Dual Redbird 430)
Navigation radio that meets the requirements listed in this item. (Dual Redbird 430)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird Entegra PFD & MFD with standby instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.15

(3) Life sized Glass Cockpit Redbird Entegra PFD & MFD and dual Redbird 430 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.15

(4) Dual Redbird 430, Transponder, Audio Panel, and Redbird 55 Autopilot. See Figure— 1.15

(5) Dual Redbird 430 . See Figure— 1.15

(6) Redbird 55 Autopilot. See Figure— 1.15

(7) Manual and electric pitch trim with indicator. See Figure— 4.3, 2.2, 1.15

Approved Configuration: SR22-G1

This configuration represents a single engine land, fixed gear, constant speed propeller, low wing, airplane with Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering side yoke. See Figure— 2.2
(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Dual Redbird 430).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.16

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird Entegra PFD & MFD with standby instruments. See Figure- 1.16
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Dual Redbird 430)
Navigation radio that meets the requirements listed in this item. (Dual Redbird 430)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird Entegra PFD & MFD with standby instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.16

(3) Life sized Glass Cockpit Redbird Entegra PFD & MFD and dual Redbird 430 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.16

(4) Dual Redbird 430, Transponder, Audio Panel, and Redbird 55 Autopilot. See Figure— 1.16

(5) Dual Redbird 430. See Figure— 1.16

(6) Redbird 55 Autopilot. See Figure— 1.16

(7) Manual and electric pitch trim with indicator. See Figure— 4.3, 2.2, 1.16

Approved Configuration: BE58-S1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.19

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.19
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.19

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.19

(4) Redbird 430/530, Transponder, Audio Panel, and Redbird 140 Autopilot. See Figure— 1.19

(5) Redbird 430/530. See Figure— 1.19

(6) Redbird 140 Autopilot. See Figure— 1.19

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.19

Approved Configuration: PA34-S1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.23

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.23
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.23

(3) Life sized traditional “round” gages and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.23

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.23

(5) Redbird 430/530. See Figure— 1.23

(6) Redbird 140 Autopilot. See Figure—1. 23

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.23

Approved Configuration: PA44-S1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure—3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.
This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.24

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.24
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.24

(3) Life sized traditional “round” gages and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.24

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.24

(5) Redbird 430/530. See Figure— 1.24

(6) Redbird 140 Autopilot. See Figure— 1.24

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.24

Approved Configuration: C172-G2

This configuration represents a single engine land, fixed gear, fixed pitch propeller, high wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.1

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.4

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.4
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.4

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.4

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.4

(5) Glass Cockpit Redbird 1000 PFD & MFD . See Figure— 1.4

(6) Integrated Redbird 700 Autopilot. See Figure— 1.4

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.4

Approved Configuration: C182-G2

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.7

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.7
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass. Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.7

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.7

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.7

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure— 1.7

(6) Integrated Redbird 700 Autopilot. See Figure— 1.7

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.7

Approved Configuration: PA28-60-G1

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.9

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird Entegra PFD & MFD with standby instruments. See Figure— 1.9
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Dual Redbird 430)
Navigation radio that meets the requirements listed in this item. (Dual Redbird 430)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird Entegra PFD & MFD representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.9

(3) Life sized Glass Cockpit Redbird Entegra PFD & MFD and dual Redbird 430 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.9

(4) Dual Redbird 430, Transponder, Audio Panel, and Redbird 55 Autopilot. See Figure— 1.9

(5) Dual Redbird 430. See Figure— 1.9

(6) Redbird 55 Autopilot. See Figure— 1.9

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.9

Approved Configuration: PA28-80-S1

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with traditional "round" gauge instruments, dual Redbird 430, and Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Dual Redbird 430).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.10

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.10
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass. Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gage applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item (Dual Redbird 430).
Navigation radio that meets the requirements listed in this item (Dual Redbird 430).

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.10

(3) Life sized traditional “round” gauges and dual Redbird 430GPS and Navigation radios representative of aircraft being simulated See Figure— 1.10

(4) Dual Redbird 430, Transponder, Audio Panel, ADF, and Redbird 55 Autopilot. See Figure— 1.10

(5) Redbird 430/530. See Figure— 1.10

(6) Redbird 55 Autopilot. See Figure— 1.10

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.10

Approved Configuration: PA28-2R-G1

This configuration represents a single engine land, retractable gear, constant speed propeller, low wing, airplane with Glass Cockpit Redbird Entegra PFD & MFD, Dual Redbird 430, Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.4

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Dual Redbird 430).
Clock and timer.
Gear handle that functions
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.12

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird Entegra PFD & MFD with standby instruments. See Figure- 1.12
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Dual Redbird 430)
Navigation radio that meets the requirements listed in this item. (Dual Redbird 430)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird Entegra PFD & MFD representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.12

(3) Life sized Glass Cockpit Redbird Entegra PFD & MFD and dual Redbird 430 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.12

(4) Dual Redbird 430, Transponder, Audio Panel, and Redbird 55 Autopilot. See Figure— 1.12

(5) Dual Redbird 430. See Figure— 1.12

(6) Redbird 55 Autopilot. See Figure— 1.12

(7) Manual trim with indicator. See Figure— 4.3, 1.12

Approved Configuration: DA20-S1

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430, and Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering displacement center stick. See Figure— 2.3
(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.13

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented: Traditional flight instruments. See Figure— 1.13
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430)
Navigation radio that meets the requirements listed in this item. (Redbird 430)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.13

(3) Life sized traditional “round” gages and Redbird 430 GPS and Navigation radio representative of aircraft being simulated See Figure— 1.13

(4) Redbird 430, Transponder, Audio Panel, and Redbird 55 Autopilot. See Figure— 1.13

(5) Redbird 430. See Figure— 1.13

(6) Redbird 55 Autopilot. See Figure— 1.13

(7) Manual and electric pitch trim with indicator. See Figure— 4.3, 1.13

Approved Configuration: DA40-G1

This configuration represents a single engine land, fixed gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and a Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering displacement center stick. See Figure— 2.3
(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.4
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.14

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.14
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass. Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.14

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.14

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.14

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure— 1.14

(6) Integrated Redbird 700 Autopilot. See Figure— 1.14

(7) Manual and electric pitch trim with indicator. See Figure— 4.3, 1.14

Approved Configuration: SR22-G2

This configuration represents a single engine land, fixed gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird Perspective PFD & MFD with Redbird FMS Keypad and Redbird Perspective Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering displacement side yoke. See Figure— 2.2
(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird Perspective).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.17

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird Perspective PFD & MFD with Redbird FMS Keypad and Redbird Perspective Autopilot with standby instruments. See Figure— 1.17
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio meets the requirements listed in this item. (Redbird Perspective)
Navigation radio that meets the requirements listed in this item. (Redbird Perspective)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.17

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.17

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.17

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure— 1.17

(6) Integrated Redbird 700 Autopilot. See Figure— 1.17

(7) Manual pitch and electric trim with indicator. See Figure— 4.3, 2.2, 1.17

Approved Configuration: BE55-S1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.6

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.18

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.18
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.18

(3) Life sized traditional “round” gages and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.18

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.18

(5) Redbird 430/530. See Figure— 1.18

(6) Redbird 140 Autopilot. See Figure— 1.18

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.18

Approved Configuration: BE58-G1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.20

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.20
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure—1. 20

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.20

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.20

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure—1.20

(6) Integrated Redbird 700 Autopilot. See Figure— 1.20

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.20

Approved Configuration: BE76-S1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.21

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.21
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.21

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.21

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.21

(5) Redbird 430/530. See Figure— 1.21

(6) Redbird 140 Autopilot. See Figure— 1.21

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.21

Approved Configuration: PA30-S1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.22

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.22
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.22

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated. See Figure— 1.22

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.22

(5) Redbird 430/530. See Figure— 1.22

(6) Redbird 140 Autopilot. See Figure— 1.22

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.22

Approved Configuration: DA42-G1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering displacement center stick. See Figure— 2.3

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.7

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.25

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.25
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.25

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.25

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.25

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure— 1.25

(6) Integrated Redbird 700 Autopilot. See Figure— 1.25

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.25

Approved Configuration: GA7-S1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.26

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.26
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass. Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.26

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated. See Figure— 1.26

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.26

(5) Redbird 430/530. See Figure— 1.26

(6) Redbird 140 Autopilot. See Figure— 1.26

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.26

Approved Configuration: C172-S2

This configuration represents a single engine land, fixed gear, fixed pitch propeller, high wing, airplane with traditional "round" gauge instruments, Redbird KLN94 GPS and Redbird Radios for Navigation and Communication, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.1

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird Radios).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.27

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.27
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item. Gyroscopic rate-of-turn indicator that meets the requirements listed in this item. Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird Radios)
Navigation radio that meets the requirements listed in this item. (Redbird Radios, Redbird KLN94)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.27

(3) Life sized traditional “round” gages, Redbird KLN94 GPS and Redbird Radios for Navigation and Communication representative of aircraft being simulated See Figure— 1.27

(4) Redbird KLN94, Redbird Radios, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.27

(5) Redbird KLN94. See Figure— 1.27

(6) Redbird 140 Autopilot. See Figure—1. 27

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.27

Approved Configuration: C182-S2

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with traditional "round" gauge instruments, Redbird KLN94 GPS and Redbird Radios for Navigation and Communication, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird Radios).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.28

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.28
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item. Gyroscopic rate-of-turn indicator that meets the requirements listed in this item. Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird Radios)
Navigation radio that meets the requirements listed in this item. (Redbird Radios, Redbird KLN94)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.28

(3) Life sized traditional “round” gages, Redbird KLN94 GPS and Redbird Radios for Navigation and Communication representative of aircraft being simulated See Figure— 1.28

(4) Redbird KLN94, Redbird Radios, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.28

(5) Redbird KLN94. See Figure— 1.28

(6) Redbird 140 Autopilot. See Figure—1. 28

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.28

Approved Configuration: C206-S1

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.29

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.29
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.29

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.29

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.29

(5) Redbird 430/530. See Figure— 1.29

(6) Redbird 140 Autopilot. See Figure— 1.29

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.29

Approved Configuration: C206-G1

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and a Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.30

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.30
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.30

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.30

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Redbird 140 Autopilot. See Figure— 1.30

(5) Glass Cockpit Redbird 1000 PFD & MFD . See Figure— 1.30

(6) Redbird 140 Autopilot. See Figure— 1.30

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.30

Approved Configuration: C206-G2

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.31

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.31
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass. Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.31

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.31

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.31

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure— 1.31

(6) Integrated Redbird 700 Autopilot. See Figure— 1.31

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.31

Approved Configuration: BE36-S1

This configuration represents a single engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.4

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.32

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.32
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.32

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.32

(4) Redbird 430/530, Transponder, Audio Panel, and Redbird 140 Autopilot. See Figure— 1.32

(5) Redbird 430/530. See Figure— 1.32

(6) Redbird 140 Autopilot. See Figure— 1.32

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.32

Approved Configuration: BE36-G1

This configuration represents a single engine land, retractable gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.4

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.33

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.33
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure—1. 33

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.33

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.33

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure—1.33

(6) Integrated Redbird 700 Autopilot. See Figure— 1.33

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.33

Approved Configuration: LXL2-S1

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering displacement yoke. See Figure— 2.3
(1)(d) This configuration has throttle and fuel cutoff controls. See Figure— 3.3
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.34

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.34
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.34

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.34

(4) Redbird 430/530, Transponder, Audio Panel, and Redbird 55 Autopilot. See Figure— 1.34

(5) Redbird 430/530. See Figure— 1.34

(6) Redbird 55 Autopilot. See Figure— 1.34

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.34

Approved Configuration: LXL2-S2

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430, Redbird EFD1000, Redbird SL40 and Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering displacement yoke. See Figure— 2.3
(1)(d) This configuration has throttle and fuel cutoff controls. See Figure— 3.3
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430 and Redbird SL40).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.35

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.35
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430 and Redbird SL40)
Navigation radio that meets the requirements listed in this item. (Redbird 430 and Redbird SL40)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.35

(3) Life sized traditional “round” gauges, Redbird EFD1000 and Redbird 430 GPS and Navigation radio and Redbird SL40 Navigation radio representative of aircraft being simulated See Figure— 1.35

(4) Redbird 430, Redbird SL40, Transponder, Audio Panel, and Redbird 55 Autopilot. See Figure— 1.35

(5) Redbird 430. See Figure— 1.35

(6) Redbird 55 Autopilot. See Figure— 1.35

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.35

Approved Configuration: SR20-G2

This configuration represents a single engine land, fixed gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird Perspective PFD & MFD with Redbird FMS Keypad and Redbird Perspective Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a self-centering displacement side yoke. See Figure— 2.2
(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3
(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird Perspective).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.
See Figures— 4.1-4.6, 1.36

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird Perspective PFD & MFD with Redbird FMS Keypad and Redbird Perspective Autopilot with standby instruments. See Figure— 1.36
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio meets the requirements listed in this item. (Redbird Perspective)
Navigation radio that meets the requirements listed in this item. (Redbird Perspective)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure— 1.36

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.36

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.36

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure— 1.36

(6) Integrated Redbird 700 Autopilot. See Figure— 1.36

(7) Manual pitch and electric trim with indicator. See Figure— 4.3, 2.2, 1.36

Approved Configuration: C206-S2

This configuration represents a single engine land, fixed gear, constant speed propeller, high wing, airplane with traditional "round" gauge instruments, Redbird KLN94 GPS and Redbird Radios for Navigation and Communication, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller and throttle controls. See Figure— 3.2

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird Radios).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.37

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.37
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item. Gyroscopic rate-of-turn indicator that meets the requirements listed in this item. Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird Radios)
Navigation radio that meets the requirements listed in this item. (Redbird Radios, Redbird KLN94)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.37

(3) Life sized traditional “round” gages, Redbird KLN94 GPS and Redbird Radios for Navigation and Communication representative of aircraft being simulated See Figure— 1.37

(4) Redbird KLN94, Redbird Radios, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.37

(5) Redbird KLN94. See Figure— 1.37

(6) Redbird 140 Autopilot. See Figure—1.37

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.37

Approved Configuration: PA28-60-S1

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with traditional "round" gauge instruments, dual Redbird 430, and Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Dual Redbird 430).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.38

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.38
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass. Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gage applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item (Dual Redbird 430).
Navigation radio that meets the requirements listed in this item (Dual Redbird 430).

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.38

(3) Life sized traditional “round” gauges and dual Redbird 430GPS and Navigation radios representative of aircraft being simulated See Figure— 1.38

(4) Dual Redbird 430, Transponder, Audio Panel, ADF, and Redbird 55 Autopilot. See Figure— 1.38

(5) Redbird 430/530. See Figure— 1.38

(6) Redbird 55 Autopilot. See Figure— 1.38

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.38

Approved Configuration: PA28-80-S2

This configuration represents a single engine land, fixed gear, fixed pitch propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture and throttle controls. See Figure— 3.3

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that does not function by type of aircraft represented.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.39

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.39
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.39

(3) Life sized traditional “round” gages and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.39

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.39

(5) Redbird 430/530. See Figure— 1.39

(6) Redbird 140 Autopilot. See Figure— 1.39

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.39

Approved Configuration: PA28-2R-S2

This configuration represents a single engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird Dual 430, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has mixture, propeller, and throttle controls. See Figure— 3.4

(1)(e) This configuration has controls for:

Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Dual Redbird 430).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.40

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:

Traditional flight instruments. See Figure— 1.40
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item(Dual Redbird 430).
Navigation radio that meets the requirements listed in this item (Dual Redbird 430).

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure—1.40

(3) Life sized traditional “round” gauges and Redbird Dual 430 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.40

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.40

(5) Redbird 430/530. See Figure— 1.40

(6) Redbird 55 Autopilot. See Figure— 1.40

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.40

Approved Configuration: PA34-G1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.41

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.41
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure—1. 41

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.41

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.41

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure—1.41

(6) Integrated Redbird 700 Autopilot. See Figure— 1.41

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.41

Approved Configuration: PA44-G1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 700 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.42

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.42
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure—1. 42

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.42

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Integrated Redbird 700 Autopilot. See Figure— 1.42

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure—1.42

(6) Integrated Redbird 700 Autopilot. See Figure— 1.42

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.42

Approved Configuration: P2006-G1

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with a Glass Cockpit Redbird 1000 PFD & MFD and an Integrated Redbird 55 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin carb heat, and twin throttle controls. See Figure— 3.8

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 1000).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.43

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Glass Cockpit Redbird 1000 PFD & MFD with standby instruments. See Figure— 1.43
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge is not applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 1000)
Navigation radio that meets the requirements listed in this item. (Redbird 1000)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Glass Cockpit Redbird 1000 PFD & MFD with standby by instruments representative of aircraft being simulated with appropriate knobs/system controls/switches/switch panels. See Figure—1.43

(3) Life sized Glass Cockpit Redbird 1000 PFD & MFD representative of aircraft being simulated. See Figure— 1.43

(4) Glass Cockpit Redbird 1000 PFD & MFD, audio panel, and Redbird 55 Autopilot. See Figure— 1.43

(5) Glass Cockpit Redbird 1000 PFD & MFD. See Figure—1.43

(6) Redbird 55 Autopilot. See Figure— 1.43

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.43

Approved Configuration: BE58-S2

This configuration represents a twin engine land, retractable gear, constant speed propeller, low wing, airplane with traditional "round" gauge instruments, Redbird 430/530, and Redbird 140 Autopilot.

Meets all requirements under "All Configurations"

AC 61-136, Appendix 2, Paragraph 8: BATD Design Criteria

b. Control Requirements:

(1)(a) This configuration has a single (FMX, SD, LD) or dual (MCX) self-centering displacement yoke. See Figures— 2.1, 2.4

(1)(d) This configuration has twin mixture, twin propeller, and twin throttle controls. See Figure— 3.5

(1)(e) This configuration has controls for:
Wing Flaps.
Pitch Trim.
Communication and Navigation Radios (Redbird 430/530).
Clock and timer.
Gear handle that functions.
Transponder.
Altimeter.
Microphone with push-to-talk switch.

This configuration does not have controls for:
Carburetor heat—N/A by type of aircraft represented.
Cowl flaps—N/A by type of aircraft represented.

See Figures— 4.1-4.6, 1.44

d. Display Requirements:

(1) This configuration has instruments and indicators appropriate and applicable to the aircraft being represented:
Traditional flight instruments. See Figure— 1.44
Sensitive altimeter that meets the requirements listed in this item.
Magnetic compass.
Heading indicator that meets the requirements listed in this item.
Airspeed indicator that meets the requirements listed in this item.
Vertical speed indicator that meets the requirements listed in this item.
Gyroscopic rate-of-turn indicator that meets the requirements listed in this item.
Slip and skid indicator that meets the requirements listed in this item.
Engine instruments applicable to the aircraft being represented.
Suction gauge applicable to the aircraft being represented.
Flap setting indicator applicable to the aircraft being represented.
Pitch trim indicator that meets the requirements listed in this item.
Communication radio that meets the requirements listed in this item. (Redbird 430/530)
Navigation radio that meets the requirements listed in this item. (Redbird 430/530)

AC 61-136, Appendix 3, Paragraph 3: AATD Design Criteria

a. AATD Design Criteria

(2) Traditional “round” gauges representative of aircraft being simulated with appropriate knobs/ system controls/switches/switch panels. See Figure— 1.44

(3) Life sized traditional “round” gauges and Redbird 430/530 GPS and Navigation radios representative of aircraft being simulated See Figure— 1.44

(4) Redbird 430/530, Transponder, Audio Panel, ADF, and Redbird 140 Autopilot. See Figure— 1.44

(5) Redbird 430/530. See Figure— 1.44

(6) Redbird 140 Autopilot. See Figure— 1.44

(7) Manual pitch trim with indicator. See Figures— 4.3, 4.5, 1.44

Section 4: Figures

Group 1: Virtual Instrument Controls Overlay

Figure 1.1: RB10-S1



Figure 1.2: C172-S1



Figure 1.3: C172-G1



Figure 1.4: C172-G2



Figure 1.5: C182-S1



Figure 1.6: C182-G1



Figure 1.7: C182-G2



Figure 1.8: PA28-60-S2



Figure 1.9: PA28-60-G1



Figure 1.10: PA28-80-S1



Figure 1.11: PA28-2R-S1



Figure 1.12: PA28-2R-G1



Figure 1.13: DA20-S1



Figure 1.14: DA40-G1



Figure 1.15: SR20-G1



Figure 1.16: SR22-G1



Figure 1.17: SR22-G2



Figure 1.18: BE55-S1



Figure 1.19: BE58-S1



Figure 1.20: BE58-G1



Figure 1.21: BE76-S1



Figure 1.22: PA30-S1



Figure 1.23: PA34-S1



Figure 1.24: PA44-S1



Figure 1.25: DA42-G1



Figure 1.26: GA7-S1



Figure 1.27: C172-S2



Figure 1.28: C182-S2



Figure 1.29: C206-S1



Figure 1.30: C206-G1



Figure 1.31: C206-G2



Figure 1.32: BE36-S1



Figure 1.33: BE36-G1



Figure 1.34: LXL2-S1



Figure 1.35: LXL2-S2



Figure 1.36: SR20-G2



Figure 1.37: C206-S2



Figure 1.38: PA28-60-S1



Figure 1.39: PA28-80-S2



Figure 1.40: PA28-2R-S2



Figure 1.41: PA34-G1



Figure 1.42: PA44-G1



Figure 1.43: P2006-G1



Figure 1.44: BE58-S2



Group 2: Yoke

Figure 2.1: Standard Yoke



Figure 2.2: Side Yoke



Figure 2.3: Center Stick



Figure 2.4: Dual Yoke



Group 3: Throttle Quadrant

Figure 3.1: Single Engine Vernier Throttle Quadrant



Figure 3.2: Single Engine Complex Vernier Throttle Quadrant



Figure 3.3: Single Engine "Boat Style" Throttle Quadrant

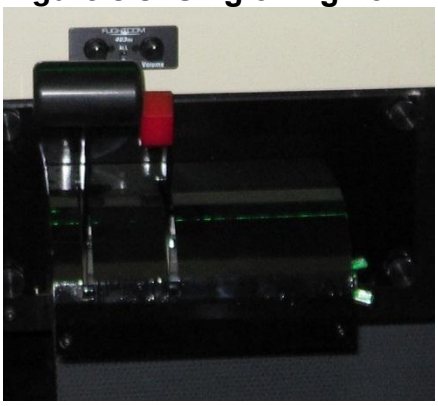


Figure 3.4: Single Engine Complex “Boat Style” Throttle Quadrant

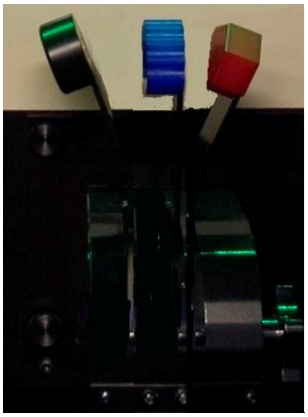


Figure 3.5: Twin Engine Throttle Quadrant – Type 1

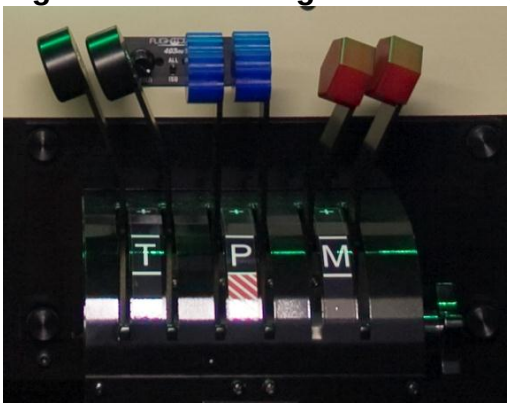


Figure 3.6: Twin Engine Throttle Quadrant – Type 2

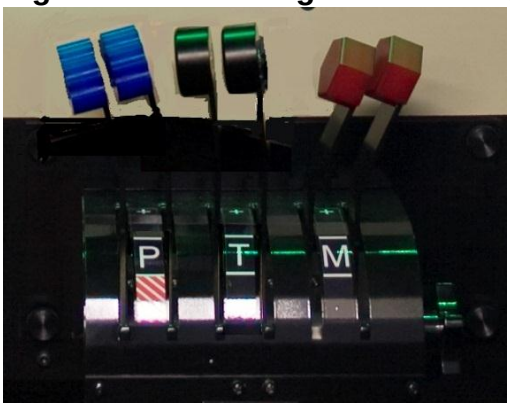


Figure 3.7: Twin Engine Throttle Quadrant – Type 3


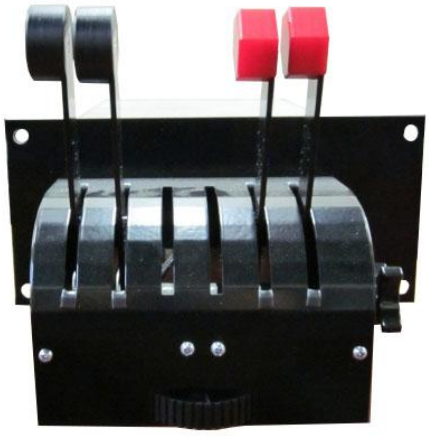


Figure 3.8: Twin Engine Throttle Quadrant – Type 4

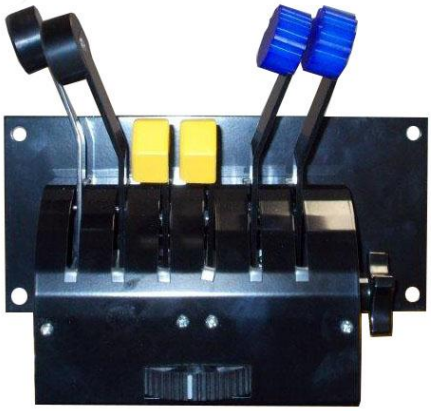

Group 4: Switch Panel

Figure 4.1: Left Side of Lower Switch Panel Type 1



Figure 4.2: Right Side of Lower Switch Panel Type 1

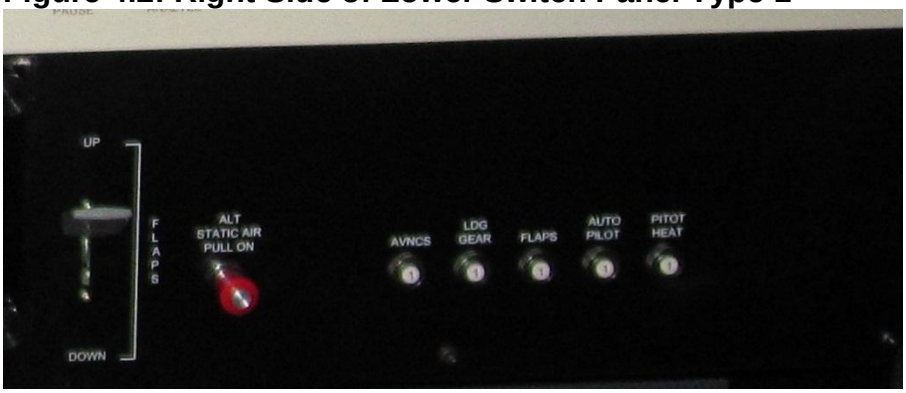


Figure 4.3: Manual Trim Wheel Switch Panel Type 1



Figure 4.4: Left Side of Lower Switch Panel Type 2



Figure 4.5: Left Side of Lower Switch Panel Type 2



Figure 4.6: Right Side of Lower Switch Panel Type 2



Group 5: Other

Figure 5.1: Training Session Buttons

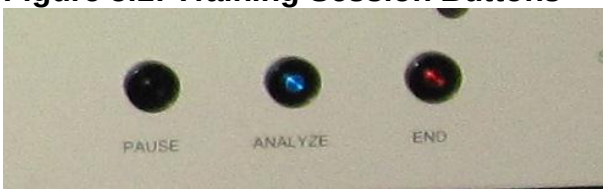


Figure 5.2: Instructors Tablet PC



Figure 5.3: Rudder Pedals – Single

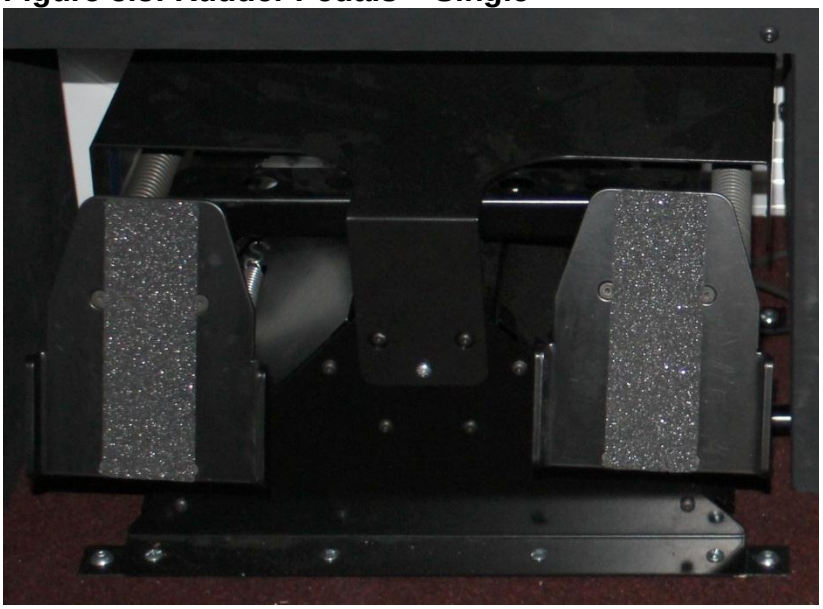


Figure 5.4: Visual Displays



Figure 5.5: Example Assembled Cockpit Configuration



Figure 5.6: Example Assembled Cockpit Configuration



Figure 5.7: External Shroud LD




Figure 5.8: External Shroud SD



Figure 5.9: External Shroud and Motion Platform Type 1 (FMX and MCX Configurations)



Figure 5.11: Rudder Pedals – Dual

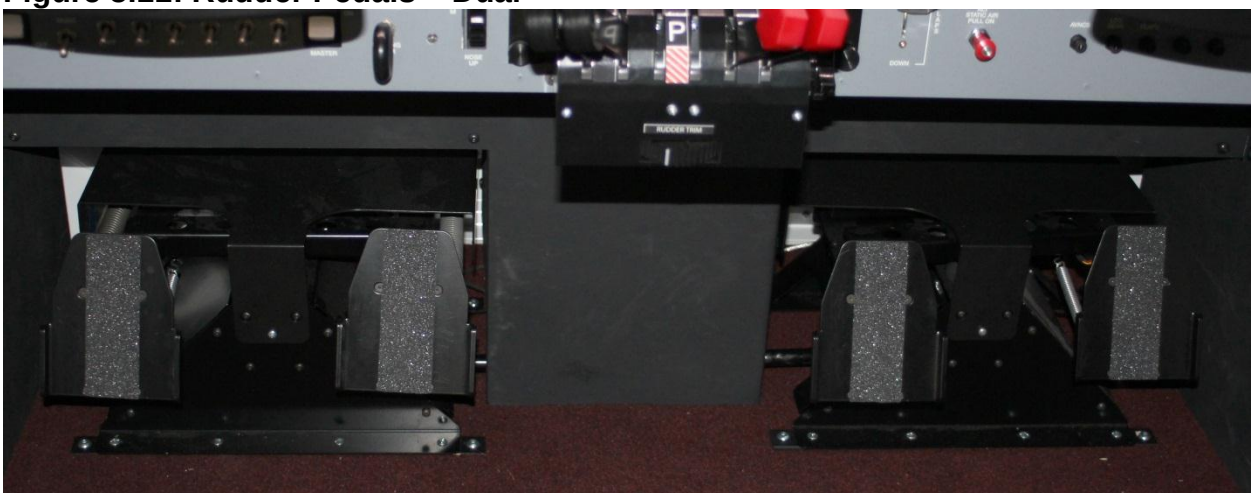

Appendix 1: Advanced ATD Checklist

Functions and Maneuvers	Satisfactory? Yes/No
a. Preparation for Flight	
(1) Preflight	Yes
b. Pre-Takeoff	
(1) Engine start	Yes
(2) Brake operation	Yes
c. Takeoff	
(1) **AIRPLANE Takeoff**	
(i) Power plant checks	Yes
(ii) Acceleration characteristics	Yes
(iii) Nose wheel and rudder steering	Yes
(iv) Effect of crosswind	Yes
(v) Instrument	Yes
(vi) Landing gear, wing flap operation	Yes
(2) **HELICOPTER Takeoff**	
(i) Power plant checks	N/A
(ii) From Hover	N/A
(iii) From Ground	N/A
(iv) Vertical	N/A
(v) Running	N/A
d. In-flight Operation	
(1) **AIRPLANE In-flight Operation**	
(i) Climb	Yes
(a) Normal	Yes
(b) One engine inoperative procedures	Yes* (Multi-Engine Configurations only)
(ii) Cruise	
(a) Performance characteristics (speed vs. power)	Yes
(b) Normal and steep turns	Yes
(c) Performance turns	Yes
(d) Approach to stalls, i.e., stall warning (cruise, takeoff/approach, and landing configuration)	Yes
(e) High angle of attack maneuvers (cruise, takeoff/approach, and landing)	Yes
(f) In-flight engine shutdown	Yes
(g) In-flight engine restart	Yes
(iii) Descent	Yes
(a) Normal	Yes
(b) Maximum rate	Yes
(2) **HELICOPTER In-flight Operation**	

(i) Hovering	N/A
(a) Forward	N/A
(b) Rearward	N/A
(c) Sideward	N/A
(d) Turns	N/A
(ii) Climb	N/A
(iii) Cruise	N/A
(a) Performance characteristics	N/A
(b) Turns	N/A
i. Recovery	N/A
ii. Skidding	N/A
iii. Slipping	N/A
(c) In-flight engine shutdown	N/A
(d) In-flight engine restart	N/A
(iv) Descent	N/A
e. Approaches	
(1) Non-precision	Yes
(i) GPS-WAAS	Varies* (Based on Configuration)
(ii) GPS-LAAS	Varies* (Based on Configuration)
(iii) All engines operating	Yes
(iv) One or more engines inoperative	Yes
(v) Approach procedures (NDB, VOR, DME Arc, LOC/BC, LOC, LDA, SDF, ASR, LNAV/VNAV, GPS, & LPV, and additional types when developed and certified)	Yes
(vi) Missed approach (all engines operational, one or more engines inoperative)	Yes
(2) Precision	Yes
(i) PAR – normal	Yes
(ii) ILS	Yes
(iii) GLS	Yes
(iv) Effects of crosswind	Yes
(v) With engine(s) inoperative	Yes
(vi) Missed approach	Yes
(a) Normal	Yes
(b) With engine(s) inoperative	Yes
(c) From steep glide slope	Yes
f. Surface Operations (AIRPLANE-Post Landing)	
(1) Landing roll	Yes
(2) Braking operation	Yes
(3) Reverse thrust operation, if applicable	N/A
g. Any Flight Phase	
(1) Aircraft and power plant systems	Yes

(i) Electrical	Yes
(ii) Flaps (**AIRPLANE**)	Yes
(iii) Fuel and oil	Yes
(iv) Landing gear (**AIRPLANE**)	Yes
(2) Flight management and guidance systems	Yes
(i) Automatic pilot	Yes
(ii) Flight director/system displays	Yes
(iii) Navigation systems	Yes
(iv) Stall warning/avoidance (**AIRPLANE**)	Yes
(v) Multi function displays	Varies* (Based on Configuration)
(vi) Primary flight displays	Varies* (Based on Configuration)
(3) Airborne procedures	Yes
(i) Holding	Yes
(4) Engine shutdown and parking	Yes
(i) Systems operation	Yes
(ii) Parking brake operation (**AIRPLANE**)	Yes