
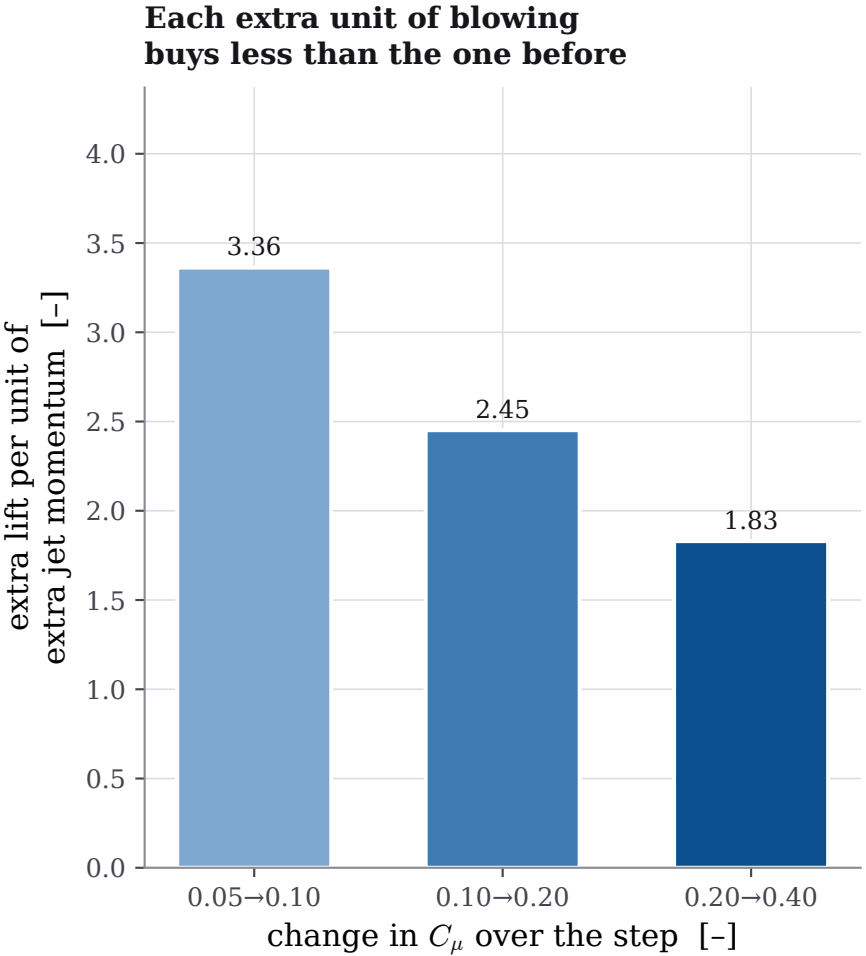


PRELIMINARY — EXPLORATORY CALCULATION, NOT A VALIDATED RESULT

Two-dimensional wing section, 1.0 m chord, symmetric, at zero incidence in a 10 m s⁻¹ stream. A 5.0 mm slot at the trailing edge blows a sheet of air aimed 30° below the chord line. C_μ is the jet's momentum divided by the oncoming stream's dynamic pressure times the chord. All five calculations share one mesh of 39 984 cells and differ only in how hard the slot blows, so the differences between them are caused by the blowing and by nothing else.

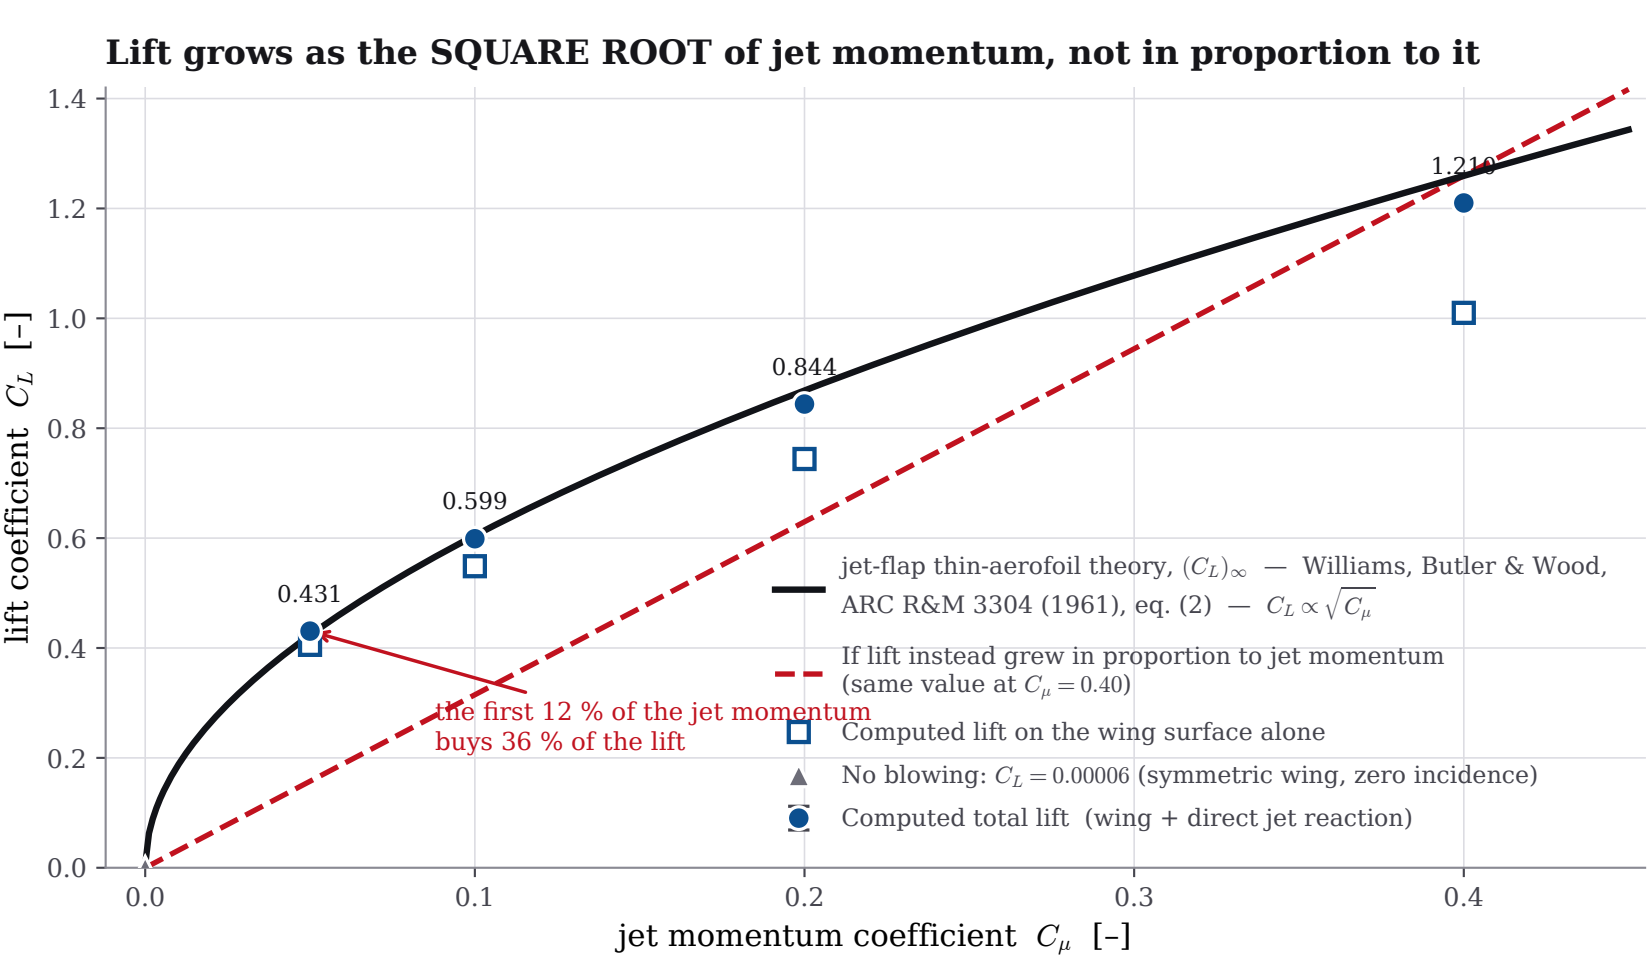

WHAT YOU SHOULD KNOW ABOUT THESE NUMBERS

- None of these calculations reached the convergence target that was fixed before they were run (all five solution channels below 1×10^{-6}). The turbulence-energy channel is the slowest everywhere, and it gets worse as blowing increases — from 3.5×10^{-6} with no jet to 1.5×10^{-4} at the strongest jet, a factor of 43. Strong blowing makes this flow genuinely hard to converge; that is a property of the physics, not of any one calculation.
- The lift itself has stopped moving: over the last 1000 iterations it varies by less than $\pm 3 \times 10^{-5}$. Those bars are drawn but are smaller than the symbols.
- Mesh sensitivity has NOT been quantified for these points. No refinement study was run, so no grid uncertainty is claimed.
- Treat every number here as indicative. It is not a validated result and it has not been compared against experiment.