
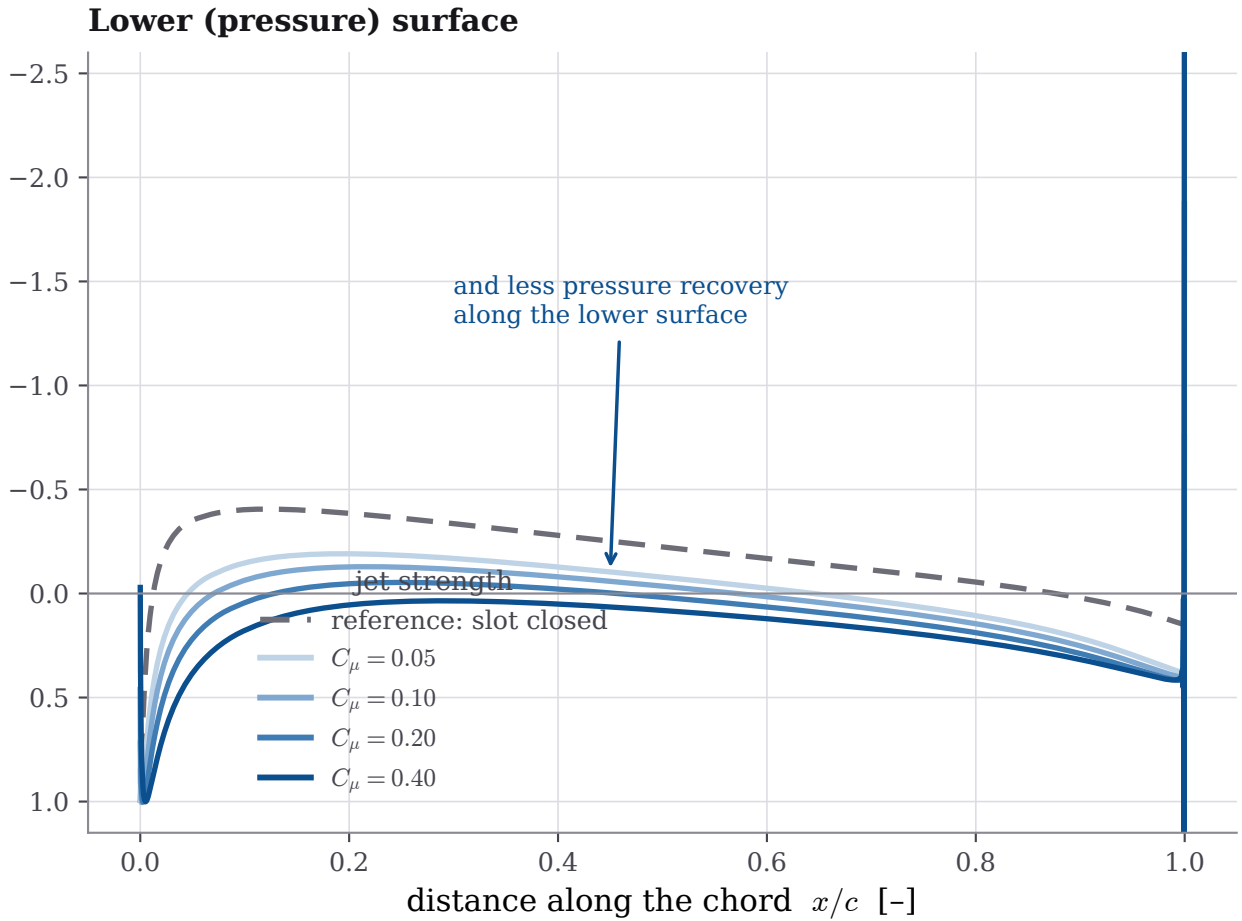


PRELIMINARY — EXPLORATORY CALCULATION, NOT A VALIDATED RESULT

The same wing and the same mesh in all five curves. The four blown curves differ from one another only in the strength of the trailing-edge jet, so that comparison is controlled. The fifth curve, dashed grey, is the reference case with the slot closed — not the same wing with the jet turned down to zero.

Pressure is shown in the usual aerodynamic convention with suction upward. The area between the upper and lower curves is the lift, so the widening gap as the jet strengthens IS the lift the blowing produces.

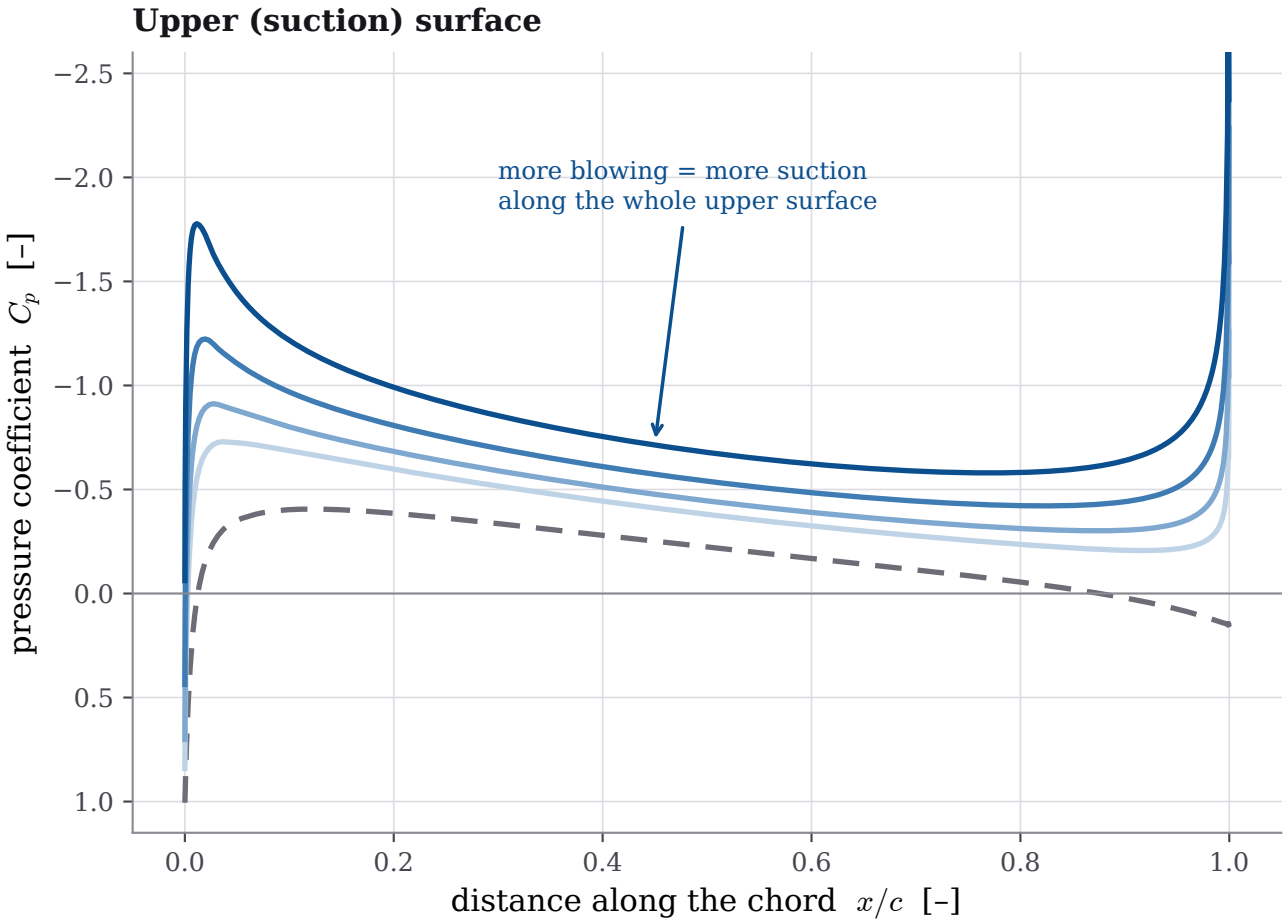

WHAT YOU SHOULD KNOW ABOUT THESE NUMBERS

- None of these calculations reached the convergence target that was fixed before they were run (all five solution channels below 1×10^{-6}). The turbulence-energy channel is the slowest everywhere, and it gets worse as blowing increases — from 3.5×10^{-6} with no jet to 1.5×10^{-4} at the strongest jet, a factor of 43. Strong blowing makes this flow genuinely hard to converge; that is a property of the physics, not of any one calculation.
- Over the final 4,000 iterations the lift still moves by up to 3.4×10^{-5} at the worst row. That is a settling indicator, not convergence. Those bars are drawn but are smaller than the symbols.
- Mesh sensitivity has NOT been quantified for these points. No refinement study was run, so no grid uncertainty is claimed.
- Treat every number here as indicative. It is not a validated result and it has not been compared against experiment.