CS 305 Computer Networks

Chapter 6 Link Layer and LANs (2)

Jin Zhang
Department of Computer Science and Engineering
Southern University of Science and Technology

Link layer, LANs: outline

6.1 introduction, services

6.2 error detection, correction

6.3 multiple access protocols

6.4 LANs

- addressing, ARP
- Ethernet
- switches
- VLANS

6.5 link virtualization: MPLS

6.6 data center networking

6.7 a day in the life of a web request

Ethernet

"dominant" wired LAN technology:

- single chip, multiple speeds (e.g., Broadcom BCM5761)
- first widely used LAN technology
- simpler, cheap
- kept up with speed race: 10 Mbps – 10 Gbps

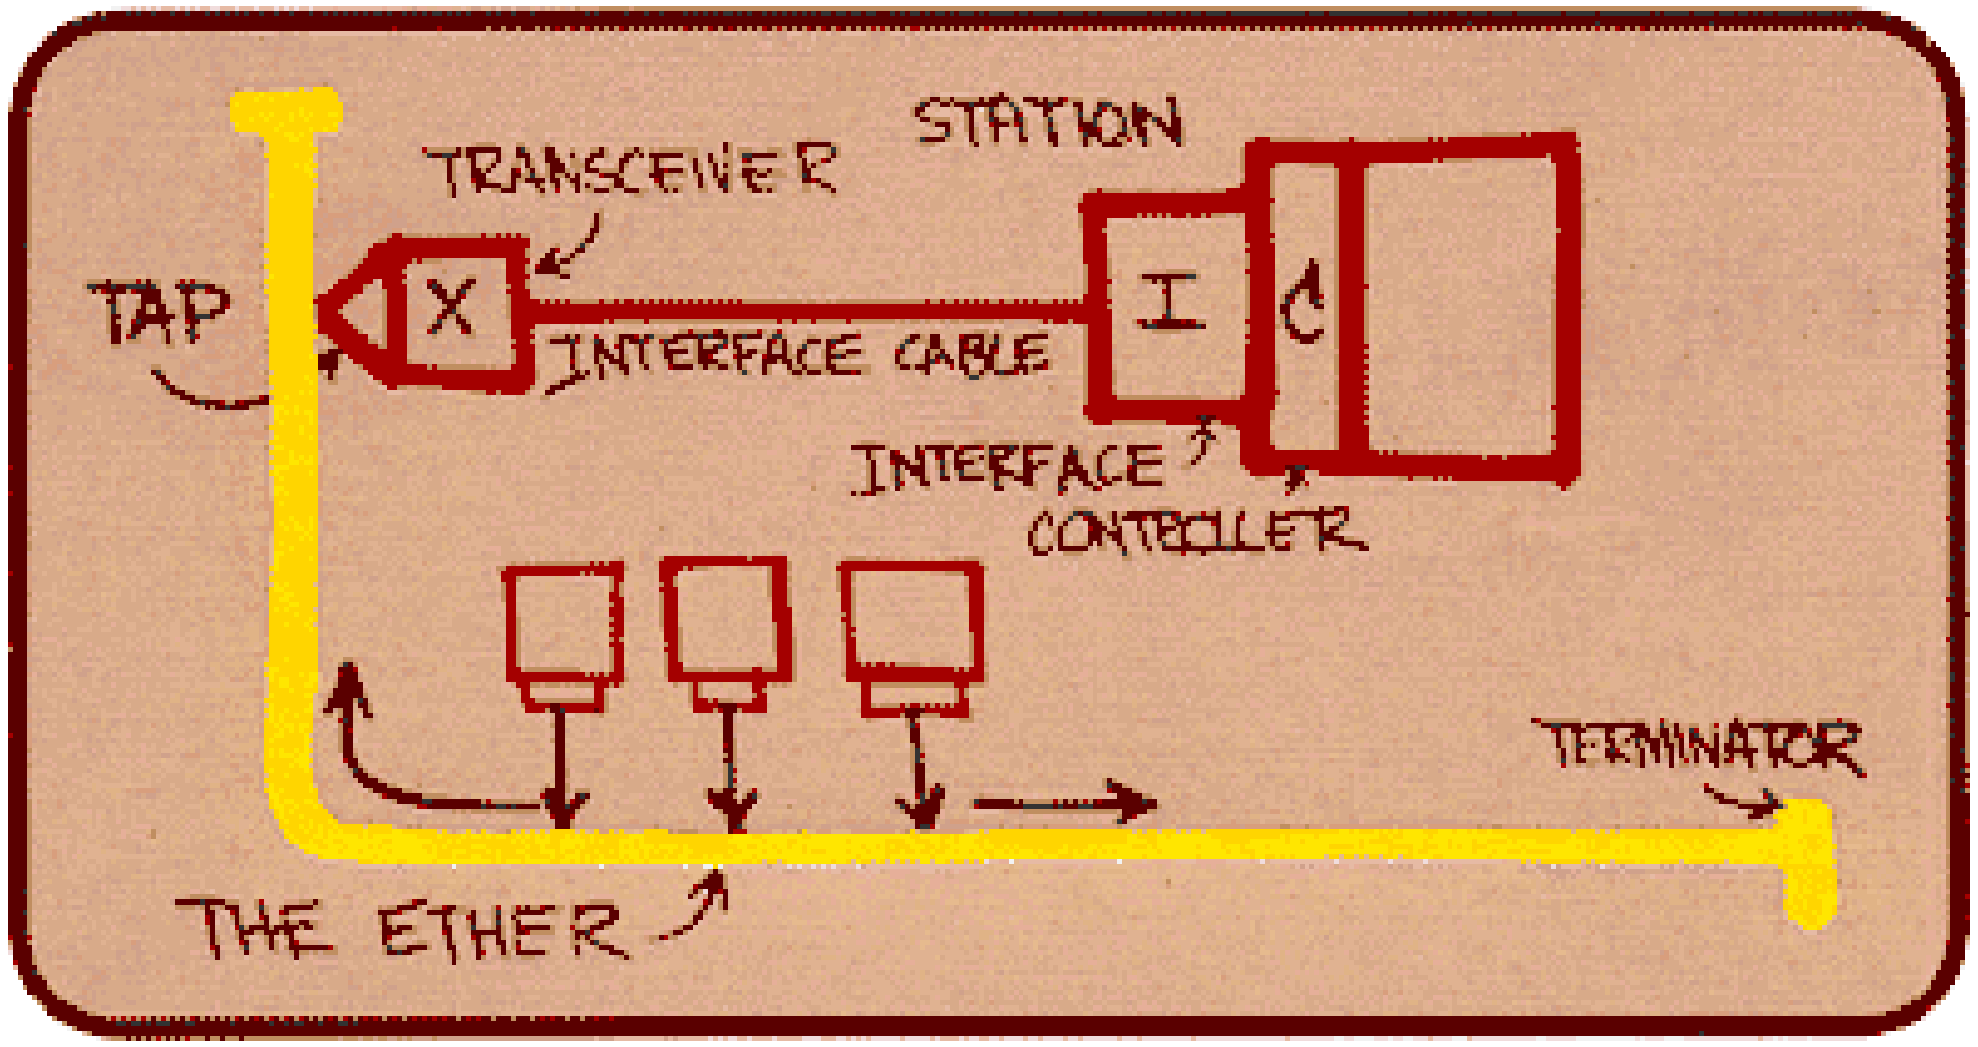

Metcalfe's Ethernet sketch

Ethernet: physical topology

- *bus:* popular through mid 90s
  - all nodes in same collision domain (can collide with each other)
- *star:* prevails today
  - active *switch* in center
  - each “spoke” runs a (separate) Ethernet protocol (nodes do not collide with each other)

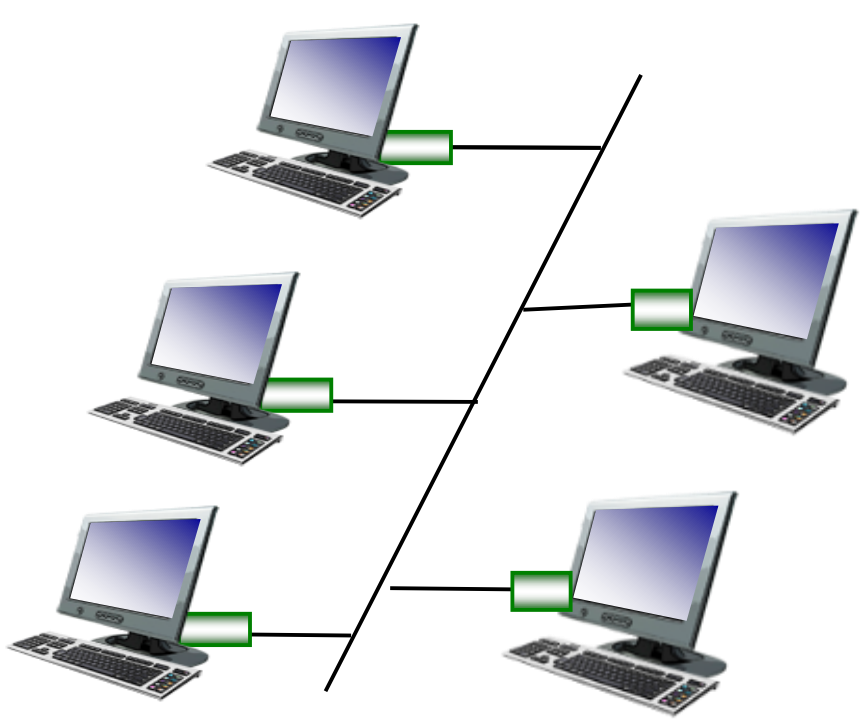

bus: coaxial cable

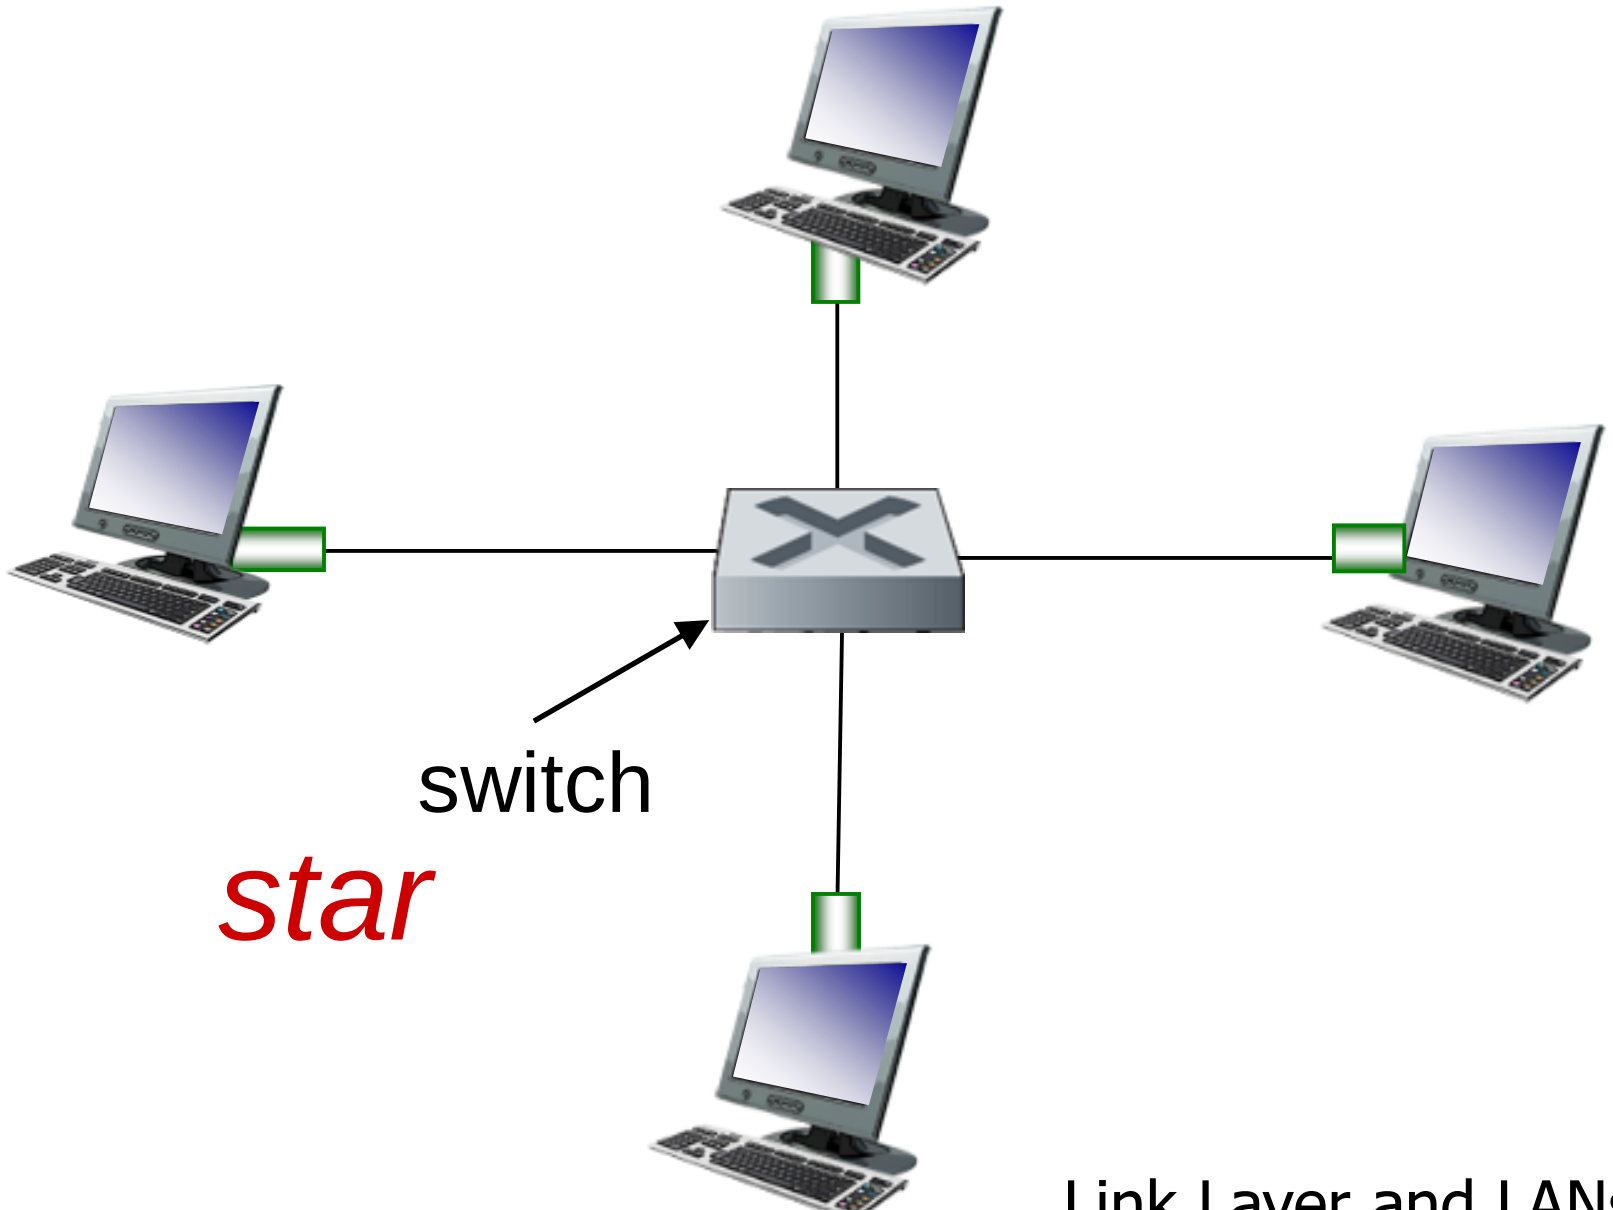

star

Ethernet frame structure

sending adapter encapsulates IP datagram (or other network layer protocol packet) in Ethernet frame

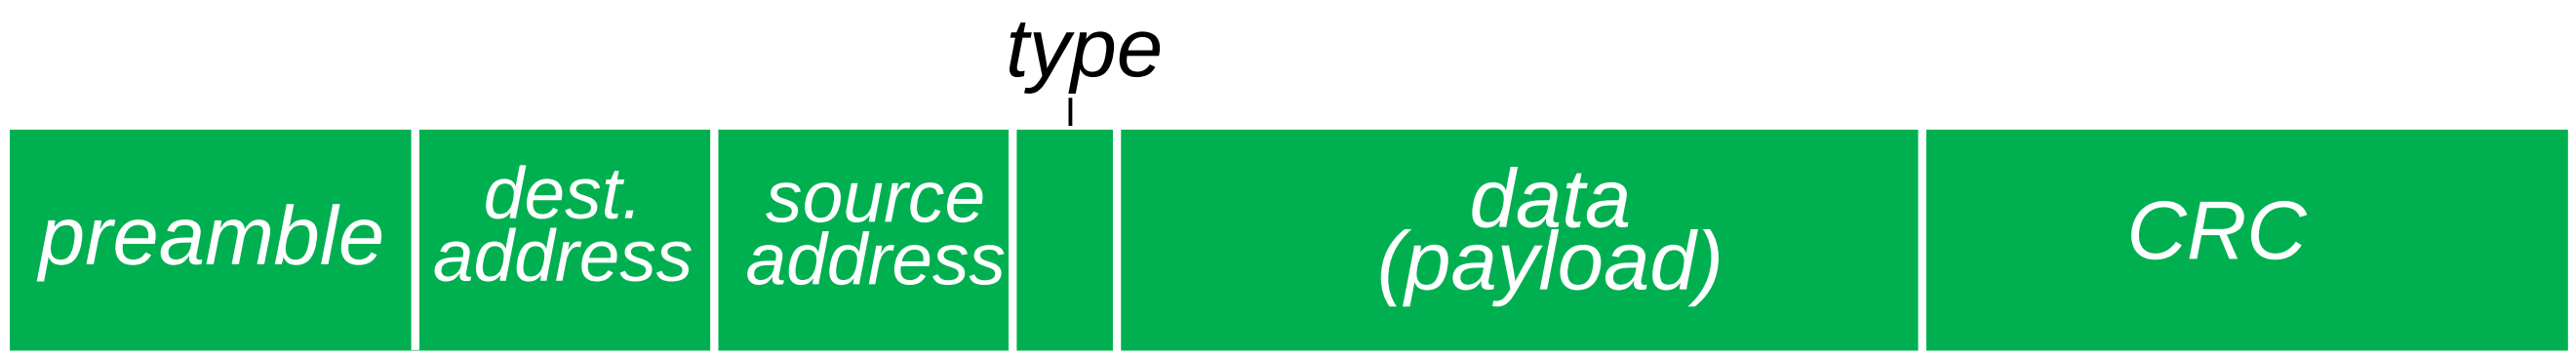

preamble:

- 7 bytes with pattern 10101010 followed by one byte with pattern 10101011
- used to synchronize receiver, sender clock rates

Ethernet frame structure (more)

- *addresses:* 6 byte source, destination MAC addresses
  - if adapter receives frame with matching destination address, or with broadcast address (e.g. ARP packet), it passes data in frame to network layer protocol
  - otherwise, adapter discards frame
- *type:* indicates higher layer protocol (mostly IP but others possible, e.g., Novell IPX, AppleTalk)
- *CRC:* cyclic redundancy check at receiver
  - error detected: frame is dropped

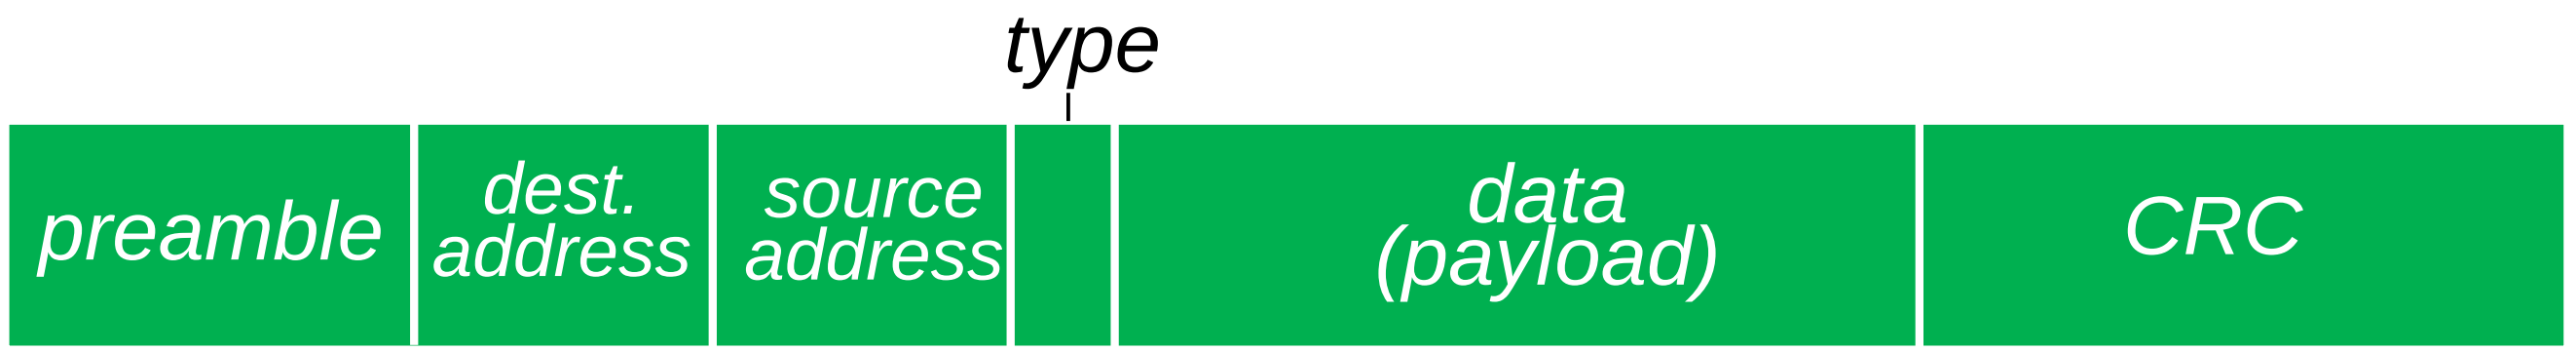

Ethernet: unreliable, connectionless

- *connectionless:* no handshaking between sending and receiving NICs
- *unreliable:* receiving NIC doesn't send acks or nacks to sending NIC
  - data in dropped frames recovered only if initial sender uses higher layer rdt (e.g., TCP), otherwise dropped data lost
- Ethernet's MAC protocol: unslotted *CSMA/CD with binary backoff*

802.3 Ethernet standards: link & physical layers

- *many* different Ethernet standards
  - common MAC protocol and frame format
  - different speeds: 2 Mbps, 10 Mbps, 100 Mbps, 1Gbps, 10 Gbps, 40 Gbps
  - different physical layer media: fiber, cable

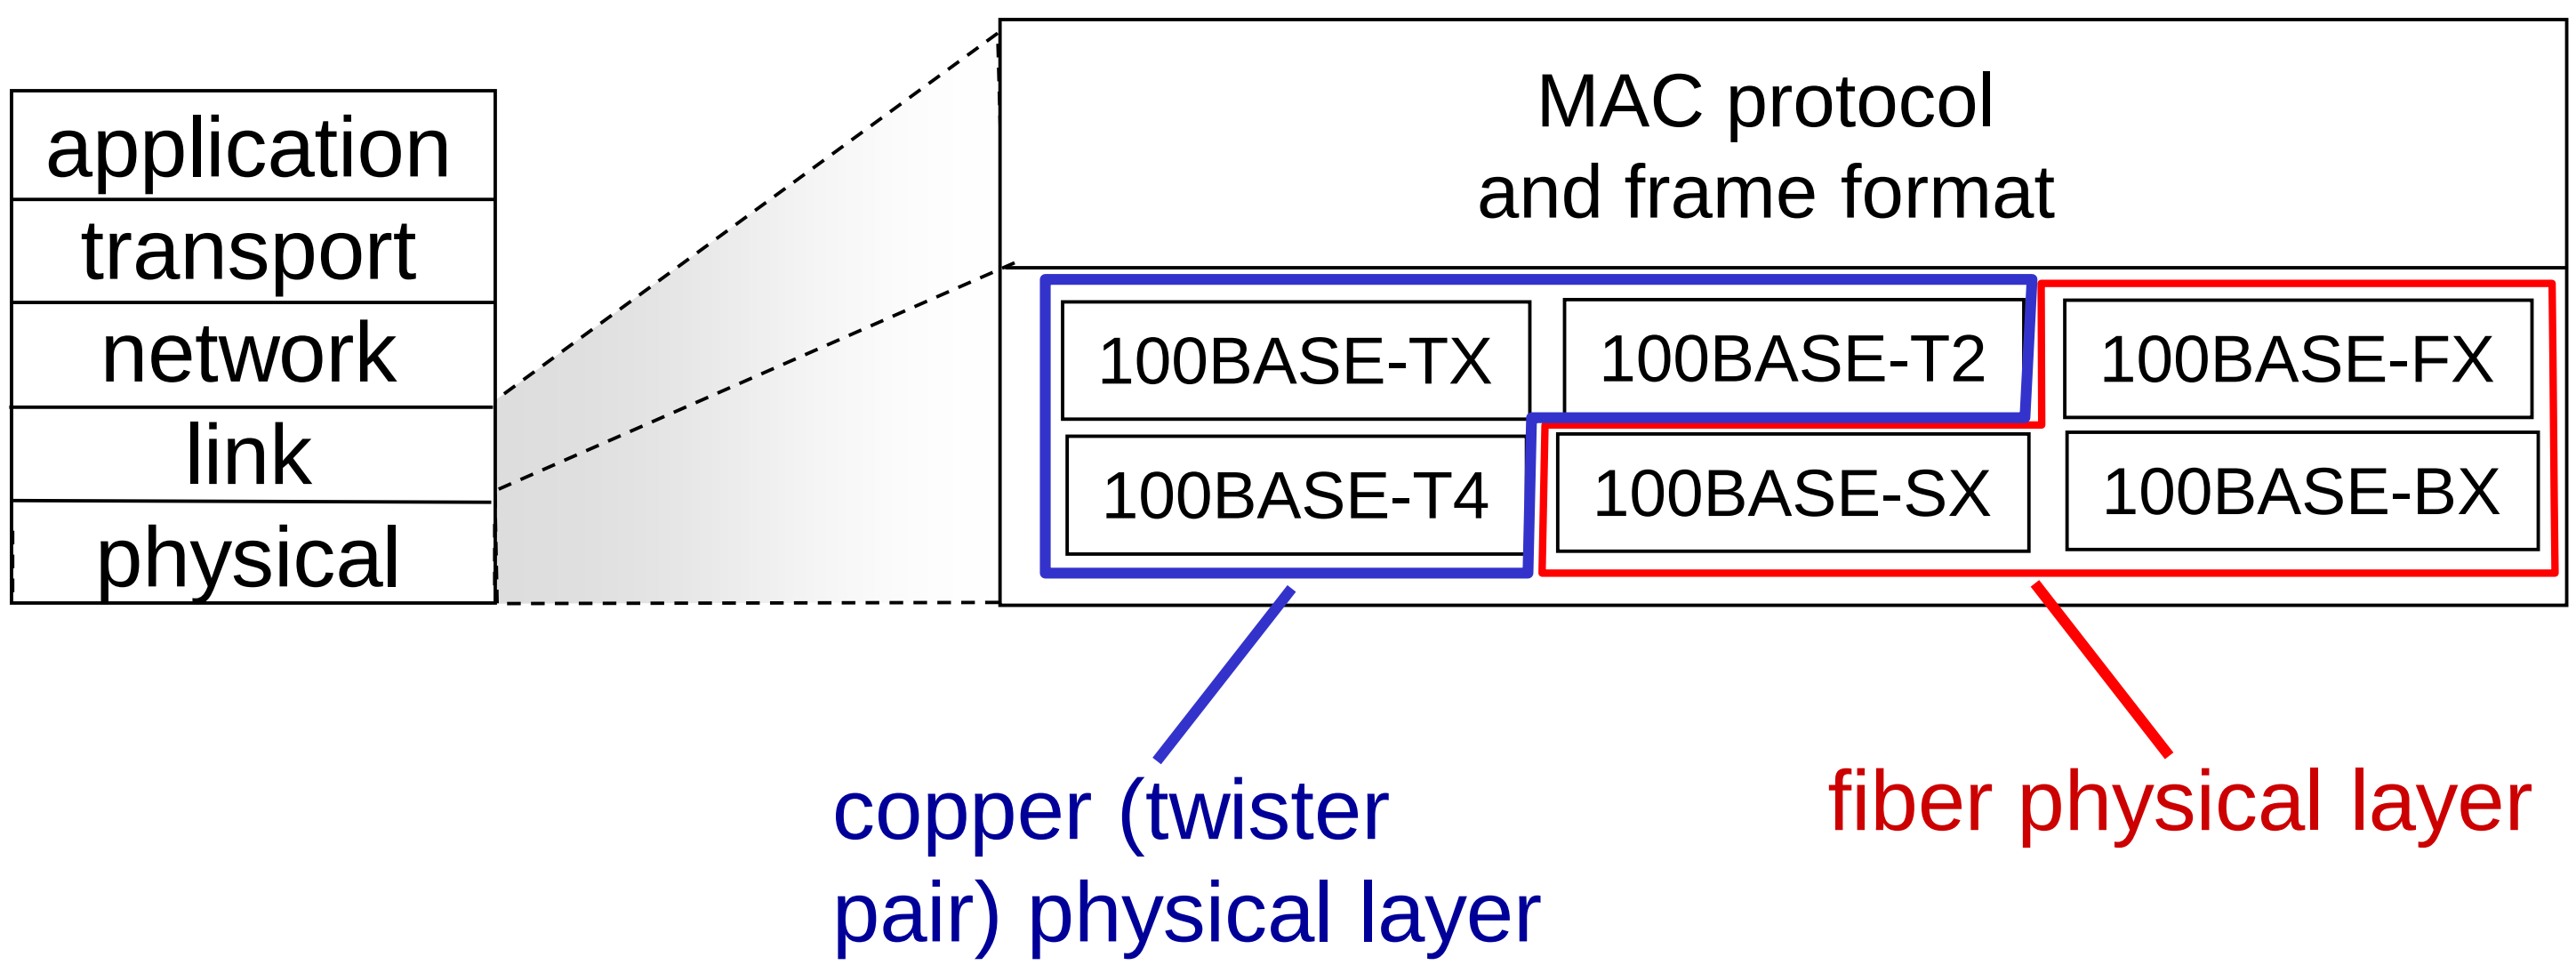

Link layer, LANs: outline

6.1 introduction, services

6.2 error detection, correction

6.3 multiple access protocols

6.4 LANs
- addressing, ARP
- Ethernet
- switches
- VLANS

6.5 link virtualization: MPLS

6.6 data center networking

6.7 a day in the life of a web request

Ethernet switch

- link-layer device: takes an *active* role
  - store, forward Ethernet frames
  - examine incoming frame's MAC address, selectively forward frame to one-or-more outgoing links when frame is to be forwarded on segment, uses CSMA/CD to access segment
- *transparent*
  - hosts are unaware of presence of switches
- *plug-and-play, self-learning*
  - switches do not need to be configured

Switch: *multiple* simultaneous transmissions

- hosts have dedicated, direct connection to switch
- switches buffer packets
- Ethernet protocol used on *each* incoming link, but no collisions; full duplex
  - each link is its own collision domain
- *switching:* A-to-A' and B-to-B' can transmit simultaneously, without collisions

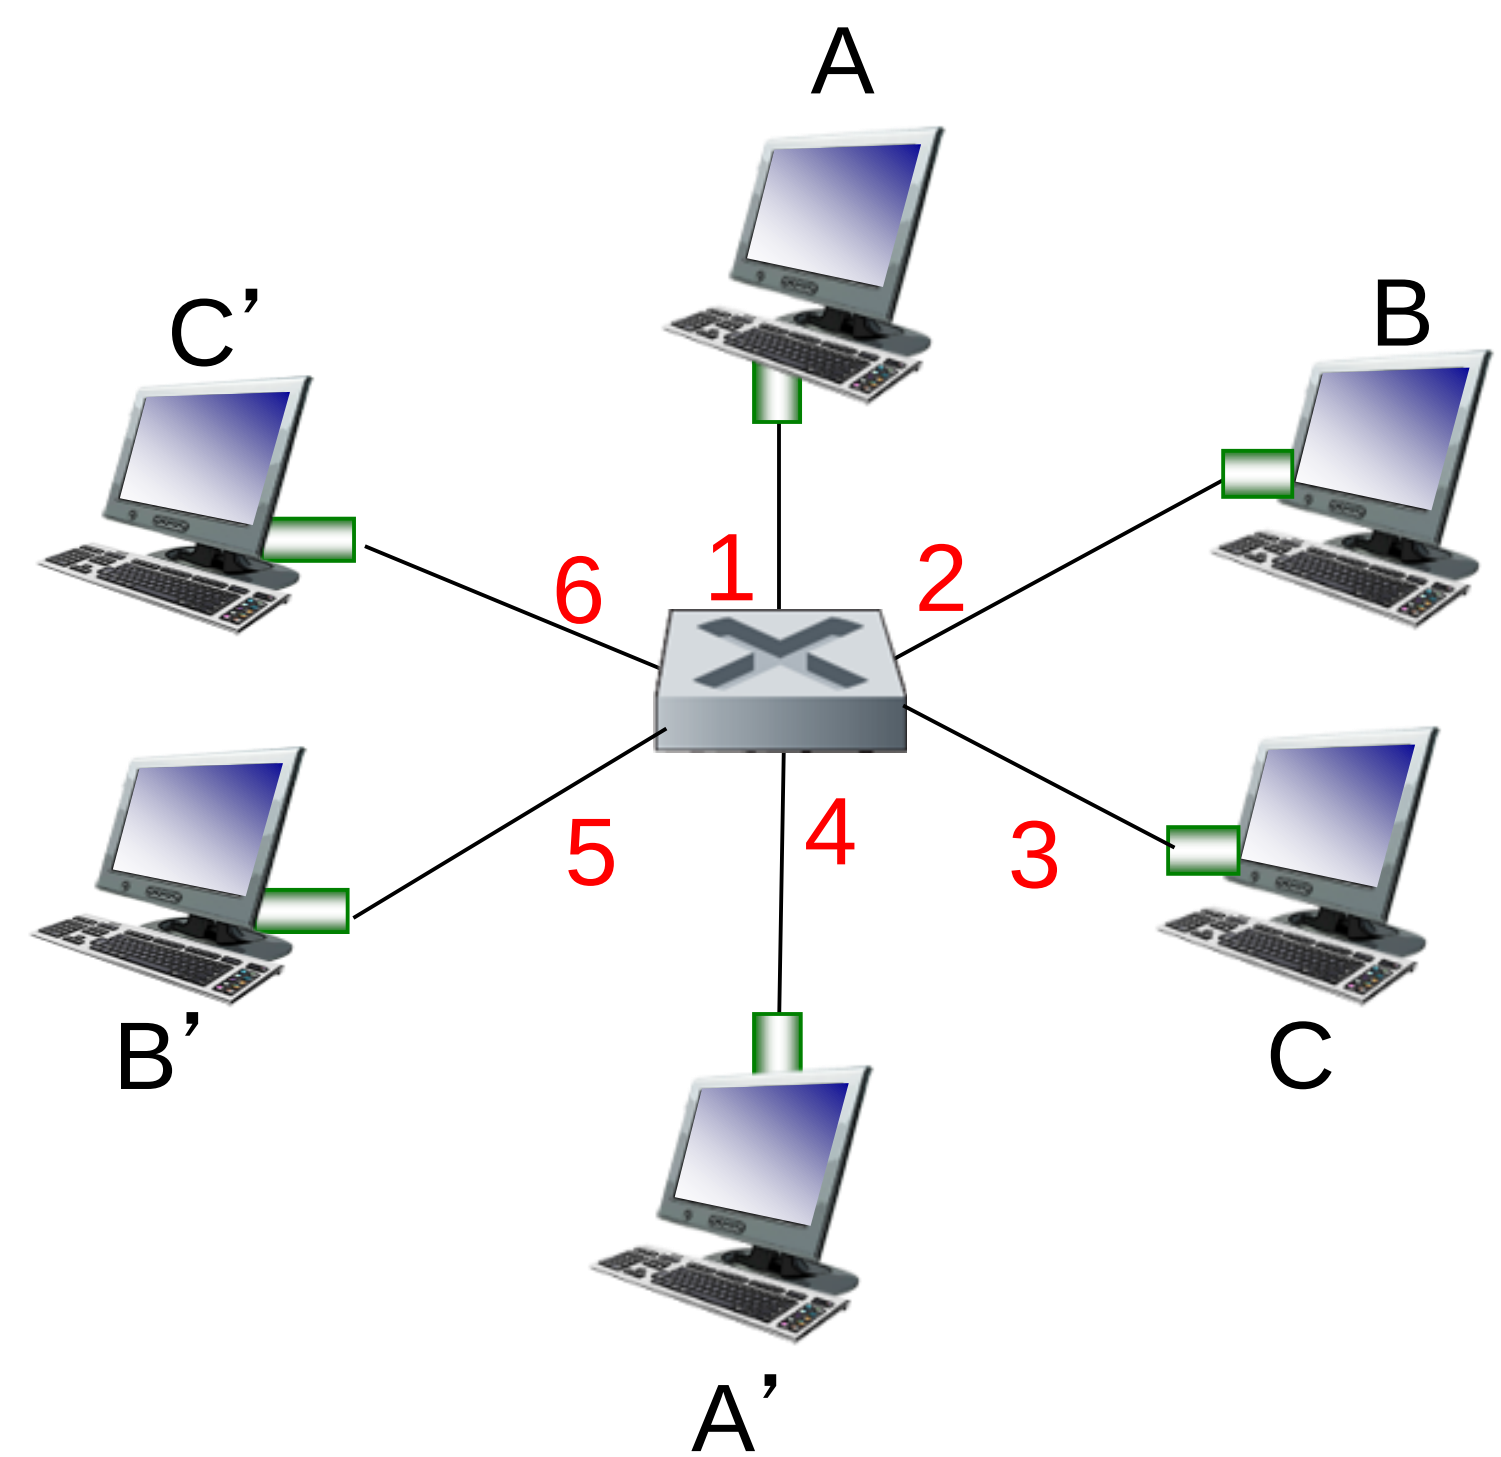

switch with six interfaces (1,2,3,4,5,6)

Switch forwarding table

Q: how does switch know A' reachable via interface 4, B' reachable via interface 5?

- *A:* each switch has a **switch table,** each entry:
  - (MAC address of host, interface to reach host, time stamp)
  - looks like a routing table!

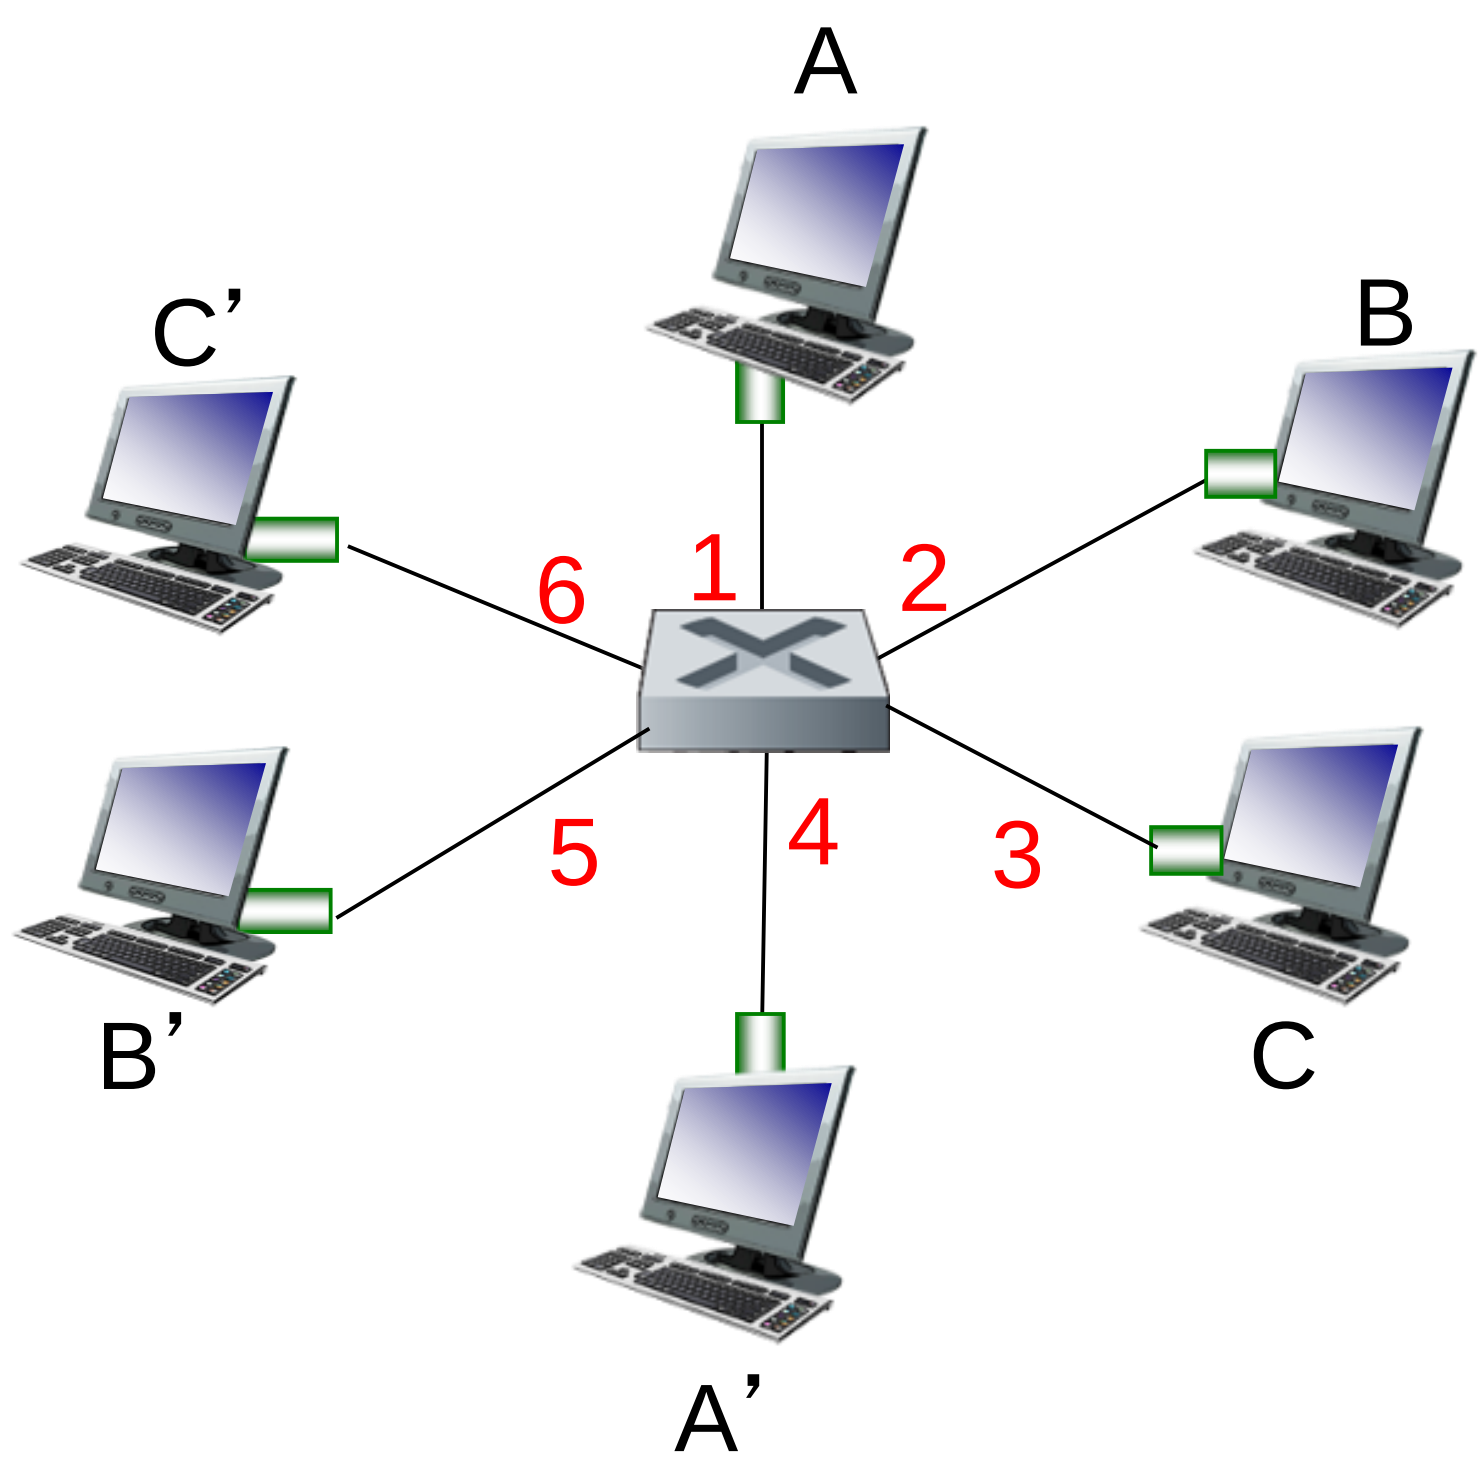

switch with six interfaces (1,2,3,4,5,6)

Q: how are entries created, maintained in switch table?

- something like a routing protocol?

Switch: self-learning

- switch *learns* which hosts can be reached through which interfaces
  - when frame received, switch "learns" location of sender: incoming LAN segment
  - records sender/location pair in switch table

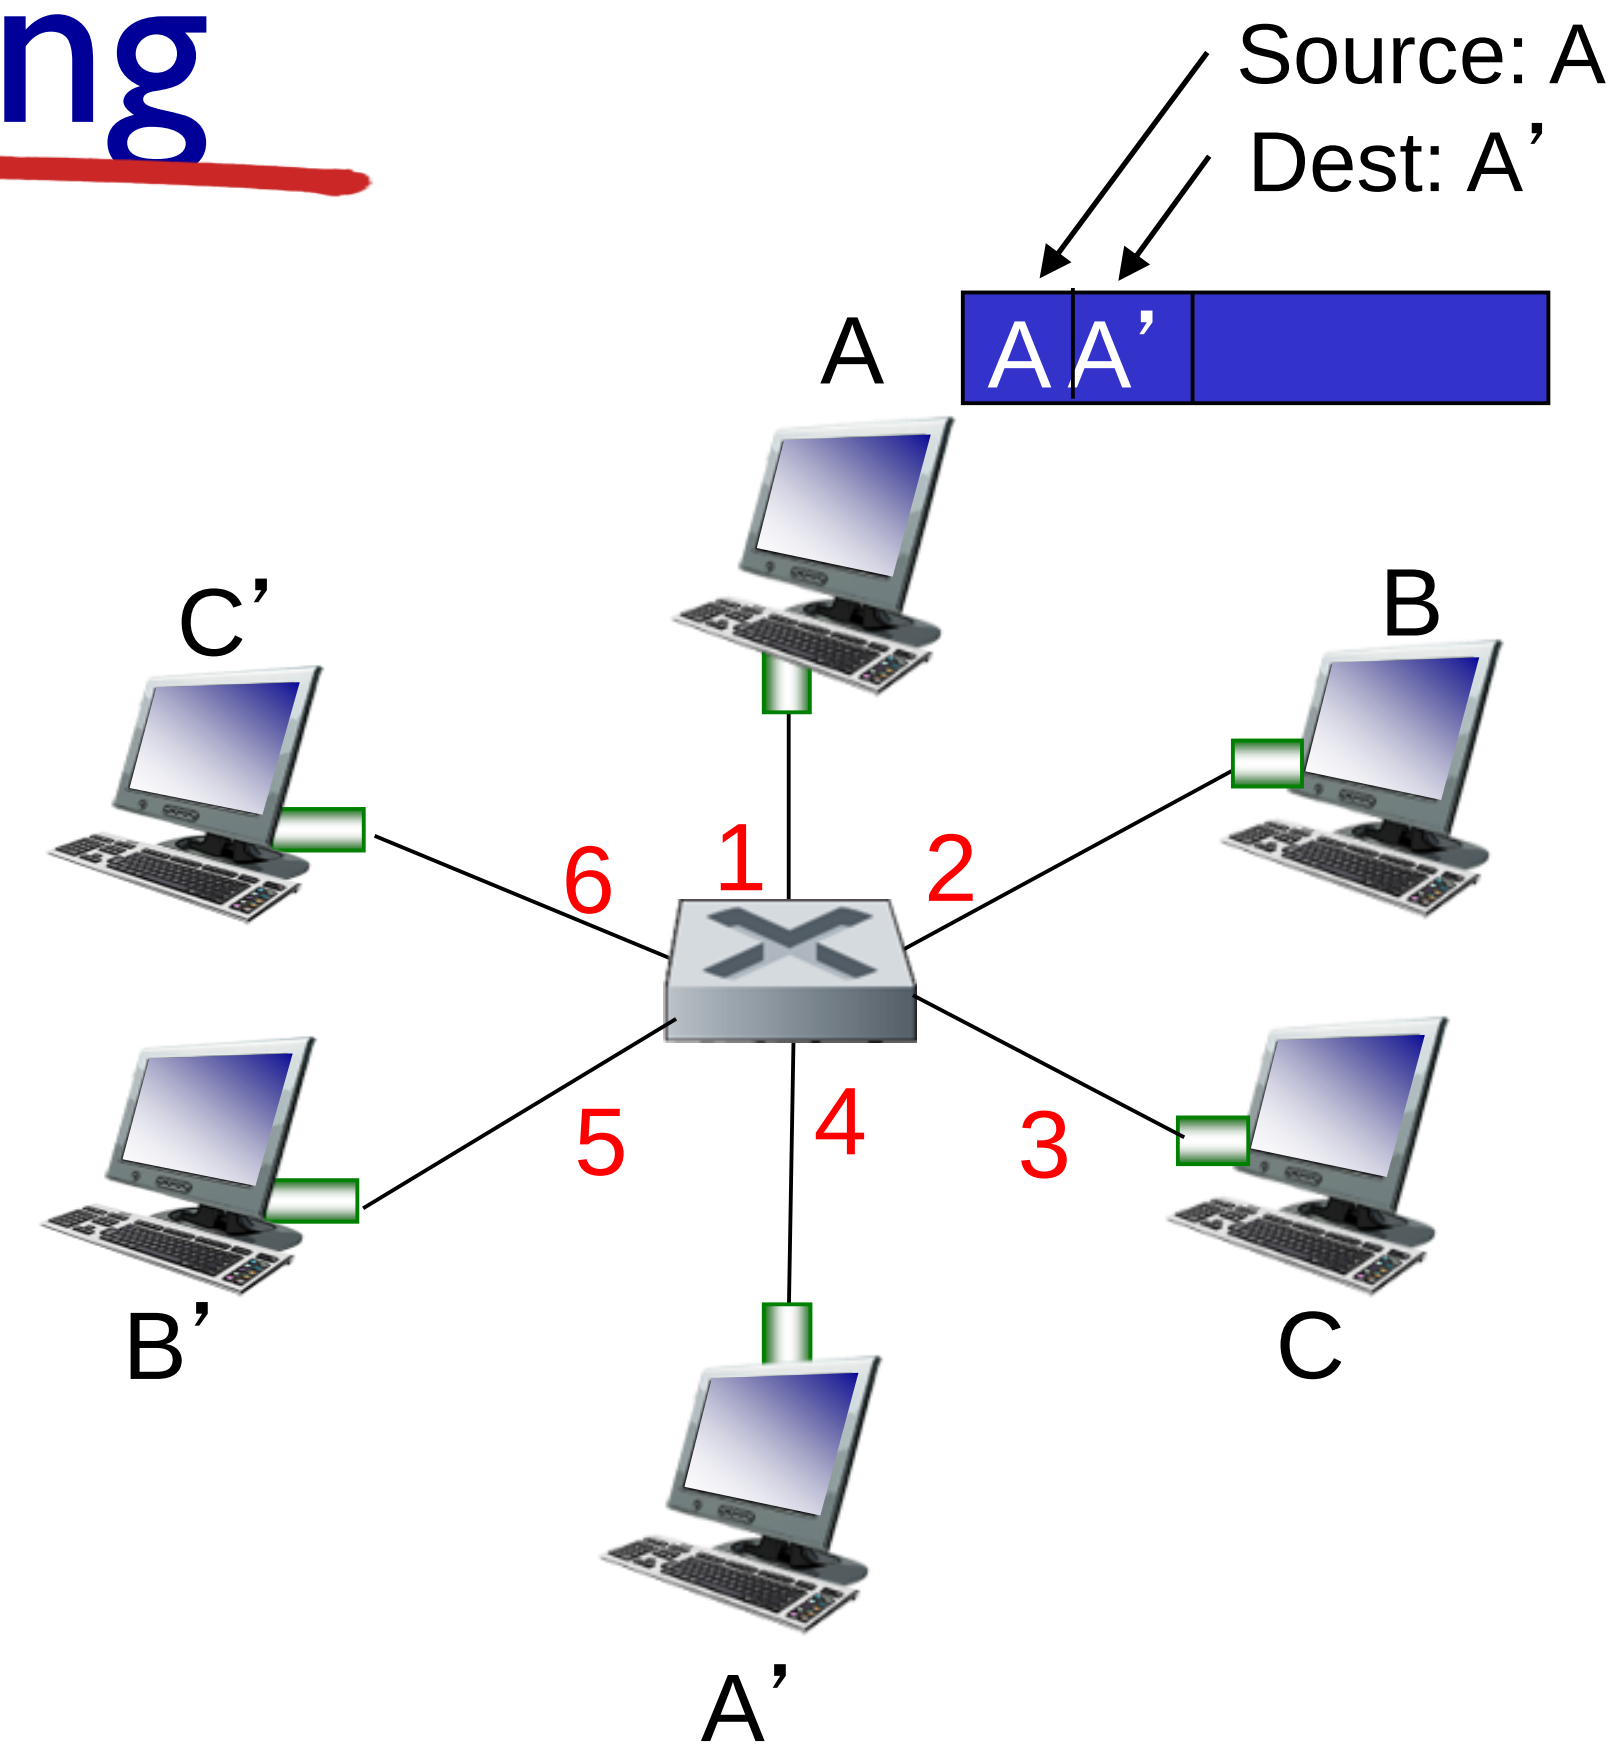

MAC addr	interface	TTL
A	*1*	*60*

Switch table (initially empty)

Self-learning, forwarding: example

- frame destination, A', location unknown: *flood*
- destination A location known: selectively send on just one link

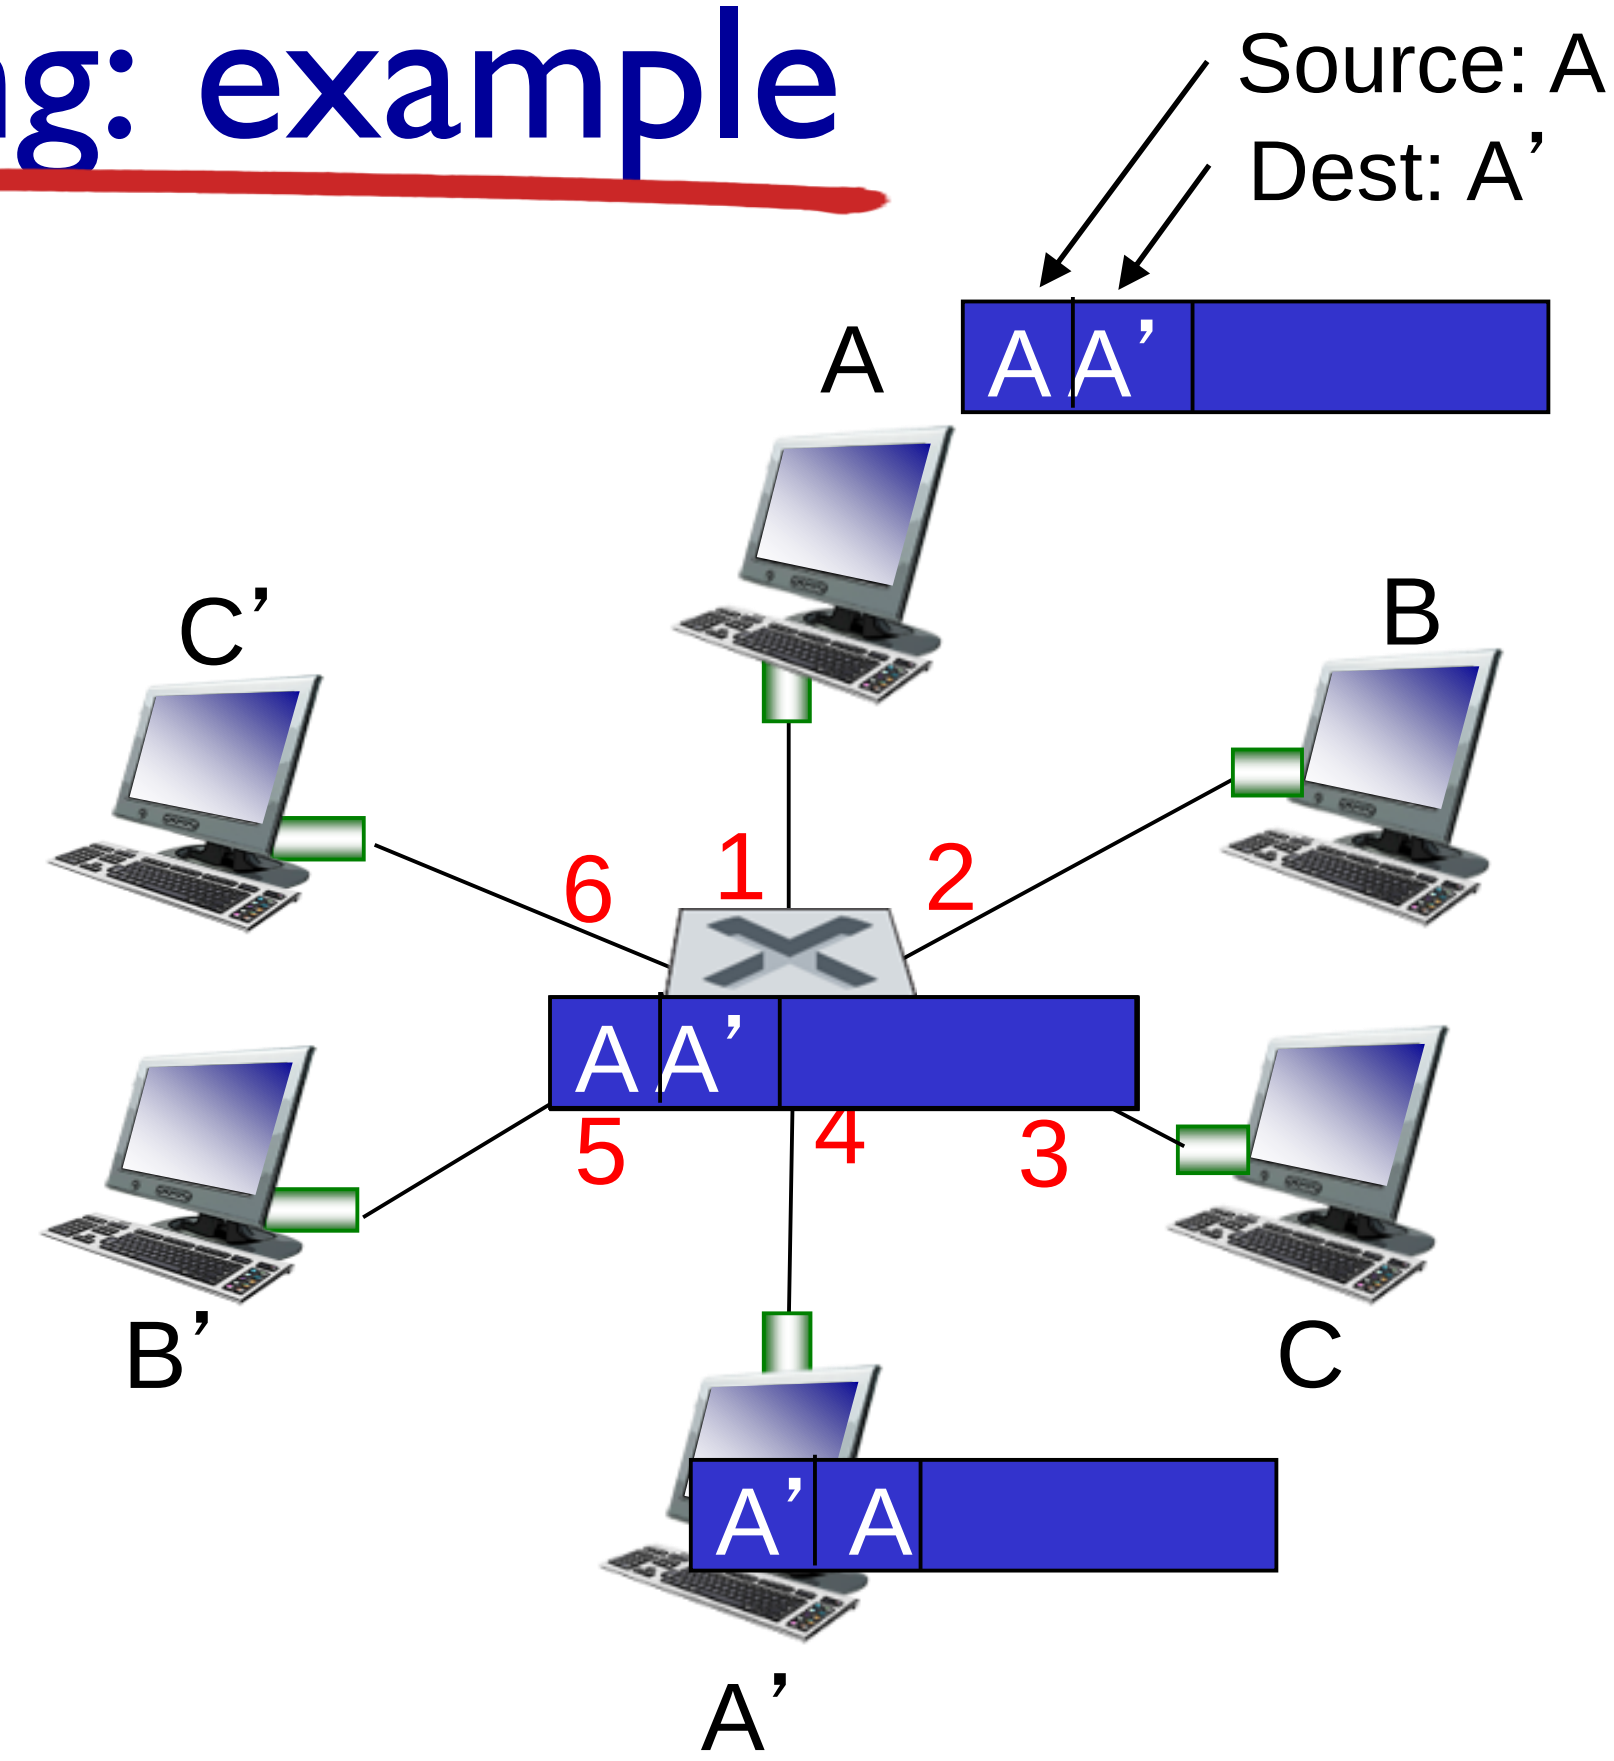

MAC addr	interface	TTL
A	*1*	*60*
A'	*4*	*60*

switch table (initially empty)

Interconnecting switches

self-learning switches can be connected together:

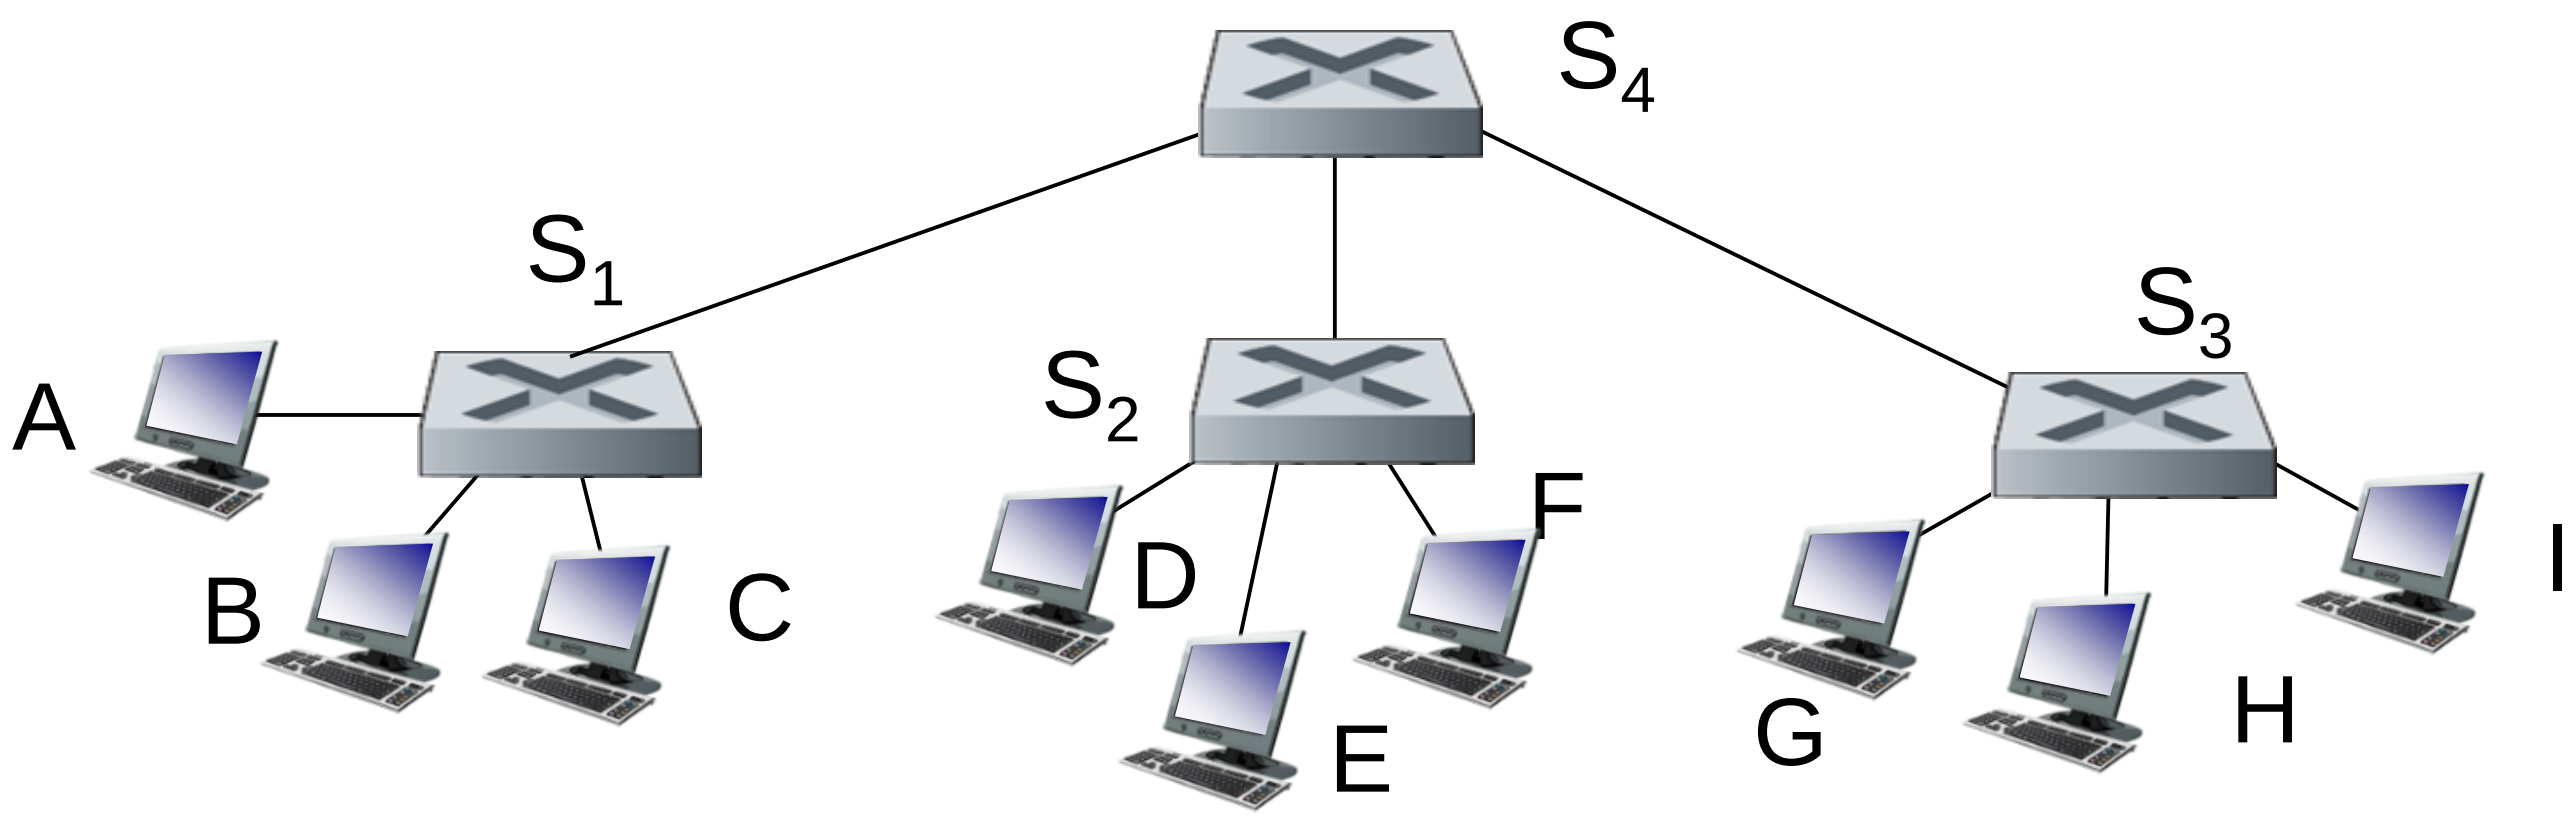

Q: sending from A to G - how does S_1 know to forward frame destined to G via S_4 and S_3?

- *A:* self learning! (works exactly the same as in single-switch case!)

Institutional network

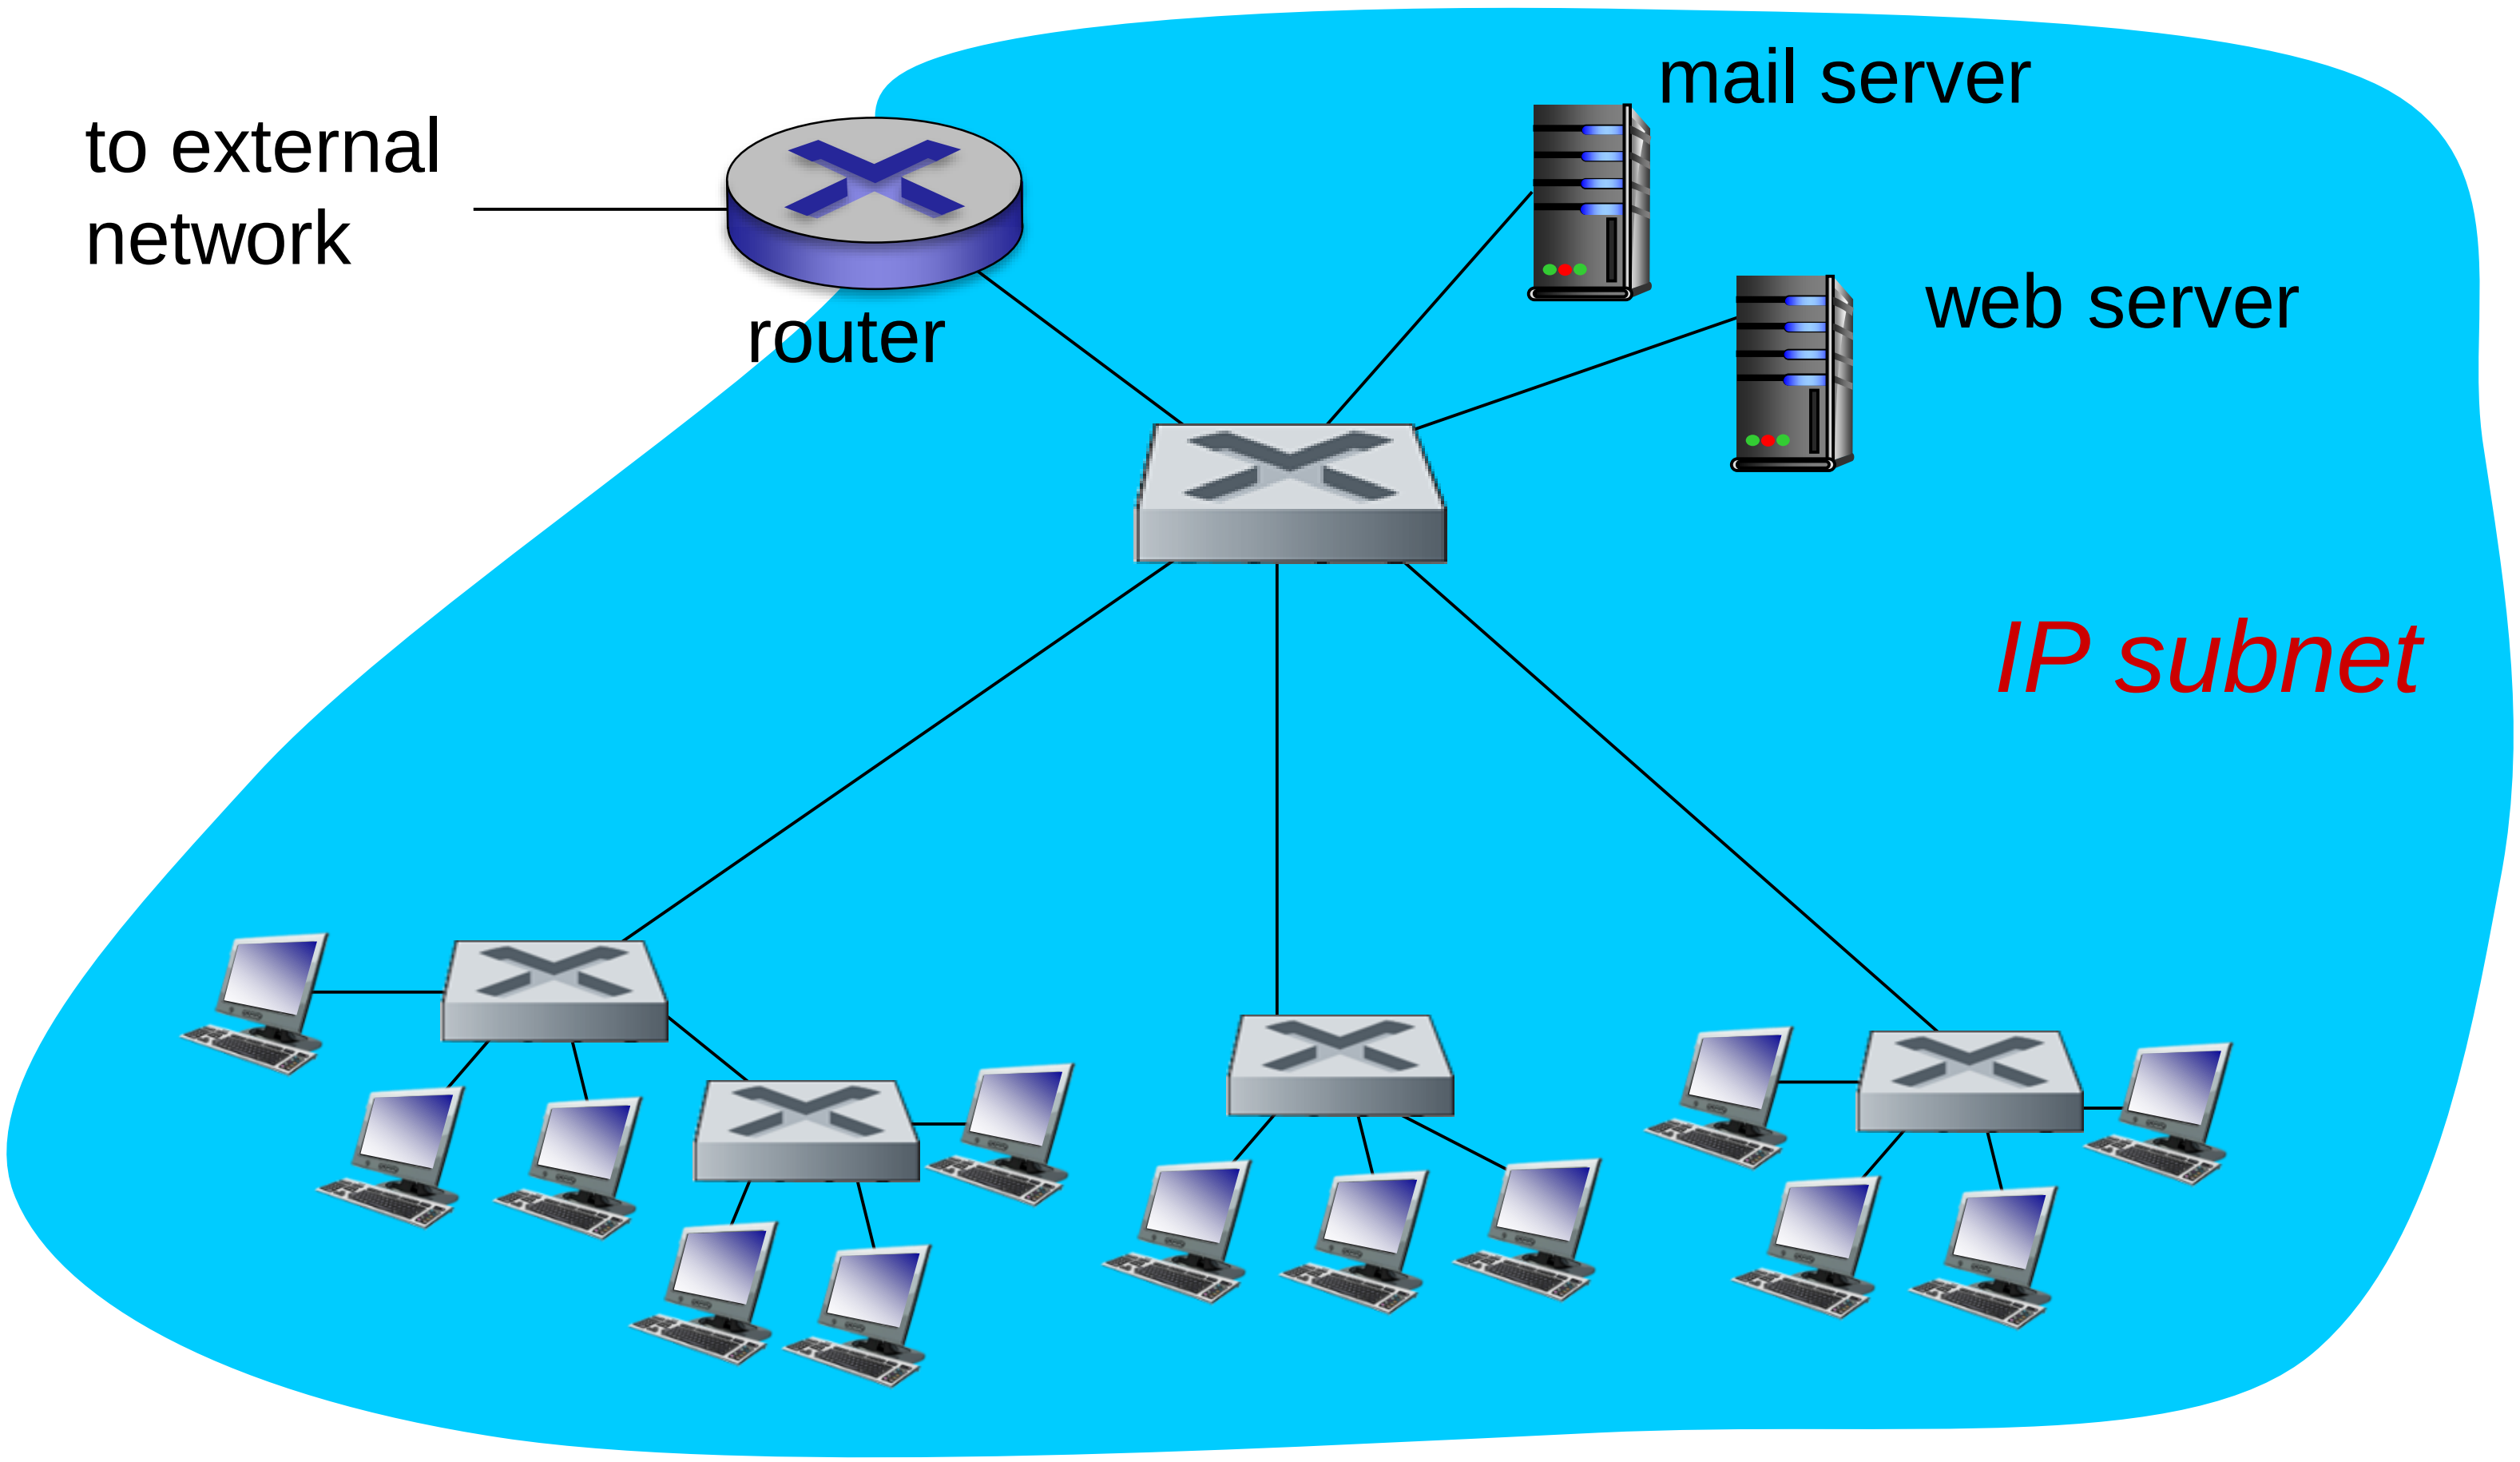

Properties of link-layer Switching

- *Elimination of collisions*
- *Heterogeneous links*
  - *Switch can isolates one link from another*
  - *Different links in the LAN can operate at different speeds and media*
- *Management*
  - *If one NIC malfunctions, the switch can detect it and disconnect it.*

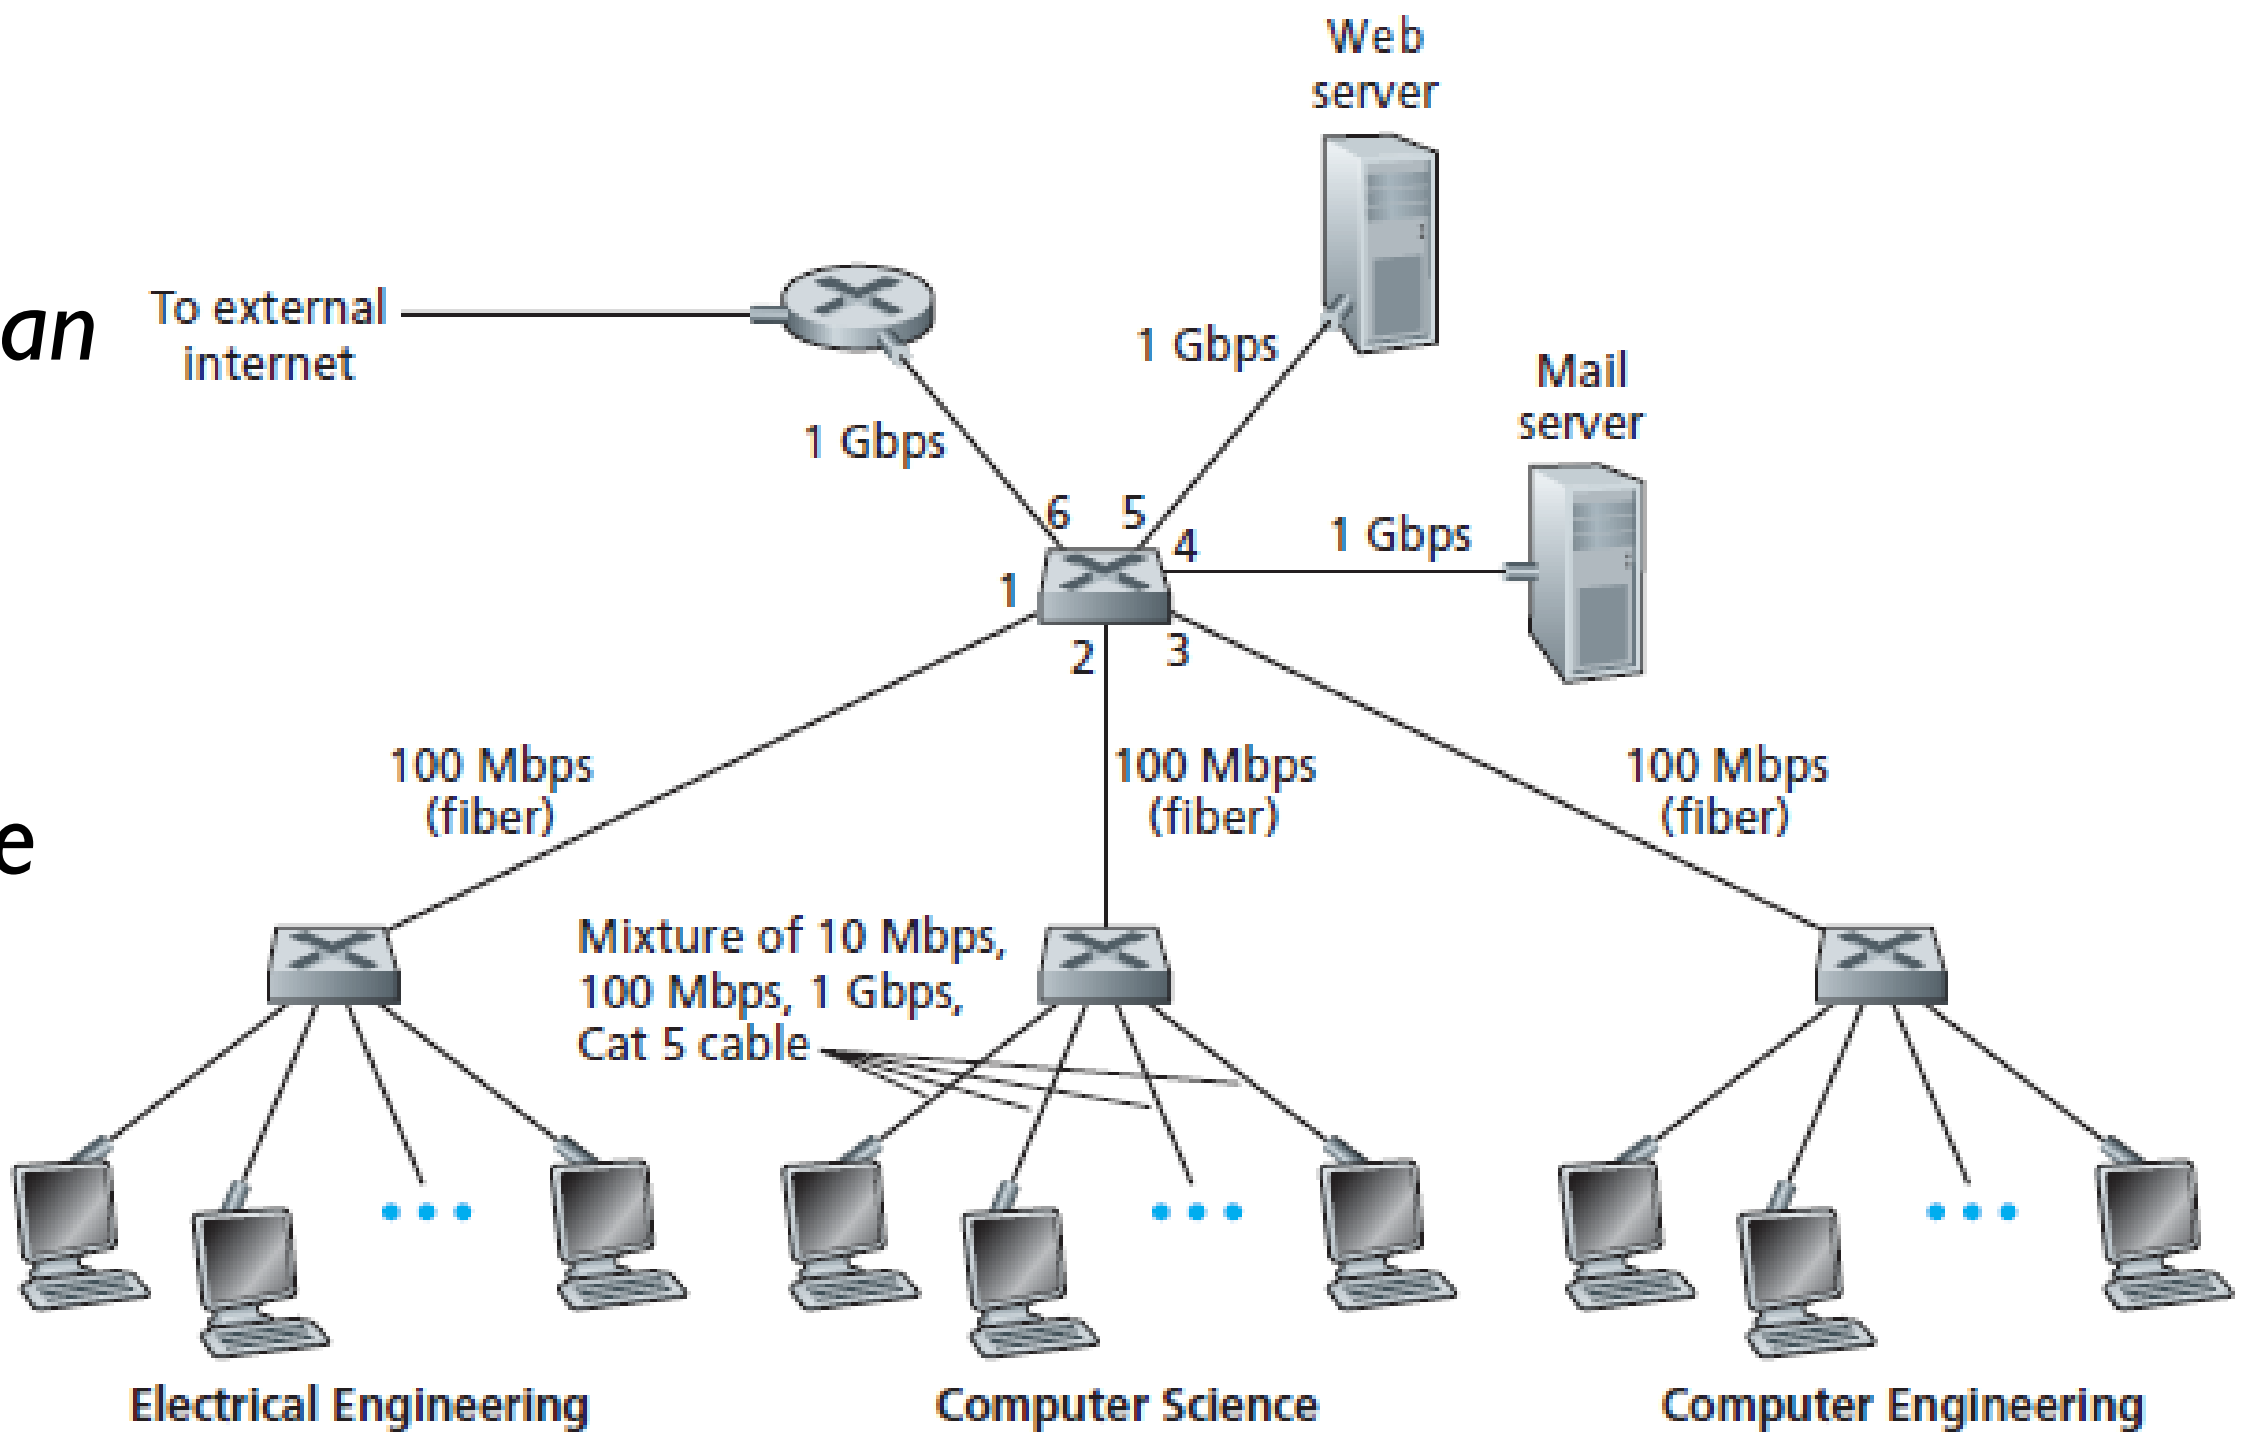

Switches vs. routers

both are store-and-forward:

- *routers:* network-layer devices (examine network-layer headers)
- *switches*: link-layer devices (examine link-layer headers)

both have forwarding tables:

- *routers:* compute tables using routing algorithms, IP addresses
- *switches:* learn forwarding table using flooding, learning, MAC addresses

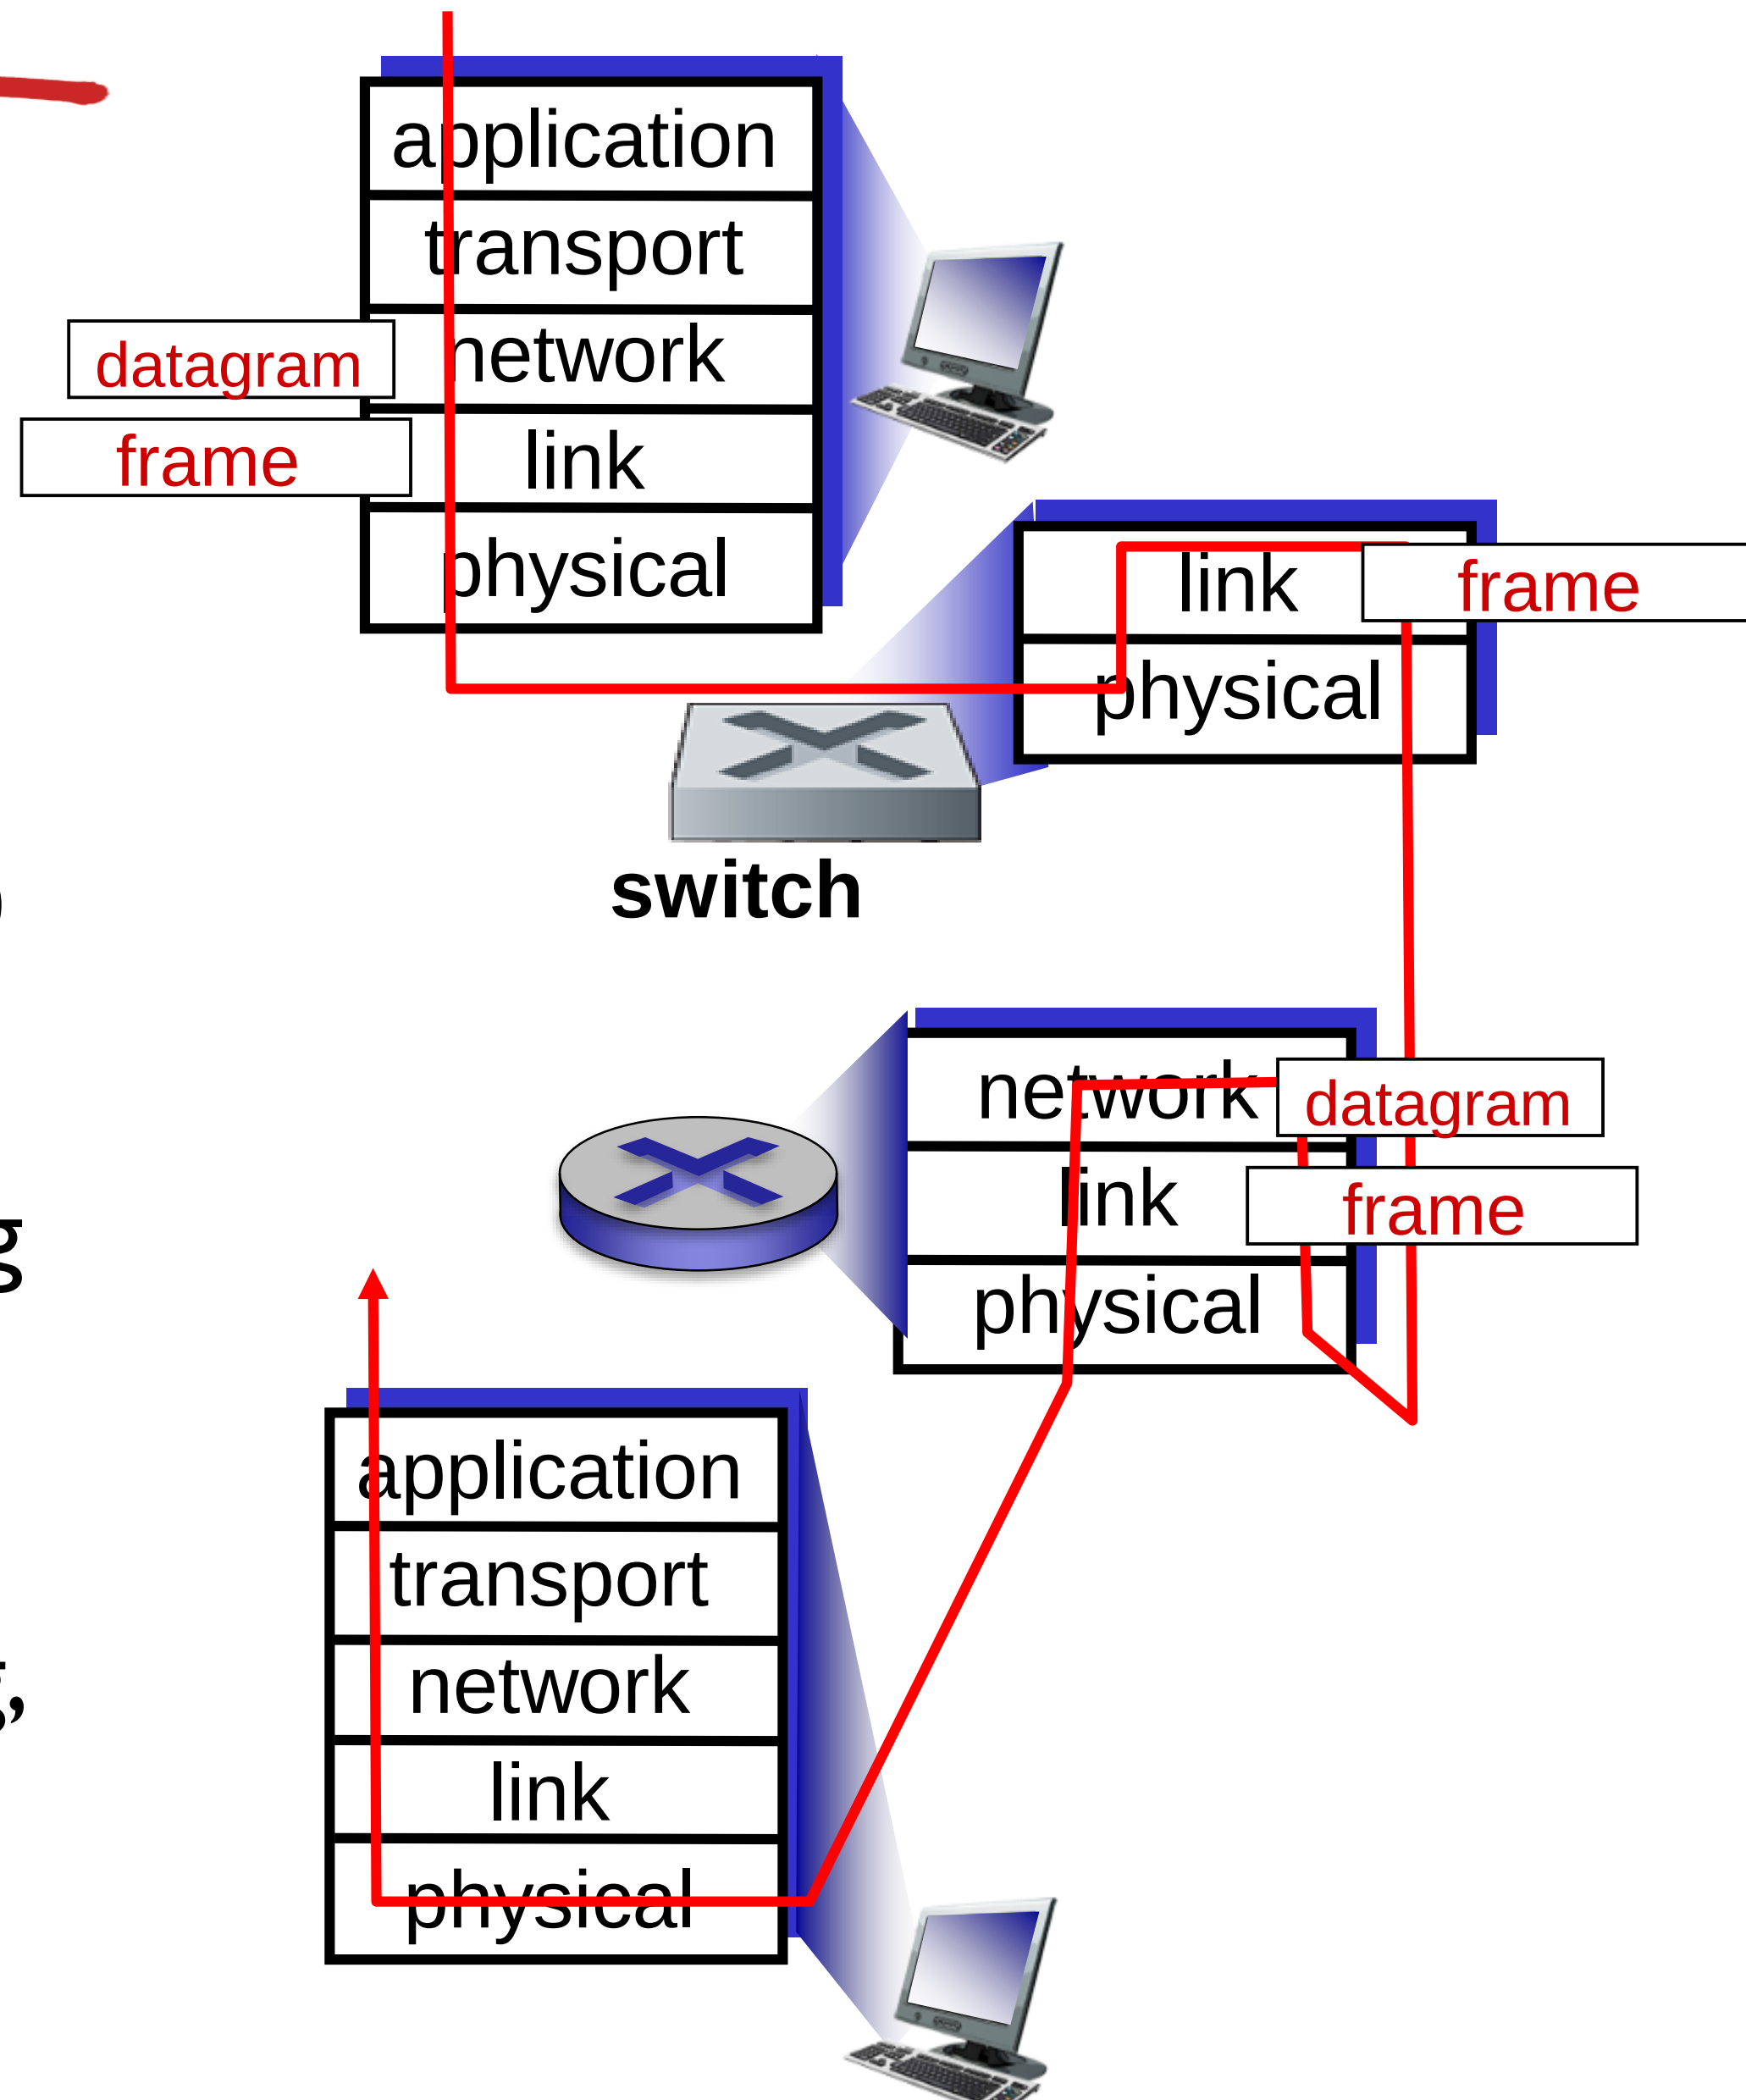

Link layer, LANs: outline

6.1 introduction, services

6.2 error detection, correction

6.3 multiple access protocols

6.4 LANs

- addressing, ARP
- Ethernet
- switches
- VLANS

6.5 link virtualization: MPLS

6.6 data center networking

6.7 a day in the life of a web request

VLANs: motivation

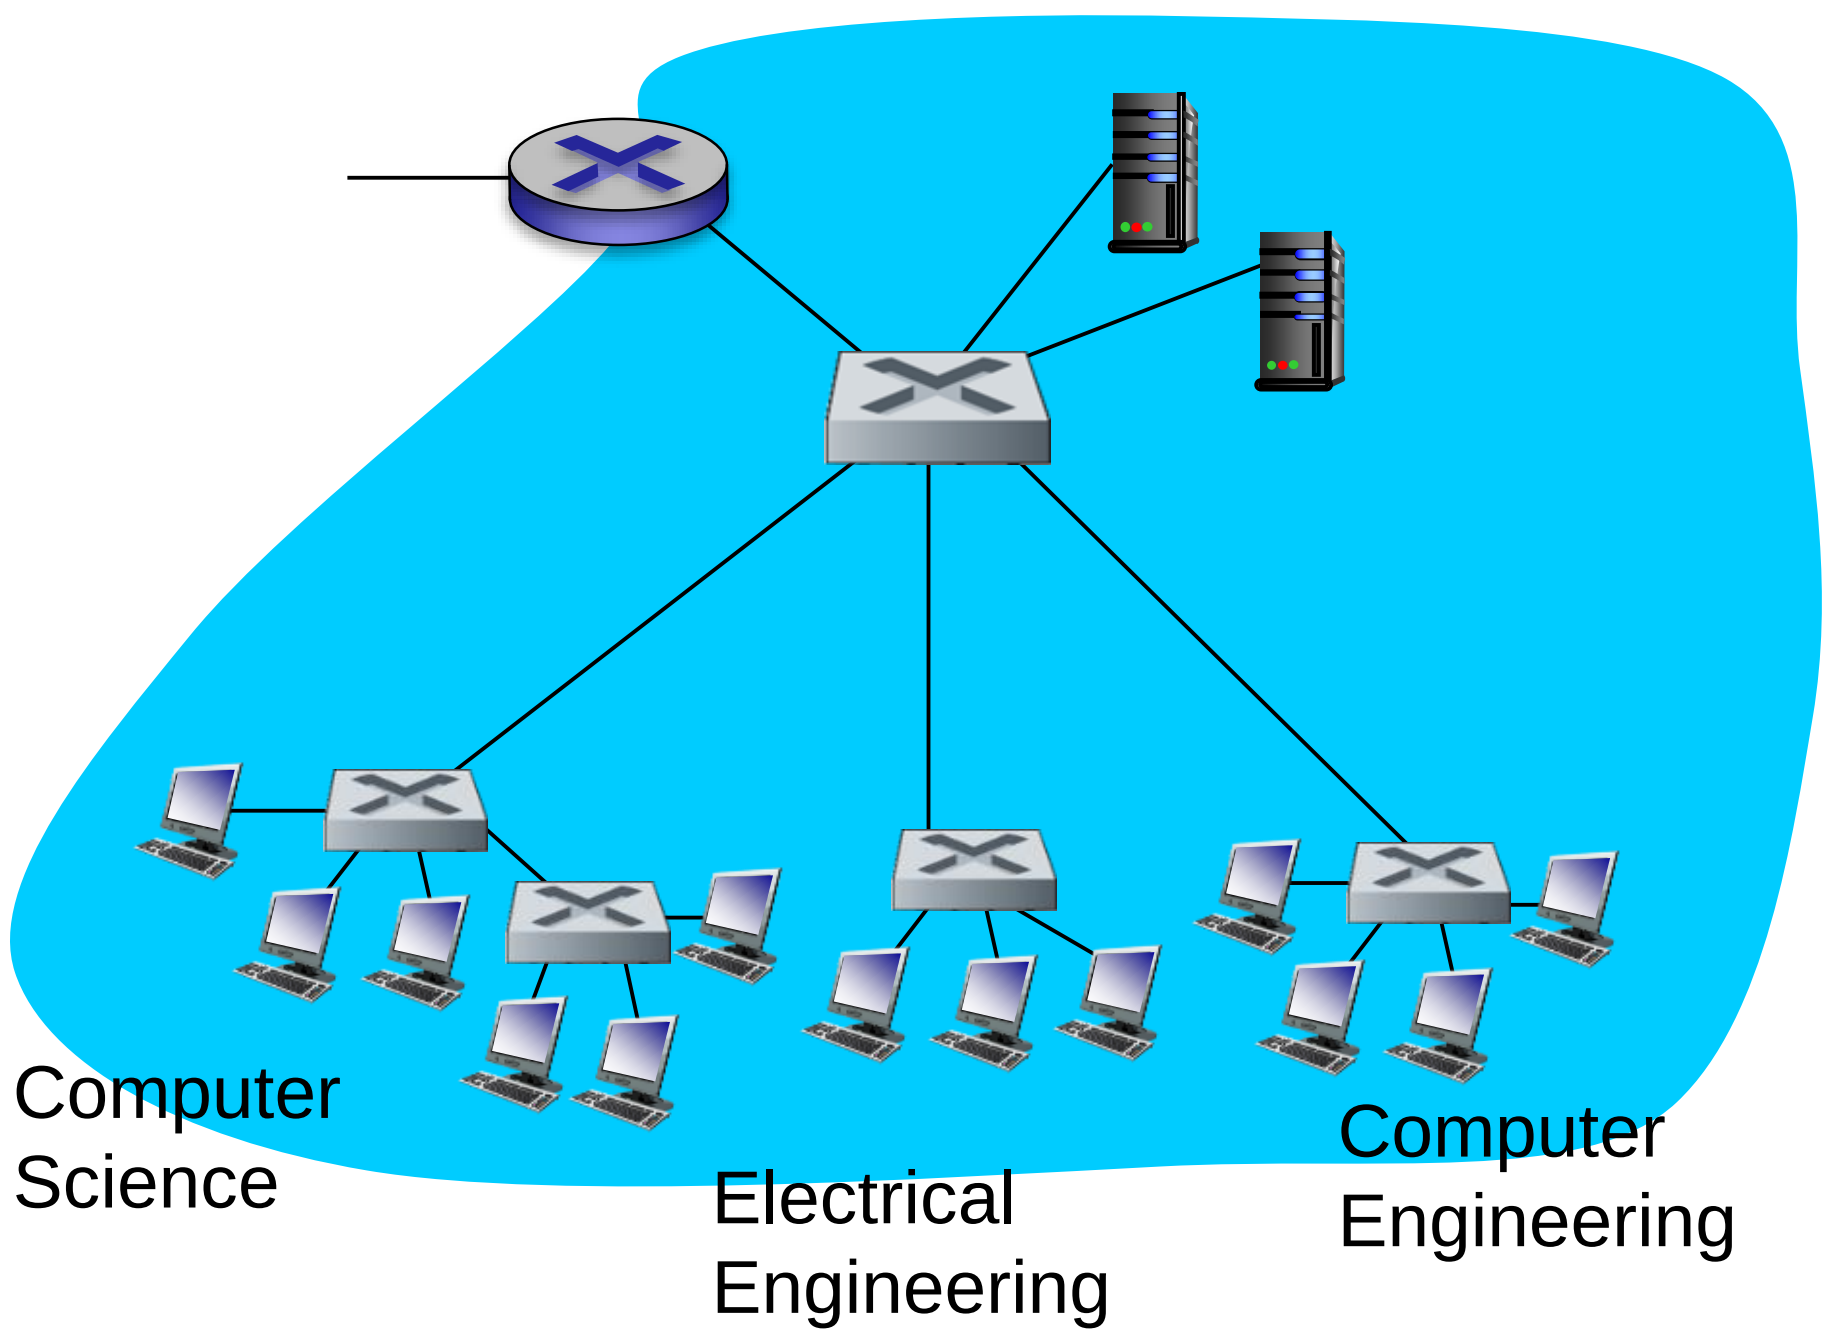

consider:

- CS user moves office to EE, but wants connect to CS switch?
- single broadcast domain:
  - all layer-2 broadcast traffic (ARP, DHCP, unknown location of destination MAC address) must cross entire LAN
  - security/privacy, efficiency issues

VLANs

Virtual Local Area Network

define multiple ***virtual*** LANS over single physical LAN infrastructure.

port-based VLAN: switch ports grouped (by switch management software) so that *single* physical switch ……

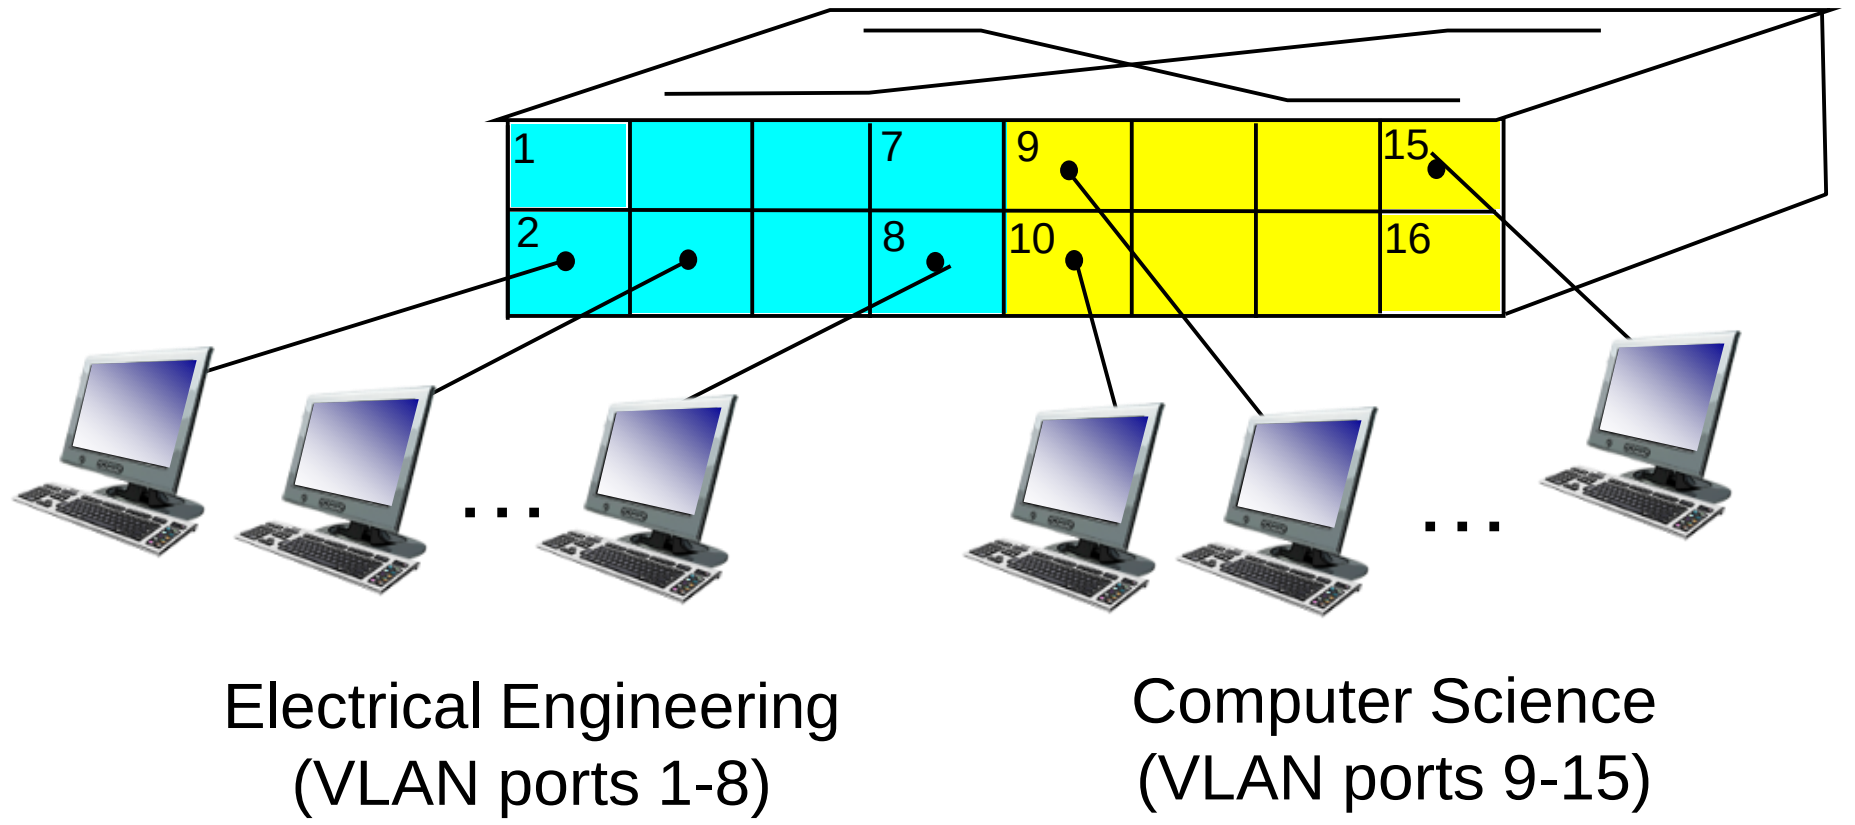

… operates as multiple virtual switches

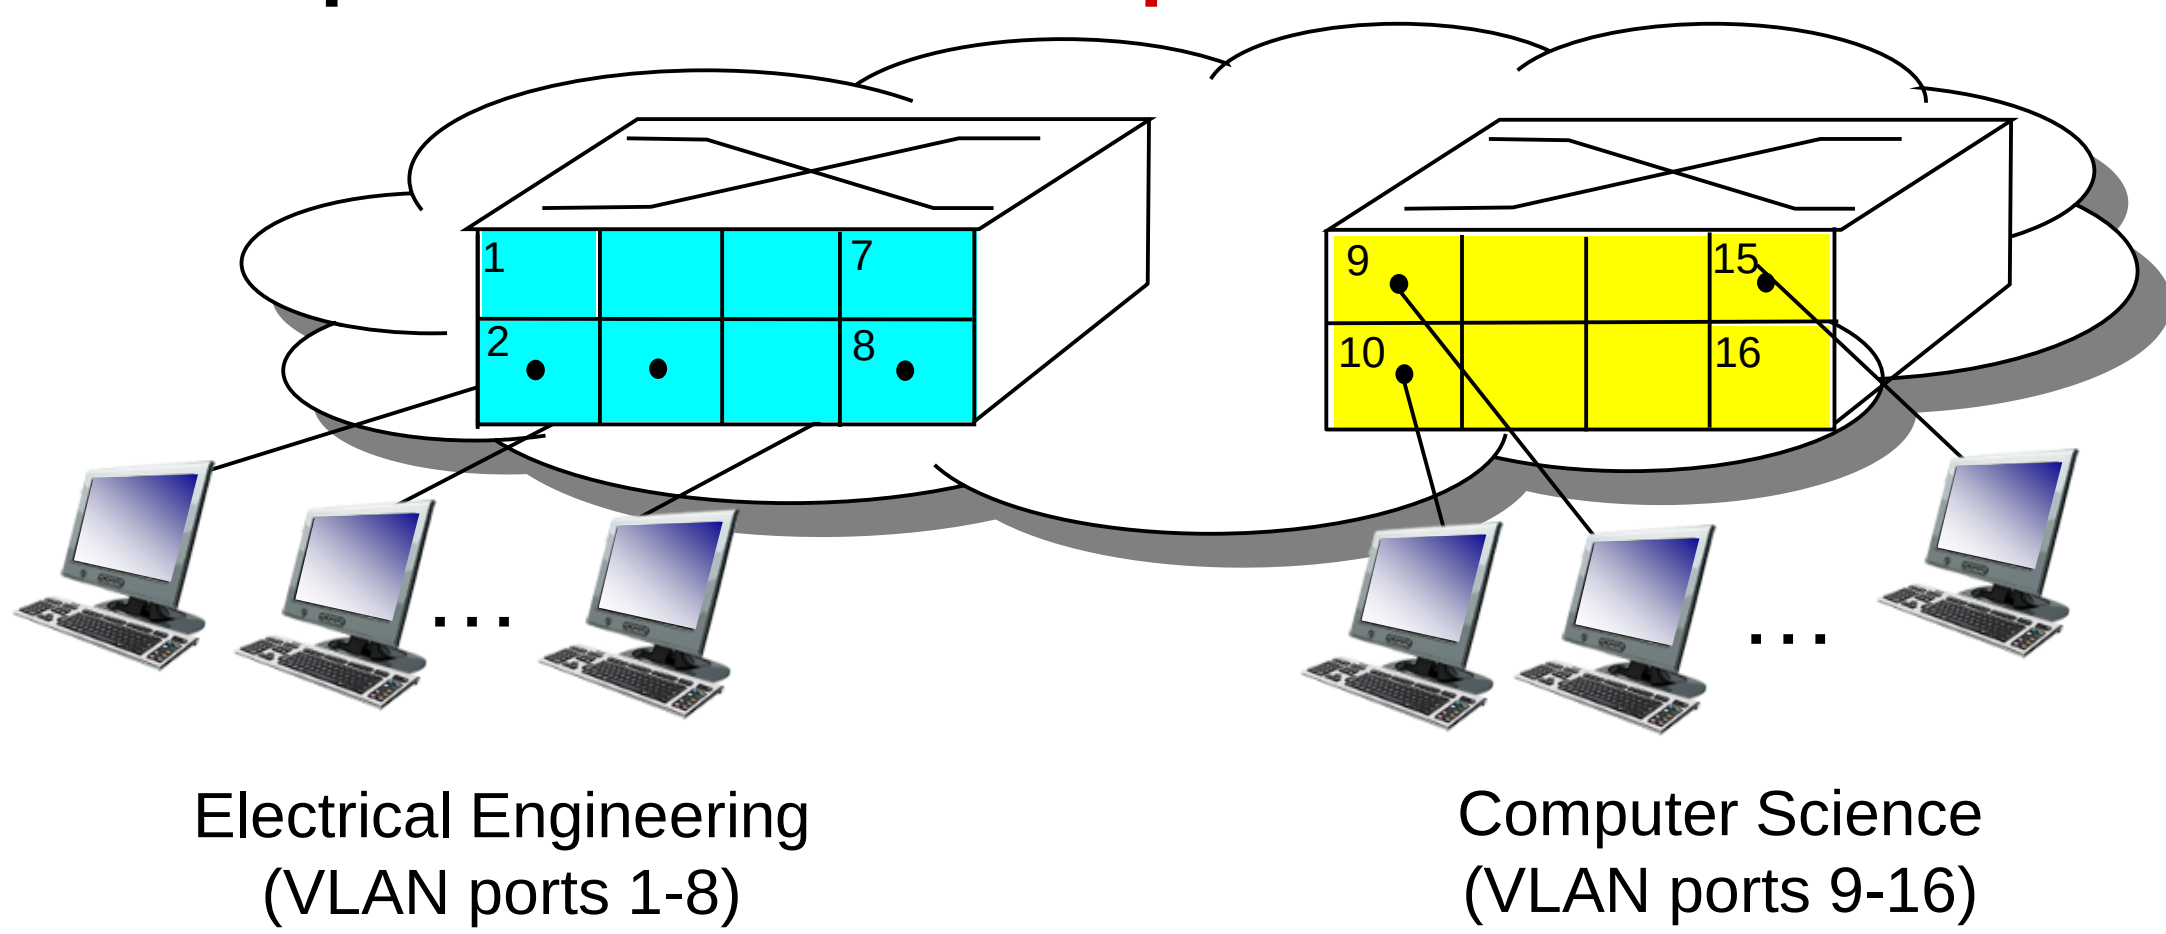

Port-based VLAN

- *traffic isolation:* frames to/from ports 1-8 can *only* reach ports 1-8
  - can also define VLAN based on MAC addresses of endpoints, rather than switch port
- dynamic membership: ports can be dynamically assigned among VLANs
- forwarding between VLANS: done via routing (just as with separate switches)
  - in practice vendors sell combined switches plus routers

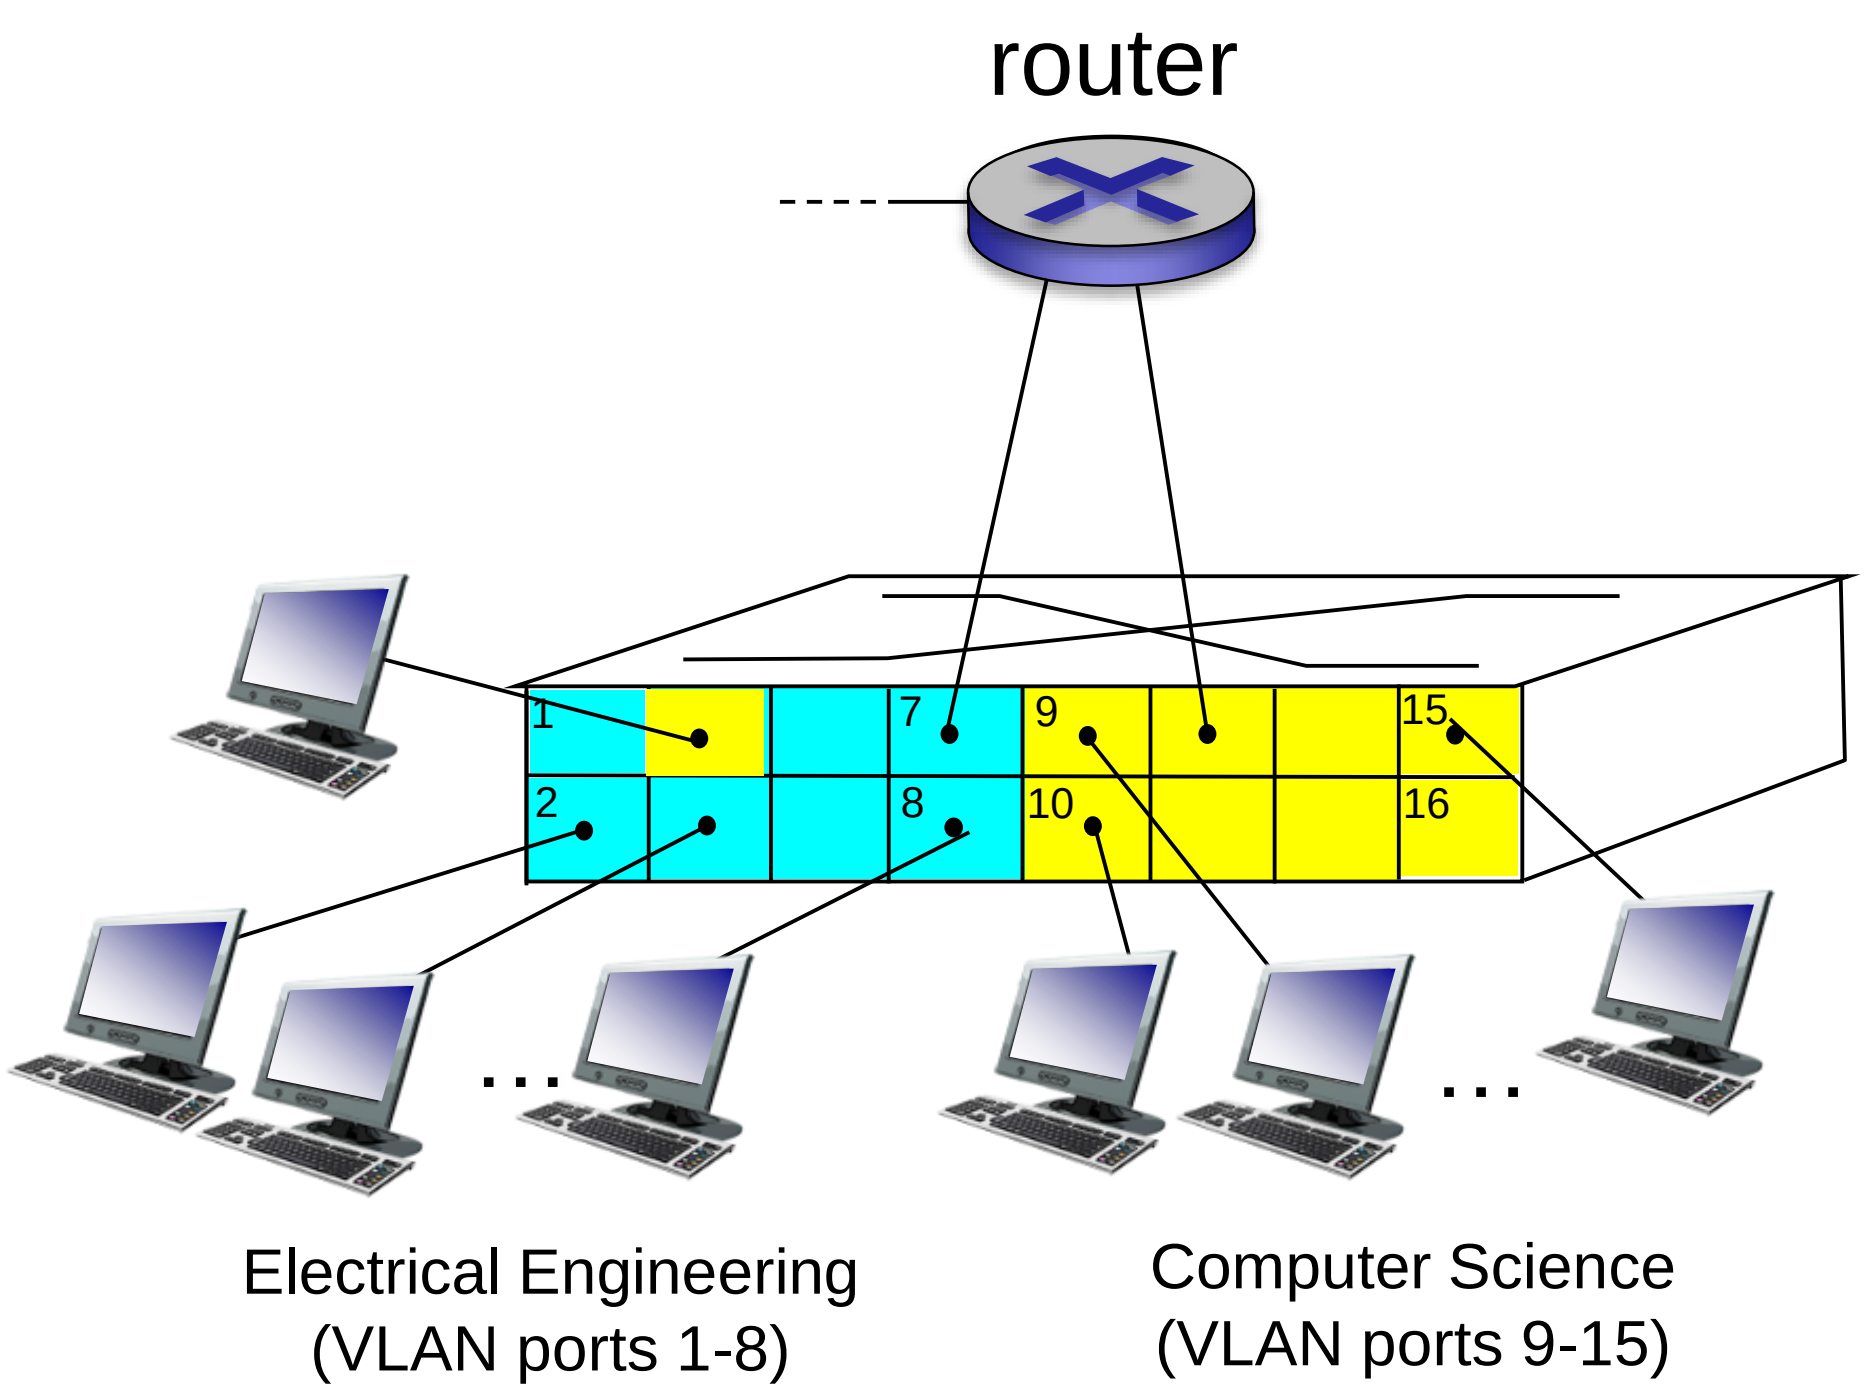

VLANS spanning multiple switches

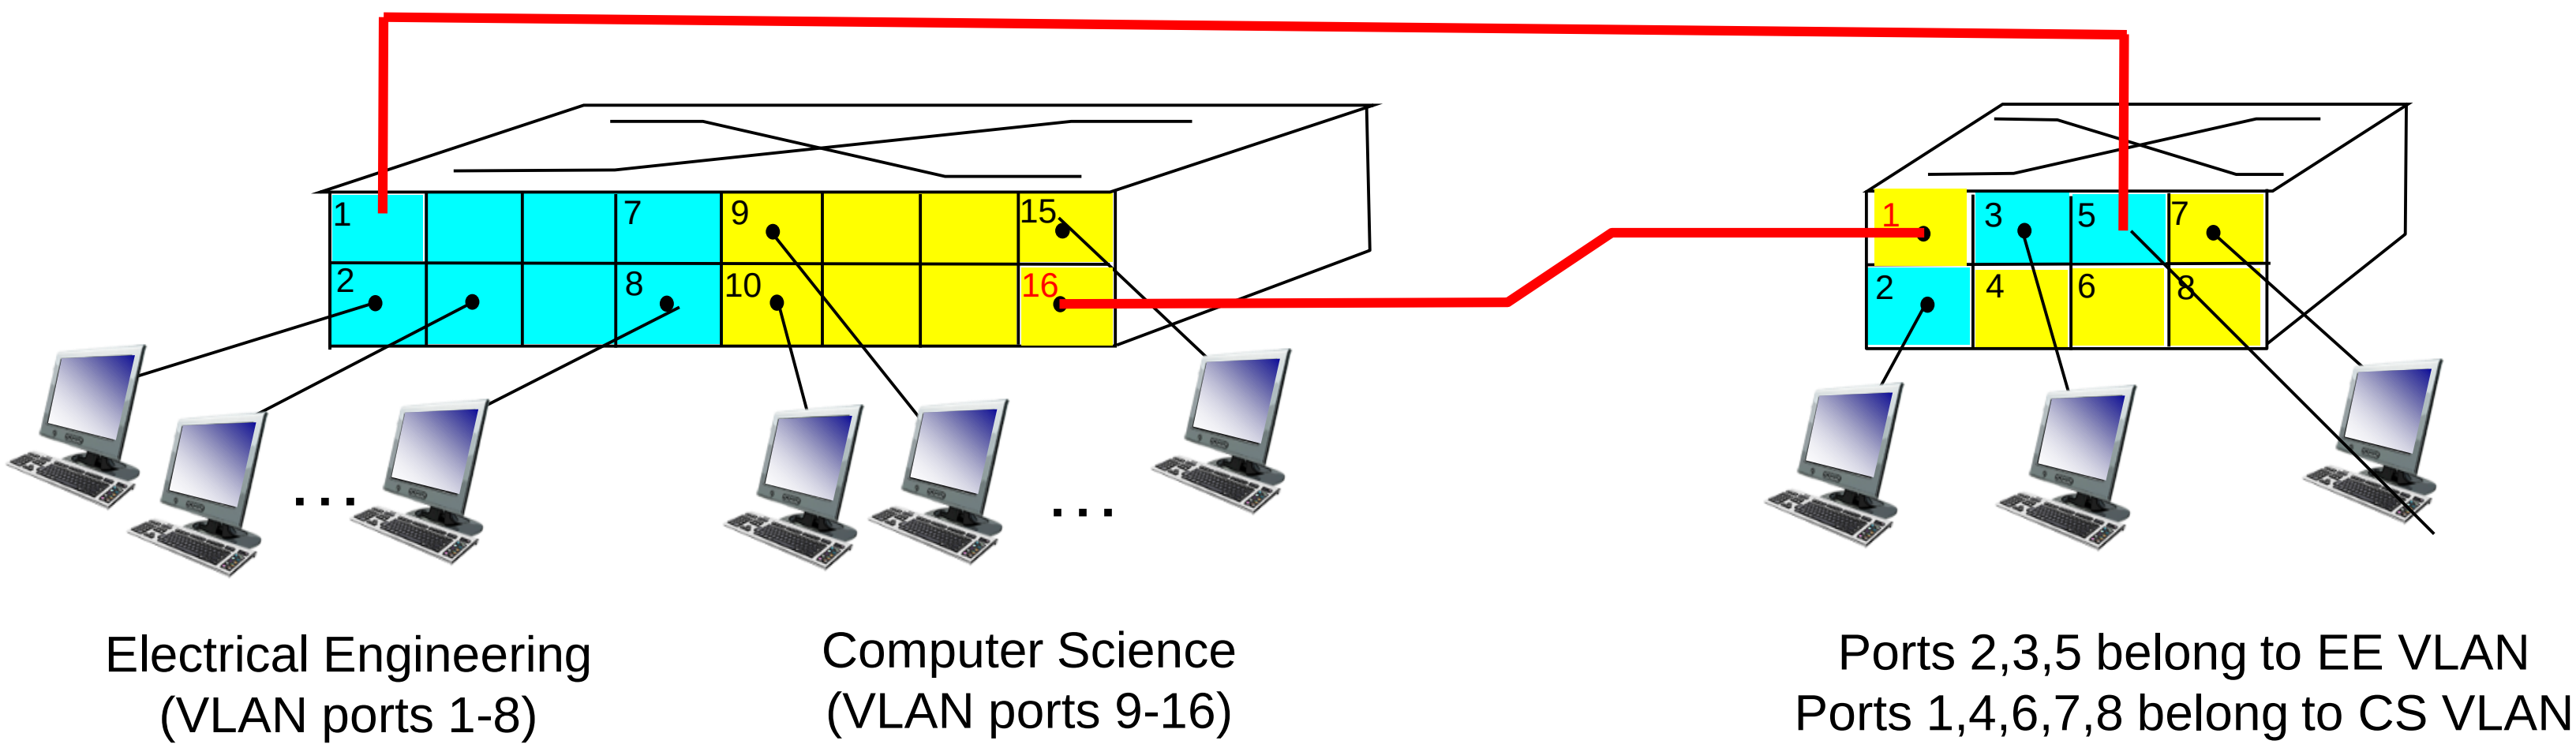

- *If some of the CS and EE faculties are in another building, how to connect two switches together as two VLANs?*
  - *Two links connect both CS VLAN and EE VLAN.*

VLANS spanning multiple switches

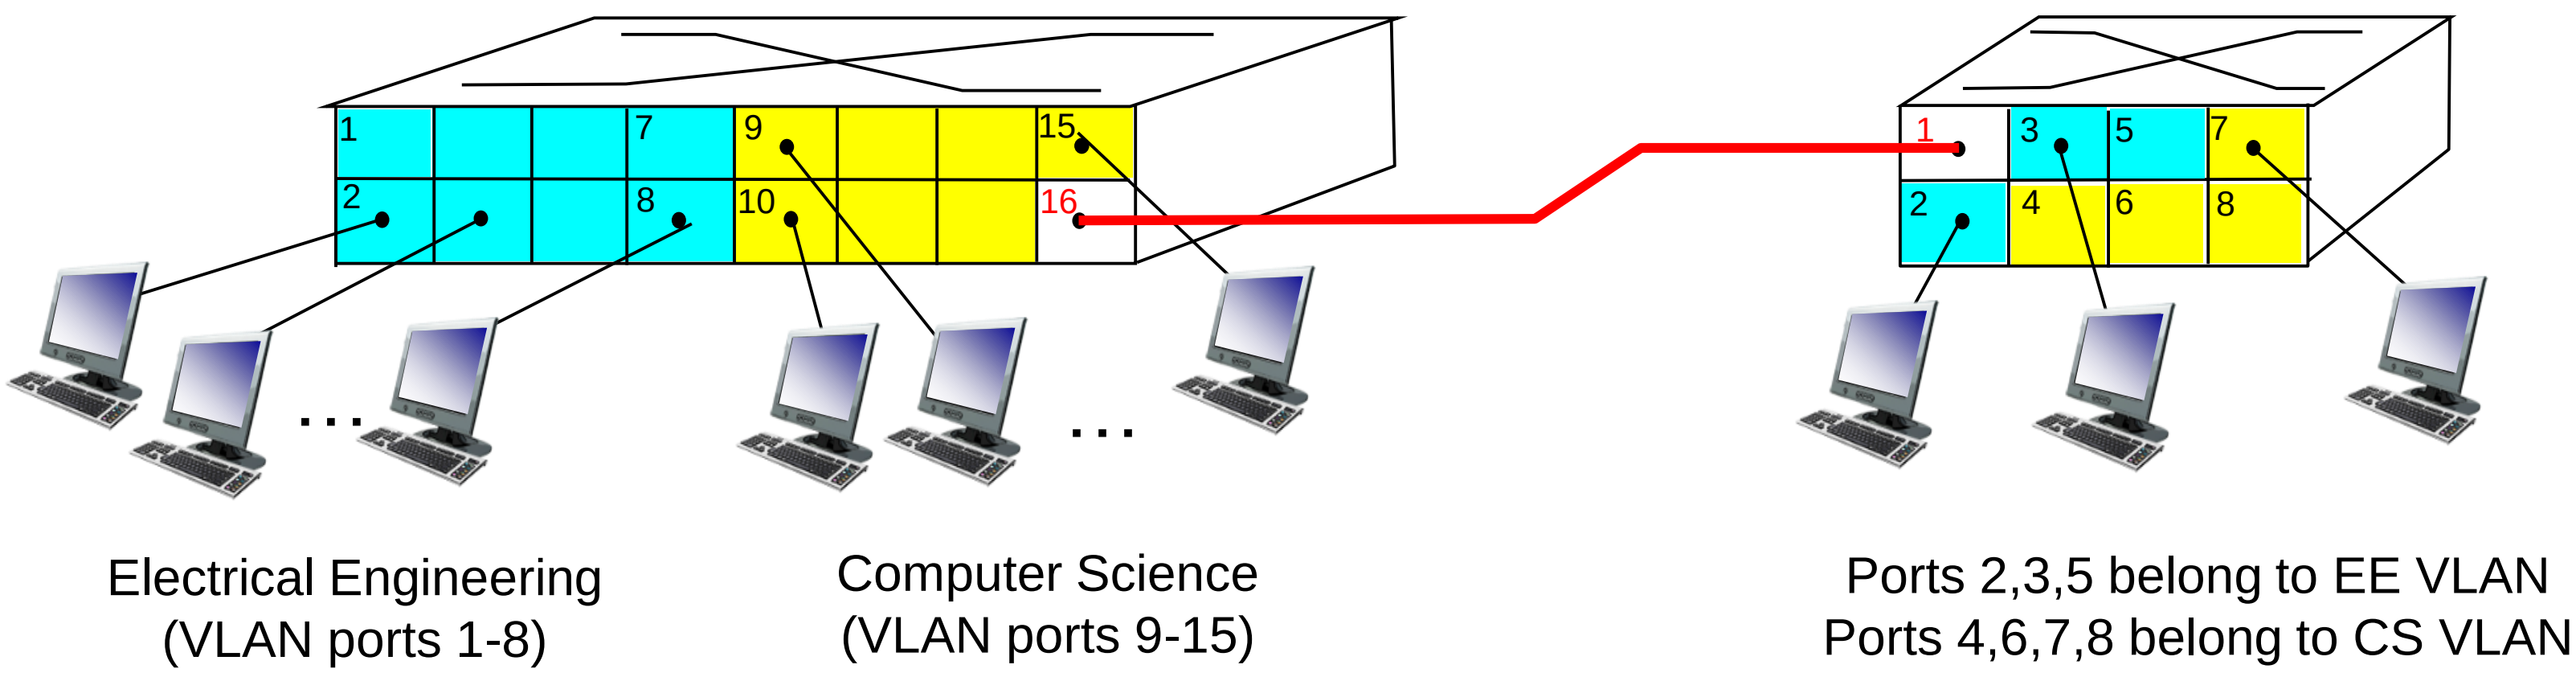

- *trunk port:* carries frames between VLANS defined over multiple physical switches
  - frames forwarded within VLAN between switches can't be vanilla 802.1 frames (must carry VLAN ID info)
  - 802.1q protocol adds/removed additional header fields for frames forwarded between trunk ports

Link layer, LANs: outline

6.1 introduction, services

6.2 error detection, correction

6.3 multiple access protocols

6.4 LANs
- addressing, ARP
- Ethernet
- switches
- VLANS

6.5 link virtualization: MPLS

6.6 data center networking

6.7 a day in the life of a web request

Data center networks

- 10's to 100's of thousands of hosts, often closely coupled, in close proximity:
  - e-business (e.g. Amazon)
  - content-servers (e.g., YouTube, Akamai, Apple, Microsoft)
  - search engines, data mining (e.g., Google)
- challenges:
  - multiple applications, each serving massive numbers of clients
  - managing/balancing load, avoiding processing, networking, data bottlenecks

Inside a 40-ft Microsoft container, Chicago data center

Data center networks

load balancer: application-layer routing

- receives external client requests
- directs workload within data center
- returns results to external client (hiding data center internals from client)

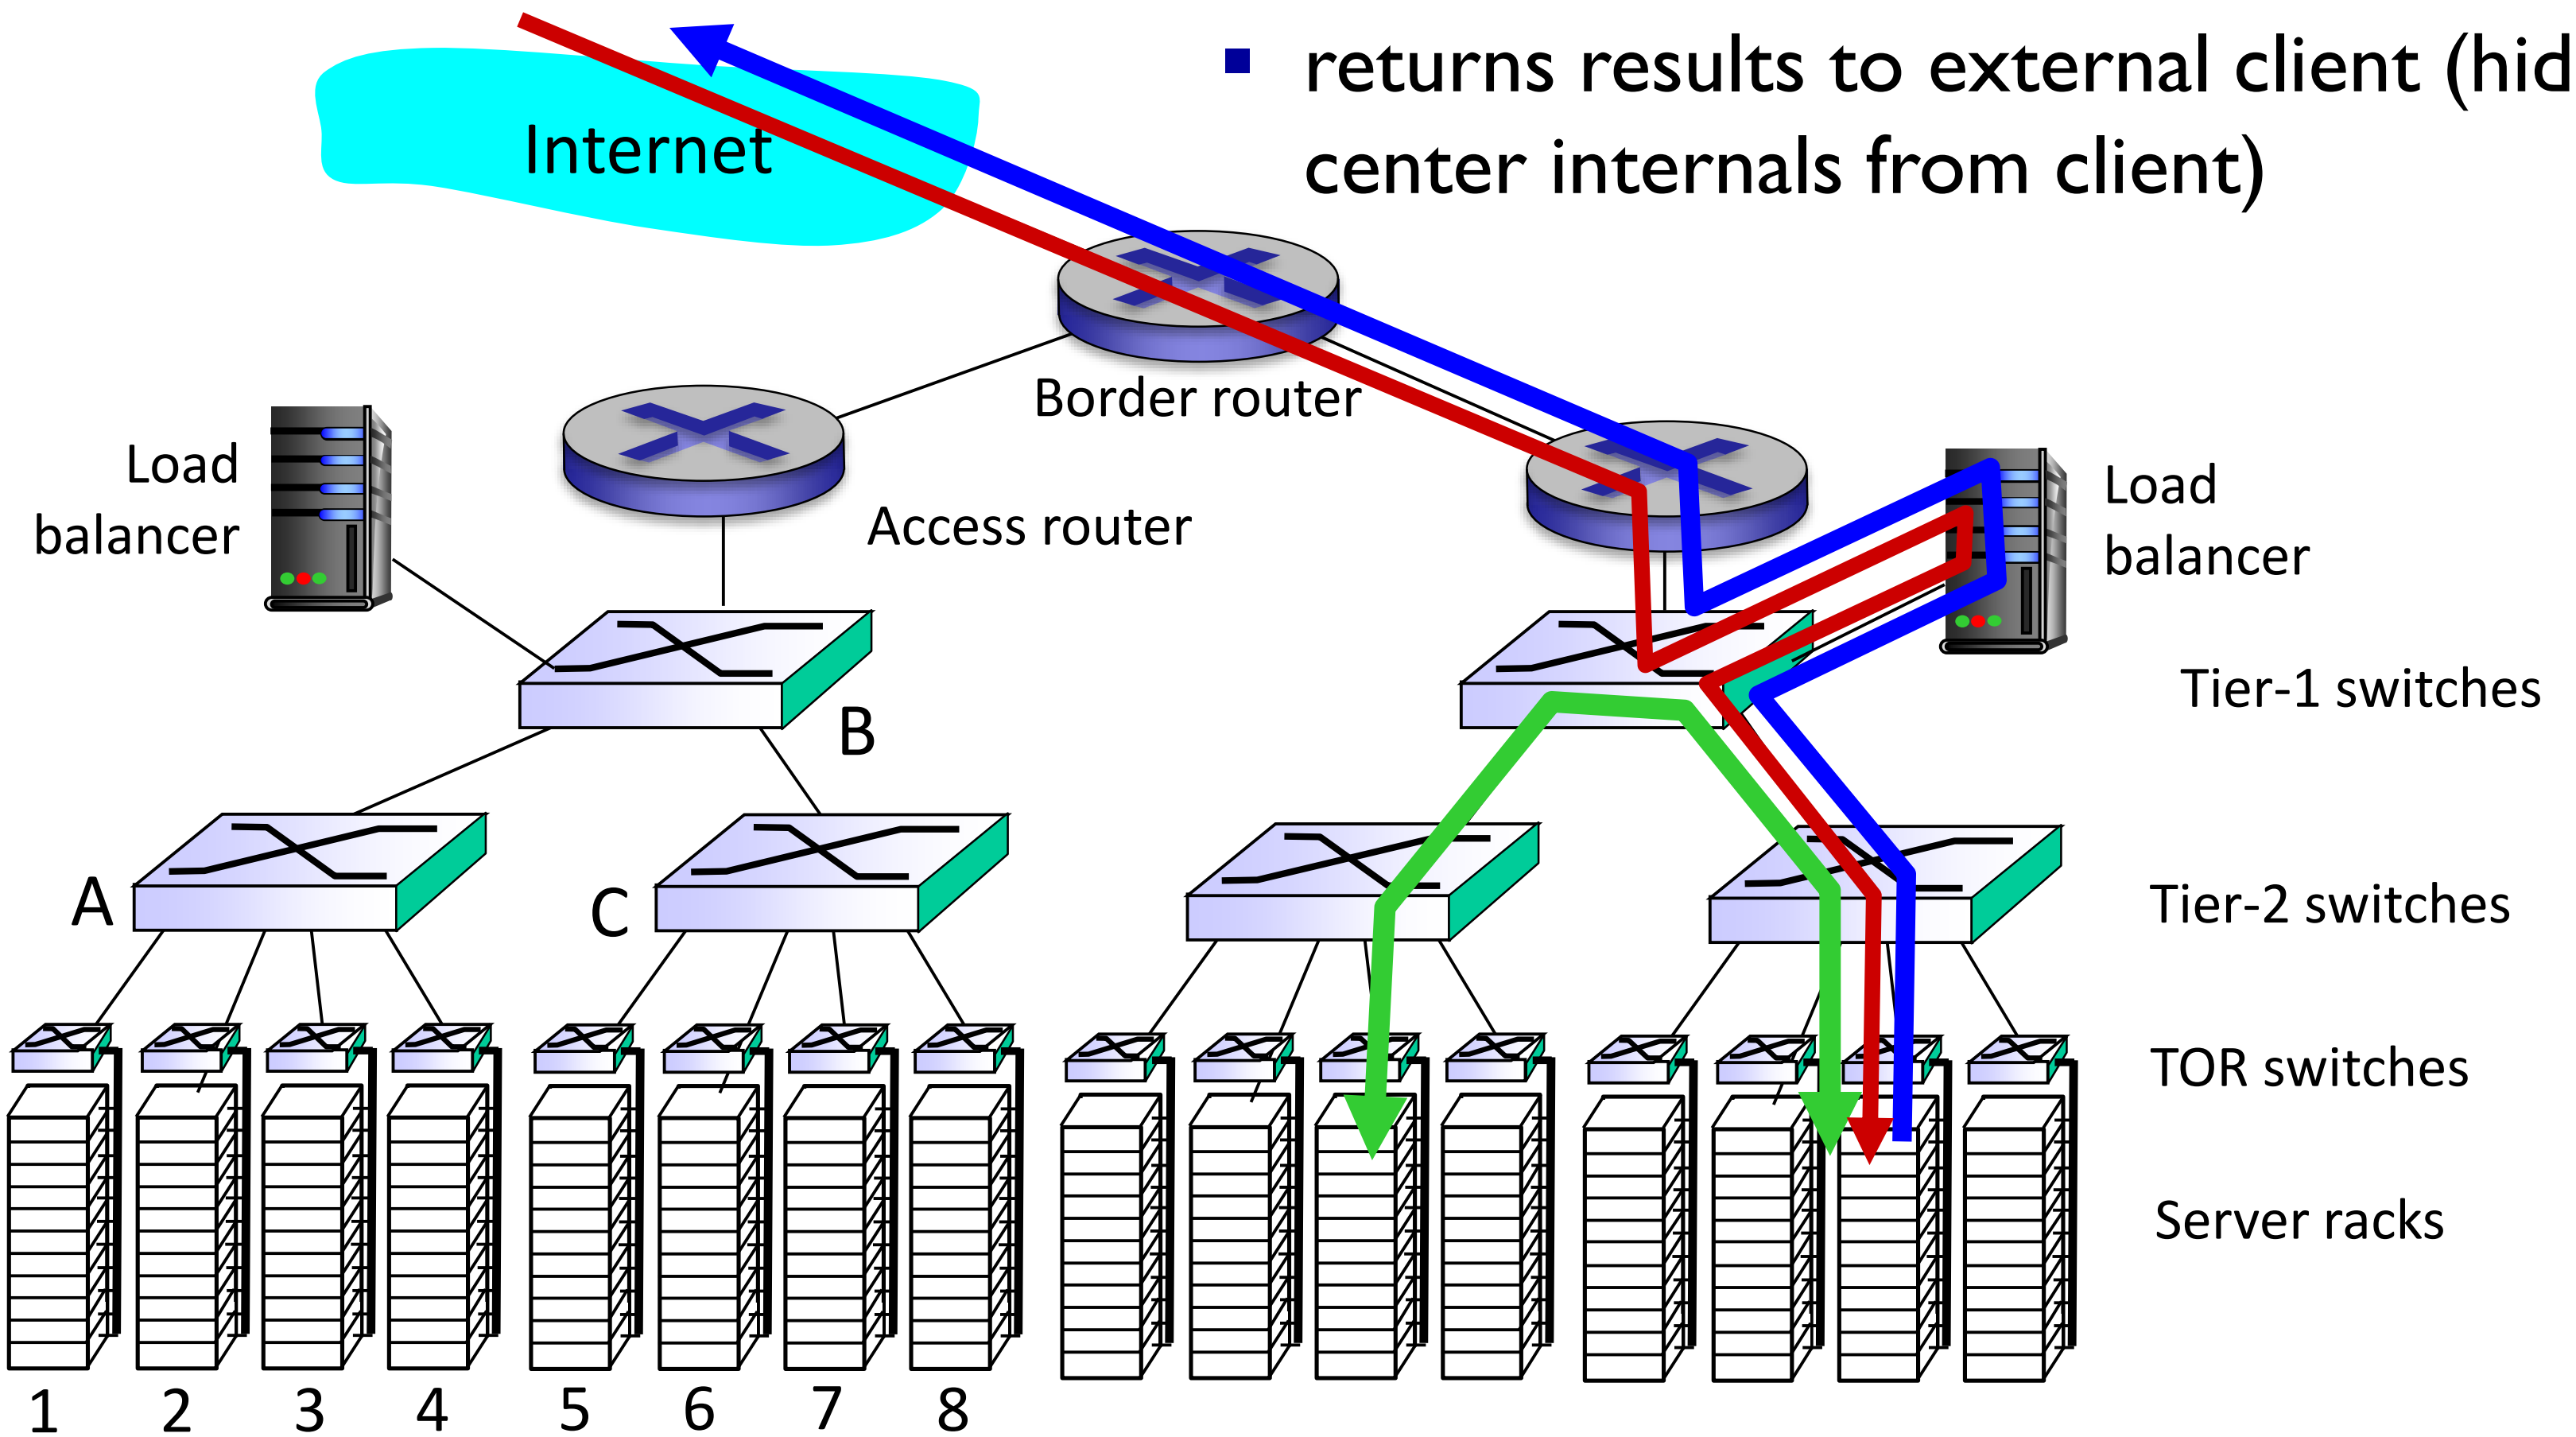

Data center networks

- rich interconnection among switches, racks:
  - increased throughput between racks (multiple routing paths possible)
  - increased reliability via redundancy

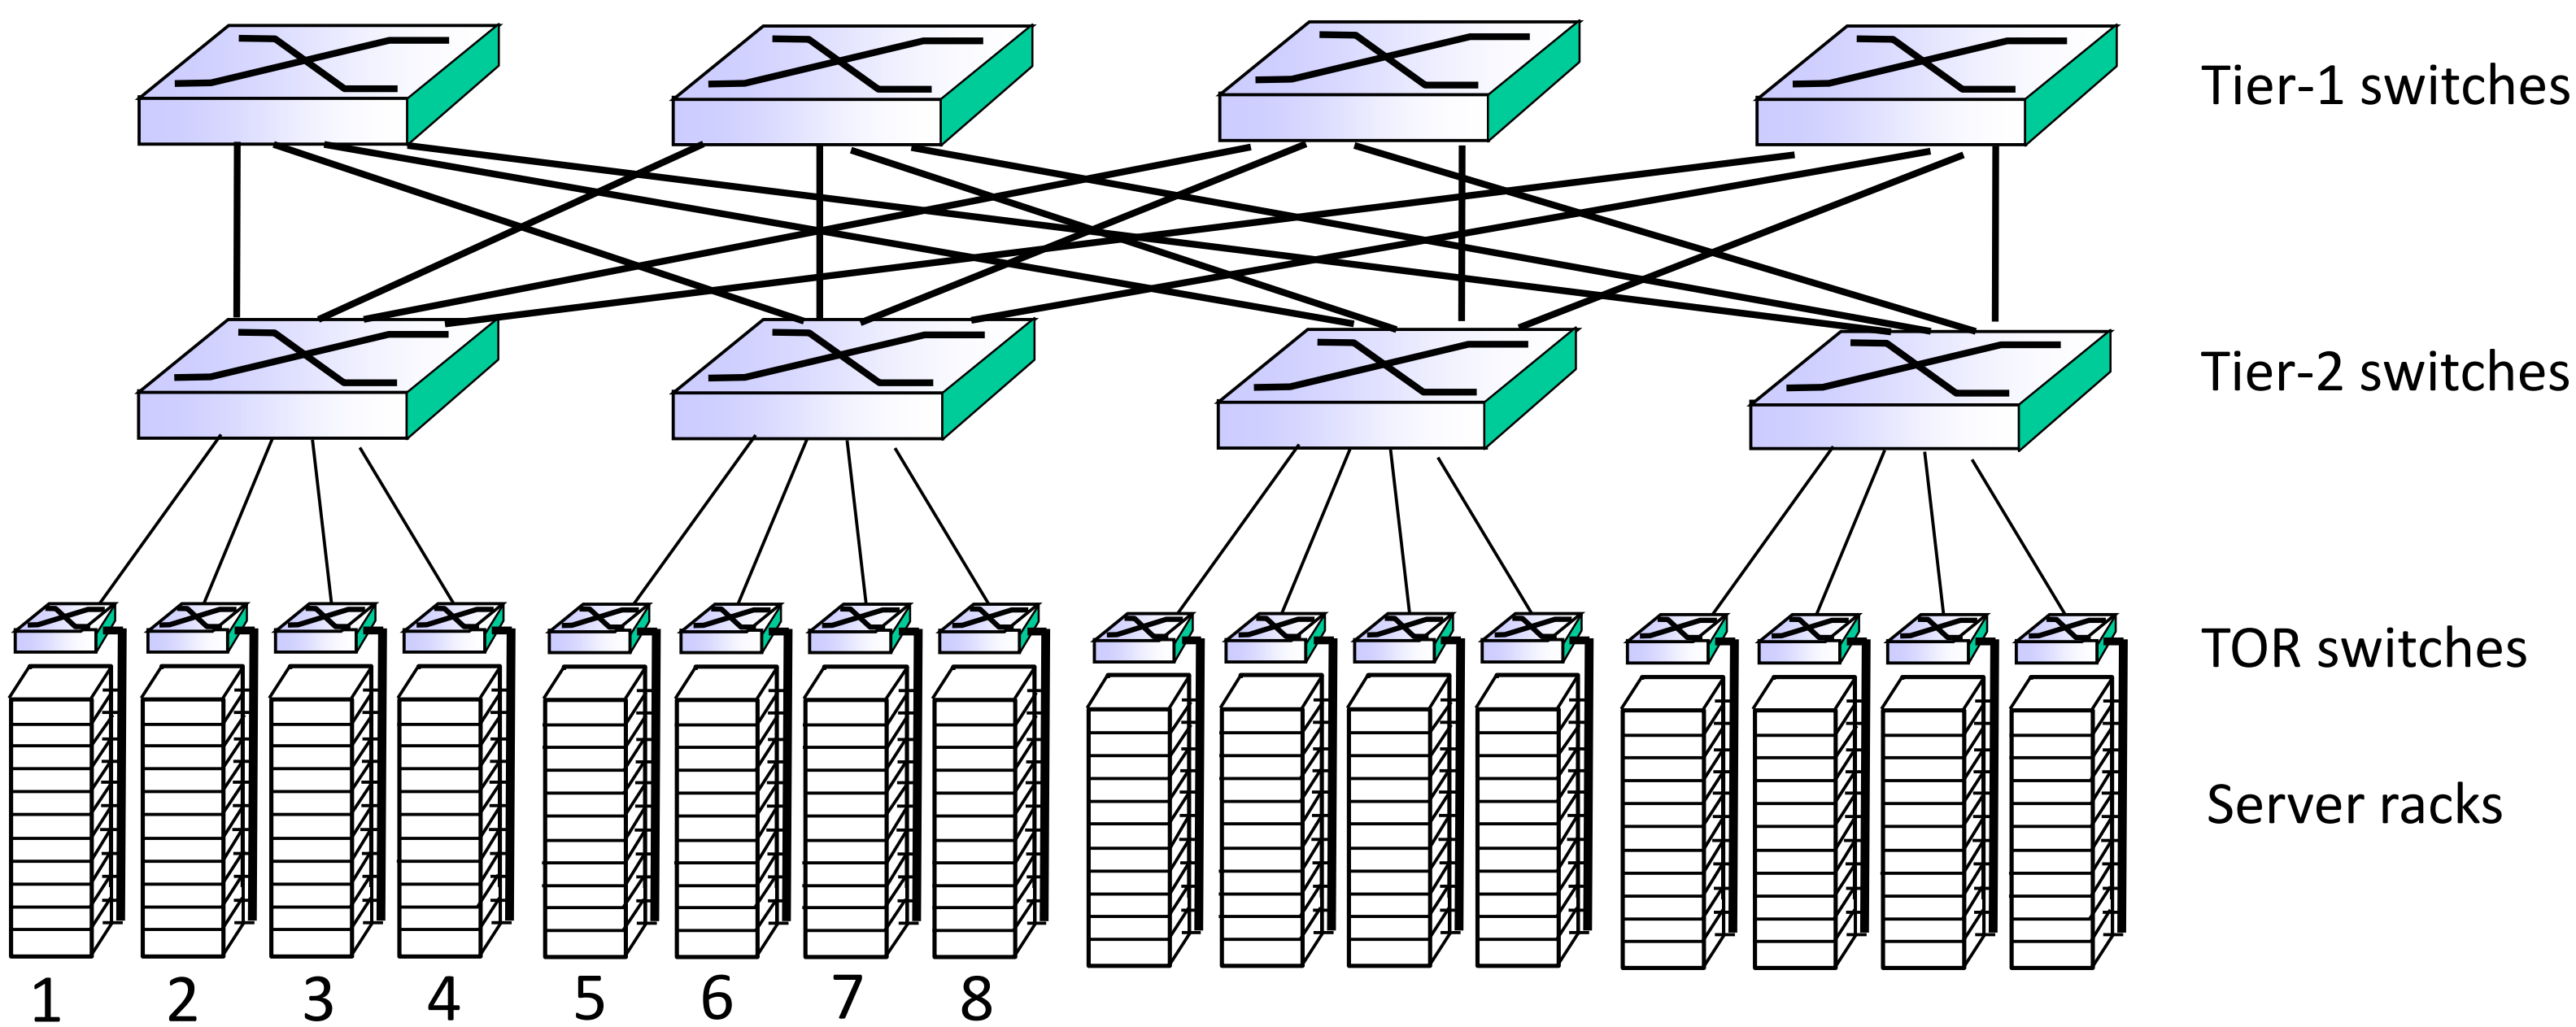

Link layer, LANs: outline

6.1 introduction, services

6.2 error detection, correction

6.3 multiple access protocols

64 LANs

- addressing, ARP
- Ethernet
- switches
- VLANS

6.5 link virtualization: MPLS

6.6 data center networking

6.7 a day in the life of a web request

Synthesis: a day in the life of a web request

- journey down protocol stack complete!
  - application, transport, network, link
- putting-it-all-together: synthesis!
  - *goal:* identify, review, understand protocols (at all layers) involved in seemingly simple scenario: requesting www page
  - *scenario:* student attaches laptop to campus network, requests/receives www.google.com

A day in the life: scenario

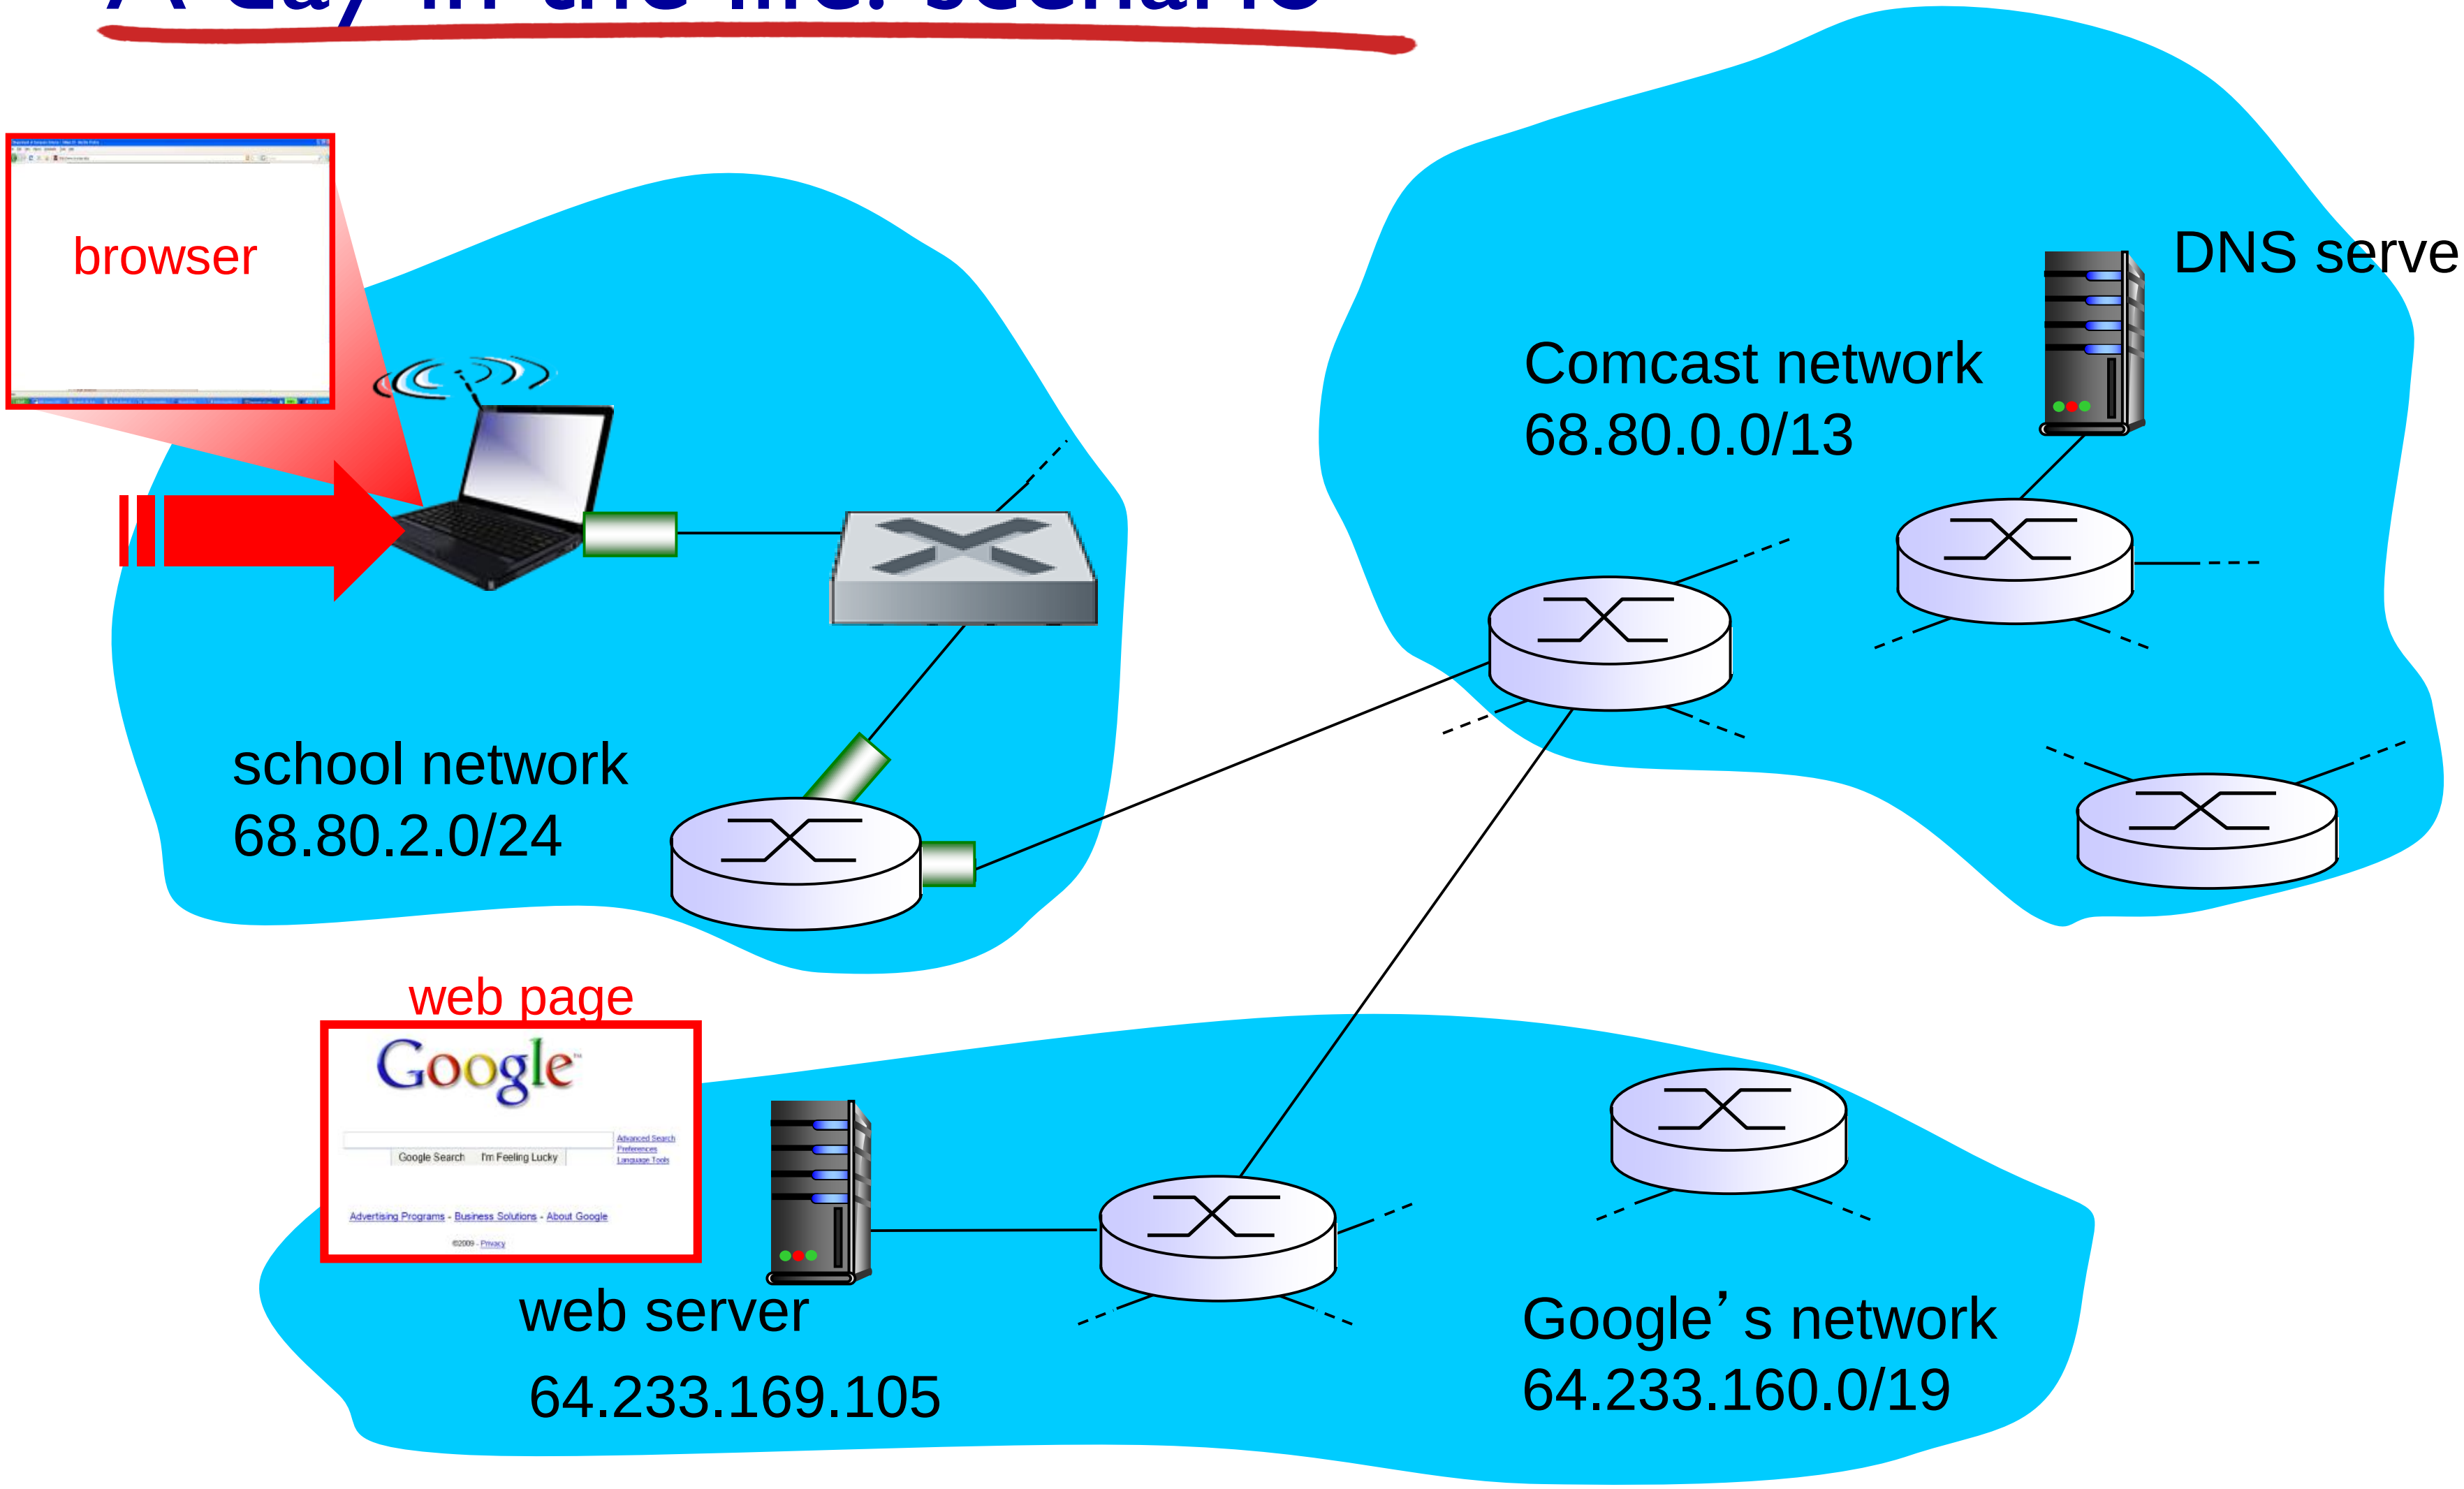

A day in the life… connecting to the Internet

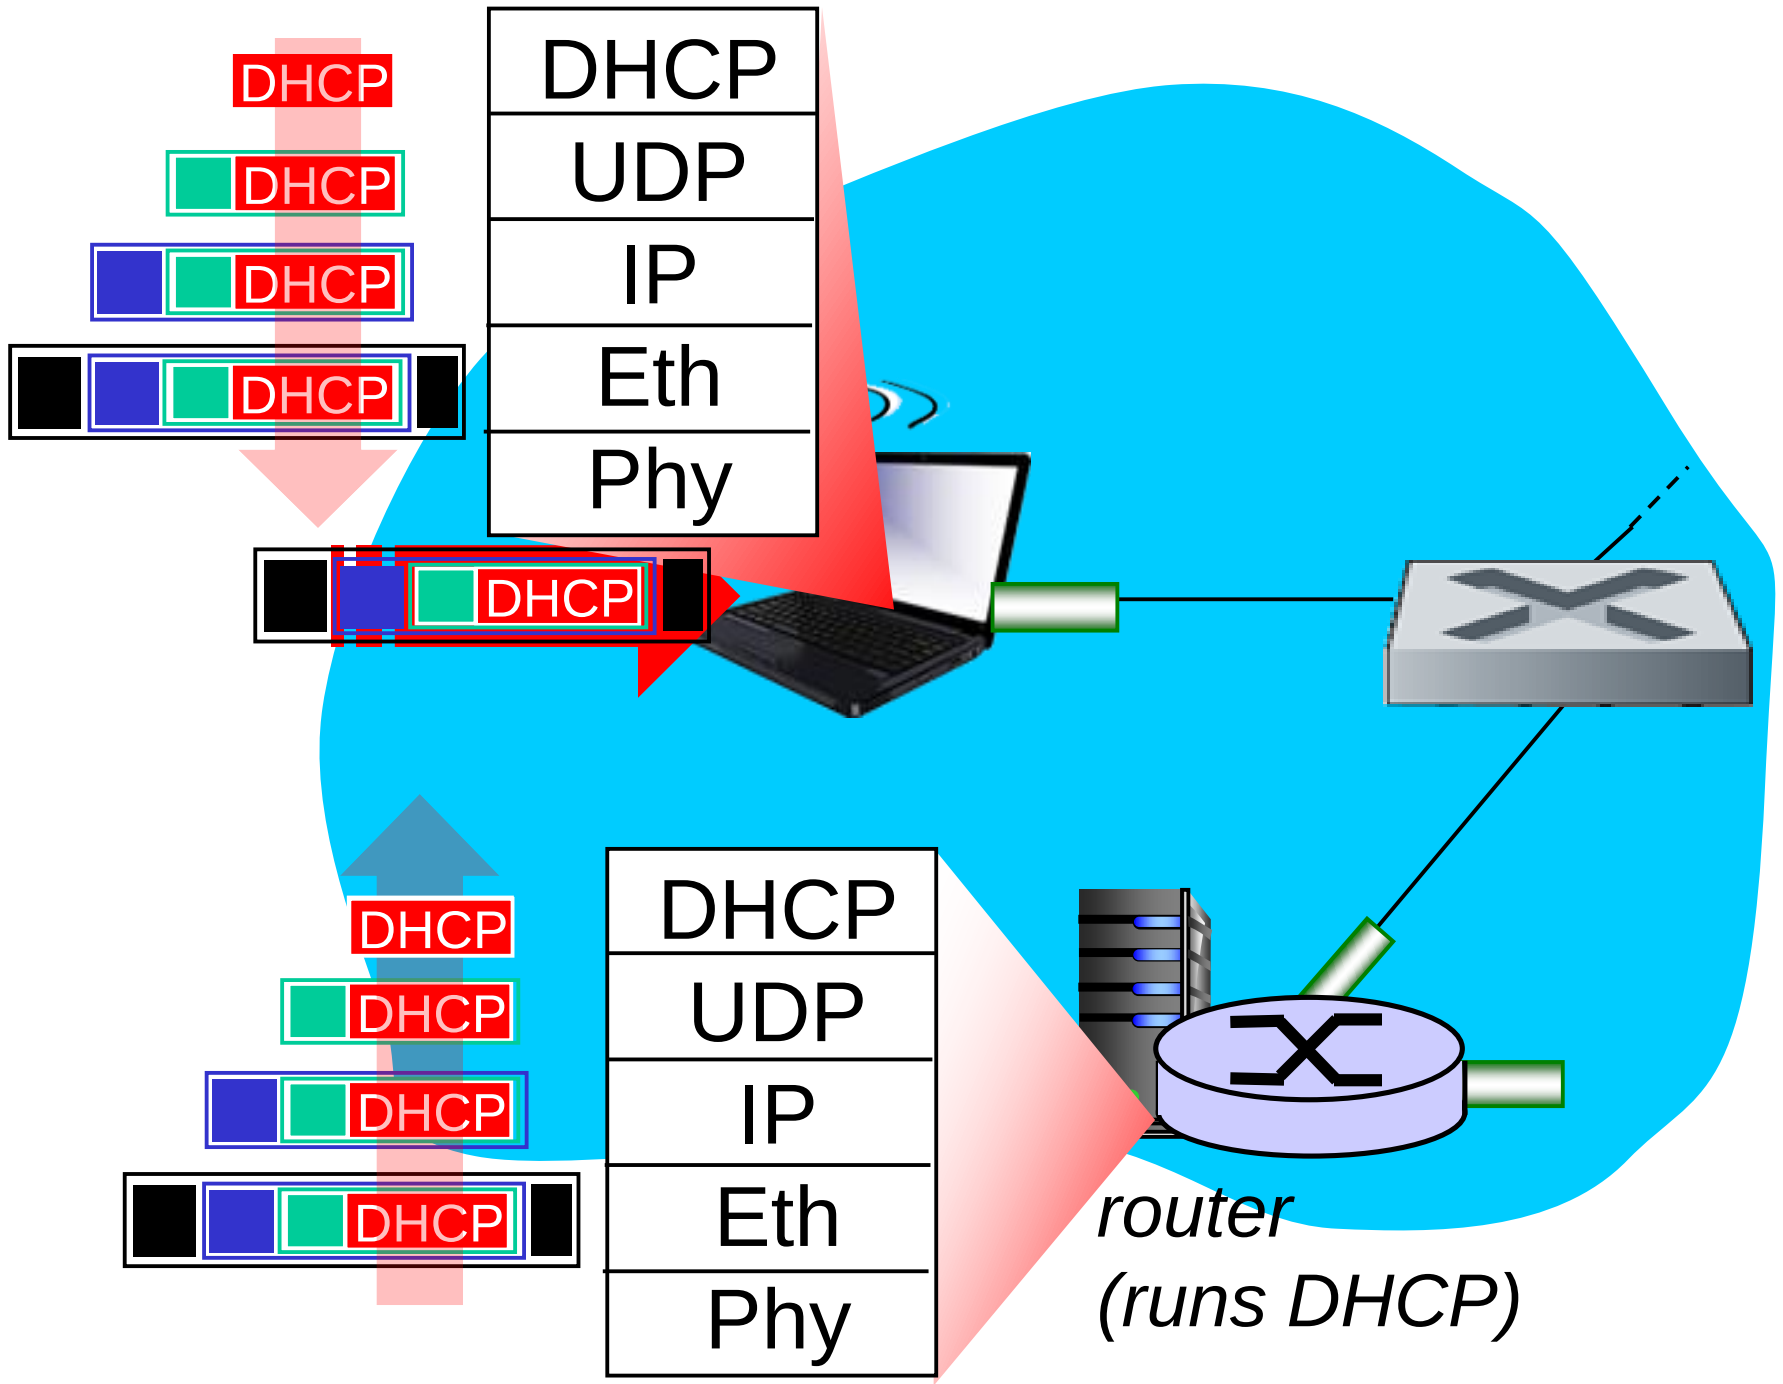

- connecting laptop needs to get its own IP address, addr of first-hop router, addr of DNS server: use *DHCP*
- DHCP request encapsulated in UDP, encapsulated in IP, encapsulated in 802.3 Ethernet
- Ethernet frame broadcast (dest: FFFFFFFFFFFF) on LAN, received at router running DHCP server
- Ethernet demuxed to IP demuxed, UDP demuxed to DHCP

A day in the life… connecting to the Internet

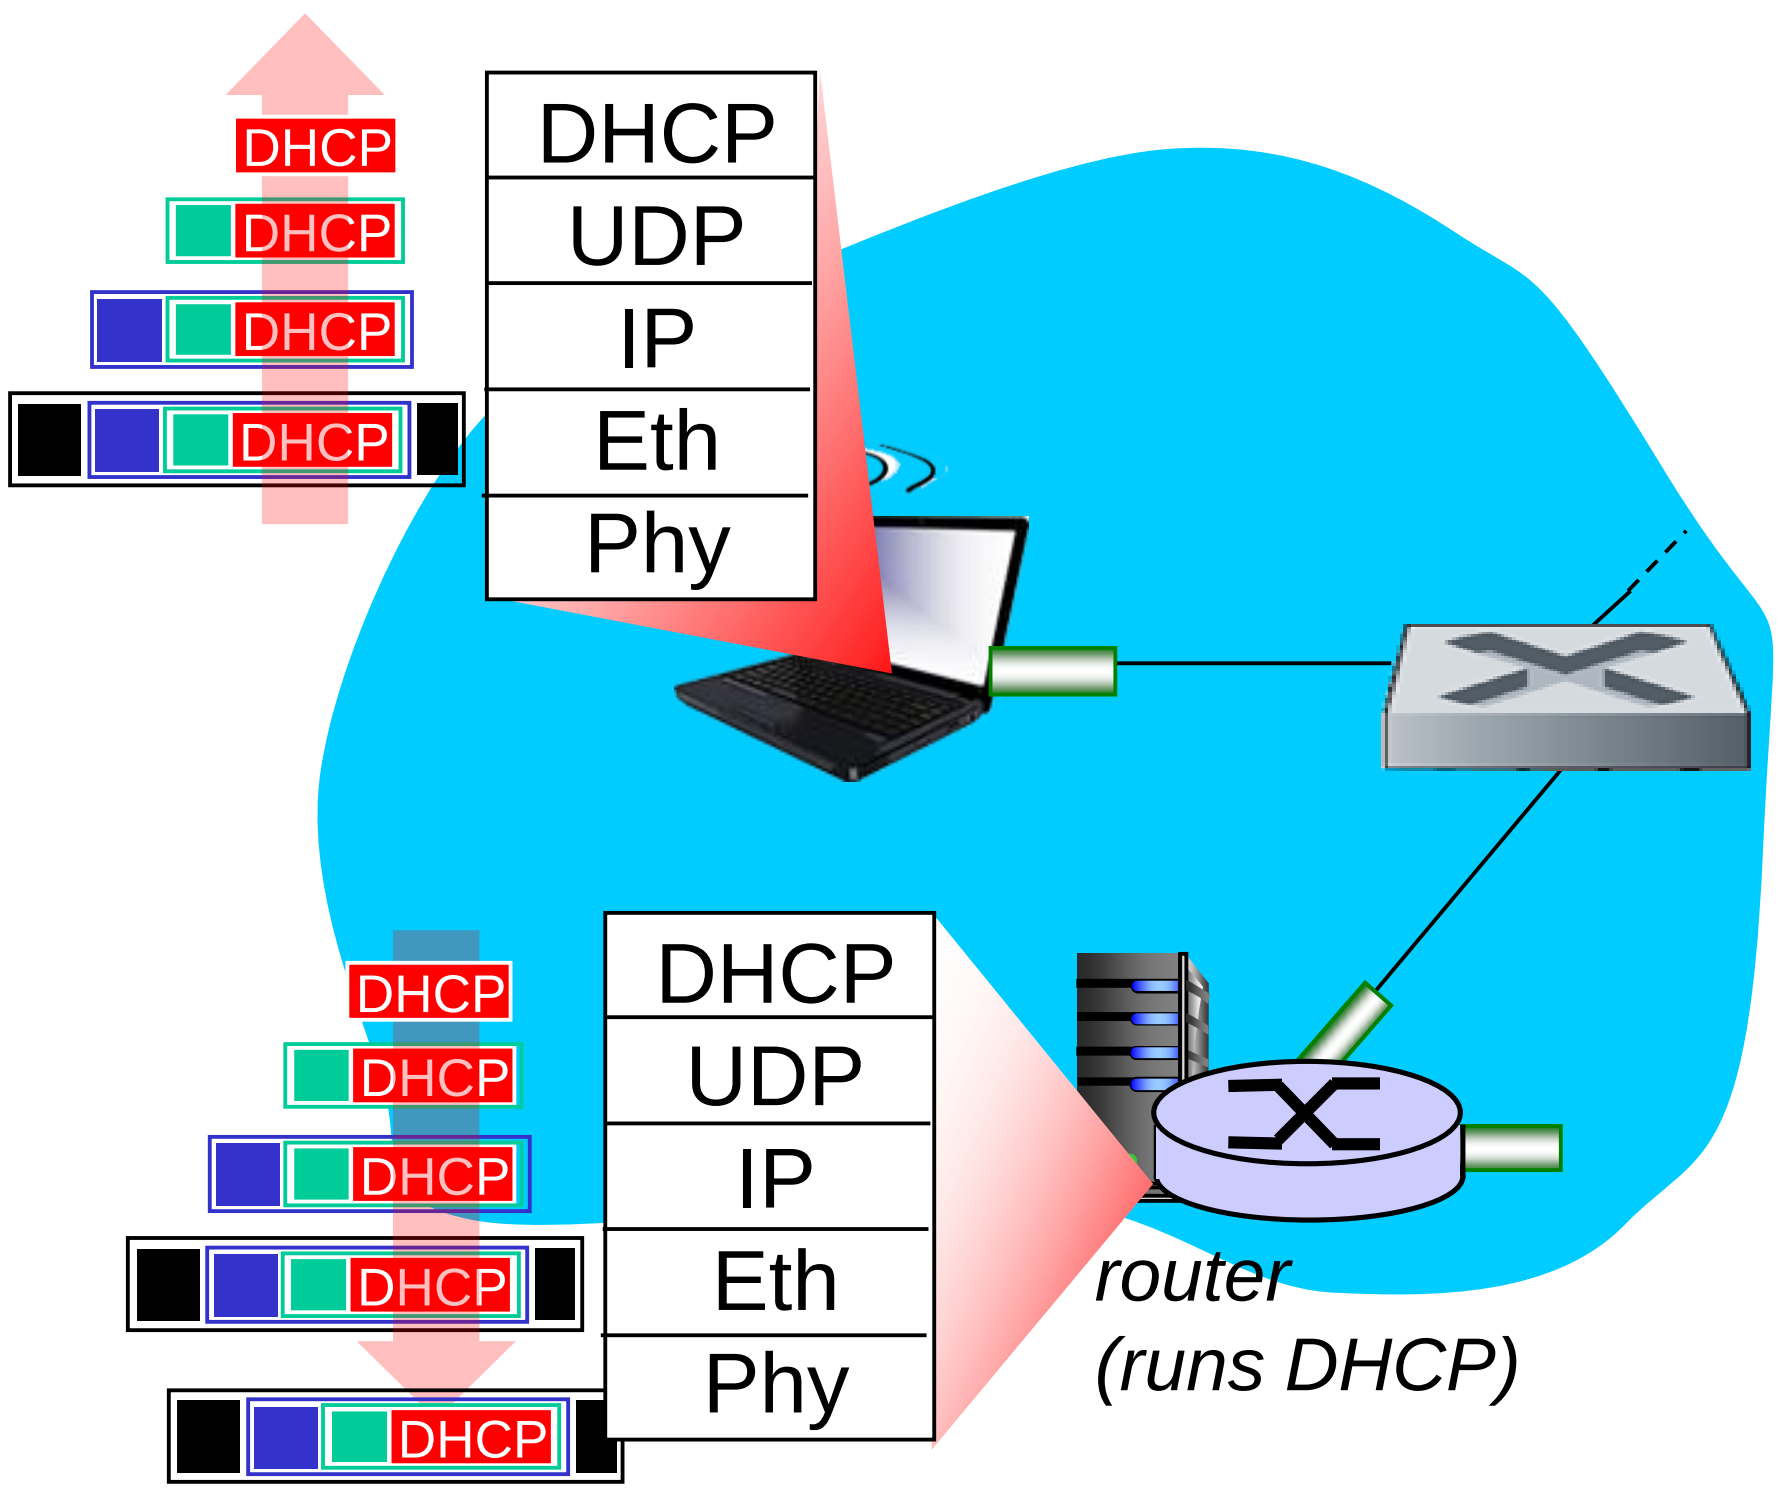

- DHCP server formulates *DHCP ACK* containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulation at DHCP server, frame forwarded (switch learning) through LAN, demultiplexing at client
- DHCP client receives DHCP ACK reply

Client now has IP address, knows name & addr of DNS server, IP address of its first-hop router

A day in the life… ARP (before DNS, before HTTP)

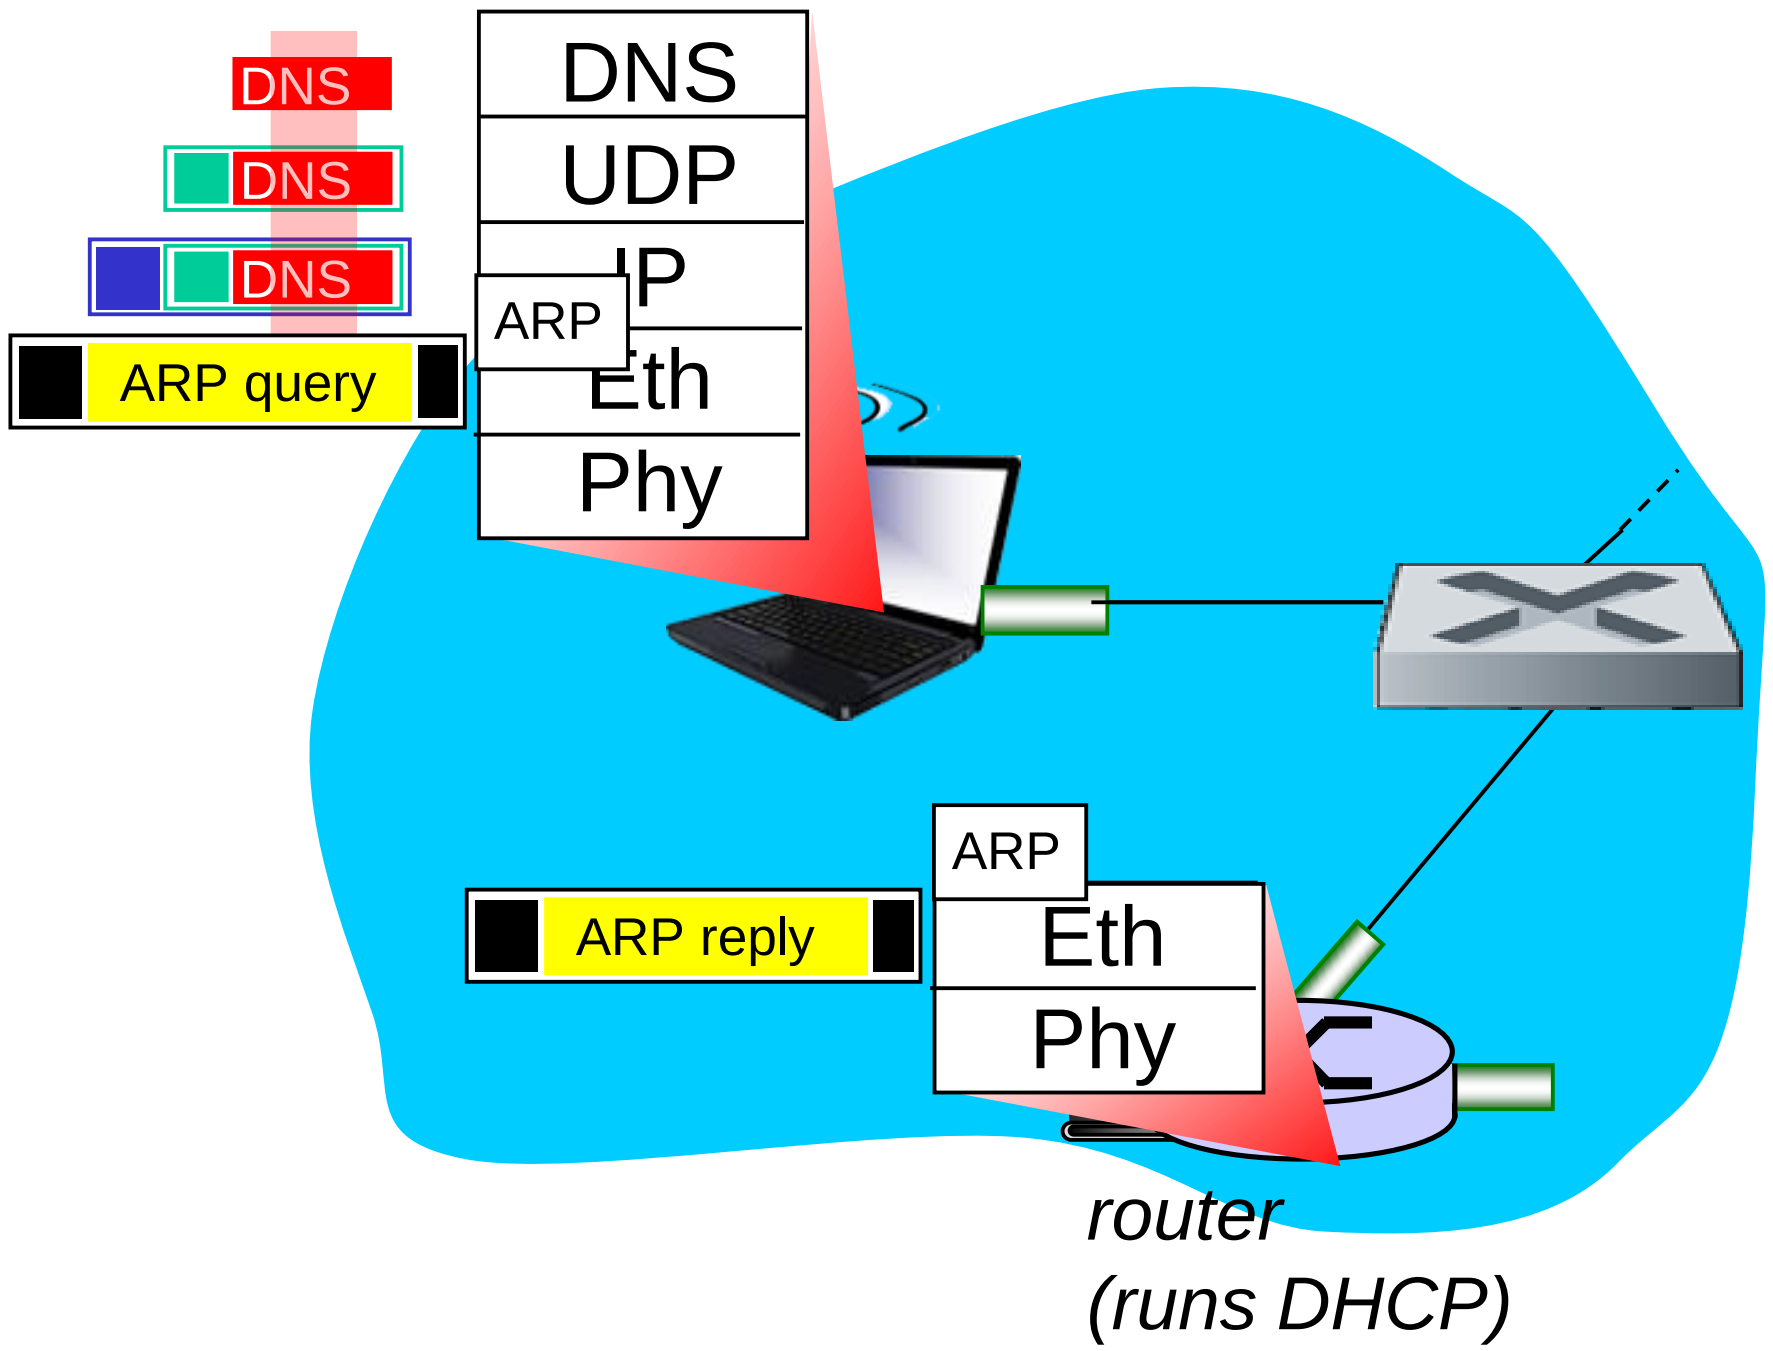

- before sending *HTTP* request, need IP address of www.google.com: *DNS*
- DNS query created, encapsulated in UDP, encapsulated in IP, encapsulated in Eth. To send frame to router, need MAC address of router interface: ARP
- ARP query broadcast, received by router, which replies with ARP reply giving MAC address of router interface
- client now knows MAC address of first hop router, so can now send frame containing DNS query

A day in the life… using DNS

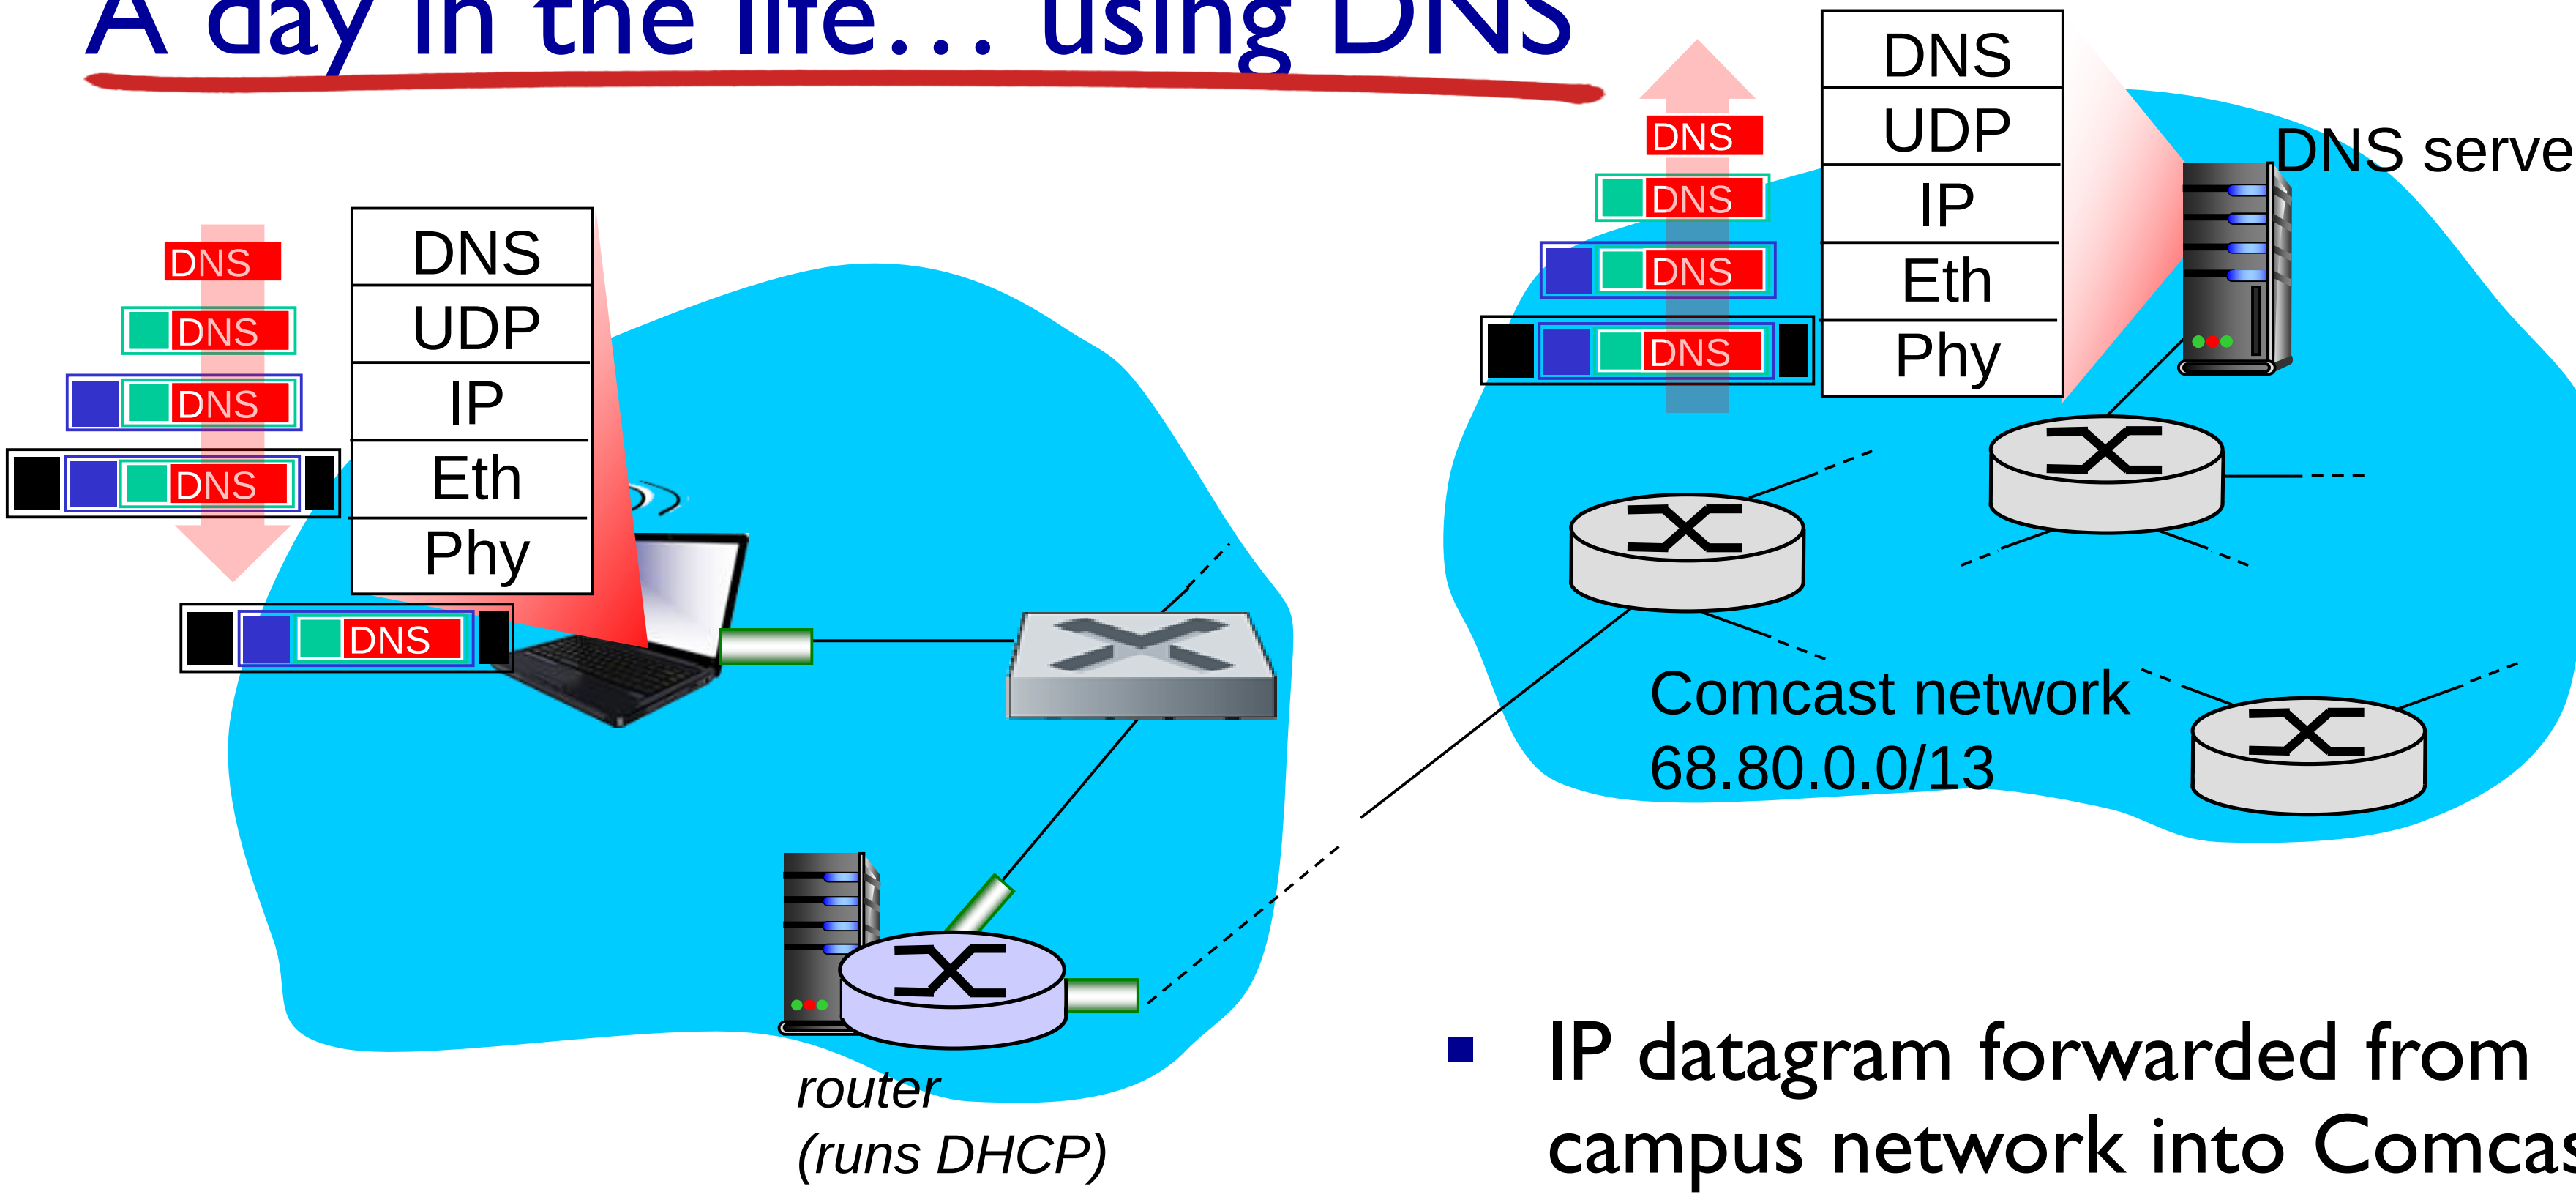

- IP datagram containing DNS query forwarded via LAN switch from client to 1st hop router

- IP datagram forwarded from campus network into Comcast network, routed (tables created by RIP, OSPF, IS-IS and/or BGP routing protocols) to DNS server
- demuxed to DNS server
- DNS server replies to client with IP address of www.google.com

A day in the life…TCP connection carrying HTTP

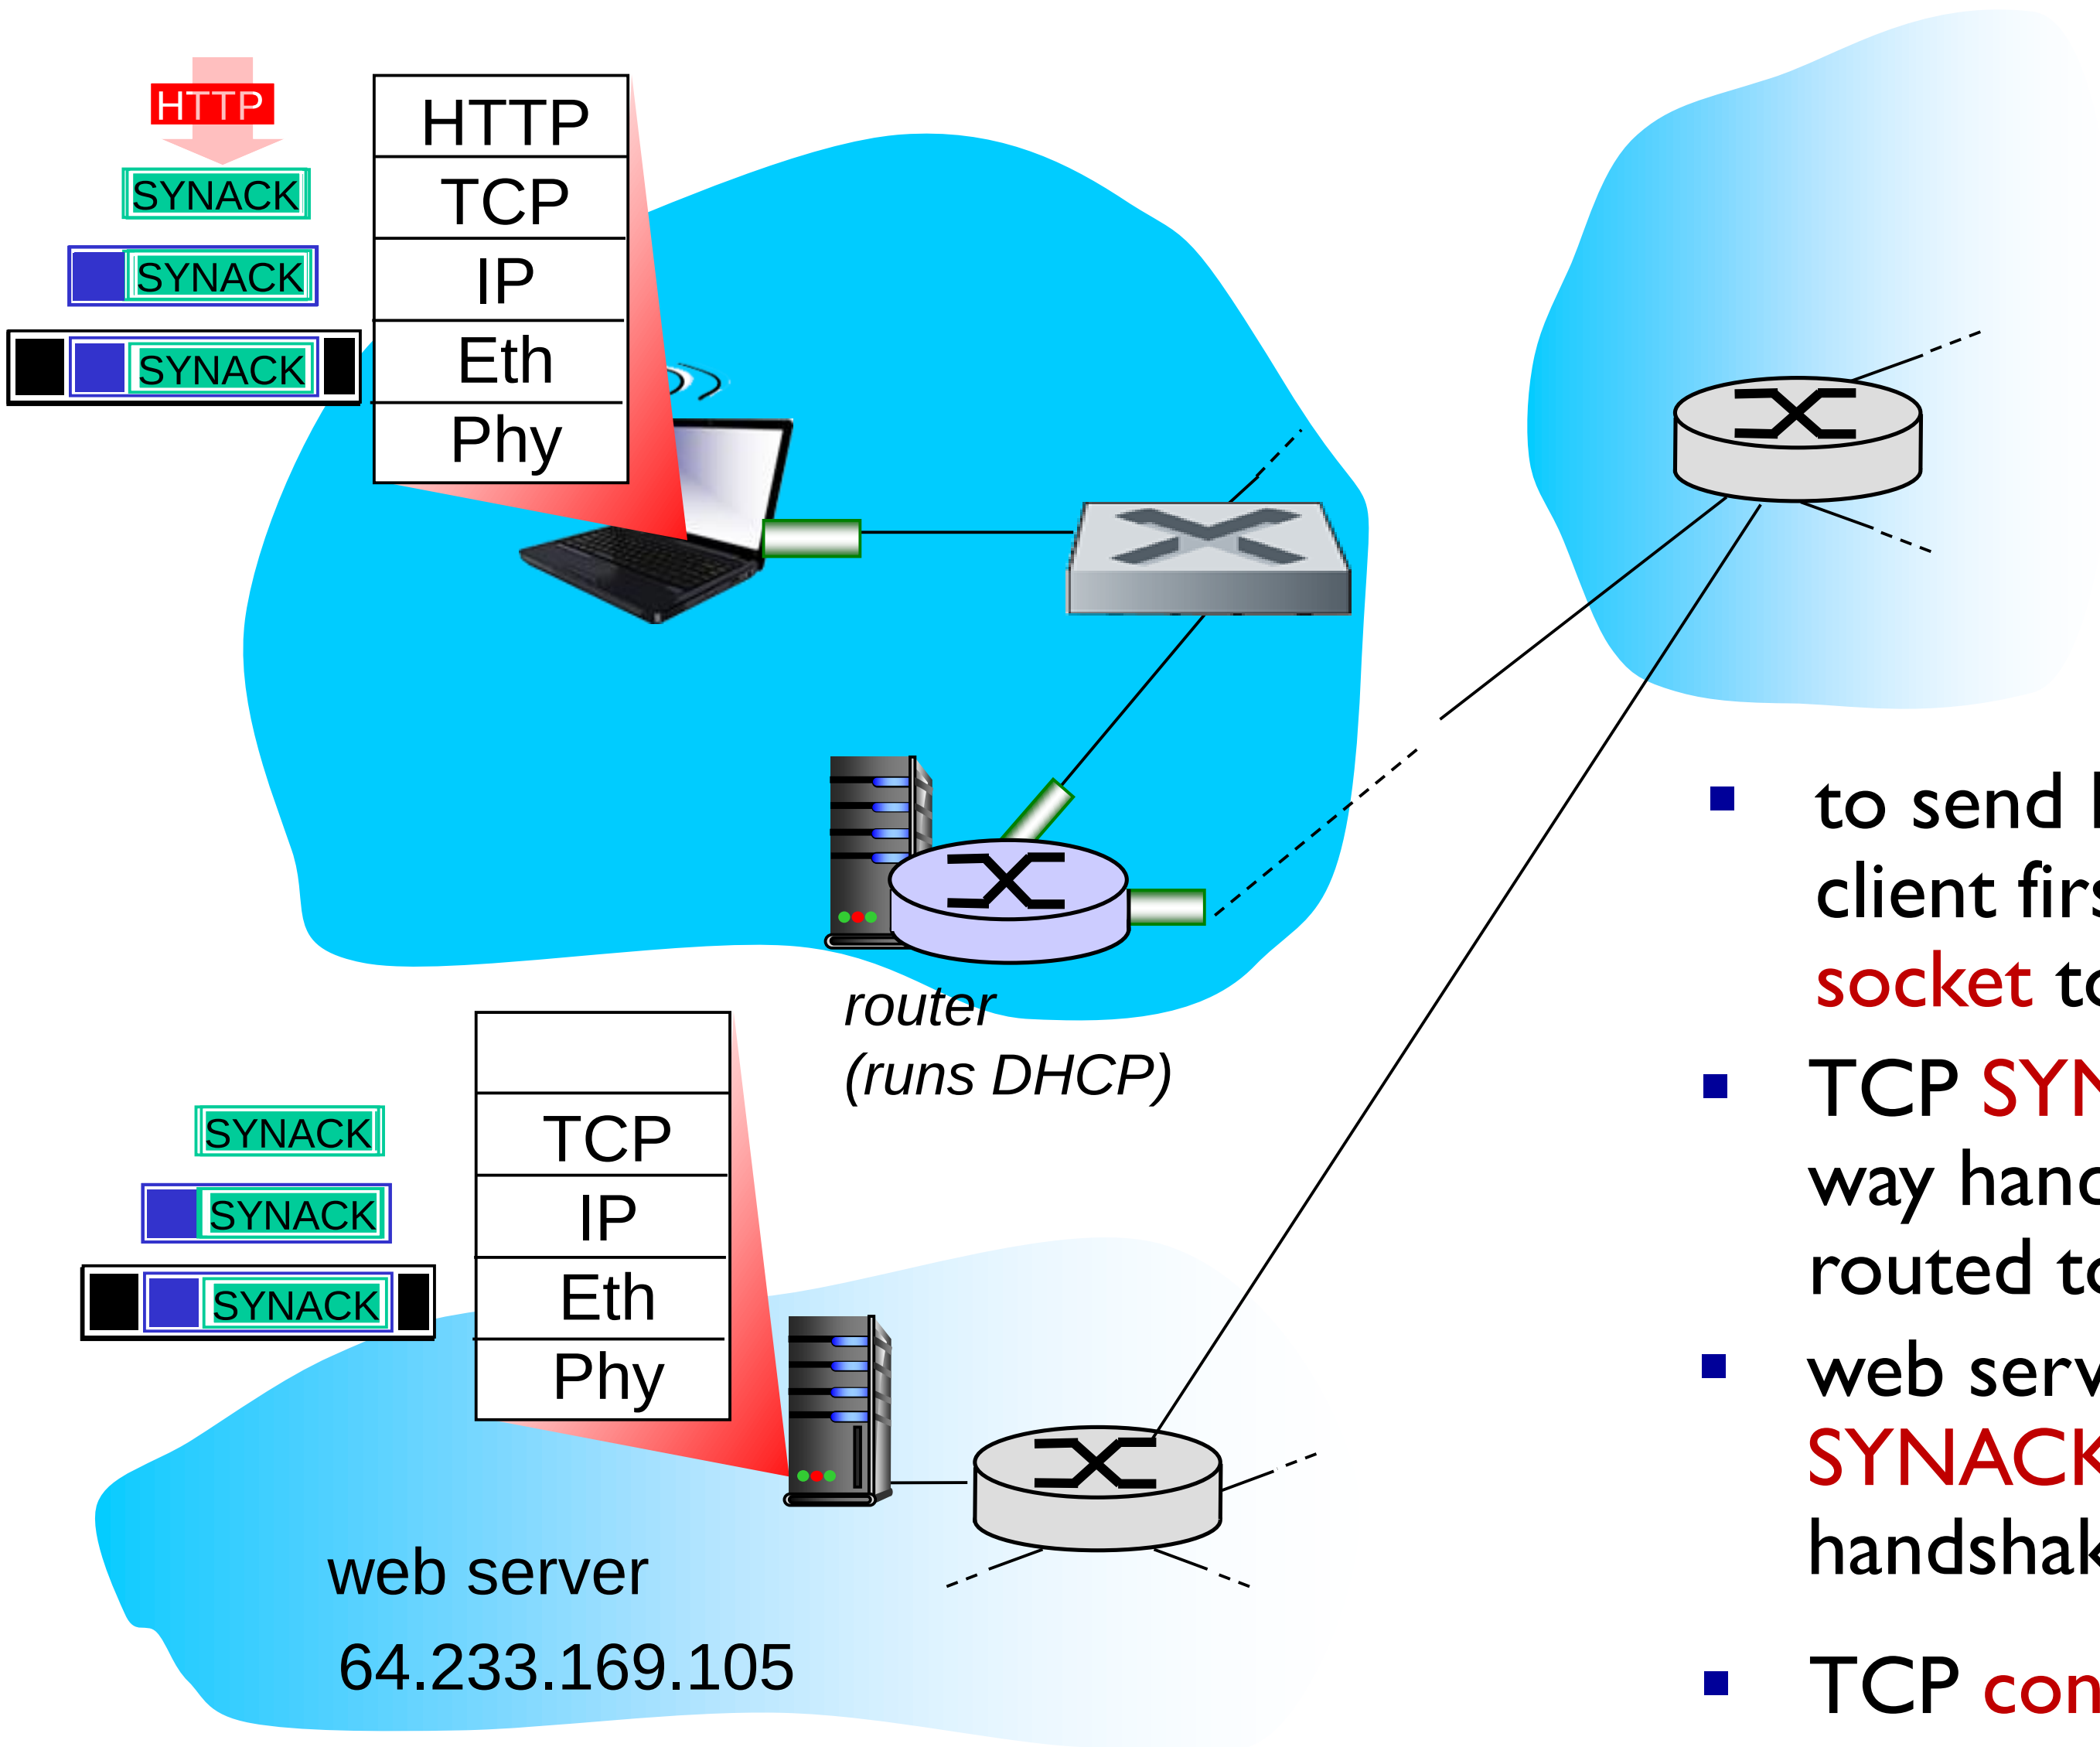

- to send HTTP request, client first opens TCP socket to web server
- TCP SYN segment (step 1 in 3-way handshake) inter-domain routed to web server
- web server responds with TCP SYNACK (step 2 in 3-way handshake)
- TCP connection established!

A day in the life… HTTP request/reply

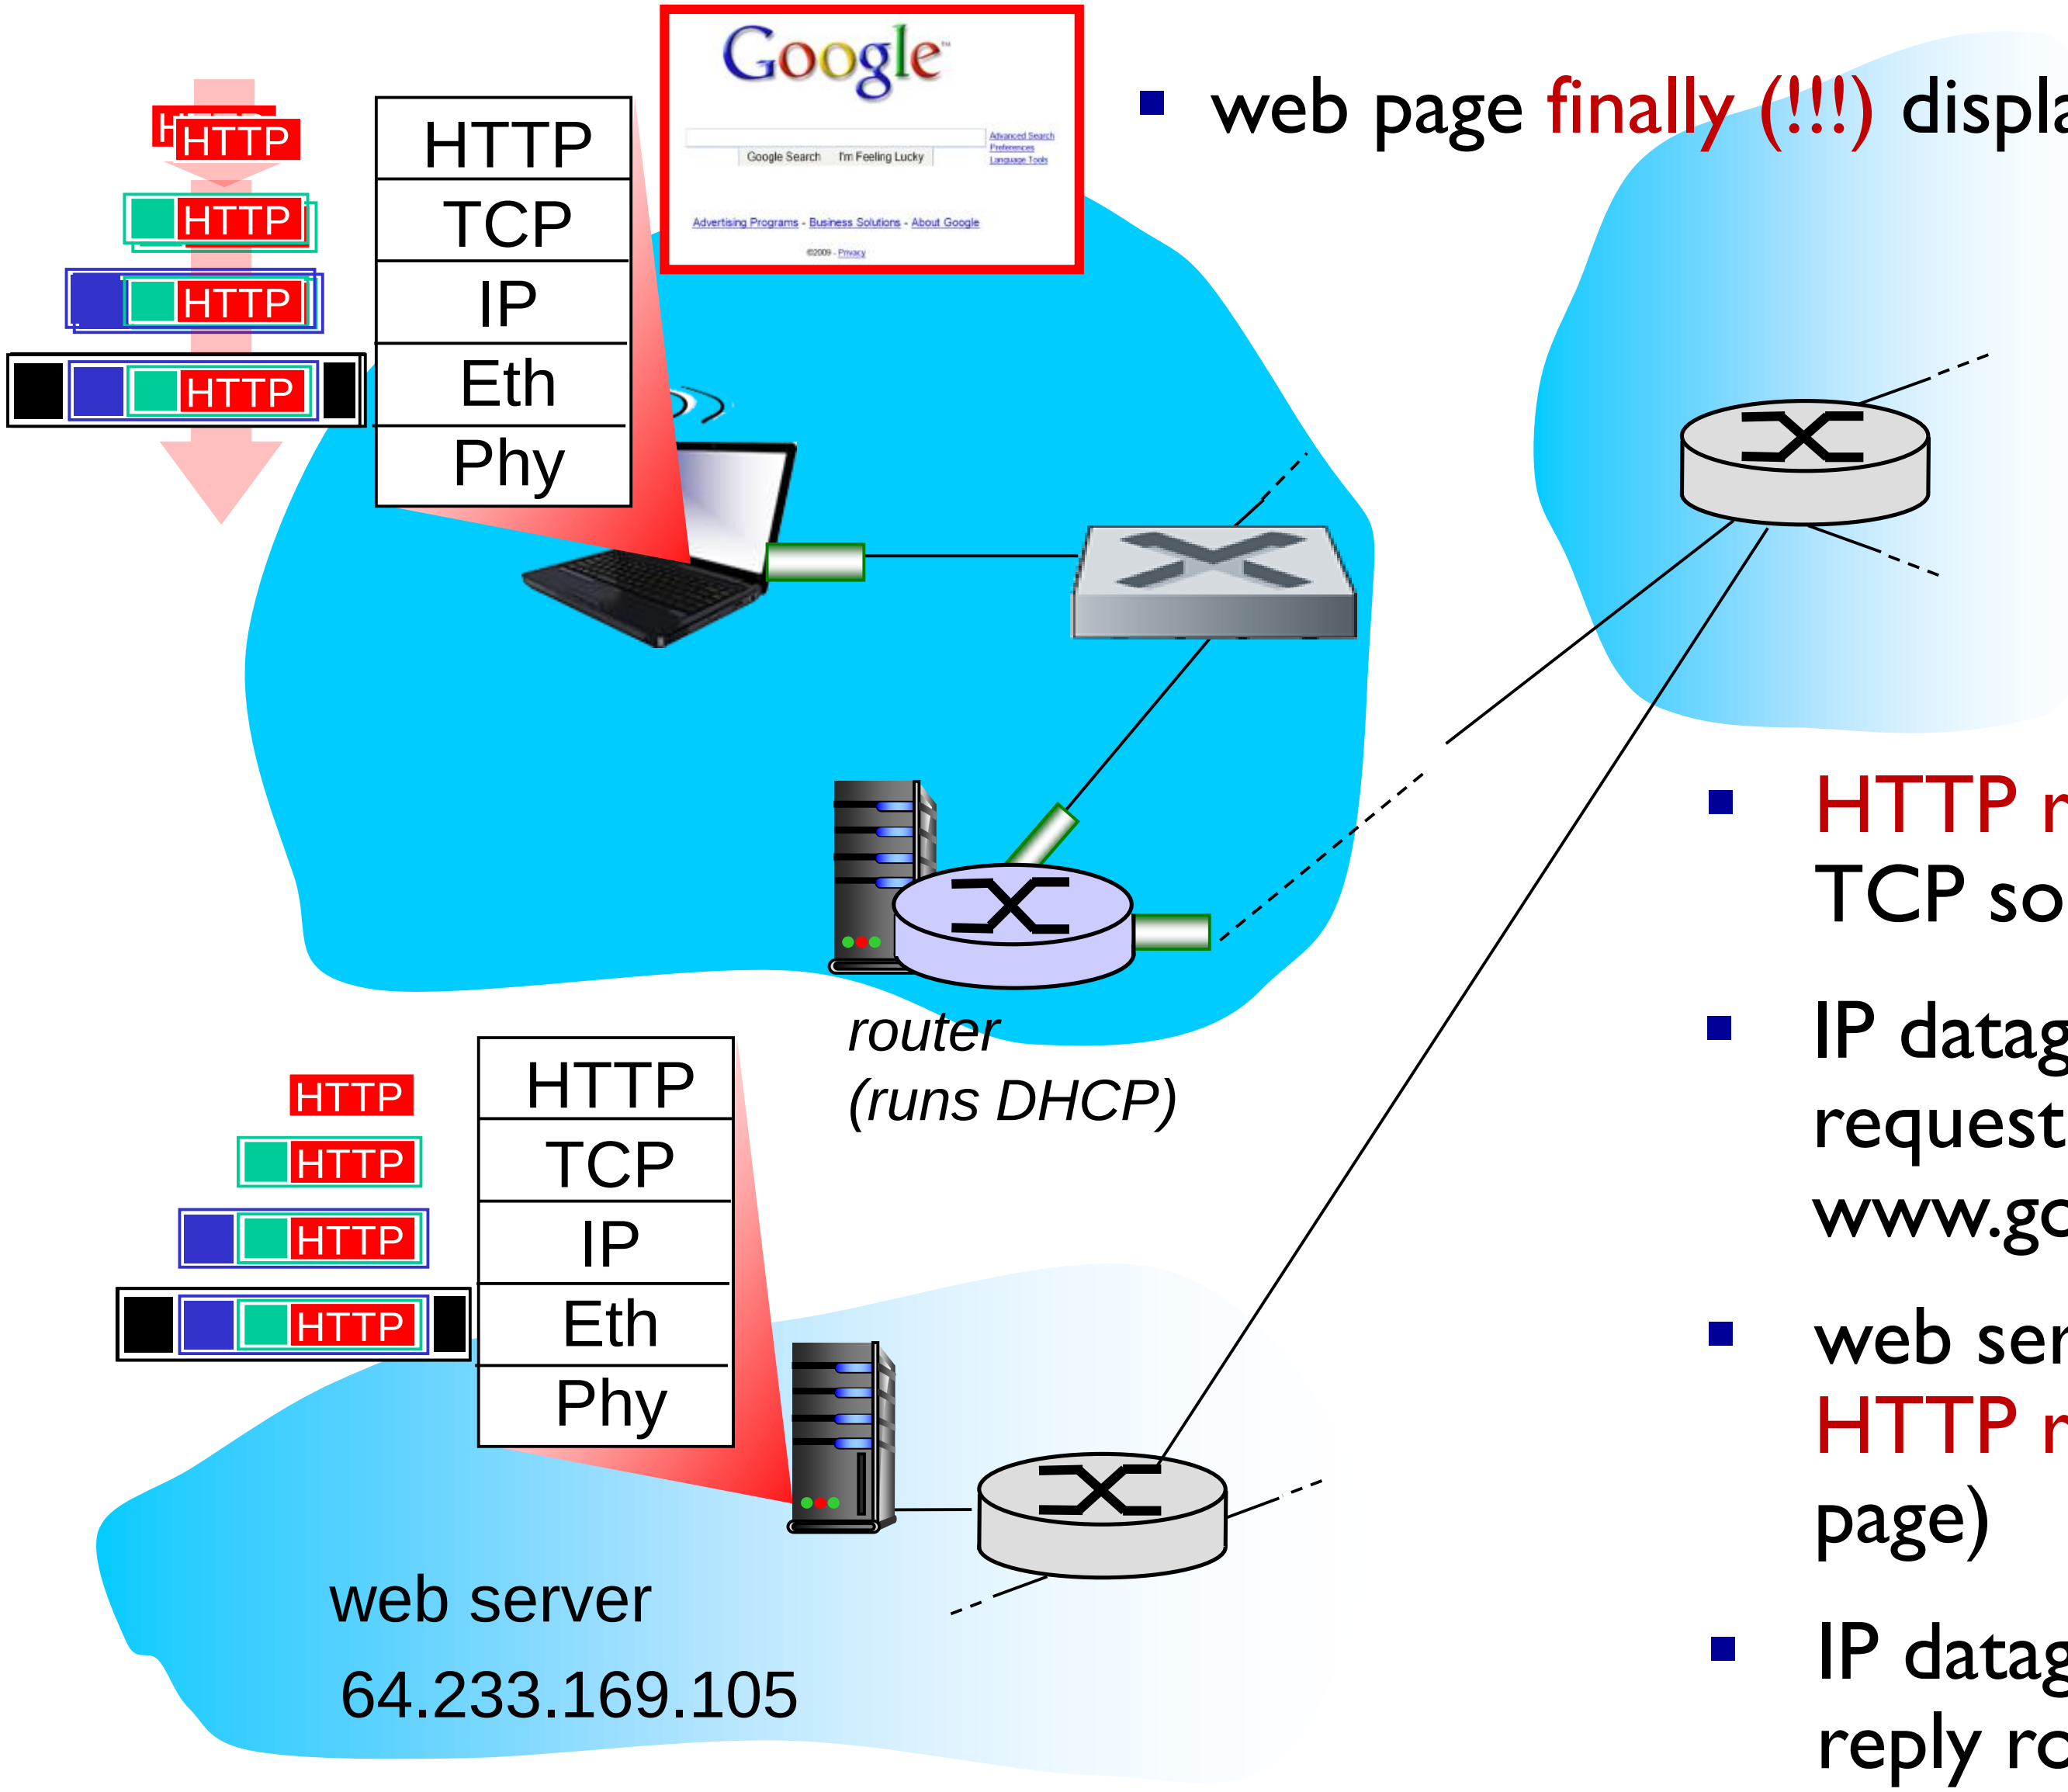

- web page finally (!!!) displayed
- HTTP request sent into TCP socket
- IP datagram containing HTTP request routed to www.google.com
- web server responds with HTTP reply (containing web page)
- IP datagram containing HTTP reply routed back to client

Chapter 6: Summary

- principles behind data link layer services:
  - error detection, correction
  - sharing a broadcast channel: multiple access
  - link layer addressing
- instantiation and implementation of various link layer technologies
  - Ethernet
  - switched LANS, VLANs
- synthesis: a day in the life of a web request