Lecture 12

Memory Performance and Dependable Memory Hierarchy

Measuring Cache Performance

- Components of CPU time
  - Program execution cycles
    - Includes cache hit time
  - Memory stall cycles
    - Mainly from cache misses
- With simplifying assumptions:

$$\text{Memory stall cycles}$$

$$= \frac{\text{Memory accesses}}{\text{Program}} \times \text{Miss rate} \times \text{Miss penalty}$$

$$= \frac{\text{Instructions}}{\text{Program}} \times \frac{\text{Misses}}{\text{Instruction}} \times \text{Miss penalty}$$

Cache Performance Example

- Calculate actual CPI, given that
  - I-cache miss rate = 2%
  - D-cache miss rate = 4%
  - Miss penalty = 100 cycles
  - Base CPI (ideal cache) = 2
  - Load & stores are 36% of instructions
- Miss cycles per instruction (assume *N* ins. In total)
  - I-cache: $N \times 0.02 \times 100/N = 2$
  - D-cache: $N \times 0.36 \times 0.04 \times 100/N = 1.44$
- Actual CPI = 2 + 2 + 1.44 = 5.44
  - Ideal CPU is 5.44/2 =2.72 times faster

Average Access Time

- Hit time is also important for performance
- Average memory access time (AMAT)
  - AMAT = Hit time + Miss rate × Miss penalty
- Example
  - CPU with 1ns clock, hit time = 1 cycle, miss penalty = 20 cycles, I-cache miss rate = 5%
  - AMAT = 1 + 0.05 × 20 = 2ns
    - 2 cycles per instruction

Performance Summary

- When CPU performance increased
  - Miss penalty becomes more significant
  - CPI=2, Miss=3.44, % of memory stall: 3.44/5.44=63%
  - CPI=1, Miss=3.44, % of memory stall: 3.44/4.44=77%
- Decreasing base CPI
  - Greater proportion of time spent on memory stalls
- Increasing clock rate
  - Memory stalls account for more CPU cycles
- Can’t neglect cache behavior when evaluating system performance

Recall: Direct Mapped Cache

- Location determined by address
- Direct mapped: only one choice
  - Capacity of cache is not fully exploited
  - Miss rate is high

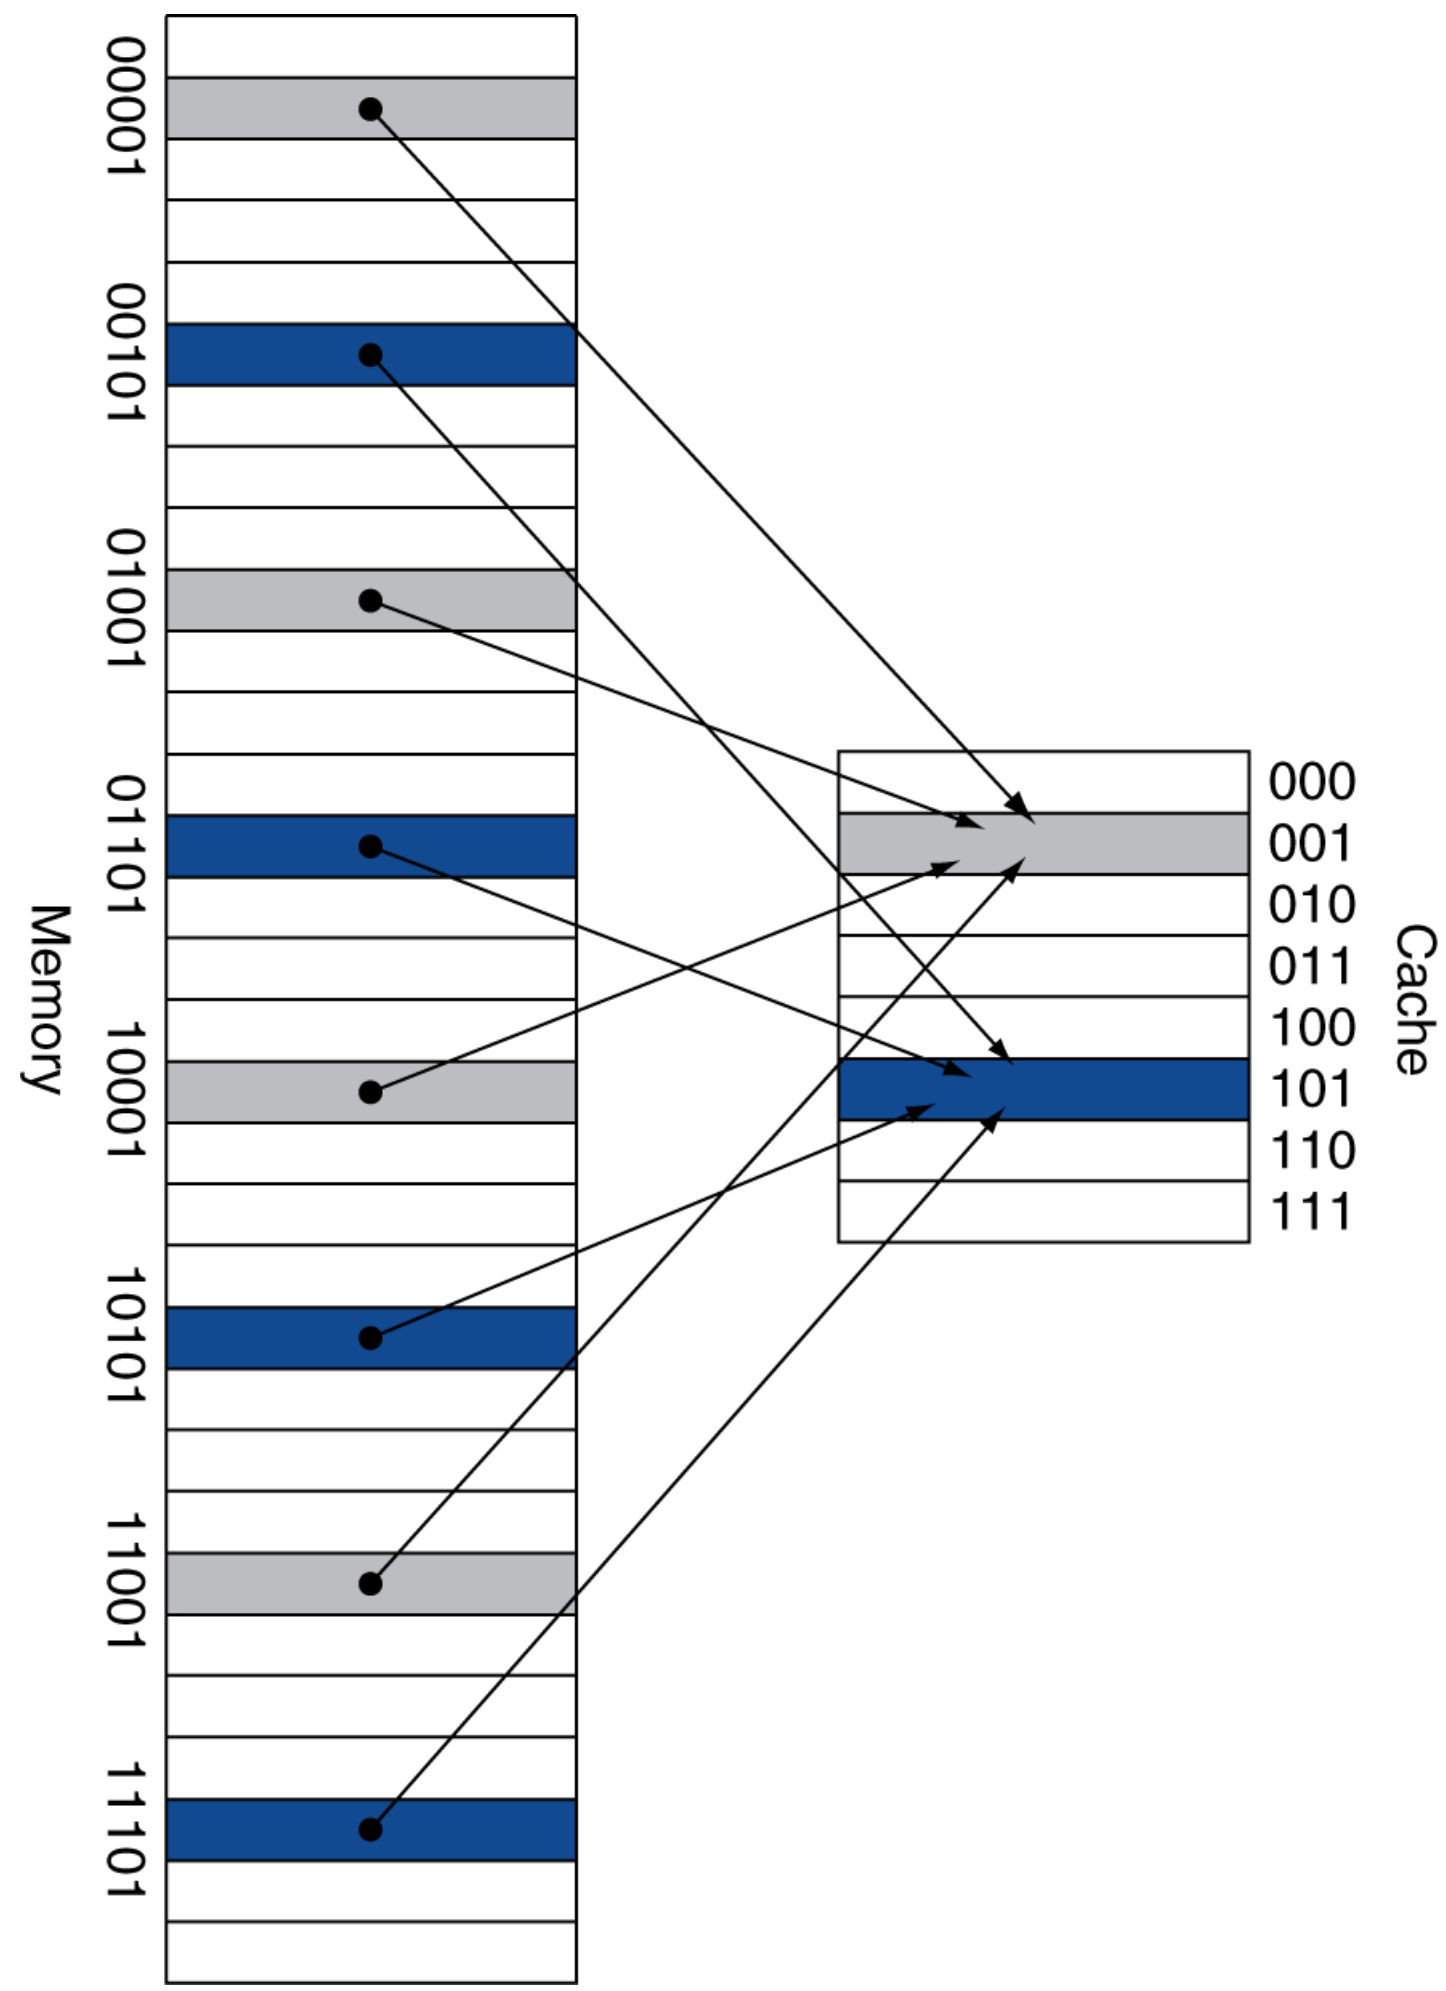

Cache Example

Word addr	Binary addr	Hit/miss	Cache block
16	10 000	Miss	000
3	00 011	Miss	011
16	10 000	Hit	000

Index	V	Tag	Data
000	**Y**	**10**	**Mem[10000]**
001	N		
010	Y	11	Mem[11010]
011	**Y**	**00**	**Mem[00011]**
100	N		
101	N		
110	Y	10	Mem[10110]
111	N		

Cache Example

Word addr	Binary addr	Hit/miss	Cache block
18	10 010	Miss	010

Index	V	Tag	Data
000	Y	10	Mem[10000]
001	N		
010	**Y**	**10**	**Mem[10010]**
011	Y	00	Mem[00011]
100	N		
101	N		
110	Y	10	Mem[10110]
111	N		

Associative Cache Example

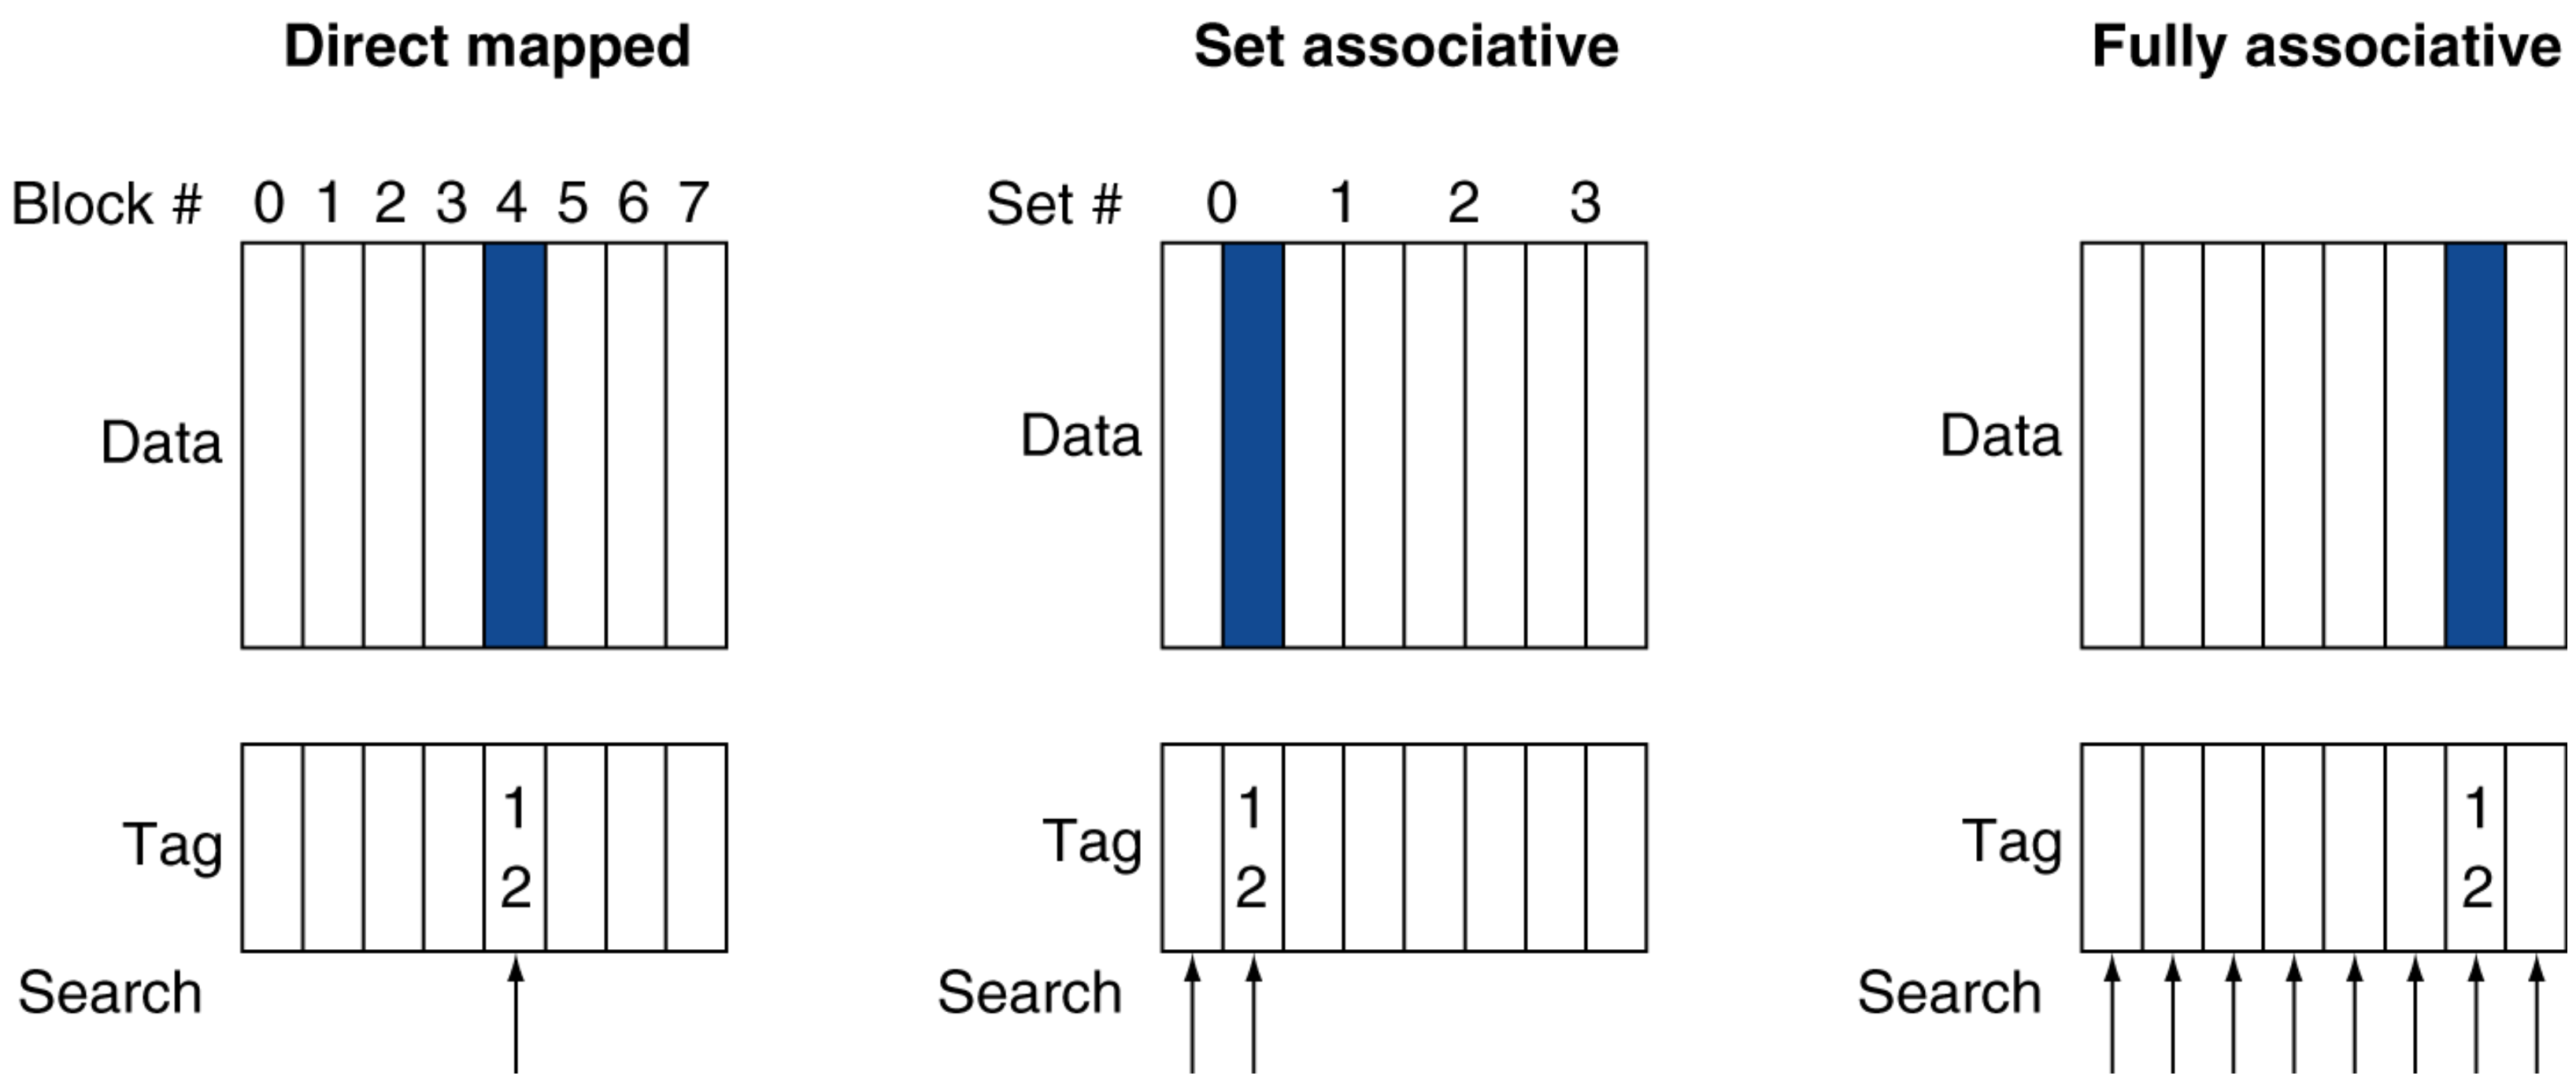

Associative Caches

- Fully associative
  - Allow a given block to go in any cache entry
  - Requires all entries to be searched at once
  - Comparator per entry (expensive)
- *n*-way set associative
  - Each set contains *n* entries
  - Block number determines which set
    - (Block number) modulo (#Sets in cache)
  - Search all entries in a given set at once
  - *n* comparators (less expensive)

Set Associative Cache Organization

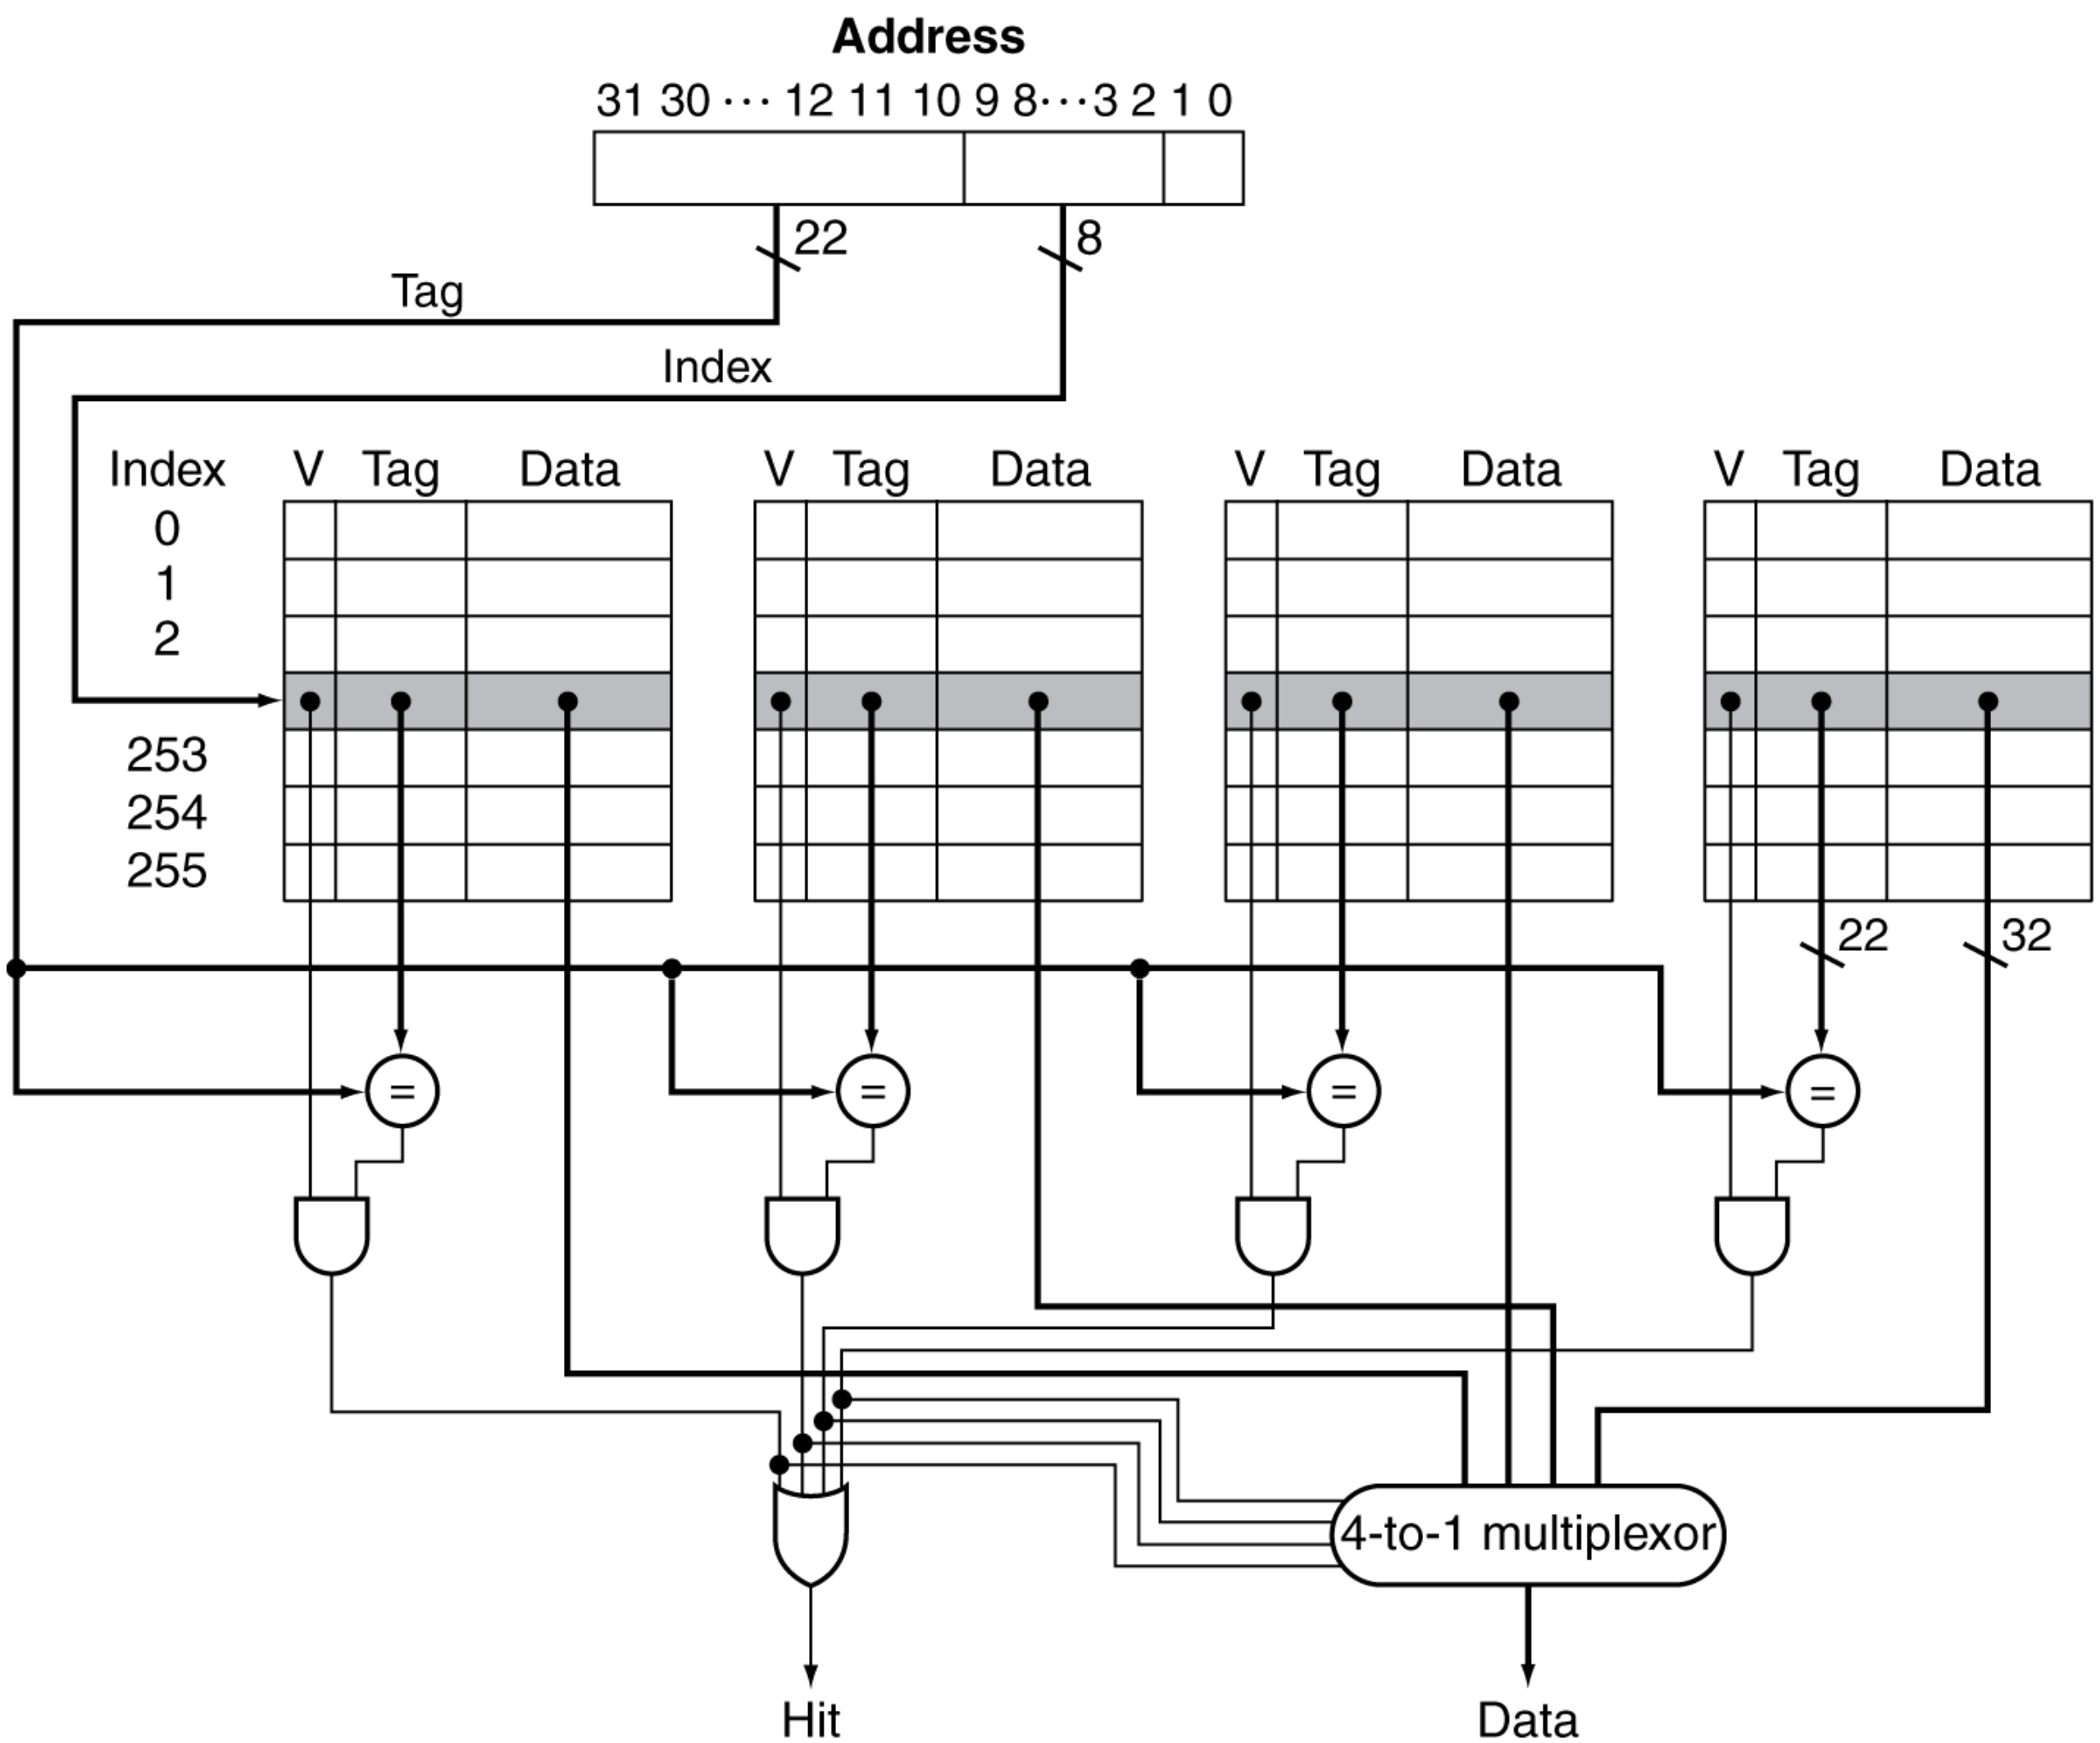

Spectrum of Associativity

- For a cache with 8 blocks

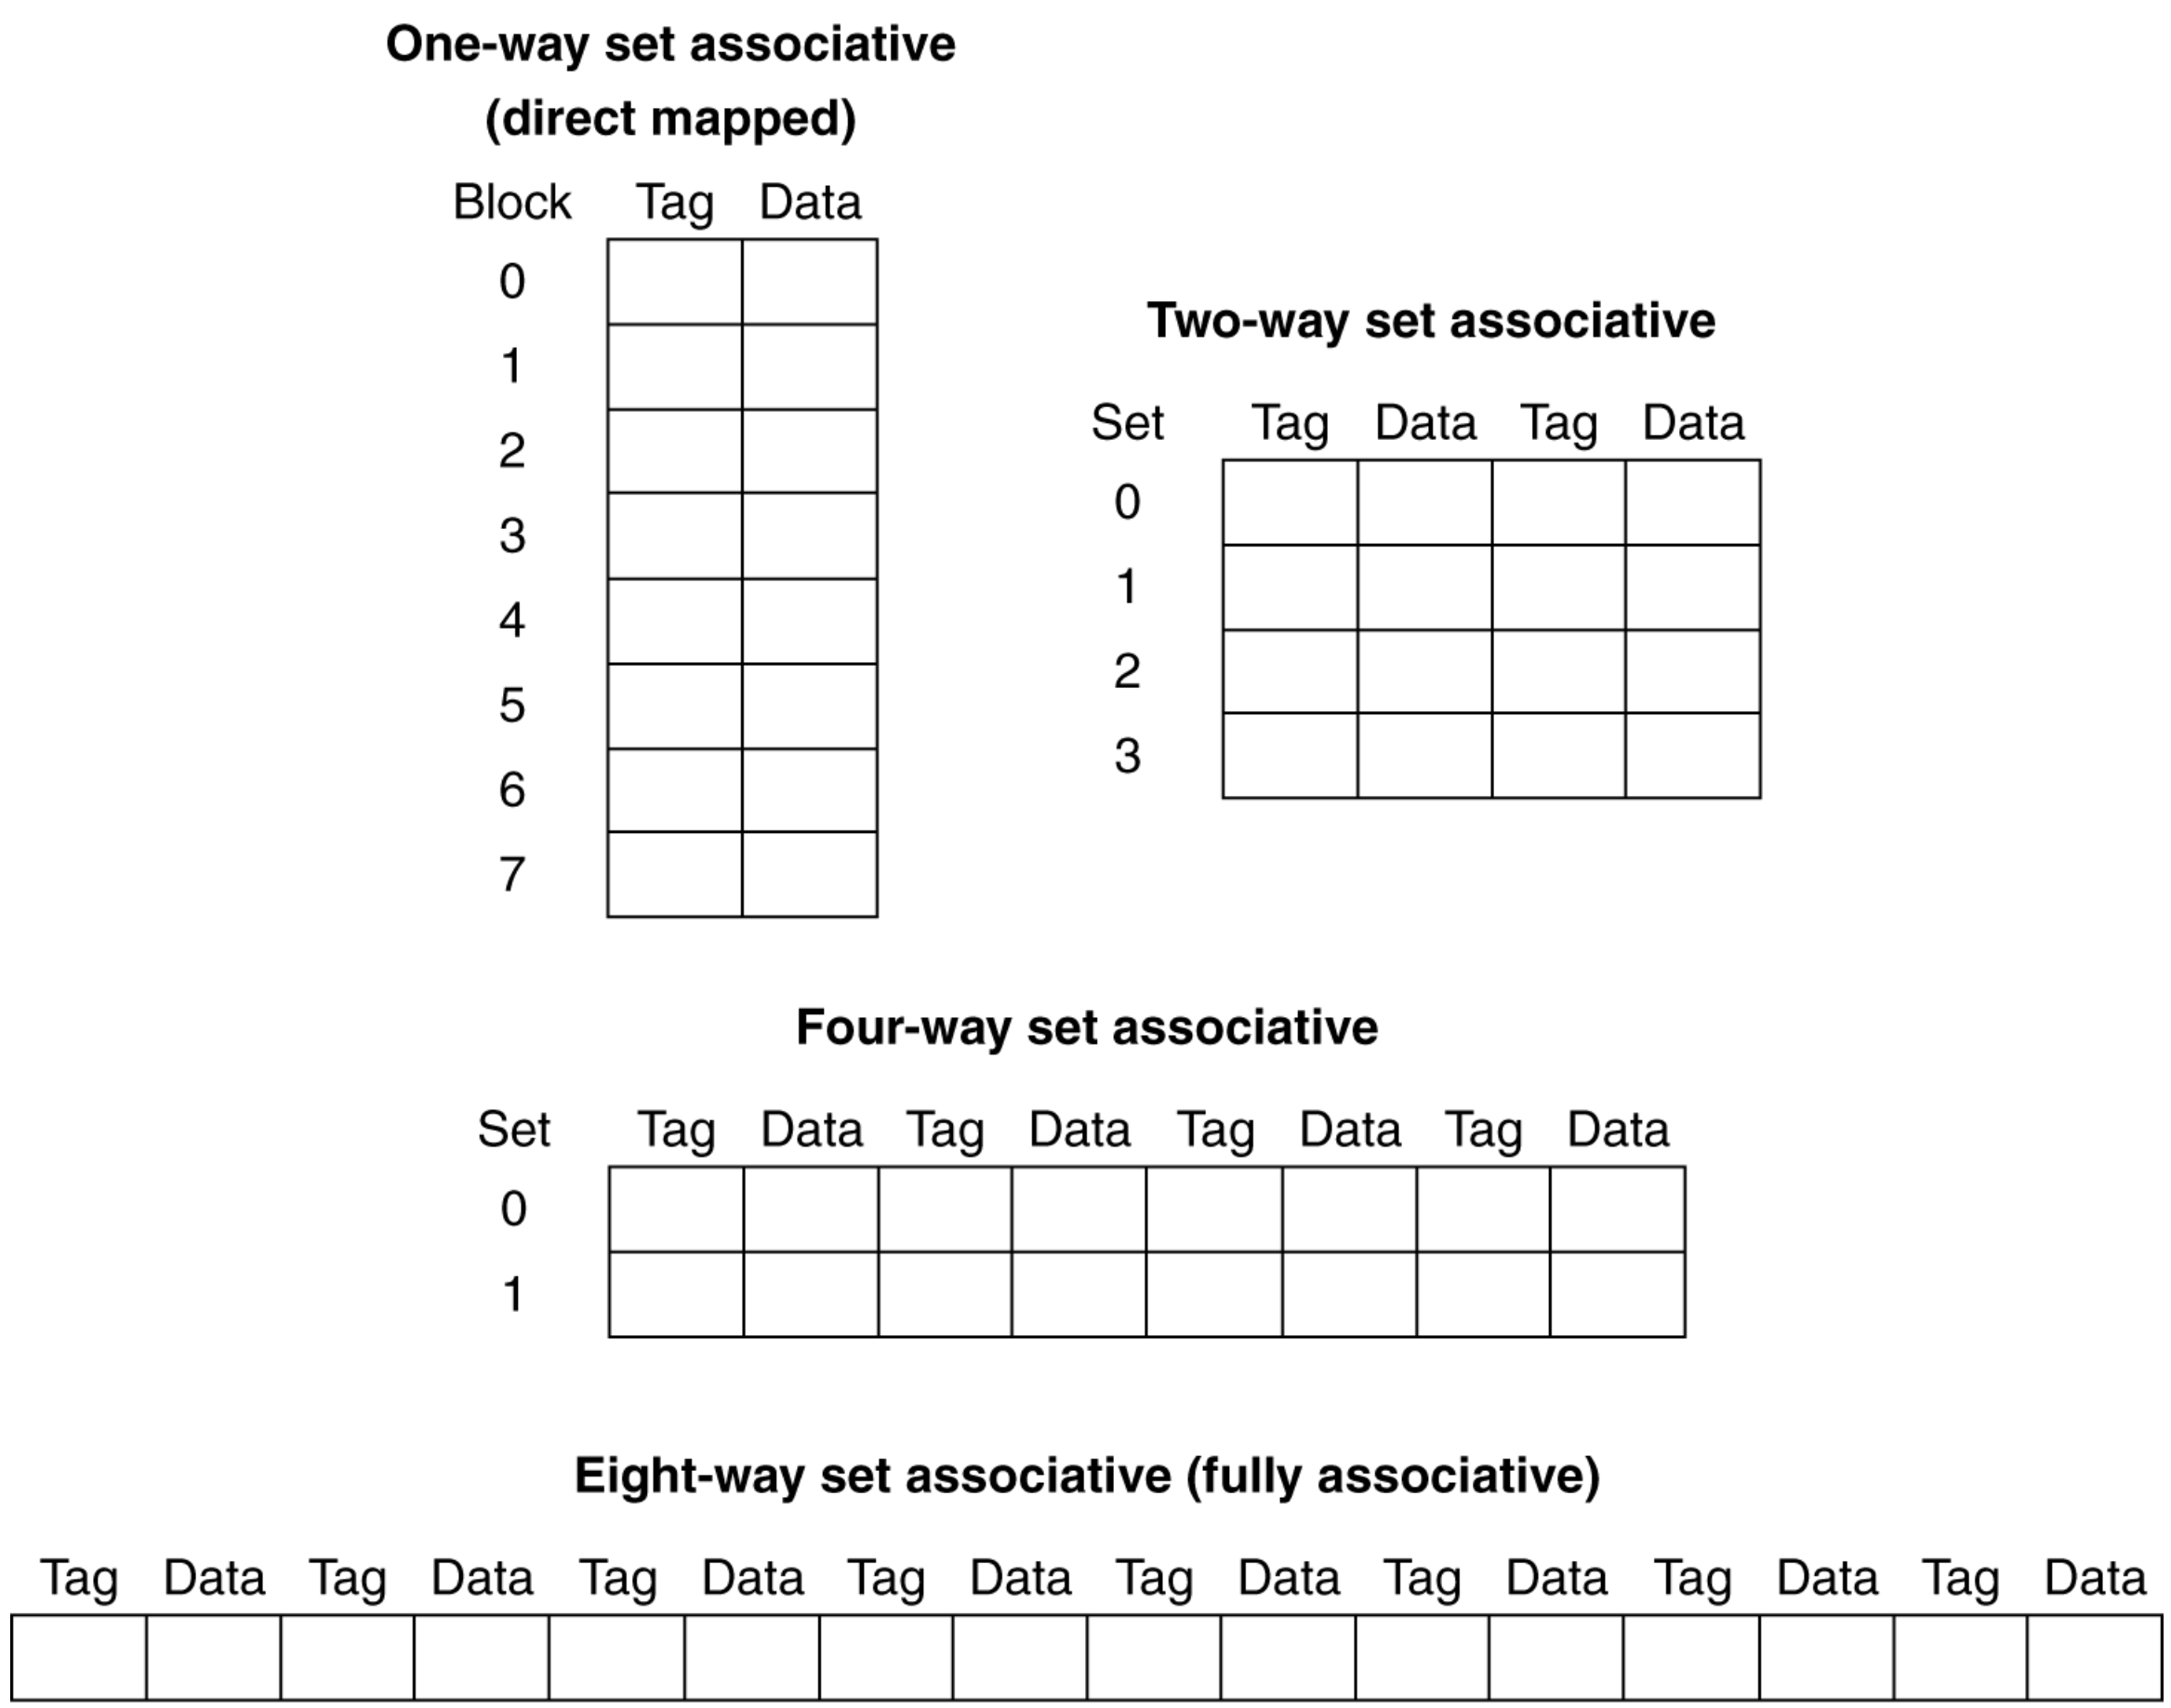

Associativity Example

- Compare 4-block caches
  - Direct mapped, 2-way set associative, fully associative
  - Block access sequence: 0, 8, 0, 6, 8
- Direct mapped

Block address	Cache index	Hit/miss	Cache content after access			
			0	1	2	3
0	0	miss	**Mem[0]**			
8	0	miss	**Mem[8]**			
0	0	miss	**Mem[0]**			
6	2	miss	Mem[0]		**Mem[6]**	
8	0	miss	**Mem[8]**		Mem[6]	

Associativity Example

- 2-way set associative

Block address	Cache index	Hit/miss	Cache content after access			
			Set 0		Set 1	
0	0	miss	**Mem[0]**			
8	0	miss	Mem[0]	**Mem[8]**		
0	0	hit	**Mem[0]**	Mem[8]		
6	0	miss	Mem[0]	**Mem[6]**		
8	0	miss	**Mem[8]**	Mem[6]		

- Fully associative

Block address		Hit/miss	Cache content after access			
0		miss	**Mem[0]**			
8		miss	Mem[0]	**Mem[8]**		
0		hit	**Mem[0]**	Mem[8]		
6		miss	Mem[0]	Mem[8]	**Mem[6]**	
8		hit	Mem[0]	**Mem[8]**	Mem[6]	

How Much Associativity

- Increased associativity decreases miss rate
  - But with diminishing returns
- Simulation of a system with 64KB D-cache, 16-word blocks, SPEC2000
  - 1-way: 10.3%
  - 2-way: 8.6%
  - 4-way: 8.3%
  - 8-way: 8.1%

Set Associative Cache Organization

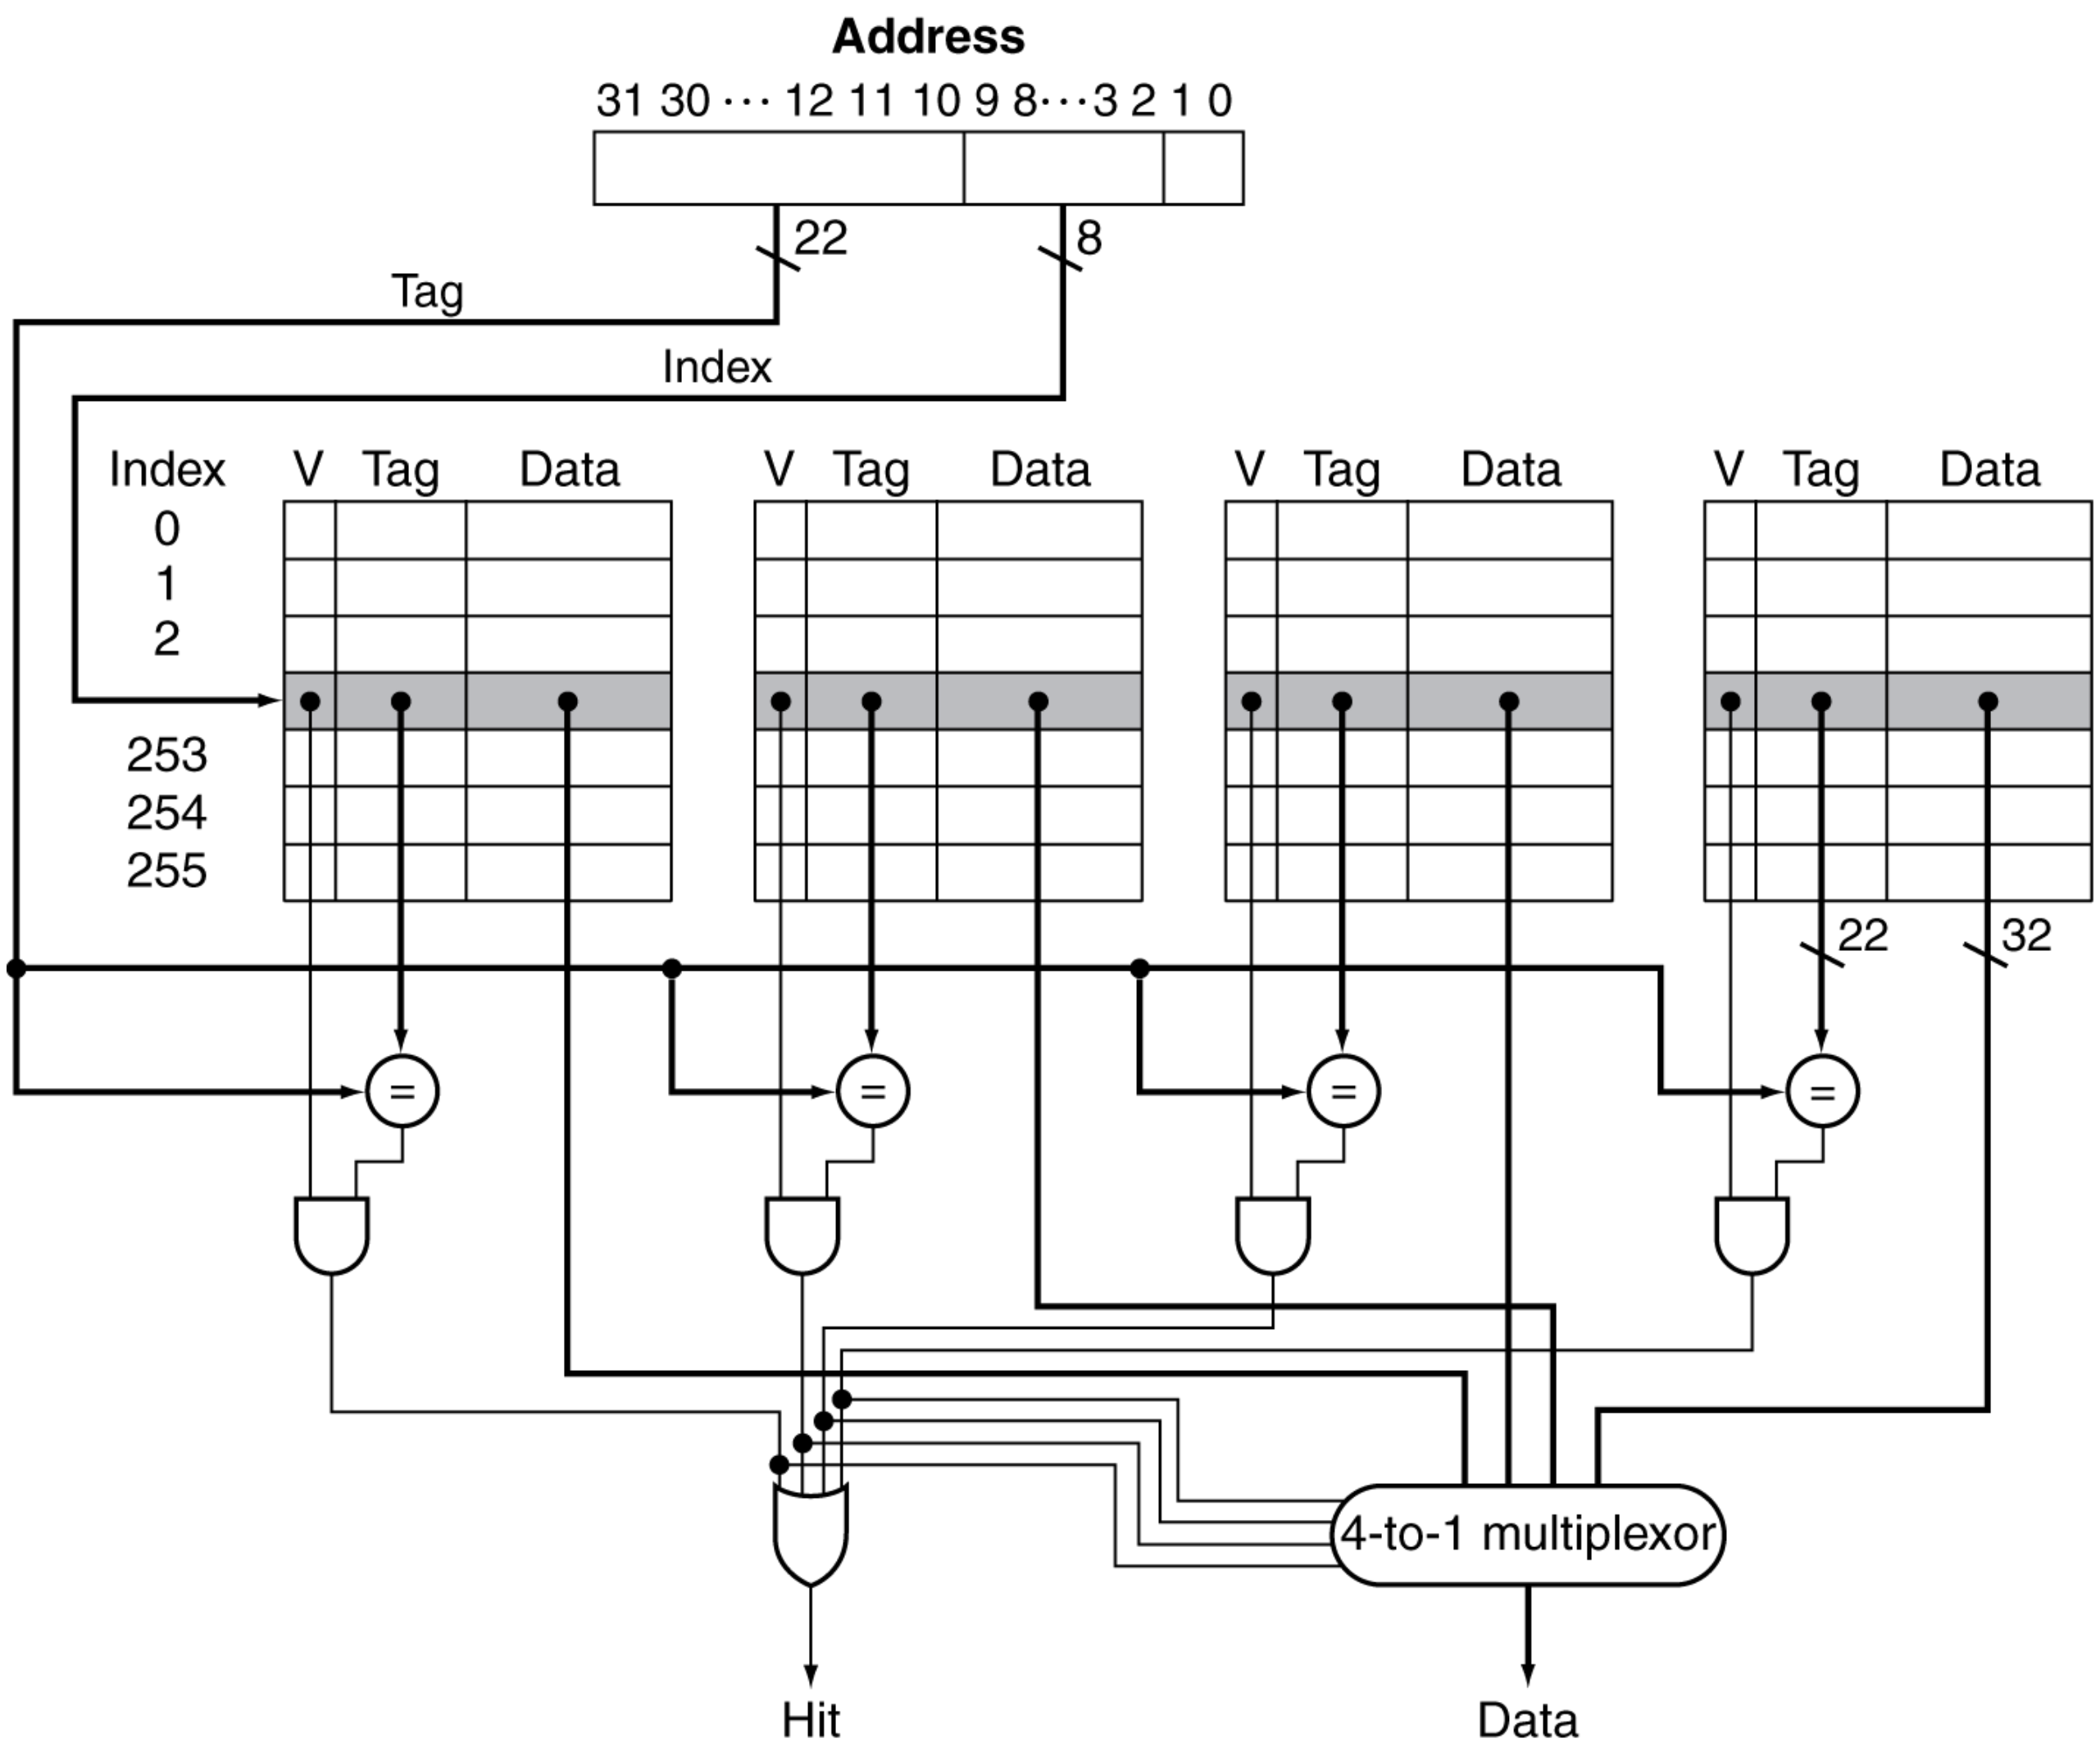

Replacement Policy

- Direct mapped: no choice
- Set associative
  - Prefer non-valid entry, if there is one
  - Otherwise, choose among entries in the set
- Least-recently used (LRU)
  - Choose the one unused for the longest time
    - Simple for 2-way, manageable for 4-way, too hard beyond that
- Random
  - Gives approximately the same performance as LRU for high associativity

Multilevel Caches

- Primary cache attached to CPU
  - Small, but fast
- Level-2 cache services misses from primary cache
  - Larger, slower, but still faster than main memory
- Main memory services L-2 cache misses
- Some high-end systems include L-3 cache

Multilevel Cache Example

- Given
  - CPU base CPI = 1, clock rate = 4GHz
  - Miss rate/instruction = 2%
  - Main memory access time = 100ns
- With just primary cache
  - Miss penalty = 100ns/0.25ns = 400 cycles
  - Effective CPI = 1 + 0.02 × 400 = 9

Example (cont.)

- Now add L-2 cache
  - Access time = 5ns
  - Global miss rate to main memory = 0.5%
- Primary miss with L-2 hit
  - Penalty = 5ns/0.25ns = 20 cycles
- Primary miss with L-2 miss
  - Extra penalty = 400 cycles
- CPI = $1 + 0.02 \times 20 + 0.005 \times 400 = 3.4$
- Performance ratio = $9/3.4 = 2.6$

Multilevel Cache Considerations

- Primary cache
  - Focus on minimal hit time
- L-2 cache
  - Focus on low miss rate to avoid main memory access
  - Hit time has less overall impact
- Results
  - L-1 cache usually smaller than a single cache
  - L-1 block size smaller than L-2 block size

Interactions with Software

- Compare two algorithms: Radix sort & Quicksort
- When size is large,
  - Radix sort has less instructions
  - But quicksort has less clock cycles
  - Because miss rate of radix sort is higher

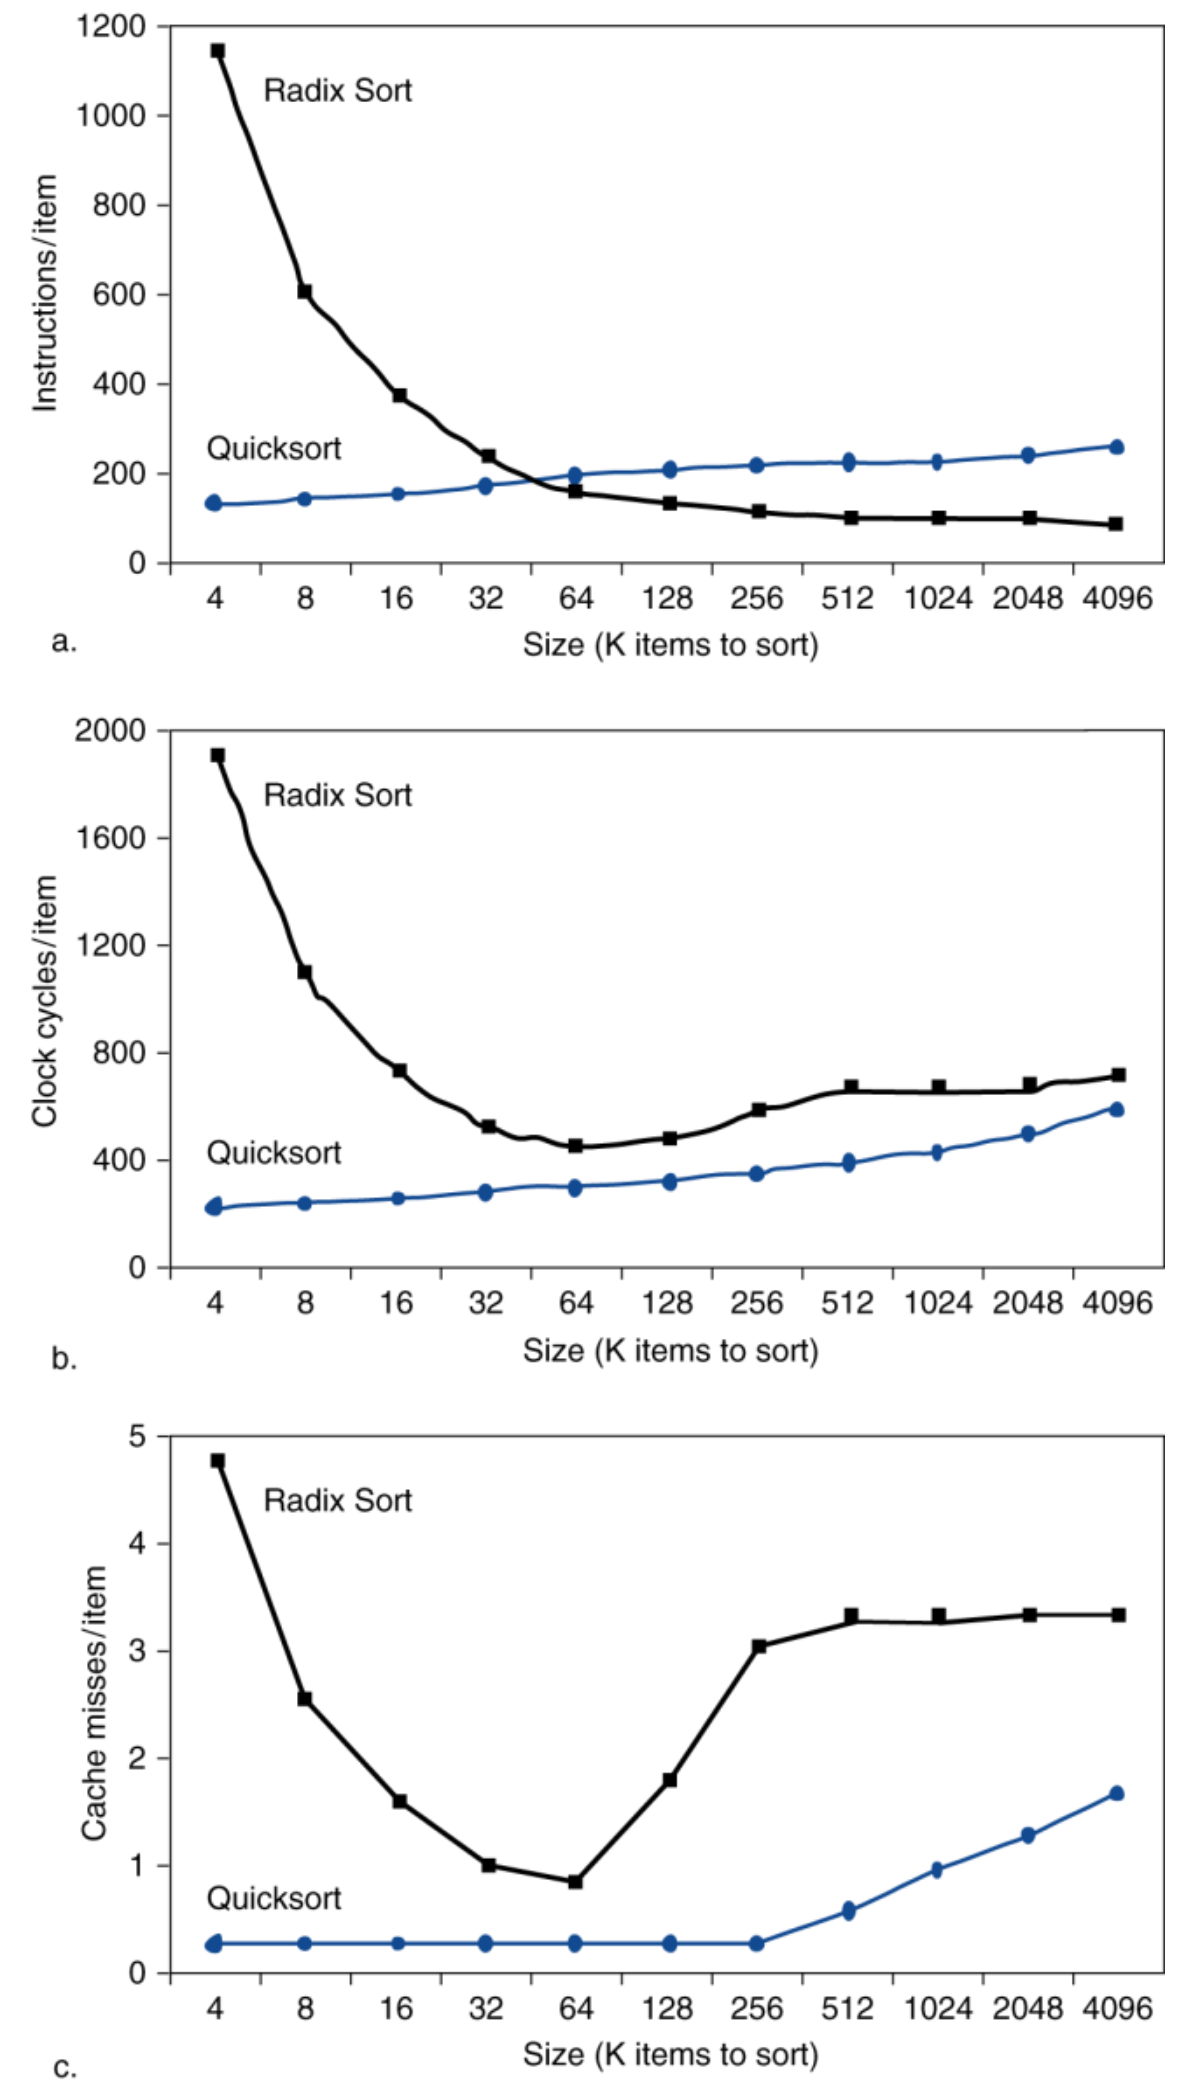

Software Optimization via Blocking

- Goal: maximize accesses to data before it is replaced
- Consider inner loops of DGEMM:

```
for (int j = 0; j < n; ++j)
{
  double cij = C[i+j*n];
  for( int k = 0; k < n; k++ )
    cij += A[i+k*n] * B[k+j*n];
  C[i+j*n] = cij;
}
```

DGEMM Access Pattern

- C, A, and B arrays

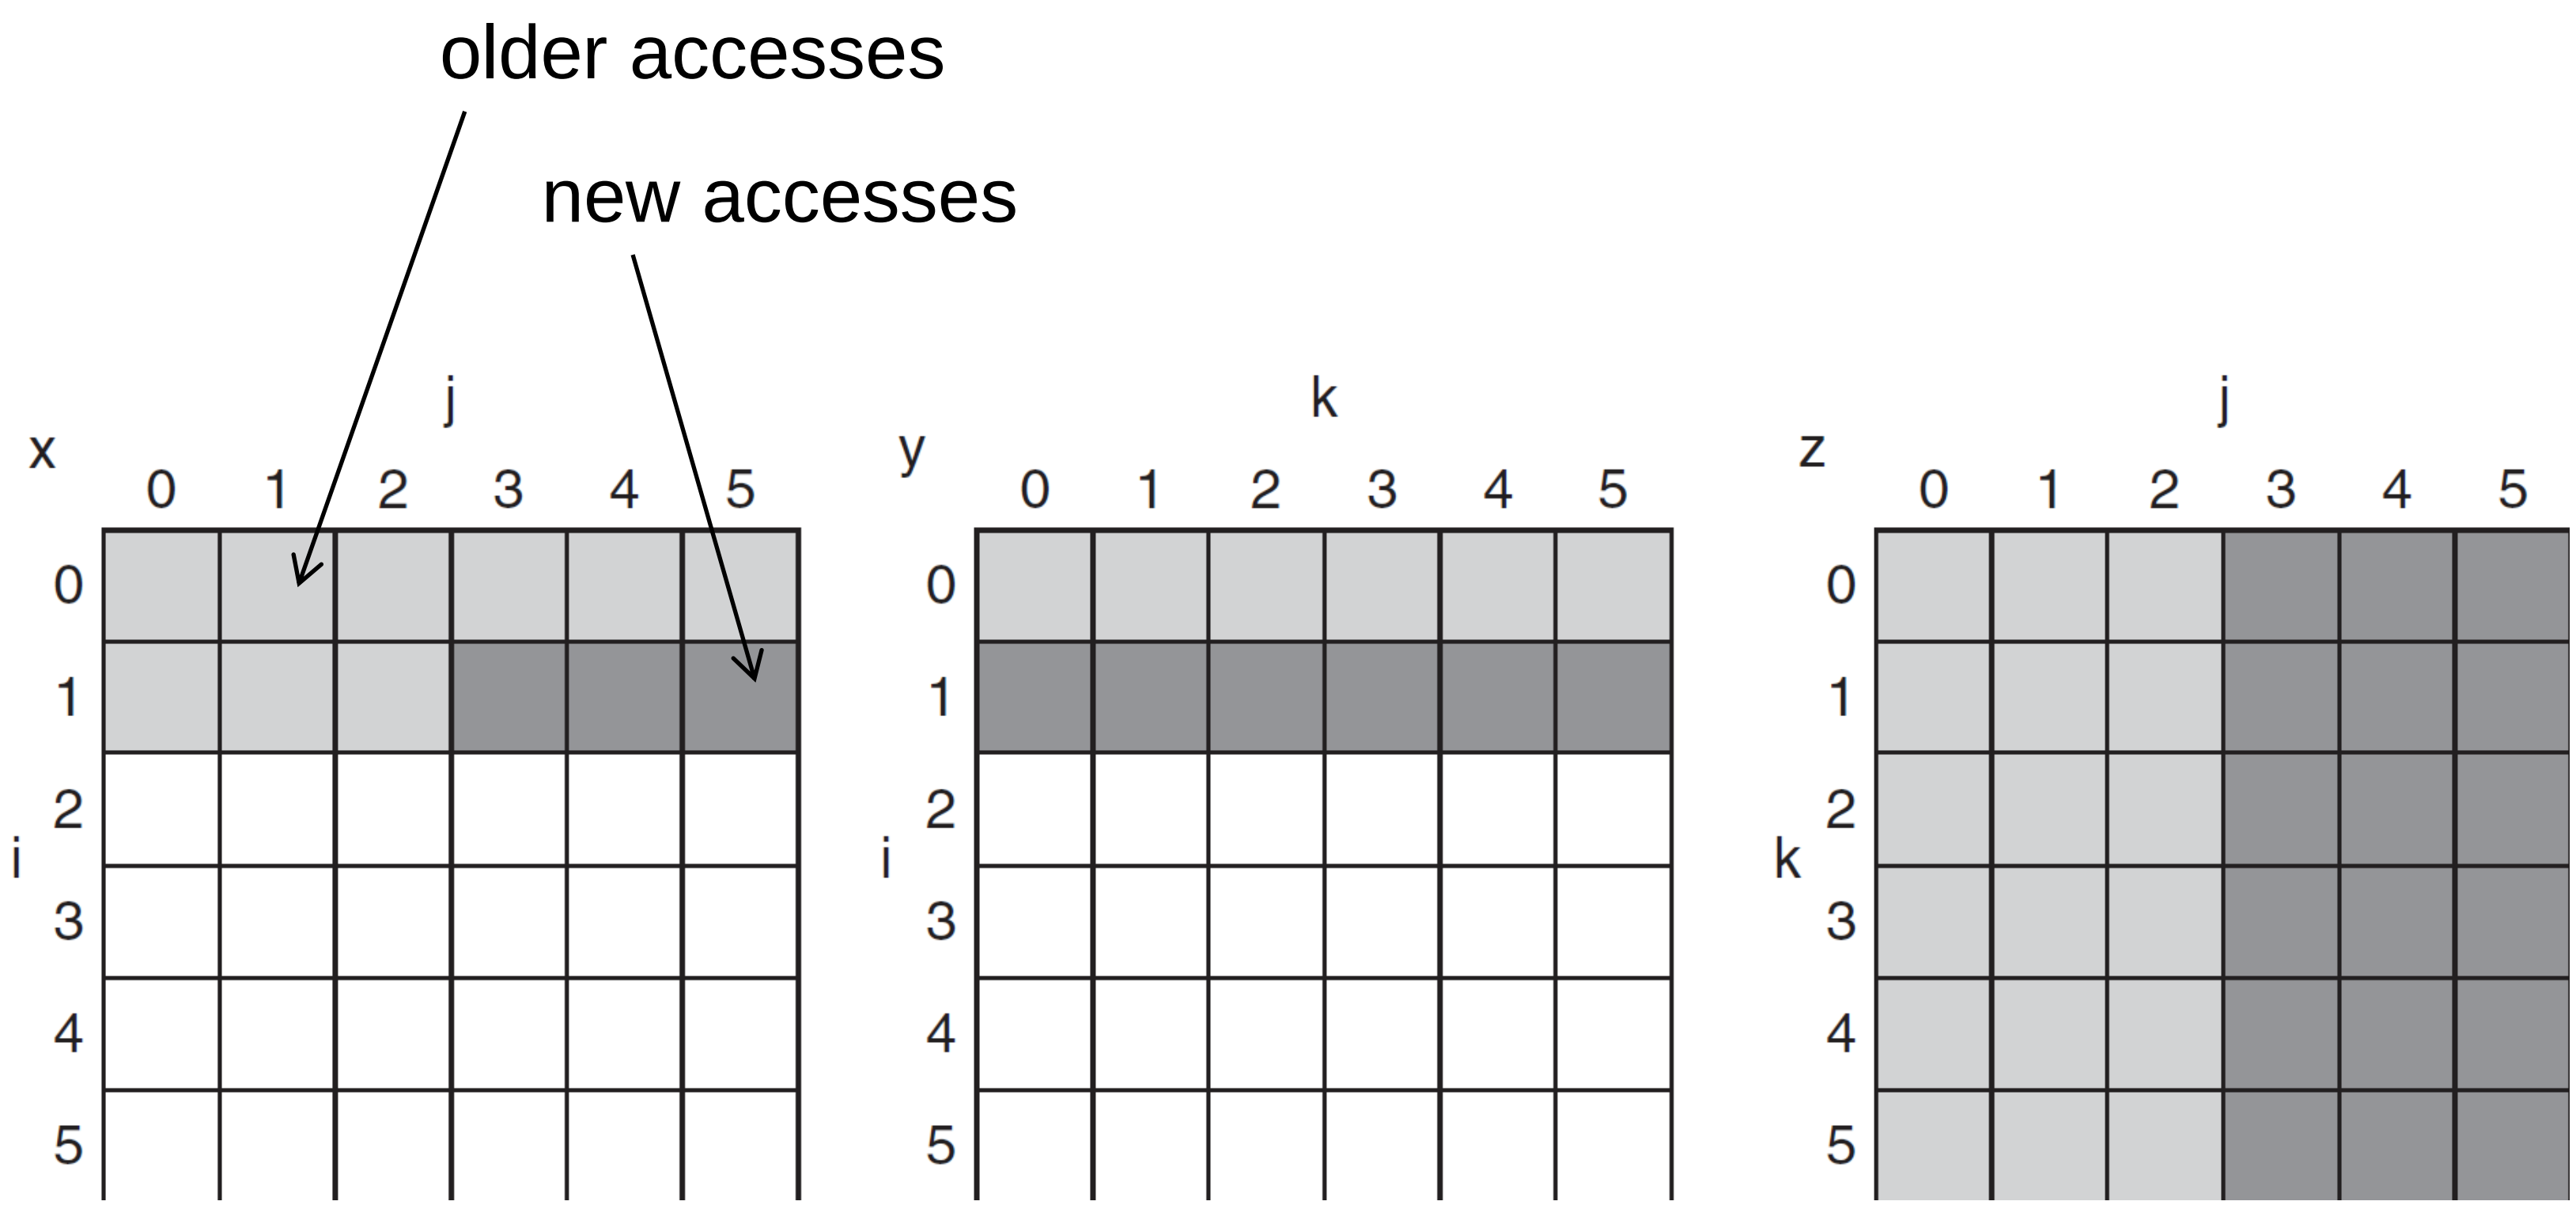

Blocked DGEMM Access Pattern

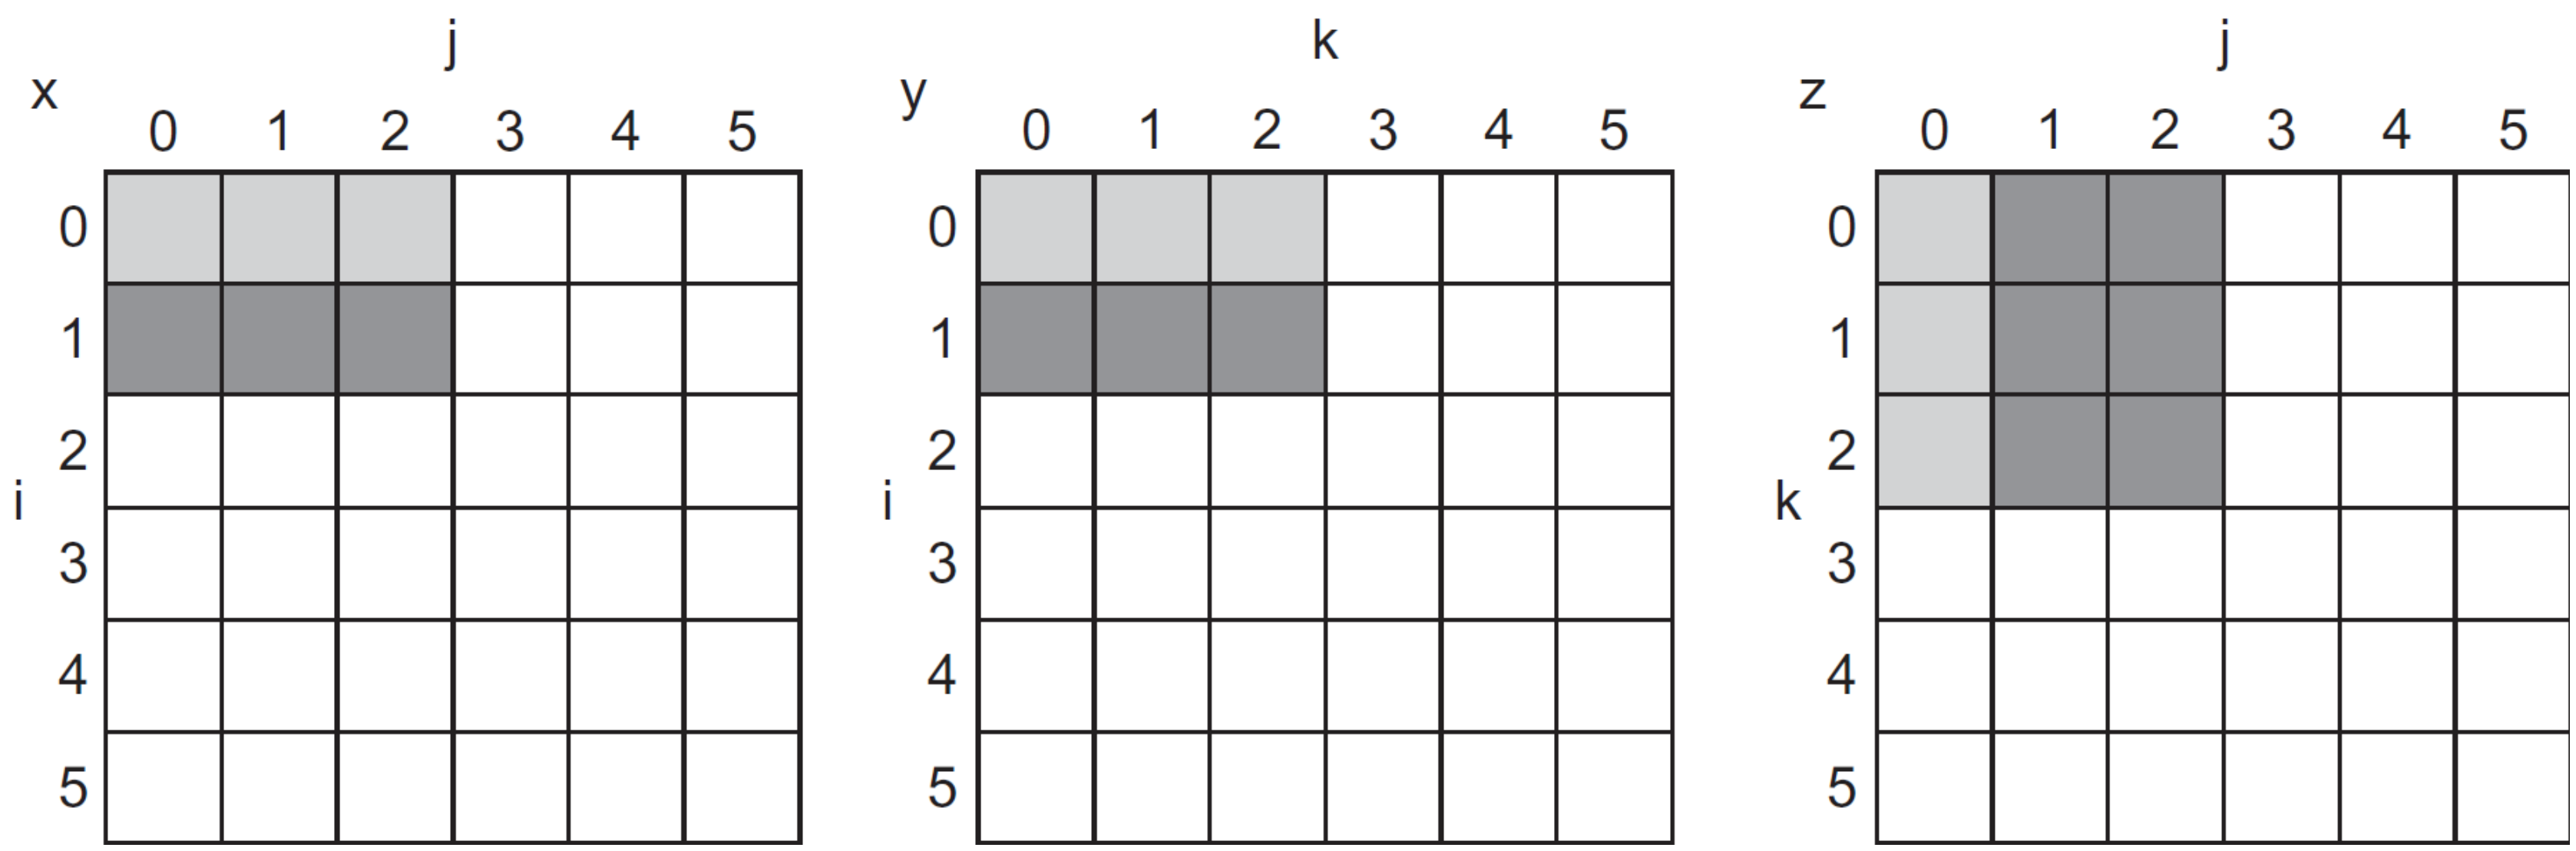

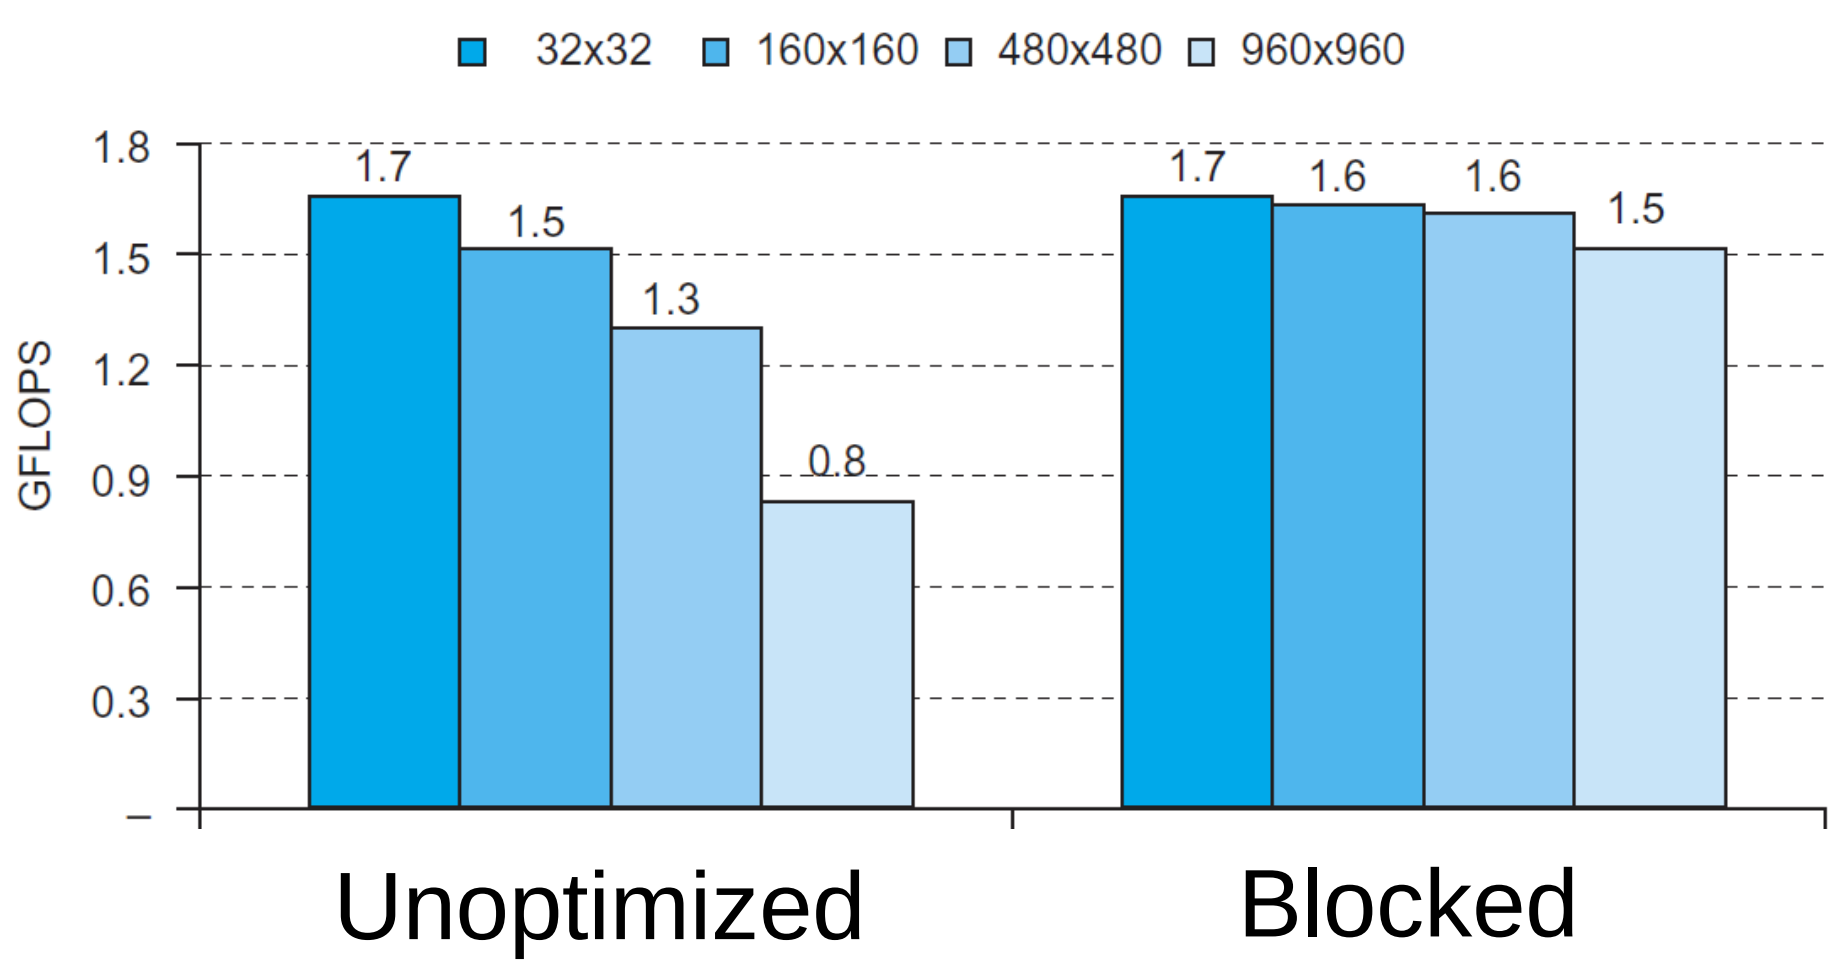

Dependability

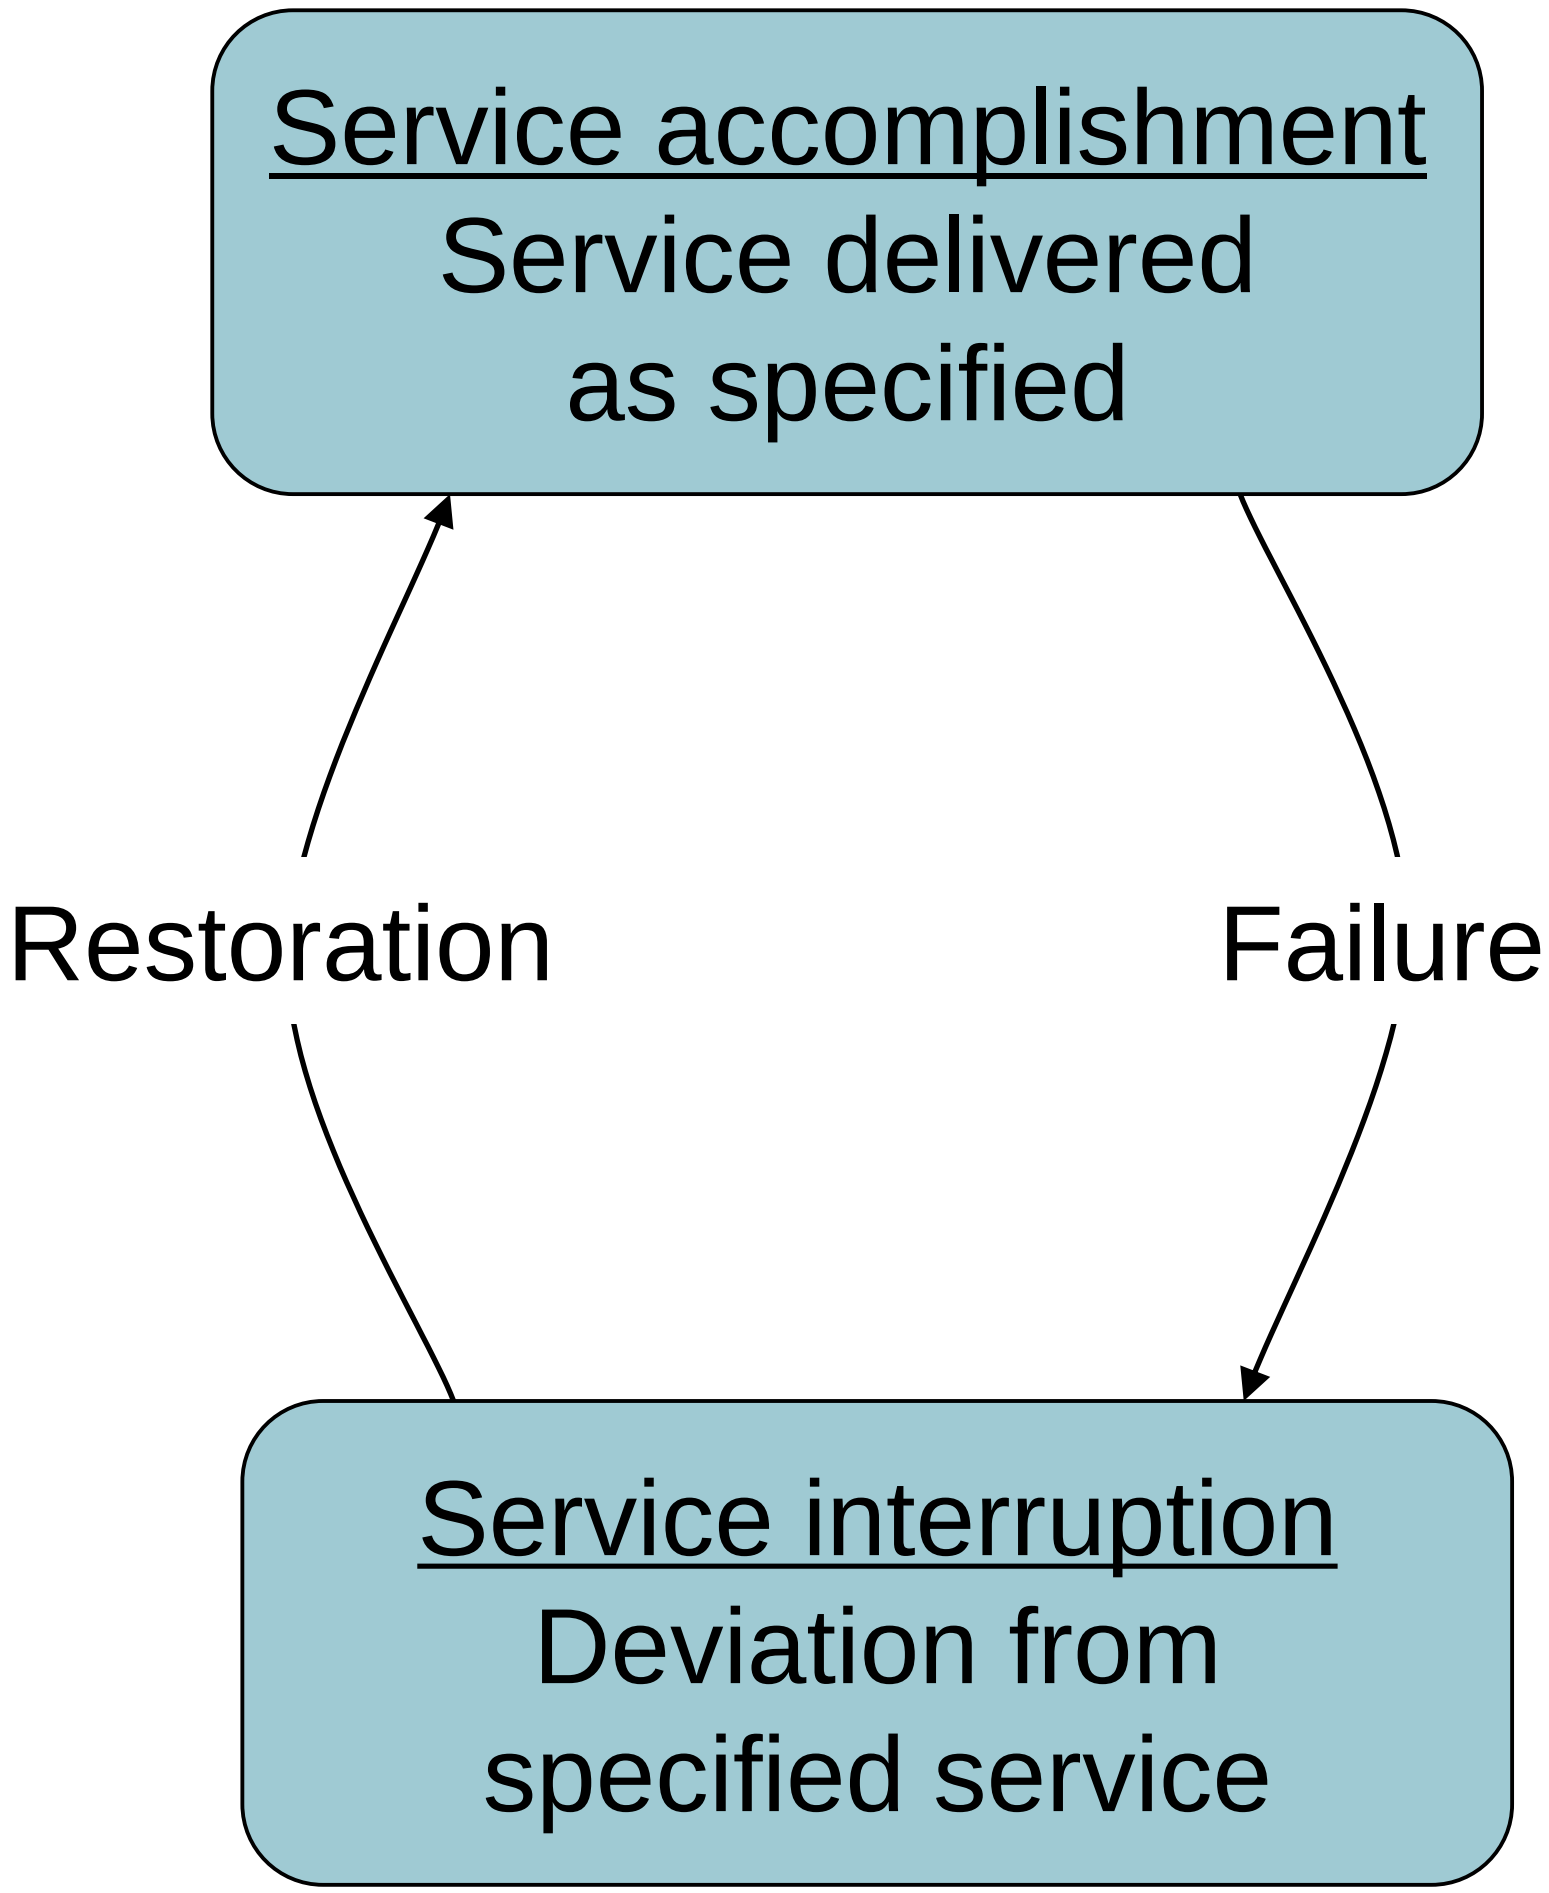

- Fault: failure of a component
  - May or may not lead to system failure

Dependability Measures

- Reliability: mean time to failure (MTTF)
- Service interruption: mean time to repair (MTTR)
- Mean time between failures
  - MTBF = MTTF + MTTR
- Availability = MTTF / (MTTF + MTTR)
- Improving Availability
  - Increase MTTF: fault avoidance, fault tolerance, fault forecasting
  - Reduce MTTR: fault detection, fault diagnosis and fault repair

The Hamming SEC Code

- Hamming distance
  - Number of bits that are different between two bit patterns
- Minimum distance = 2 provides single bit error detection
  - E.g. parity code
- Minimum distance = 3 provides single error correction, 2 bit error detection

Encoding SEC

- To calculate Hamming code:
  - Number bits from 1 on the left
  - All bit positions that are a power 2 are parity bits
  - Each parity bit checks certain data bits:

Bit position		1	2	3	4	5	6	7	8	9	10	11	12
Encoded date bits		p1	p2	d1	p4	d2	d3	d4	p8	d5	d6	d7	d8
Parity bit coverate	p1	X		X		X		X		X		X	
	p2		X	X			X	X			X	X	
	p4				X	X	X	X					X
	p8								X	X	X	X	X

Decoding SEC

- Value of parity bits indicates which bits are in error
  - Use numbering from encoding procedure
  - E.g.
    - Parity bits = 0000 indicates no error
    - Parity bits = 1010 indicates bit 10 was flipped

SEC/DED Code

- Add an additional parity bit for the whole word (p_n)
- Make Hamming distance = 4
- Decoding:
  - Let H = SEC parity bits
    - H even, p_n even, no error
    - H odd, p_n odd, correctable single bit error
    - H even, p_n odd, error in p_n bit
    - H odd, p_n even, double error occurred
- Note: ECC DRAM uses SEC/DED with 8 bits protecting each 64 bits

Summary

- Cache Performance
  - Mainly depends on miss rate and miss penalty
- To improve cache performance:
  - Fully associative cache
  - Set-associative cache
  - Replacement policy
  - Multilevel cache
- Dependability
  - MTTF, MTTR, reliability, availability
  - Hamming code: SEC/DED code

Homework

- Exercise 5.6, 5.9.