Decal-Bogen PERIHELION / DSV-27 · Maßstab 1:1 · mit 100 % drucken (nicht „an Seite anpassen“)

Kontrollmaß 50 mm

A Schiffsname, Reaktorblock links und rechts (Feld 64 × 16,5 mm)

PERIHELION
DSV-27 · DEEP SPACE VESSEL

PERIHELION
DSV-27 · DEEP SPACE VESSEL

DSV-27
DEEP SPACE VESSEL

B Schiffsname, Kugel hinten links und rechts (Feld 30 × 9,6 mm) C Kennung groß

PERIHELION
DSV-27 · DEEP SPACE VESSEL

PERIHELION
DSV-27 · DEEP SPACE VESSEL

DSV-27

DSV-27

DSV-27

CREW MODULE
PRESSURISED · 101 kPa

D Akkuwanne, Unterseite (Feld 83 × 19 mm)

BATTERY ACCESS
1 PULL LOCKING PIN 2 SWING DOWN 3 UNHOOK
18650 LI-ION 3.7 V · OBSERVE POLARITY

E Reaktor und Triebwerke



CAUTION
REACTOR SECTION · AUTHORISED CREW ONLY

DANGER
THRUSTER EXHAUST · KEEP CLEAR 50 m

CAUTION
REACTOR SECTION · AUTHORISED CREW ONLY

DANGER
THRUSTER EXHAUST · KEEP CLEAR 50 m

F Schleusen und Luken

AIRLOCK 1 — RESCUE

AIRLOCK 2 — RESCUE

AIRLOCK 3 — RESCUE

AIRLOCK 4 — RESCUE

AIRLOCK 5 — RESCUE

AIRLOCK 6 — RESCUE

EMERGENCY RELEASE · TURN LEFT — HATCH OPENS OUTWARD

EMERGENCY RELEASE · TURN LEFT — HATCH OPENS OUTWARD

EMERGENCY RELEASE · TURN LEFT — HATCH OPENS OUTWARD

G Aufhängeösen, Trittverbote, Antenne

HOIST POINT

HOIST POINT

HOIST POINT

NO STEP / NO PUSH

NO STEP / NO PUSH

NO STEP / NO PUSH

NO STEP / NO PUSH

NO STEP / NO PUSH

NO STEP / NO PUSH

ANTENNA
RF RADIATION · KEEP CLEAR WHEN ACTIVE

H Tankmodule (Feld 12 × 7,5 mm): je ein Schild pro glattem Tankdeckel

T-01 PROPELLANT

T-02 PROPELLANT

T-03 COOLANT

T-04 PROPELLANT

T-05 N2

T-06 H2O

T-07 PROPELLANT

T-08 O2

T-09 COOLANT

T-10 PROPELLANT

T-11 PROPELLANT

T-12 H2O

I Warnstreifen und Linien (beliebig zuschneiden)



J Wartungsschilder, Typenschilder, Kleintext

SERVICE PANEL
TORQUE 12 Nm
INSPECT EVERY 400 h
SEAL CLASS B

COOLANT LOOP 2
MAX 2.4 MPa
ISOLATE BEFORE OPENING
DRAIN VALVE BELOW

POWER BUS A
28 V DC · 40 A
DISCONNECT BEFORE SERVICE
FUSE PANEL F3

RCS CLUSTER
HYPERGOLIC
PURGE LINE BEFORE WORK
LEAK CHECK

EVA HANDHOLD
RATED 2 kN
TETHER POINT
CHECK LOCK

SENSOR BAY
OPTICS
DO NOT TOUCH LENS
COVER WHEN DOCKED

SERVICE PANEL
TORQUE 12 Nm
INSPECT EVERY 400 h
SEAL CLASS B

COOLANT LOOP 2
MAX 2.4 MPa
ISOLATE BEFORE OPENING
DRAIN VALVE BELOW

POWER BUS A
28 V DC · 40 A
DISCONNECT BEFORE SERVICE
FUSE PANEL F3


RCS CLUSTER
HYPERGOLIC
PURGE LINE BEFORE WORK
LEAK CHECK

EVA HANDHOLD
RATED 2 kN
TETHER POINT
CHECK LOCK

SENSOR BAY
OPTICS
DO NOT TOUCH LENS
COVER WHEN DOCKED

K Ziffern, Pfeile, Kleinschilder (Reserve)

0 1 2 3 4 5 6 7 8 9
0 1 2 3 4 5 6 7 8 9



LIFT HERE	VENT	GROUND	FILL PORT	DRAIN
O2	N2	H2O	TEST	PORT
STBD	ZENITH	NADIR	FWD	AFT

L Zweiter Satz der wichtigsten Schilder (Reserve, falls eines reißt)

PERIHELION
DSV-27 · DEEP SPACE VESSEL

PERIHELION
DSV-27 · DEEP SPACE VESSEL

DSV-27



DANGER
THRUSTER EXHAUST · KEEP CLEAR 50 m

AIRLOCK 1

AIRLOCK 2

AIRLOCK 3

NO STEP

NO STEP


NO STEP

NO STEP


Decal-Bogen 2 PERIHELION / DSV-27 · Maßstab 1:1 · mit 100 % drucken

Kontrollmaß 50 mm

M Warndreiecke in drei Größen (10 / 7,5 / 5 mm): Allgemein, Spannung, Feuer, Kälte, Laser, Magnetfeld, heiß, rotierend, Druck, Quetschen, Explosion, Strahlung, Flüssigkeit

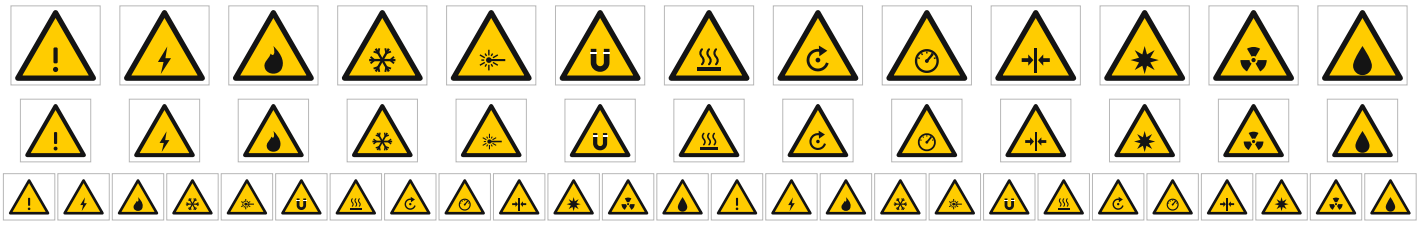

N Dreiecksmarken, Spitze nach unten: zeigen auf die gemeinte Stelle (11 mm, rot gefüllt und rot umrandet)

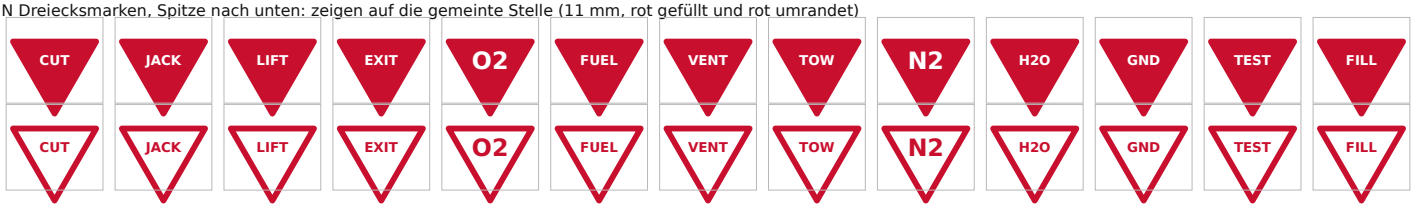


O Verbotszeichen (rot) und Gebotszeichen (blau), 10 mm




P Gefahrstoff-Rauten für Tanks und Leitungen, 12 mm




Q Andockziele und Passmarken

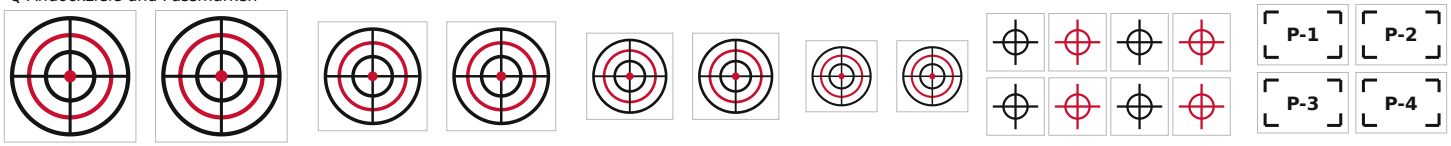


R Schiffsabzeichen: rundes Missionsabzeichen und dreieckiges Emblem

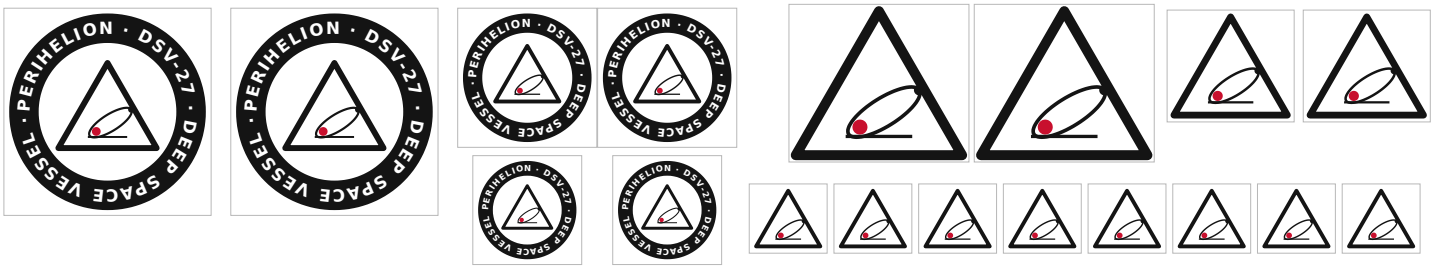

S Sektions- und Feldmarken: Dreiecke 1–10, Sechsecke, Feldnummern

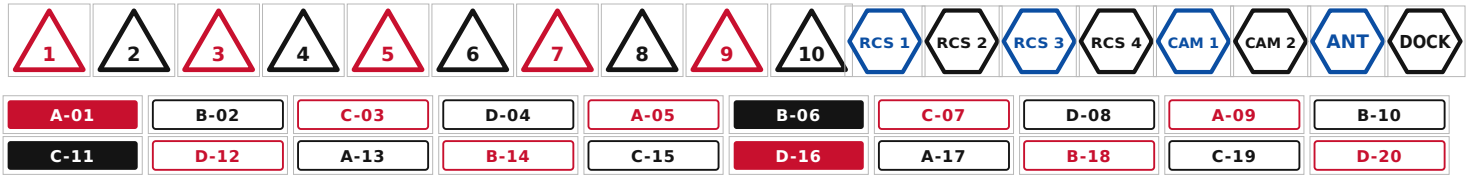

T Richtungsbänder, Schachbrett, Skalen (beliebig zuschneiden)

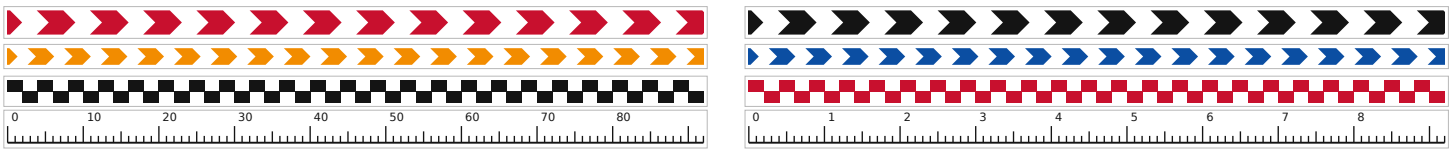

U Drehpfeile, Wimpel, kleine Dreiecke als Zierde



V Seriennummern und Strichcodes

DSV-27-A2498-52

DSV-27-B1951-39

DSV-27-C4625-77

DSV-27-D5599-35

DSV-27-E4612-95

DSV-27-F3777-45