

AGENEWTECH

M274K

Smart Module Specification_V1.1



Our aim is to provide customers with timely and comprehensive service. For any assistance, please contact our company headquarters:

Wuxi Sunning Technology Co., Ltd. (Abbreviation: Agenew)

No.52, Zone C, Huigu Pioneer Park, Huishan Economic Development Zone, Wuxi

Postal Code: 214174

PhoneNum: +86 0510 8235 0372 Mailbox: Asupport@agenewtech.com

Introduction

AGENEW OFFERS THE DOCUMENT AS A SERVICE TO ITS CUSTOMERS. CUSTOMERS MUST DESIGN THEIR PRODUCTS ACCORDING TO THE SPECIFICATIONS AND PARAMETERS PROVIDED IN THE DOCUMENTS. AGENEW SHALL NOT BE LIABLE FOR ANY DAMAGE CAUSED BY FAILURE TO COMPLY WITH RELEVANT OPERATION OR DESIGN SPECIFICATIONS. AGENEW HAS THE RIGHT TO UPDATE THE DOCUMENT BEFORE IT IS ANNOUNCED.

Disclaimers

AGENEW MAKES EFFORT TO ENSURE THE INTEGRITY, ACCURACY, TIMELINESS OR UTILITY OF THE FUNCTIONS UNDER DEVELOPMENT, BUT DOES NOT EXCLUDE THE POSSIBILITY OF ERRORS OR OMISSIONS OF THE ABOVE FUNCTIONS. UNLESS OTHERWISE SPECIFIED VALID AGREEMENTS, AGENEW MAKES NO IMPLIED OR EXPRESS GUARANTEE FOR THE USE OF FUNCTIONS UNDER DEVELOPMENT. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAWS, AGENEW SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE SUFFERED DUE TO THE USE OF THE FUNCTIONS UNDER DEVELOPMENT, WHETHER SUCH LOSS OR DAMAGE IS FORESEEABLE OR NOT.

Copyright

THE INFORMATION CONTAINED HERE IS PROPRIETARY TECHNICAL INFORMATION OF WUXI SUNNING TECHNOLOGY CO.,LTD. ANY COPIES AND REPRINTS THIS DOCUMENT WITHOUT THE PERMISSION OF AGENEW WILL BEAR LEGAL RESPONSIBILITY.

Copyright © Wuxi Sunning Technology Co., Ltd. 2026. All rights reserved.


About the Document

History

Version	Date	Author	Description
-	2023-05-16		Initial
1.1	2026-03-23	Chen Yun	Change company name

M274K

Supports Wi-Fi & BT

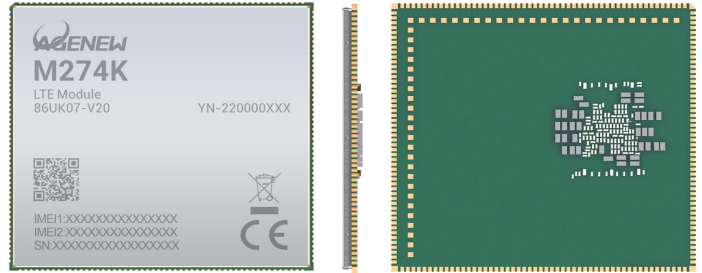

M274K is a smart module based on MediaTek Octa-core 2*ARM Cortex-A78 and 6*ARM Cortex-A55 processor launched by Agnew, which is equipped with Android 13 operation system. It has powerful performance, neon engine processing, 2D/3D graphics acceleration processing capability, and fully meets customer's demands for high speed and multimedia functions in industrial and consumer applications.

M274K supports full coverage of all network systems, Wi-Fi 802.11a/b/g/n/ac/ax, and BT5.2 near-field wireless communication. In addition, M274K also has audio and video input and output interfaces and rich GPIO interfaces. It also supports a variety of audio and video codecs.

M274K is a patch module with a total of 285 pins, including 208 LCC pins and 77 LGA pins. The size is only 55.0mm×55.0mm×3.7mm, which can be embedded in various M2M product applications through pads, making it widely used in smart cash registers, smart POS, tax control machines, security monitoring, vehicle equipment, and high-end information collection equipment, smart robots, smart homes, smart hardware, industrial smart handheld devices, drones, high-end police or law enforcement equipment, smart intercom devices, smart wearables, vending machines, logistics cabinets and other equipment are used in different industries.



Main Advantages

- ✓ Support Wi-Fi 802.11a/b/g/n/ac/ax and BT5.2 LE short-range wireless communication;
- ✓ Support ethernet communication;
- ✓ Support multiple audio and video codecs;
- ✓ Possess audio and video input and output interfaces and rich GPIO interfaces



2*Arm Cortex-A78+6*Arm Cortex-A55
64-bit processor (octa-core)



IEEE 802.11
a/b/g/n/ac/ax



Support Android 13



Multimedia process
engine



BT 5.2

WIFI		M274K
Operating System		Android 13
Memory		eMMC 5.1 + 64bit LP4X 1866MHz (Default settings) / eMMC 5.1 + 64bit DDR4 1600MHz (Optional)
Module Size(mm)		55.0× 55.0 × 3.7
Package		LCC + LGA
Temperature Range		
Operating Temperature		Operating temperature range: 0 °C ~ + 60 °C Storage temperature range: -20 °C ~ + 80 °C
WIFI & BT		
WLAN		2.4/5GHz, 802.11 a/b/g/n/ac/ax
Bluetooth		Bluetooth 5.2
Authentication		
Operator Certification		Undetermined
Compulsory Certification		Undetermined
Electrical Specification		
Operating Voltage		3.3~4.5 V, typical value: 4 V
Power Consumption		Undetermined
Interface		
Display		LCD1: MIPI DIS 4Lane or EDP 2 Lane, 2K@60fps LCD2: DP 4Lane or HDMI TX 2.0, 4K@60fps
Camera		2 4-laneMIPI_CSI, support 2 sets of cameras, up to 32MP
TP		Capacitive touch screen
Audio		Receiver, earphone and 2 sets of microphones
USB		USB3 × 1, USB2×2, support OTG
UART		3 sets of UART for debugging and applications
SD Card		Support SD card (SD3.0)
ADC		2 sets of general ADC interface
I2C		6 sets of I2C interfaces for TP, camera, sensor and other peripherals
I2S		2 sets of I2S interfaces, support I2S peripheral devices
SPI		3 sets of SPI interfaces
PWRKEY		Internally pull up to VSYS
PCIE		1 set of PCIE interface
DPI		1 set of DPI interface