
# Matrices In Geometry



G. V. V. Sharma

## About this Book

This book introduces matrices through high school coordinate geometry. This approach makes it easier for beginners to learn Python for scientific computing. All problems in the book are from NCERT mathematics textbooks from Class 9-12. Exercises are from CBSE board exam papers.

The content is sufficient for industry jobs and covers nearly all matrix prerequisites for machine learning. There is no copyright, so readers are free to print and share.

License: https://creativecommons.org/licenses/by-sa/3.0/
and
https://www.gnu.org/licenses/fdl-1.3.en.html

First manual appeared in January 2018
First edition published on July 10, 2024

In this edition, some incorrect solutions were removed. All figures redrawn. More problems added.

# Contents

**1 AE 2026** 4
1.1 Formulae . . . . . 4

**2 BT 2025** 16
2.1 Formulae . . . . . 16

**3 AG 2025** 21
3.1 Formulae . . . . . 21
3.2 Solved Questions . . . . . 23

# 1. AE 2026

## A. Formulae

1.1.1

$$\Pr(M) + \Pr(E) - \Pr(ME) + \Pr(M+E)' = 1 \tag{1.1.1.1}$$

1.1.2

$$A + A' = 1, \quad AA' = 0 \tag{1.1.2.1}$$

$$\implies \Pr(A + A') = \Pr(1) = 1 \quad \Pr(AA') = \Pr(0) = 0 \tag{1.1.2.2}$$

1.1.3

$$\Pr(A + A') = \Pr(A) + \Pr(A') \tag{1.1.3.1}$$

1.1.4 Difference rule of probability

$$\Pr(AB') = \Pr(A) - \Pr(AB) \tag{1.1.4.1}$$

**Solution:** From (1.1.2.1)

$$A = A \cdot 1 = A(B + B') = AB + AB' \tag{1.1.4.2}$$

Also,

$$(AB)(AB') = 0 \tag{1.1.4.3}$$

From (1.1.3.1),

$$\Pr(A) = \Pr(AB + AB') = \Pr(AB) + \Pr(AB') \tag{1.1.4.4}$$

Rearranging, we get:

$$P(AB') = P(A) - P(AB) \tag{1.1.4.5}$$

1.1.5 The Laplace transform is defined as

$$g(t) \overset{\mathcal{L}}{\longleftrightarrow} G(s) = \int_0^\infty e^{-st} g(t)\, dt \tag{1.1.5.1}$$

1.1.6

$$g'(t) \overset{\mathcal{L}}{\longleftrightarrow} sG(s) - g(0) \tag{1.1.6.1}$$

**Solution:** Applying integration by parts,

$$u = e^{-st}, dv = g'(t)\, dt \tag{1.1.6.2}$$

$$\implies \int_0^\infty e^{-st} g'(t)\, dt = \left[e^{-st} g(t)\right]_0^\infty - \int_0^\infty \left(-se^{-st}\right) g(t)\, dt \tag{1.1.6.3}$$

$$= -g(0) + s\int_0^\infty e^{-st} g(t)\, dt \tag{1.1.6.4}$$

yielding (1.1.6.1).

1.1.7

$$g''(t) \overset{\mathcal{L}}{\longleftrightarrow} s^2 G(s) - sg(0) - g'(0) \tag{1.1.7.1}$$

1.1.8

$$e^{at} g(t) \overset{\mathcal{L}}{\longleftrightarrow} G(s-a) \tag{1.1.8.1}$$

**Solution:**

$$\implies e^{at} g(t) \overset{\mathcal{L}}{\longleftrightarrow} \int_0^\infty e^{-st} \left(e^{at} g(t)\right) dt \tag{1.1.8.2}$$

$$= \int_0^\infty e^{-(s-a)t} g(t)\, dt \tag{1.1.8.3}$$

yielding (1.1.8.1).

1.1.9 The unit step function is defined as

$$u(t) = \begin{cases} 1 & t > 0 \\ 0 & t < 0 \end{cases} \tag{1.1.9.1}$$

1.1.10

$$u(t) \overset{\mathcal{L}}{\longleftrightarrow} \frac{1}{s} \tag{1.1.10.1}$$

**Solution:**

$$\int_0^\infty e^{-st}\, dt = \left(-\frac{e^{-st}}{s}\right)_0^\infty = \frac{1}{s} \quad \Re(s) > 0 \tag{1.1.10.2}$$

1.1.11

$$tu(t) \overset{\mathcal{L}}{\longleftrightarrow} \frac{1}{s^2} \tag{1.1.11.1}$$

**Solution:** Differentiating (1.1.10.2) with respect to $s$ results in (1.1.11.1).

1.1.12

$$e^{-at} u(t) \overset{\mathcal{L}}{\longleftrightarrow} \frac{1}{s+a}, \quad \Re(s) > \Re(a). \tag{1.1.12.1}$$

**Solution:** See (1.1.10.1) and (1.1.8.1).

1.1.13

$$\begin{aligned} \cos(at)u(t) &\overset{\mathcal{L}}{\longleftrightarrow} \frac{s}{s^2+a^2} \\ \sin(at)u(t) &\overset{\mathcal{L}}{\longleftrightarrow} \frac{a}{s^2+a^2} \end{aligned} \quad \Re(s) > a \tag{1.1.13.1}$$

**Solution:** From (1.1.8.1) and (1.1.10.1),

$$e^{\jmath at}u(t) \overset{\mathcal{L}}{\longleftrightarrow} \frac{1}{s-\jmath a}, \quad \Re(s) > a \tag{1.1.13.2}$$

$$\implies \cos(at)u(t) + \jmath \sin(at)u(t) \overset{\mathcal{L}}{\longleftrightarrow} \frac{s+\jmath a}{(s-\jmath a)(s+\jmath a)} \tag{1.1.13.3}$$

$$= \frac{s}{s^2+a^2} + \jmath \frac{a}{s^2+a^2} \tag{1.1.13.4}$$

resulting in (1.1.13.1).

1.1.14 Solve

$$\frac{d^2y}{dx^2} = -\alpha^2 y, \alpha \neq 0 \tag{1.1.14.1}$$

**Solution:** Applying the Laplace transform on both sides, and using (1.1.7.1),

$$s^2Y(s) - sy(0) - y'(0) = -\alpha^2 Y(s) \tag{1.1.14.2}$$

Substituting

$$y(0) = \beta, y'(0) = \gamma \tag{1.1.14.3}$$

in (1.1.14.2),

$$Y(s) = \frac{s\beta + \gamma}{s^2+\alpha^2} \tag{1.1.14.4}$$

$$= \frac{s\beta}{s^2+\alpha^2} + \frac{\gamma}{s^2+\alpha^2} \tag{1.1.14.5}$$

yielding

$$y(t) = \beta\cos(\alpha t) + \frac{\gamma}{\alpha}\sin(\alpha t) \tag{1.1.14.6}$$

from (1.1.13.1).

1.1.15 (Euler's Method of Forward Differences.) Numerically solve

$$\frac{dy}{dx} = f(x,y), y(x_0) = y_0 \tag{1.1.15.1}$$

**Solution:** By definition,

$$\left.\frac{dy}{dx}\right|_{x=x_0} = \lim_{h\to 0} \frac{y(x_0+h) - y(x_0)}{h} \tag{1.1.15.2}$$

which can be expressed using the notation

$$y_0' = \frac{y_1 - y_0}{h} \tag{1.1.15.3}$$

Similarly,

$$y_n'' = \frac{y_{n+1}' - y_n'}{h} \tag{1.1.15.4}$$

From (1.1.15.3),

$$y'_{n+1} = \frac{y_{n+2} - y_{n+1}}{h}, y'_n = \frac{y_{n+1} - y_n}{h} \tag{1.1.15.5}$$

yielding

$$y''_n = \frac{y_{n+2} - 2y_{n+1} + y_n}{h^2} \tag{1.1.15.6}$$

upon simplification.

1.1.16 Kronecker delta function

$$\delta_n = \begin{cases} 1, & n = 0 \\ 0, & \text{otherwise} \end{cases} \tag{1.1.16.1}$$

1.1.17

$$f_0 \int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} e^{\mathrm{j}2\pi n f_0 t}\, dt = \delta_n \tag{1.1.17.1}$$

1.1.18 The Fourier Series. Let

$$x(t) = \sum_{k=-\infty}^{\infty} x_0(t)\,(t - nT_0) \tag{1.1.18.1}$$

be a periodic signal with

$$x(t) = \begin{cases} x_0(t), & t \in \left(-\frac{T_0}{2}, \frac{T_0}{2}\right) \\ 0 & \text{otherwise} \end{cases}. \tag{1.1.18.2}$$

Then,

$$x(t) = \sum_{n=-\infty}^{\infty} c_n e^{\mathrm{j}2\pi n f_0 t}, \quad f_0 = \frac{1}{T_0} \tag{1.1.18.3}$$

Show that

$$c_n = f_0 \int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} x_0(t)\, e^{-\mathrm{j}2\pi n f_0 t}\, dt \tag{1.1.18.4}$$

**Solution:** From (1.1.18.3),

$$\int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} x(t)\, e^{-\mathrm{j}2\pi n f_0 t}\, dt = \int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} \left( \sum_{k=-\infty}^{\infty} c_k e^{\mathrm{j}2\pi k f_0 t} \right) e^{-\mathrm{j}2\pi n f_0 t}\, dt \tag{1.1.18.5}$$

$$\int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} x_0(t)\, e^{-\mathrm{j}2\pi n f_0 t}\, dt = \sum_{k=-\infty}^{\infty} c_k \int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} e^{\mathrm{j}2\pi (k-n) f_0 t}\, dt \tag{1.1.18.6}$$

$$= \frac{1}{f_0} \sum_{k=-\infty}^{\infty} c_k \delta_{k-n} \tag{1.1.18.7}$$

upon substituting from (1.1.18.2) and (1.1.17.1), yielding (1.1.18.4).

1.1.19 The rectangular function. The unit rectangular function is defined as

$$\text{rect}\,(t) = \begin{cases} 1 & t \in \left(-\frac{1}{2}, \frac{1}{2}\right) \\ 0 & \text{otherwise} \end{cases} \tag{1.1.19.1}$$

1.1.20 Square Wave. Consider the Fourier series with

$$x_0(t) = \text{rect}\,(t), \quad T_0 = 2. \tag{1.1.20.1}$$

Show that

$$c_n = \frac{\sin\left(\frac{\pi k}{2}\right)}{\pi k} \tag{1.1.20.2}$$

**Solution:** Substituting $f_0 = \frac{1}{2}$ in (1.1.18.4),

$$c_n = \frac{1}{2}\int_{-1}^{1} e^{-j\pi kt}\, dt \tag{1.1.20.3}$$

$$= \left[\frac{\sin(\pi kt)}{2\pi k}\right]_{-\frac{1}{2}}^{\frac{1}{2}} \tag{1.1.20.4}$$

The following code verifies the result in Fig. 1.1.20.1. Note that Fig. 1.1.20.1 is continuous while (1.1.20.1) is discontinuous. So (1.1.20.2) provides only an approximation. This is known as the Gibbs' phenomenon.

codes/Fourier.py

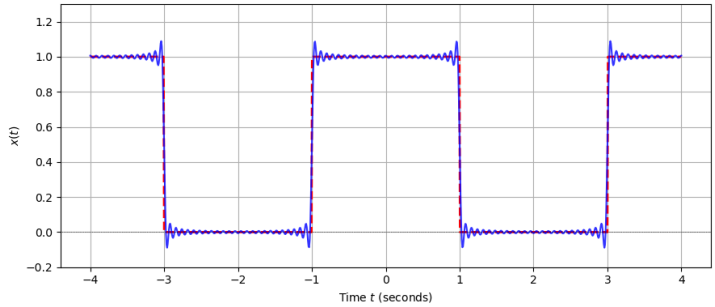



Fig. 1.1.20.1. Gibbs phenomenon

1.1.21 If

$$x(t) \overset{\mathcal{F}}{\longleftrightarrow} c_n, \tag{1.1.21.1}$$

show that

$$x(t - t_0) \overset{\mathcal{F}}{\longleftrightarrow} c_n e^{-\mathrm{J}2\pi n t_0}, \tag{1.1.21.2}$$

**Solution:**

$$\int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} x_0\left(t-t_0\right) e^{-\jmath 2\pi n f_0 t}\, dt = \int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} x_0\left(t\right) e^{-\jmath 2\pi n f_0 (t+t_0)}\, dt \tag{1.1.21.3}$$

$$= e^{\jmath 2\pi n f_0 t_0} \int_{-\frac{1}{2f_0}}^{\frac{1}{2f_0}} x_0\left(t\right) e^{-\jmath 2\pi n f_0 t}\, dt \tag{1.1.21.4}$$

after a change of variables. Note that the limits of integration are unchanged due the periodicity of $x(t)$. Transferring the exponential term in (1.1.21.4) to the L.H.S yields (1.1.21.2).

1.1.22 The standard 2-D basis vectors are defined as

$$\mathbf{e}_1 = \begin{pmatrix} 1 \\ 0 \end{pmatrix}, \mathbf{e}_2 = \begin{pmatrix} 0 \\ 1 \end{pmatrix}. \tag{1.1.22.1}$$

Also,

$$\mathbf{1} = \begin{pmatrix} 1 \\ 1 \end{pmatrix} \tag{1.1.22.2}$$

1.1.23 Find the echelon form of the matrix

$$\mathbf{A} = \begin{pmatrix} 1 & 4 & 2 \\ 2 & 8 & 4 \\ 3 & 12 & 6 \end{pmatrix} \tag{1.1.23.1}$$

**Solution:** Following row reduction,

$$\mathbf{A} \xrightarrow{R_2 \to R_2 - 2R_1} \begin{pmatrix} 1 & 4 & 2 \\ 0 & 0 & 0 \\ 3 & 12 & 6 \end{pmatrix} \xrightarrow{R_3 \to R_3 - 3R_1} \begin{pmatrix} 1 & 4 & 2 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \tag{1.1.23.2}$$

1.1.24 The rank of a matrix is defined to be the number of nonzero rows in echelon form. $\therefore \text{rank}\left(\mathbf{A}\right) = 1$.

1.1.25 A matrix is said to be singular if its rank is nonzero.

1.1.26 For

$$\mathbf{A} = \mathbf{u}\mathbf{v}^\top, \text{rank}\left(\mathbf{A}\right) = 1. \tag{1.1.26.1}$$

where both $\mathbf{u}$ and $\mathbf{v}$ are $n$-dimensional real-valued non-zero column vectors.

**Solution:** Let

$$\mathbf{u} = \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix}, \mathbf{v} = \begin{pmatrix} 1 \\ 4 \\ 2 \end{pmatrix}. \tag{1.1.26.2}$$

Then

$$\mathbf{A} = \mathbf{u}\mathbf{v}^\top = \begin{pmatrix} 1 \\ 2 \\ 3 \end{pmatrix} \begin{pmatrix} 1 & 4 & 2 \end{pmatrix} \tag{1.1.26.3}$$

$$= \begin{pmatrix} 1 & 4 & 2 \\ 2 & 8 & 4 \\ 3 & 12 & 6 \end{pmatrix} \tag{1.1.26.4}$$

From (1.1.23.2) and Definition 1.1.24, we obtain (1.1.26.1).

1.1.27

$$\left|\mathbf{A}^\top\right| = \left|\mathbf{A}\right| \tag{1.1.27.1}$$

1.1.28

$$\left|\mathbf{AB}\right| = \left|\mathbf{A}\right| \left|\mathbf{B}\right| \tag{1.1.28.1}$$

**Solution:** If $\mathbf{A}$ is invertible

$$\mathbf{A} = \mathbf{E}_1\mathbf{E}_2 \cdots \mathbf{E}_k \tag{1.1.28.2}$$

where $\mathbf{E}_i$ are invertible matrices. For any single elementary matrix $\mathbf{E}$, it is easy to verify that

$$\left|\mathbf{EB}\right| = \left|\mathbf{E}\right| \left|\mathbf{B}\right|. \tag{1.1.28.3}$$

$$\therefore \left|\mathbf{AB}\right| = \left|\mathbf{E}_1\mathbf{E}_2 \cdots \mathbf{E}_k\mathbf{B}\right| \tag{1.1.28.4}$$

$$= \left|\mathbf{E}_1\right| \left|\mathbf{E}_2 \cdots \mathbf{E}_k\mathbf{B}\right| \tag{1.1.28.5}$$

$$= \left|\mathbf{E}_1\right| \left|\mathbf{E}_2\right| \cdots \left|\mathbf{E}_k\right| \left|\mathbf{B}\right| \tag{1.1.28.6}$$

For $\mathbf{B} = \mathbf{I}$,

$$\left|\mathbf{A}\right| = \left|\mathbf{E}_1\right| \left|\mathbf{E}_2\right| \cdots \left|\mathbf{E}_k\right| \tag{1.1.28.7}$$

which upon substituting in (1.1.28.6) yields

$$\left|\mathbf{AB}\right| = \left|\mathbf{A}\right| \left|\mathbf{B}\right| \tag{1.1.28.8}$$

1.1.29

$$\left|\mathbf{A^{-1}}\right| = \frac{1}{\left|\mathbf{A}\right|} \tag{1.1.29.1}$$

1.1.30 If

$$\mathbf{Ax} = \lambda\mathbf{x}, \tag{1.1.30.1}$$

then $\lambda$ is an eigenvalue $\mathbf{x}$ of $\mathbf{A}$.

1.1.31 Let $\lambda_1, \lambda_2, ...., \lambda_i$ be the eigenvalues of a matrix $\mathbf{A}$. Then,

$$\sum_{i=1}^{n} \lambda_i = \text{Tr}\left(\mathbf{A}\right) \tag{1.1.31.1}$$

$$\prod_{i=1}^{n} \lambda_i = \left|\mathbf{A}\right| \tag{1.1.31.2}$$

1.1.32 $\mathbf{A}$ and $\mathbf{A}^\top$ have the same eigenvalues.
**Solution:** From (1.1.29.1),

$$\left|\mathbf{A} - \lambda\mathbf{I}\right| = \left|\left(\mathbf{A} - \lambda\mathbf{I}\right)^\top\right| \tag{1.1.32.1}$$

$$= \left|\mathbf{A}^\top - \lambda\mathbf{I}\right|, \tag{1.1.32.2}$$

completing the proof.

1.1.33 The equation of a conic with directrix $\mathbf{n}^\top\mathbf{x} = c$, eccentricity $e$ and focus $\mathbf{F}$ is given by

$$\text{g}\left(\mathbf{x}\right) = \mathbf{x}^\top\mathbf{V}\mathbf{x} + 2\mathbf{u}^\top\mathbf{x} + f = 0 \tag{1.1.33.1}$$

where

$$\mathbf{V} = \left\|\mathbf{n}\right\|^2\mathbf{I} - e^2\mathbf{n}\mathbf{n}^\top, \tag{1.1.33.2}$$

$$\mathbf{u} = ce^2\mathbf{n} - \left\|\mathbf{n}\right\|^2\mathbf{F}, \tag{1.1.33.3}$$

$$f = \left\|\mathbf{n}\right\|^2\left\|\mathbf{F}\right\|^2 - c^2e^2 \tag{1.1.33.4}$$

**Solution:**

$$\left\|\mathbf{x} - \mathbf{F}\right\|^2 = e^2\frac{\left(\mathbf{n}^\top\mathbf{x} - c\right)^2}{\left\|\mathbf{n}\right\|^2} \tag{1.1.33.5}$$

$$\implies \left\|\mathbf{n}\right\|^2\left(\mathbf{x} - \mathbf{F}\right)^\top\left(\mathbf{x} - \mathbf{F}\right) = e^2\left(\mathbf{n}^\top\mathbf{x} - c\right)^2 \tag{1.1.33.6}$$

$$\implies \left\|\mathbf{n}\right\|^2\left(\mathbf{x}^\top\mathbf{x} - 2\mathbf{F}^\top\mathbf{x} + \left\|\mathbf{F}\right\|^2\right) = e^2\left(c^2 + \left(\mathbf{n}^\top\mathbf{x}\right)^2 - 2c\mathbf{n}^\top\mathbf{x}\right) \tag{1.1.33.7}$$

$$= e^2\left(c^2 + \left(\mathbf{x}^\top\mathbf{n}\mathbf{n}^\top\mathbf{x}\right) - 2c\mathbf{n}^\top\mathbf{x}\right) \tag{1.1.33.8}$$

which can be expressed as (1.1.33.1) after simplification.

1.1.34 The polar form of a conic section is given as:

$$r = \frac{ep}{1 + e\cos\left(\theta - \theta_0\right)} \tag{1.1.34.1}$$

where

- $r$ is the distance from the focus(origin) to a point on the curve.
- $e$ is the eccentricity of the conic
- $p$ is the distance from the focus to the directrix
- $\theta_0$ is the angle that defines the orientation of the major axis of the conic section relative to the polar reference axis ($\theta = 0$).

**Solution:** From (1.1.33.1), the general equation of a conic in matrix form is given

by

$$\mathbf{x}^\top \mathbf{V}\mathbf{x} + 2\mathbf{u}^\top \mathbf{x} + f = 0 \tag{1.1.34.2}$$

For a conic with a focus at the origin ($\mathbf{F} = \mathbf{0}$), unit normal vector $\mathbf{n} = \begin{pmatrix}\cos\theta_0 \\ \sin\theta_0\end{pmatrix}$, eccentricity $e$, and directrix distance parameter $c = -p$, substituting into (1.1.33.2)–(1.1.33.4) yields:

$$\mathbf{V} = \mathbf{I} - e^2\mathbf{n}\mathbf{n}^\top, \tag{1.1.34.3}$$

$$\mathbf{u} = -pe^2\mathbf{n}, \tag{1.1.34.4}$$

$$f = -p^2e^2 \tag{1.1.34.5}$$

Expressing $\mathbf{x}$ directly in polar coordinates yields

$$\mathbf{x} = r\mathbf{r}(\theta), \quad \text{where } \mathbf{r}(\theta) = \begin{pmatrix}\cos\theta \\ \sin\theta\end{pmatrix} \tag{1.1.34.6}$$

Substituting into (1.1.34.2) yields

$$r^2\left(\mathbf{r}(\theta)^\top \mathbf{V}\mathbf{r}(\theta)\right) + 2r\left(\mathbf{u}^\top \mathbf{r}(\theta)\right) + f = 0 \tag{1.1.34.7}$$

Evaluating the inner products:

$$\mathbf{n}^\top \mathbf{r}(\theta) = \begin{pmatrix}\cos\theta_0 & \sin\theta_0\end{pmatrix}\begin{pmatrix}\cos\theta \\ \sin\theta\end{pmatrix} = \cos(\theta - \theta_0) \tag{1.1.34.8}$$

$$\mathbf{r}(\theta)^\top \mathbf{V}\mathbf{r}(\theta) = \mathbf{r}(\theta)^\top\left(\mathbf{I} - e^2\mathbf{n}\mathbf{n}^\top\right)\mathbf{r}(\theta) = 1 - e^2\cos^2(\theta - \theta_0) \tag{1.1.34.9}$$

$$\mathbf{u}^\top \mathbf{r}(\theta) = -pe^2\cos(\theta - \theta_0) \tag{1.1.34.10}$$

Substituting these into (1.1.34.7):

$$r^2\left[1 - e^2\cos^2(\theta - \theta_0)\right] - 2rpe^2\cos(\theta - \theta_0) - p^2e^2 = 0 \tag{1.1.34.11}$$

Factoring the quadratic expression:

$$\left[r\left(1 + e\cos(\theta - \theta_0)\right) - ep\right]\left[r\left(1 - e\cos(\theta - \theta_0)\right) + ep\right] = 0 \tag{1.1.34.12}$$

Taking the positive real root for radial distance $r > 0$:

$$r\left(1 + e\cos(\theta - \theta_0)\right) = ep \tag{1.1.34.13}$$

yielding (1.1.34.1)

1.1.35 Gravitational parameter of a body $\mu$ is defined as

$$\mu = GM \tag{1.1.35.1}$$

where $M$ is the mass of the body

1.1.36 Specific angular momentum for a satellite with position vector $\mathbf{r}$ and velocity vector $\mathbf{v}$ is

$$h = \|\mathbf{r} \times \mathbf{v}\| \tag{1.1.36.1}$$

1.1.37 Specific Energy for a satellite with position vector $\mathbf{r}$, velocity vector $\mathbf{v}$ and gravitational parameter $\mu$ is

$$\varepsilon = \frac{v^2}{2} - \frac{\mu}{r} \tag{1.1.37.1}$$

where

$$r = \|\mathbf{r}\|, v = \|\mathbf{v}\| \tag{1.1.37.2}$$

1.1.38 The gravitational acceleration $\mathbf{a}$ acting on a satellite is given by Newton's law of gravitation:

$$\mathbf{a} = -\frac{\mu}{r^3}\mathbf{r} \tag{1.1.38.1}$$

1.1.39 The trajectory of a satellite under a central gravitational force is always a conic section.

**Solution:** Taking the cross product of $\mathbf{r}$ with $\mathbf{a}$:

$$\mathbf{r} \times \mathbf{a} = \mathbf{r} \times \left(-\frac{\mu}{r^3}\mathbf{r}\right) = \mathbf{0} \tag{1.1.39.1}$$

From (1.1.39.1)

$$\frac{d}{dt}(\mathbf{r} \times \mathbf{v}) = \mathbf{v} \times \mathbf{v} + \mathbf{r} \times \mathbf{a} = \mathbf{0} \tag{1.1.39.2}$$

Hence, the specific angular momentum vector $\mathbf{h}$ is conserved:

$$\mathbf{h} = \mathbf{r} \times \mathbf{v} = \text{constant} \tag{1.1.39.3}$$

Crossing the acceleration $\mathbf{a}$ with $\mathbf{h}$:

$$\mathbf{a} \times \mathbf{h} = \left(-\frac{\mu}{r^3}\mathbf{r}\right) \times (\mathbf{r} \times \mathbf{v}) \tag{1.1.39.4}$$

$$= -\frac{\mu}{r^3}\left[(\mathbf{r} \cdot \mathbf{v})\,\mathbf{r} - (\mathbf{r} \cdot \mathbf{r})\,\mathbf{v}\right] \tag{1.1.39.5}$$

$$= \frac{\mu}{r^3}\left[r^2\mathbf{v} - (\mathbf{r} \cdot \mathbf{v})\,\mathbf{r}\right] \tag{1.1.39.6}$$

Using $\mathbf{r} \cdot \mathbf{v} = r\frac{dr}{dt}$, this simplifies to:

$$\mathbf{a} \times \mathbf{h} = \mu\left[\frac{\mathbf{v}}{r} - \frac{1}{r^2}\frac{dr}{dt}\mathbf{r}\right] = \mu\frac{d}{dt}\left(\frac{\mathbf{r}}{r}\right) \tag{1.1.39.7}$$

Integrating with respect to time $t$:

$$\mathbf{v} \times \mathbf{h} = \mu\left(\frac{\mathbf{r}}{r} + \mathbf{C}\right) \tag{1.1.39.8}$$

where $\mathbf{C}$ is the integration constant. Taking the scalar product of (1.1.39.8) with $\mathbf{r}$:

$$\mathbf{r} \cdot (\mathbf{v} \times \mathbf{h}) = \mu\mathbf{r} \cdot \left(\frac{\mathbf{r}}{r} + \mathbf{C}\right) \tag{1.1.39.9}$$

$$\implies (\mathbf{r} \times \mathbf{v}) \cdot \mathbf{h} = \mu\left(r + rC\cos\theta\right) \tag{1.1.39.10}$$

$$\implies \|\mathbf{h}\|^2 = \mu r\left(1 + C\cos\theta\right) \tag{1.1.39.11}$$

where $\theta$ is the angle between $\mathbf{r}$ and $\mathbf{C}$. Rearranging for $r$ yields

$$r = \frac{\frac{\|\mathbf{h}\|^2}{\mu}}{1 + C\cos\theta} = \frac{ep}{1 + e\cos\theta} \tag{1.1.39.12}$$

This is the same equation as (1.1.34.1) where

$$ep = \frac{\|\mathbf{h}\|^2}{\mu} \tag{1.1.39.13}$$

$$\mathbf{e} = \mathbf{C} \tag{1.1.39.14}$$

1.1.40 The squared eccentricity $e^2$ of a satellite's trajectory is related to its specific orbital energy $\varepsilon$ and specific angular momentum magnitude $h$ by

$$e^2 = 1 + \frac{2\varepsilon h^2}{\mu^2} \tag{1.1.40.1}$$

**Solution:** From (1.1.39.8) and (1.1.39.14),

$$\mathbf{e} = \frac{\mathbf{v} \times \mathbf{h}}{\mu} - \frac{\mathbf{r}}{r} \tag{1.1.40.2}$$

Taking the magnitude squared of both sides using $\|\mathbf{e}\|^2 = \mathbf{e} \cdot \mathbf{e}$:

$$e^2 = \|\mathbf{e}\|^2 = \left(\frac{\mathbf{v} \times \mathbf{h}}{\mu} - \frac{\mathbf{r}}{r}\right) \cdot \left(\frac{\mathbf{v} \times \mathbf{h}}{\mu} - \frac{\mathbf{r}}{r}\right) \tag{1.1.40.3}$$

Expanding the inner product:

$$e^2 = \frac{\|\mathbf{v} \times \mathbf{h}\|^2}{\mu^2} - \frac{2}{\mu r}\left[\mathbf{r} \cdot (\mathbf{v} \times \mathbf{h})\right] + \frac{\mathbf{r} \cdot \mathbf{r}}{r^2} \tag{1.1.40.4}$$

We know that

$$\mathbf{r} \cdot (\mathbf{v} \times \mathbf{h}) = (\mathbf{r} \times \mathbf{v}) \cdot \mathbf{h} = \mathbf{h} \cdot \mathbf{h} = h^2 \tag{1.1.40.5}$$

And,

$$\mathbf{r} \cdot \mathbf{r} = r^2 \tag{1.1.40.6}$$

Substituting these back into (1.1.40.4) yields

$$e^2 = \frac{v^2 h^2}{\mu^2} - \frac{2h^2}{\mu r} + 1 \tag{1.1.40.7}$$

$$= 1 + \frac{2h^2}{\mu^2}\left(\frac{v^2}{2} - \frac{\mu}{r}\right) \tag{1.1.40.8}$$

Substituting (1.1.37.1) into (1.1.40.8) yields:

$$e^2 = 1 + \frac{2\varepsilon h^2}{\mu^2} \tag{1.1.40.9}$$

1.1.41 Consider the system A system comprising a bar, spring and mass is shown in the

figure Fig. 1.1.41.1 The bar, having negligible mass, is made of a material having Young's modulus $E$, cross-sectional area $A$ and length $L$. The spring stiffness is $k$ and the mass is $M$ kg. Find the axial stiffness of the bar.





Fig. 1.1.41.1. Spring mass system

**Solution:** The axial stiffness of the bar is

$$k_b = \frac{AE}{L} \tag{1.1.41.1}$$

1.1.42 Find the overall spring constant in Fig. 1.1.41.1.

**Solution:** Using Hooke's law, by balancing the displacements,

$$\frac{Mg}{k_t} = \frac{Mg}{k_b} + \frac{Mg}{k} \tag{1.1.42.1}$$

$$\implies k_{eq} = \frac{k_b k}{k_b + k} \tag{1.1.42.2}$$

where $k_t$ is the overall spring constant.

1.1.43 Show that the equation for motion for the mass in Fig. 1.1.43.1 is

$$\frac{d^2x}{dt^2} = -\frac{k}{M}x \tag{1.1.43.1}$$





Fig. 1.1.43.1. Spring Mass system in vertical plane

**Solution:** When the mass $M$ is at rest, let the system stretch by $\delta_{st}$.Then,

$$Mg - k\delta_{st} = 0 \implies Mg = k\delta_{st} \tag{1.1.43.2}$$

When the mass is displaced downward by $x(t)$, using Hooke's law,

$$M\frac{d^2x}{dt^2} = Mg - k(\delta_{\text{st}} + x) \tag{1.1.43.3}$$

$$\tag{1.1.43.4}$$

yielding (1.1.43.1), upon substituting from (1.1.43.2).

## 2. BT 2025

### *A. Formulae*

2.1.1 Exponential Series

$$e^x = \sum_{n=0}^{\infty} \frac{x^n}{n!} = 1 + \frac{x}{1!} + \frac{x^2}{2!} + \frac{x^3}{3!} + \cdots \tag{2.1.1.1}$$

2.1.2 The normal form of the equation of a line is

$$\mathbf{n}^\top \mathbf{x} = c \tag{2.1.2.1}$$

2.1.3 The parametric form of the equation of a line is

$$\mathbf{x} = \mathbf{h} + \kappa \mathbf{m} \tag{2.1.3.1}$$

where

$$\mathbf{m}^\top \mathbf{n} = 0 \tag{2.1.3.2}$$

2.1.4 A circle with center $\mathbf{c}$ and radius $r$, can be expressed as (1.1.33.1) with

$$\mathbf{V} = \mathbf{I} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}, \quad \mathbf{u} = -\mathbf{c}, \quad f = \|\mathbf{c}\|^2 - r^2 \tag{2.1.4.1}$$

**Solution:** The equation of a circle is

$$\|\mathbf{x}-\mathbf{c}\|^2 = r^2 \tag{2.1.4.2}$$

$$(\mathbf{x}-\mathbf{c})^\top (\mathbf{x}-\mathbf{c}) = r^2 \tag{2.1.4.3}$$

$$\mathbf{x}^\top\mathbf{x} - 2\mathbf{c}^\top\mathbf{x} + \mathbf{c}^\top\mathbf{c} - r^2 = 0 \tag{2.1.4.4}$$

yielding (2.1.4.1) upon comparing with (1.1.33.1)

2.1.5 (Line-Conic Intersection) The points of intersection of a line $L : \mathbf{x} = \mathbf{h}+\kappa\mathbf{m}$ ($\kappa \in \mathbb{R}$) with a conic section $\mathbf{x}^\top\mathbf{V}\mathbf{x} + 2\mathbf{u}^\top\mathbf{x} + f = 0$ are given by

$$\mathbf{X} = \begin{pmatrix}\mathbf{h} & \mathbf{m}\end{pmatrix}\begin{pmatrix}1 & 1\\ \kappa_1 & \kappa_2\end{pmatrix} \tag{2.1.5.1}$$

where

$$\kappa_i = \frac{-\mathbf{m}^\top(\mathbf{V}\mathbf{h}+\mathbf{u}) \pm \sqrt{\left[\mathbf{m}^\top(\mathbf{V}\mathbf{h}+\mathbf{u})\right]^2 - g(\mathbf{h})(\mathbf{m}^\top\mathbf{V}\mathbf{m})}}{\mathbf{m}^\top\mathbf{V}\mathbf{m}}, i = 1, 2. \tag{2.1.5.2}$$

with $g(\mathbf{h}) = \mathbf{h}^\top\mathbf{V}\mathbf{h} + 2\mathbf{u}^\top\mathbf{h} + f$.

2.1.6 (Intersection of Conics and Common Chord) The intersection of two conics with parameters $(\mathbf{V}_1, \mathbf{u}_1, f_1)$ and $(\mathbf{V}_2, \mathbf{u}_2, f_2)$ is given by the pencil

$$\mathbf{x}^\top(\mathbf{V}_1 + \mu\mathbf{V}_2)\mathbf{x} + 2(\mathbf{u}_1 + \mu\mathbf{u}_2)^\top\mathbf{x} + (f_1 + \mu f_2) = 0 \tag{2.1.6.1}$$

The value of $\mu$ corresponding to the degenerate conic (the radical axis / common chord line) is found from

$$\begin{vmatrix}\mathbf{V}_1 + \mu\mathbf{V}_2 & \mathbf{u}_1 + \mu\mathbf{u}_2\\ (\mathbf{u}_1 + \mu\mathbf{u}_2)^\top & f_1 + \mu f_2\end{vmatrix} = 0 \tag{2.1.6.2}$$

2.1.7 For a differentiable function $f(x)$,

$$f''(x) > 0 \quad \forall x \in (0,\infty) \implies f(x) \text{ is strictly convex} \tag{2.1.7.1}$$

2.1.8 (Gradient Descent Optimization) For the convex optimization problem

$$\min_x f(x), \tag{2.1.8.1}$$

$$x_{k+1} = x_k - \eta f'(x_k) \tag{2.1.8.2}$$

is the iterative parameter update with learning rate $\eta > 0$.

2.1.9 (Newton-Raphson Method) For a real-valued differentiable function $f(x)$, the root is iteratively approximated using its first-order Taylor series expansion about the current estimate $x_n$

$$x_{n+1} = x_n - \frac{f(x_n)}{f'(x_n)} \tag{2.1.9.1}$$

2.1.10 (System of Linear Equations) The matrix equation

$$\mathbf{A}\mathbf{x} = \mathbf{b} \tag{2.1.10.1}$$

is consistent iff

$$\text{rank}\left(\mathbf{A}\right) = \text{rank}\left(\left[\mathbf{A} \mid \mathbf{b}\right]\right) = r \tag{2.1.10.2}$$

2.1.11 Sum of Independent Discrete Random Variables (Two Dice Roll)

- Let $X_1, X_2 \in \{1,2,3,4,5,6\}$ be independent discrete uniform random variables representing the outcomes of two fair dice, each having probability mass function (PMF)

$$p_{X_1}\left(n\right) = p_{X_2}\left(n\right) = \begin{cases} \frac{1}{6}, & 1 \leq n \leq 6 \\ 0, & \text{otherwise} \end{cases} \tag{2.1.11.1}$$

- (Convolution) Let $X = X_1 + X_2$ denote their sum. The PMF of $X$ is given by the discrete convolution of $p_{X_1}\left(n\right)$ and $p_{X_2}\left(n\right)$:

$$p_X\left(n\right) = \Pr\left(X_1 + X_2 = n\right) = \sum_k \Pr\left(X_1 = n-k \mid X_2 = k\right) p_{X_2}\left(k\right) \tag{2.1.11.2}$$

$$= \sum_k p_{X_1}\left(n-k\right) p_{X_2}\left(k\right) = p_{X_1}\left(n\right) * p_{X_2}\left(n\right) \tag{2.1.11.3}$$

- Substituting (2.1.11.1) into (2.1.11.3) yields the triangular PMF

$$p_X\left(n\right) = \begin{cases} 0, & n < 2 \\ \frac{n-1}{36}, & 2 \leq n \leq 7 \\ \frac{13-n}{36}, & 7 < n \leq 12 \\ 0, & n > 12 \end{cases} \tag{2.1.11.4}$$

The following code verifies (2.1.11.4) in Fig. 2.1.11.1.

codes/btq35/dice.py

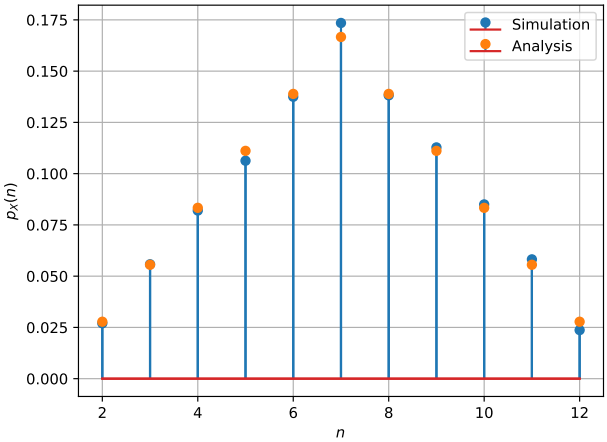



Fig. 2.1.11.1. PMF of the sum of two fair dice: Simulation vs Analysis

2.1.12 (Unit Step Response of an $RC$ Circuit) Consider a series $RC$ circuit excited by a step input $v_i(t) = V_0 u(t)$ where $V_0$ is a constant. Applying KVL around the loop,

$$RC\frac{dv_o}{dt} + v_o(t) = V_0 u(t) \tag{2.1.12.1}$$

yielding

$$\frac{V_0}{s} = sCRV_o(s) + V_o(s) \tag{2.1.12.2}$$

$$\implies V_o(s) = \frac{V_0}{s(RCs+1)} \tag{2.1.12.3}$$

$$= V_0\left[\frac{1}{s} - \frac{1}{s+\frac{1}{RC}}\right] \tag{2.1.12.4}$$

$$\implies v_o(t) = V_0\left(1 - e^{-\frac{t}{RC}}\right)u(t) \tag{2.1.12.5}$$

2.1.13 (Continuity) A real-valued function $f(x)$ is continuous at $x = x_0$ iff

$$\lim_{x\to x_0^-} f(x) = \lim_{x\to x_0^+} f(x) = f(x_0) \tag{2.1.13.1}$$

2.1.14 (Differentiability) A function $f(x)$ is differentiable at $x = x_0$ if

$$f'(x_0^-) = \lim_{h\to 0^-}\frac{f(x_0+h)-f(x_0)}{h} = \lim_{h\to 0^+}\frac{f(x_0+h)-f(x_0)}{h} = f'(x_0^+) \tag{2.1.14.1}$$

2.1.15 If $f(x)$ is differentiable at $x = x_0$, it must necessarily be continuous at $x = x_0$

$$\lim_{x \to x_0} [f(x) - f(x_0)] = \lim_{x \to x_0} \left[ \frac{f(x) - f(x_0)}{x - x_0} (x - x_0) \right] = f'(x_0) \cdot 0 = 0 \tag{2.1.15.1}$$

2.1.16 Piecewise Boundary Conditions at $x = a$

- Consider a function $f(x)$ defined by differentiable branches $f_1(x)$ and $f_2(x)$ across a boundary point $x = a$:

$$f(x) = \begin{cases} f_1(x), & x \leq a \\ f_2(x), & x > a \end{cases} \tag{2.1.16.1}$$

For $f(x)$ to be continuous at $x = a$, the one-sided limits must equal the boundary value:

$$\lim_{x \to a^-} f_1(x) = \lim_{x \to a^+} f_2(x) \implies f_1(a) = f_2(a) \tag{2.1.16.2}$$

For $f(x)$ to be differentiable at $x = a$, the one-sided derivatives at the boundary must coincide:

$$f_1'(a) = f_2'(a) \tag{2.1.16.3}$$

2.1.17 The Z-Transform

$$X(z) = \sum_{n=-\infty}^{\infty} x[n] z^{-n} \tag{2.1.17.1}$$

over the Region of Convergence (ROC) where the series converges absolutely.

2.1.18 The discrete unit step function is defined as

$$u(n) = \begin{cases} 1, & n \geq 0 \\ 0, & n < 0 \end{cases} \tag{2.1.18.1}$$

and

$$u[n] \overset{\mathcal{Z}}{\longleftrightarrow} \sum_{n=0}^{\infty} z^{-n} = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \tag{2.1.18.2}$$

2.1.19 Time-Shift Property

$$x(n - k) \overset{\mathcal{Z}}{\longleftrightarrow} z^{-k} X(z) \tag{2.1.19.1}$$

2.1.20 Standard Inverse Transform Pair: For any scalar constant $\alpha$,

$$\alpha^n u(n) \overset{\mathcal{Z}}{\longleftrightarrow} \frac{1}{1 - \alpha z^{-1}}, \quad |z| > |\alpha| \tag{2.1.20.1}$$

2.1.21 (Trace of a Matrix) Let $\mathbf{A} \in \mathbb{R}^{n \times n}$ be a square matrix with eigenvalues

$\lambda_1, \lambda_2, \ldots, \lambda_n$. Then,

$$\sum_{i=1}^{n} \lambda_i = \sum_{i=1}^{n} a_{ii} = \mathrm{tr}\,(\mathbf{A}) \tag{2.1.21.1}$$

**Solution:** The characteristic polynomial of $\mathbf{A}$ is defined by

$$p_{\mathbf{A}}(\lambda) = \left|\lambda\mathbf{I} - \mathbf{A}\right| \tag{2.1.21.2}$$

$$= \prod_{i=1}^{n} (\lambda - \lambda_i) = \lambda^n - \left(\sum_{i=1}^{n} \lambda_i\right) \lambda^{n-1} + \cdots + (-1)^n \prod_{i=1}^{n} \lambda_i \tag{2.1.21.3}$$

Evaluating the determinant $\left|\lambda\mathbf{I} - \mathbf{A}\right|$ using cofactor expansion, the only term that contributes to $\lambda^n$ and $\lambda^{n-1}$ is the product of the principal diagonal entries

$$\prod_{i=1}^{n} (\lambda - a_{ii}) = \lambda^n - \left(\sum_{i=1}^{n} a_{ii}\right) \lambda^{n-1} + \ldots \tag{2.1.21.4}$$

where $a_{ii}$ denotes the diagonal elements of $\mathbf{A}$. Equating the coefficient of $\lambda^{n-1}$ from (2.1.21.3) and (2.1.21.4)

## 3. AG 2025

### A. Formulae

3.1.1 (Bernoulli Distribution) For $X \in \{0, 1\}$, the pmf is defined as

$$P_X(k) = \begin{cases} p & k = 1 \\ q & k = 0 \\ 0 & \text{otherwise} \end{cases} \tag{3.1.1.1}$$

3.1.2 The moment generating function

$$\begin{aligned} M_X(z) \triangleq E\left[z^{-X}\right] &= p_X(1) z^{-1} + p_X(0) z^0 \\ &= p z^{-1} + q \end{aligned} \tag{3.1.2.1}$$

upon substituting from (2.1.17.1).

3.1.3 (Binomial Distribution) If $X_i$ are independent, for

$$\begin{aligned} Y \triangleq \sum_{i=1}^{n} X_i, \quad M_Y(z) &= \prod_{i=1}^{n} M_{X_i}(z) \\ &= \left(pZ^{-1} + q\right)^n \end{aligned} \tag{3.1.3.1}$$

**Solution:** From (3.1.2.1),

$$M_Y(z) = E\left[z^{-\sum_{i=1}^{n} X_i}\right] = E\left[\prod_{i=1}^{n} z^{-X_i}\right] \tag{3.1.3.2}$$

$$= \prod_{i=1}^{n} E\left[z^{-X_i}\right] \tag{3.1.3.3}$$

yielding (3.1.3.1).

3.1.4 From (3.1.3.1),

$$\left(pz^{-1}+q\right)^{n} = {}^{n}C_{k}p^{k}q^{n-k}z^{-k} \tag{3.1.4.1}$$

$$\implies p_{Y}\left(k\right) = \begin{cases} {}^{n}C_{k}p^{k}q^{n-k} & 0 \leq k \leq n \\ 0 & \text{otherwise} \end{cases} \tag{3.1.4.2}$$

using the definition in (3.1.2.1) along with (2.1.17.1).

3.1.5

$$\begin{aligned} \sinh\left(at\right)u(t) &\overset{\mathcal{L}}{\longleftrightarrow} \frac{a}{s^{2}-a^{2}} \\ \cosh\left(at\right)u(t) &\overset{\mathcal{L}}{\longleftrightarrow} \frac{s}{s^{2}-a^{2}} \end{aligned} \tag{3.1.5.1}$$

**Solution:** From (1.1.13.1),

$$\cos(\jmath at)u(t) \overset{\mathcal{L}}{\longleftrightarrow} \frac{s}{s^{2}+\left(\jmath a\right)^{2}} \tag{3.1.5.2}$$

yielding (3.1.5.1).

3.1.6 (Geometric Progression)

$$\sum_{i=0}^{n-1} q^{i} = \frac{q^{n}-1}{q-1} \tag{3.1.6.1}$$

3.1.7

$$\begin{aligned} \sin\left(x\right) &= \sum_{i=1}^{n} -1^{i+1}\frac{x^{2i-1}}{(2i-1)!} \\ \cos\left(x\right) &= \sum_{i=1}^{n} -1^{i+1}\frac{x^{i-1}}{i-1!} \end{aligned} \tag{3.1.7.1}$$

3.1.8 If

$$f\left(\alpha x, \alpha y\right) = \alpha^{n}\alpha^{n}f\left(x,y\right), \tag{3.1.8.1}$$

$f(x,y)$ is homogeneous of degree $n$. Then,

$$x\frac{\partial f}{\partial x} + y\frac{\partial f}{\partial y} = nf \tag{3.1.8.2}$$

3.1.9 (fourth order Runge Kutta method) Let a function be defined as follows: $\frac{dy}{dx} = f\left(x,y\right)$ , $y\left(x_{0}\right) = y_{0}$.
the difference equation is given by

$$y_{n+1} = y_{n} + \frac{h}{6}\left(k_{1}+2k_{2}+2k_{3}+k_{4}\right) \tag{3.1.9.1}$$

$$x_{n+1} = x_{n} + h \tag{3.1.9.2}$$

We find $k_1, k_2, k_3, k_4$ by the following formulae:

$$k_1 = f\left(x_n, y_n\right) \tag{3.1.9.3}$$

$$k_2 = f\left(x_n + \frac{h}{2}, y_n + k_1\frac{h}{2}\right) \tag{3.1.9.4}$$

$$k_3 = f\left(x_n = \frac{h}{2}, y_n + k_2\frac{h}{2}\right) \tag{3.1.9.5}$$

$$k_4 = f\left(x_n + h, y_n + hk_3\right) \tag{3.1.9.6}$$

*B. Solved Questions*

3.2.1 A fair six-faced dice, with the faces labelled '1', '2', '3', '4', '5', and '6', is rolled thrice. What is the probability of rolling '6' exactly once? (AG 2025)

a) $\frac{75}{216}$ b) $\frac{1}{6}$ c) $\frac{1}{18}$ d) $\frac{25}{216}$

**Solution:** From (2.1.11.1),

$$P_{X_1}(k) = \begin{cases} \frac{1}{6} & k = 1 \\ \frac{5}{6} & k = 0 \end{cases} \tag{3.2.1.1}$$

where $X_i$ represents the $i$th roll. Substituting $n = 3, p = \frac{1}{6}, q = \frac{5}{6}$, in (3.1.4.2), the desired probability is obtained as

$${}^3C_1\frac{1}{6}\left(\frac{5}{6}\right)^2 = \frac{75}{216}. \tag{3.2.1.2}$$

The following code simulates the result

codes/Probability.c

3.2.2 If $a, b$, and $c$ are the roots of

$$2x^3 - 3x^2 + px - 1 = 0 \tag{3.2.2.1}$$

and sum of the two roots is 1, the value of $p$ is (AG 2025)

a) 2 b) 1 c) 3 d) $\frac{1}{3}$

**Solution:** Using the sum and product of roots from high school algebra and the given information,

$$a + b = 1 \tag{3.2.2.2}$$

$$a + b + c = \frac{3}{2} \tag{3.2.2.3}$$

$$abc = \frac{1}{2} \tag{3.2.2.4}$$

$$ab + bc + ac = \frac{p}{2} \tag{3.2.2.5}$$

From (3.2.2.2) and (3.2.2.3),

$$c = \frac{1}{2}, \tag{3.2.2.6}$$

(3.2.2.5) can be expressed as

$$\frac{p}{2} = \frac{abc}{c} + c\,(a+b) = \frac{1}{2c} + c \tag{3.2.2.7}$$

$$\implies p = 3 \tag{3.2.2.8}$$

upon substituting from (3.2.2.2), (3.2.2.4) and (3.2.2.6). Using the Newton-Raphson method the difference equation for computing the root of (3.2.2.1) is

$$x_{n+1} = x_n + \frac{2x^3 - 3x^2 + 3x - 1}{6x^2 - 6x + 3} \tag{3.2.2.9}$$

from (2.1.9.1). With an initial guess of 4, running this difference equation 6 times gives us the real root, which is $\frac{1}{2}$. The following code verifies the result in Fig. 3.2.2.1.

codes/raph.py

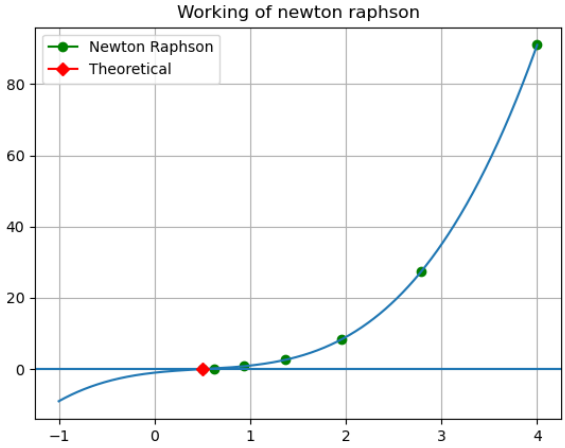



Fig. 3.2.2.1. The depiction of newton raphson method guessing the root

3.2.3 If the matrix $\begin{pmatrix} x & -3 \\ 2 & x-5 \end{pmatrix}$ is singular, sum of the values of $x$ is (AG 2025)

a) 5 b) 6 c) 0 d) $-1$

**Solution:** Through row reduction,

$$\begin{pmatrix} x & -3 \\ 2 & x-5 \end{pmatrix} \xleftrightarrow{R_2 \leftrightarrow R_1} \begin{pmatrix} 2 & x-5 \\ x & -3 \end{pmatrix} \xleftrightarrow{R_2 \leftarrow 2R_2 - xR_1} \begin{pmatrix} 2 & x-5 \\ 0 & -6 - x^2 + 5x \end{pmatrix}$$

For the matrix to be singular, from Definition 1.1.25,

$$x^2 - 5x + 6 = 0 \tag{3.2.3.1}$$

Hence, the sum of roots is 5. The following code verifies the result

codes/echelon.py

3.2.4 $\frac{s}{s^2+a^2}$ is the Laplace transform of (AG 2025)

a) $\cos(at)$ b) $\sin(at)$ c) $\sinh(at)$ d) $\cosh(at)$

**Solution:** From (1.1.13.1),

$$\cos(at) \overset{\mathcal{L}}{\longleftrightarrow} \frac{a}{s^2 + a^2} \tag{3.2.4.1}$$

3.2.5 The median of the following set of numbers: 154, 130, 144, 137, 156, 146, 138, 149, 160, 138 is: (AG 2025)

a) 145.0 b) 145.2 c) 151.0 d) 146.0

**Solution:** From the following codes, the median is obtained as 145.0

codes/Sorter.py
codes/Quicksort.c

3.2.6 The series

$$\sum_{n=0}^{r} q^n = 1 + q + q^2 + \dots \tag{3.2.6.1}$$

has the sum (AG 2025)

a) $\frac{1}{1-q}$-$\frac{q^{r+1}}{1-q}$ b) $\frac{1}{q-1}$+$\frac{q^{r+1}}{q-1}$ c) $\frac{1}{1-q}$+$\frac{q^{r+1}}{1-q}$ d) $\frac{1}{q-1}$

**Solution:** From (3.1.6.1), the desired sum is

$$\frac{1 - q^{r+1}}{1 - q} = \frac{1}{1 - q} - \frac{q^{r+1}}{1 - q} \tag{3.2.6.2}$$

The following code verifies the result.

codes/gp.py

3.2.7 The value of $\lim_{x\to 0} \frac{x\cos(x)-\sin(x)}{x^2\sin(x)}$ (AG 2025)

a) $-\frac{1}{3}$ b) $\frac{1}{3}$ c) 3 d) $-3$

**Solution:** From (3.1.7.1),

$$\frac{x\left(\cos\left(x\right)\right)-\sin\left(x\right)}{x^2\sin\left(x\right)} = \frac{x(1-\frac{x^2}{2!}.....)-(x-\frac{x^3}{3!}.....)}{x^2(x-\frac{x^3}{3!}.....)} \tag{3.2.7.1}$$

$$\approx \frac{(x-\frac{x^3}{2})-(x-\frac{x^3}{6})}{x^3(1-\frac{x^2}{6})} \tag{3.2.7.2}$$

$$= -\frac{\frac{1}{3}}{1-\frac{x^2}{6}} \tag{3.2.7.3}$$

$$\implies \lim_{x\to 0}\frac{x\cos\left(x\right)-\sin\left(x\right)}{x^2\sin\left(x\right)} = -\frac{1}{3}. \tag{3.2.7.4}$$

The following code generates Fig. 3.2.7.1.

codes/Plottinglimit.py

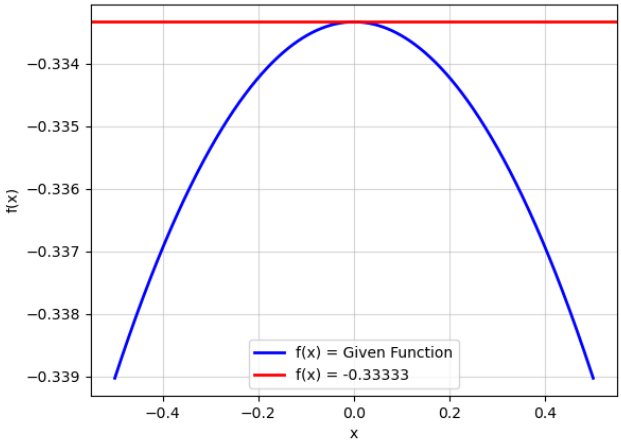



Fig. 3.2.7.1.

3.2.8 If $u = x^4 + y^4 + 3x^2y^2$, the value of $\left(x\frac{\partial u}{\partial x} + y\frac{\partial u}{\partial y}\right)^{-1}$ (AG 2025)

a) $4u$ b) $0$ c) $\frac{1}{4u}$ d) $2u$

**Solution:** Since

$$u\left(\alpha x, \alpha y\right) = \alpha^4 u\left(\alpha x, \alpha y\right), \tag{3.2.8.1}$$

$$x\frac{\partial u}{\partial x} + y\frac{\partial u}{\partial y} = 4u \tag{3.2.8.2}$$

$$\text{or, } \left(x\frac{\partial u}{\partial x} + y\frac{\partial u}{\partial y}\right)^{-1} = \frac{1}{4u} \tag{3.2.8.3}$$

from (3.1.8.2).

3.2.9 Given $y\left(x=0\right)=0$ for the differential equation $\frac{dy}{dx} = 3y + 2e^x$, the value of $y$ at $x = 0.3$ is _____. (AG 2025)

**Solution:** From (1.1.6.1) and (1.1.12.1),

$$sY\left(s\right) = 3Y\left(s\right) + 2\frac{1}{s+1} \tag{3.2.9.1}$$

$$\implies Y\left(s\right) = \frac{2}{\left(s-1\right)\left(s-3\right)} \tag{3.2.9.2}$$

$$= \frac{1}{s-3} - \frac{1}{s-1} \tag{3.2.9.3}$$

$$\text{or, } y(x) = \left(e^{3x} - e^x\right)u(x) \tag{3.2.9.4}$$

by considering the inverse.

$$\therefore y\left(0.3\right) = 1.110 \tag{3.2.9.5}$$

From (1.1.15.3),

$$y_{n+1} = y_n + h(3y_n + 2e^n). \tag{3.2.9.6}$$

The following code computes (3.2.9.6) and generates Fig. 3.2.9.1. simulates the result:

codes/foreul.py

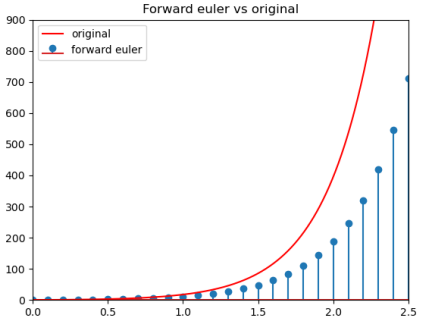



Fig. 3.2.9.1. The plot depicting the divergence of forward euler from theory at large values

3.2.10 Given $y\left(x=0\right)=0$ for the differential equation $\frac{dy}{dx}=3y+2e^{x}$, the value of $y$ at $x=0.3$ is _____. (AG 2025)

**Solution:** Solving with Runge Kutta method
let $h=0.1$ and $y(0)=0$ be the initial conditions.Taking

$$f\left(x,y\right)=3y+2e^{x} \tag{3.2.10.1}$$

From (3.1.9.1),upon repeating 3 times, we get:

$$y\left(0.3\right)=1.10964 \tag{3.2.10.2}$$

whereas the actual solution from the integrated equation (3.2.9.4) is:

$$y\left(0.3\right)=1.10974 \tag{3.2.10.3}$$

Comparing Runge Kutta with forward euler:
From (1.1.15.3),The forward euler value for the same step size is:

$$y\left(0.3\right)=0.86963 \tag{3.2.10.4}$$

The following code plots the graphs of the original (3.2.9.4) , Runge Kutta (3.1.9.1) and forward euler (1.1.15.3) values:

codes/rkcompare.py

The generated figure shows the accuracies of the above two methods of approximation:

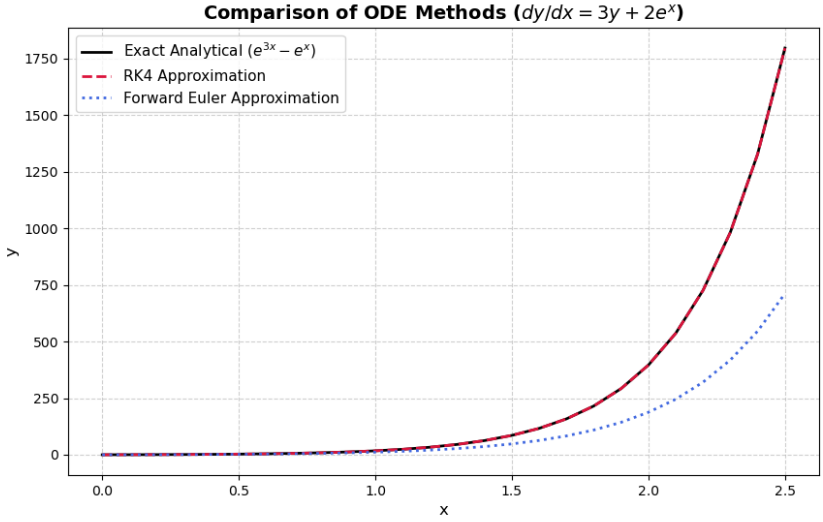



Fig. 3.2.10.1. Comparision of accuracies of the two methods