

ALUMEX PLC

B 101.1

DIE NO.	ALC-1286	COE	E NO.	MCP489DI0003000		
CUSTOMER	M/s. AIS – USA	PRES	S: 1400 TON	BILLET: Ø152 mm	MATERIAL:	6063 - T5
\triangle		<u>^2</u>				



Actual Size

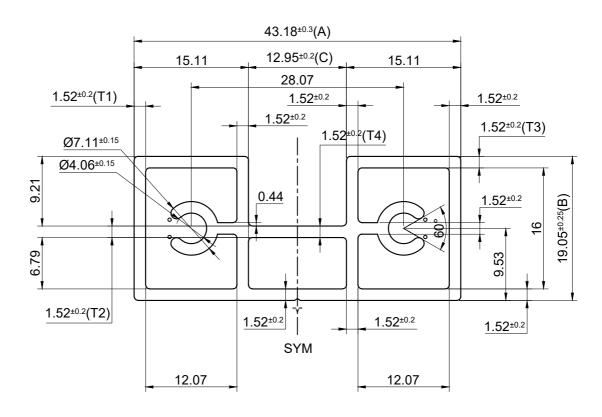

"V" - 0.25 Deep x 113° Groove UNSPECIFIED RADII - R 0.51 mm

Dak hima				DWG				NO.: ALC/SD/24/42						
Ŋ						1	VS-379							
DRAWN	CHE	HECKED APPROVED					PRODUCT CATEGORY / APPLICATION:				TION:	AL-1044		
DATE	2024	/ 02 /	15	·	SC	ALE		2:1		UNIT	mm	SECTION NO.:		
MICRONS				10~15 µ	л 1	10~15 μ						EST. SURFACE AREA	0.141 m ² /m	
SURFACE FII	FINISH MF			NAT		BR						EST. PERIMETER	141.285 mm.	
<u> </u>	VISIBLE SURFACE								EST. WEIGHT 0.758 kg./m					
<u>o: fr - 04EA</u>				STANDARD TOLERANCE				BS EN 12020-2 / SLS-1410			LS-1410	EST. AREA	280.894 mm ²	
<u> </u>	THICKNESS				-				EXR. PROPORTION 68.948					
<u> </u>	STANDARD LENGTH				5800 mm				NO. OF HOLES 01					