

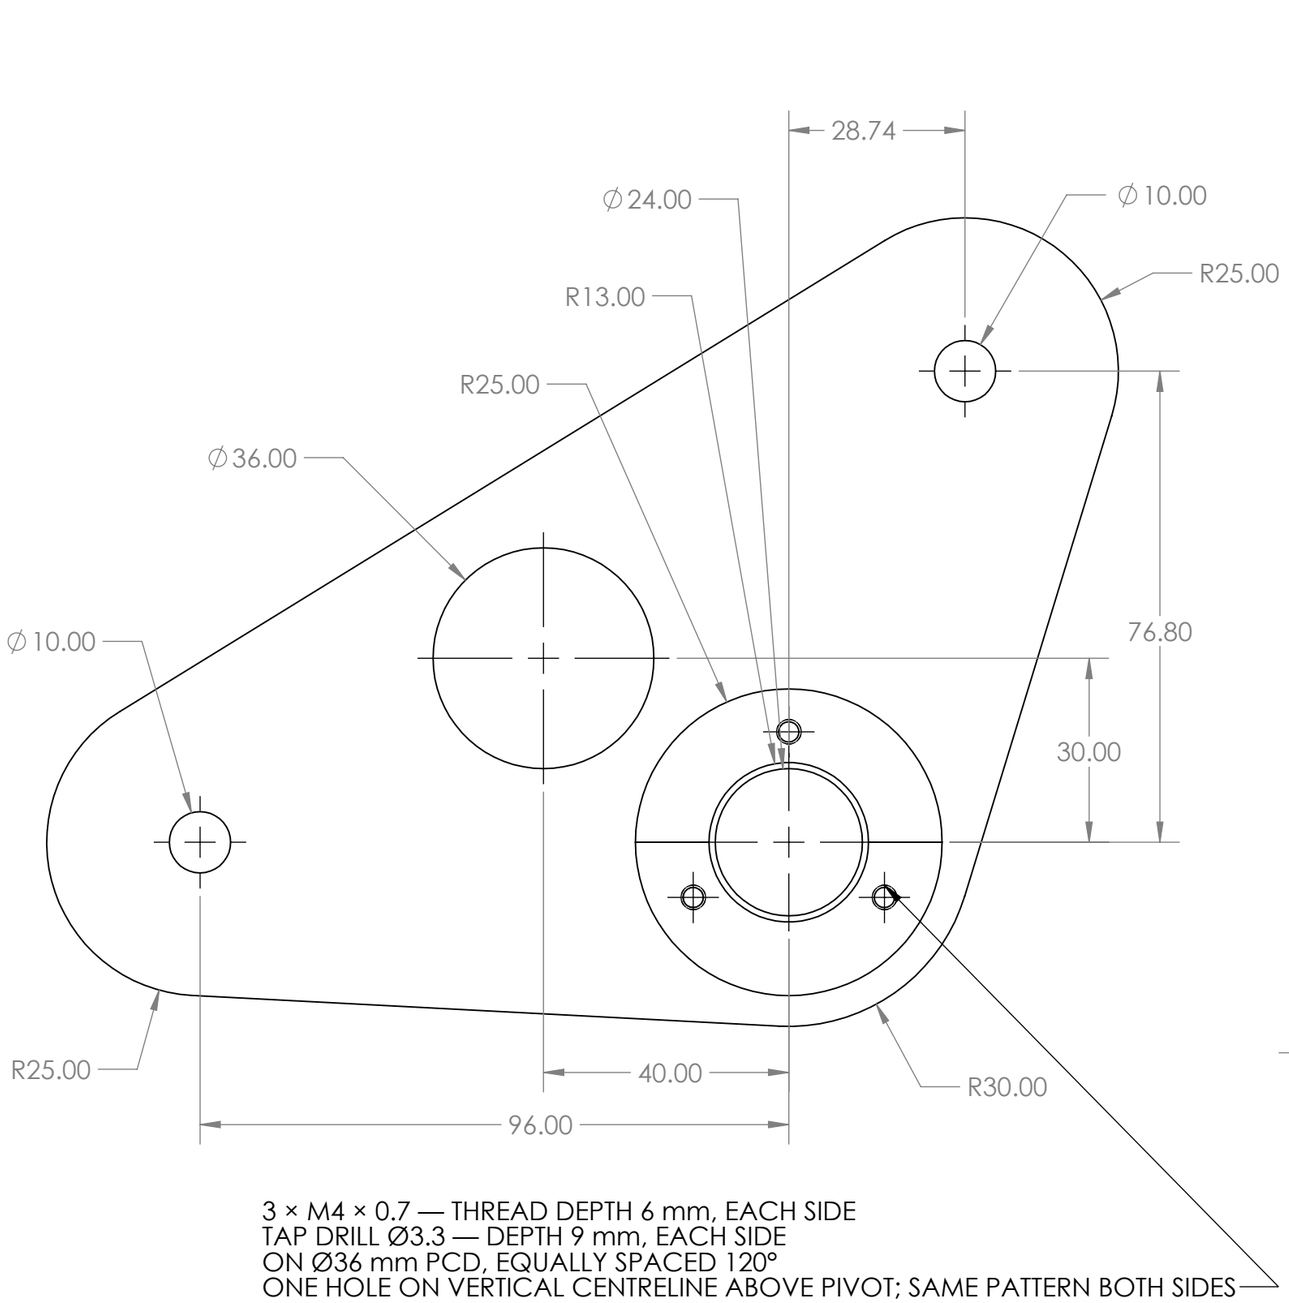


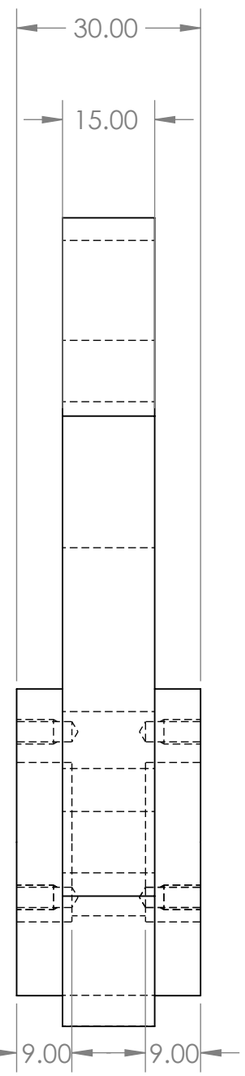

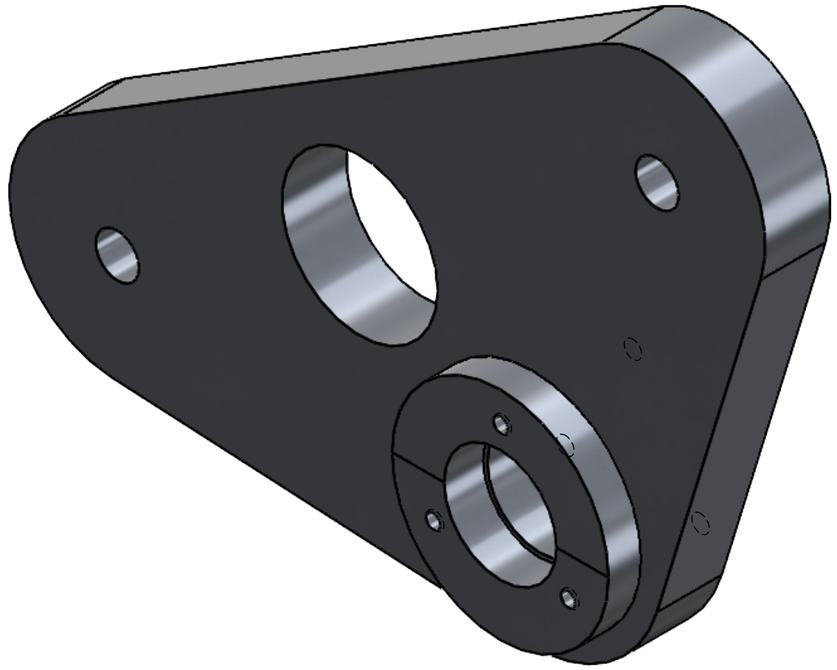

3 × M4 × 0.7 — THREAD DEPTH 6 mm, EACH SIDE
TAP DRILL Ø3.3 — DEPTH 9 mm, EACH SIDE
ON Ø36 mm PCD, EQUALLY SPACED 120°
ONE HOLE ON VERTICAL CENTRELINE ABOVE PIVOT; SAME PATTERN BOTH SIDES

OUTER PROFILE ARCS CONCENTRIC WITH THEIR RESPECTIVE HOLES.
STRAIGHT OUTER EDGES TANGENT TO ADJOINING PROFILE ARCS.
LEFT Ø10 HOLE CENTRE AND PIVOT CENTRE ON SAME HORIZONTAL LINE.
Ø10 LINKAGE HOLES AND Ø36 LIGHTENING HOLE THROUGH ALL.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH:		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION	A
	NAME	SIGNATURE	DATE	TITLE: SUSPENSION ROCKER — OPTIMIZED		
DRAWN	Chamika Nimsara		05-Oct-2026			
CHK'D						
APPV'D						
MFG						
Q.A				MATERIAL: ALUMINIUM 6061-T6	DWG NO. Rocker_Optimized	A3
				WEIGHT: 572.63 g	SCALE:1:1	SHEET 1 OF 1