

NYATI

Building: YUCCA · Tank: Overhead Tank 1

Society	NYATI	Building	YUCCA
Tank name	Overhead Tank 1	Generated	Tue, Sep 29, 2026, 22:10
Period	Last 7 days, Sep 22, 2026 - Sep 29, 2026	Device	ESP8266 NodeMCU, firmware 2.10.0
Usage	Domestic, loft / bathroom	Tank	Loft 225 L, 103.5 × 72.5 × 38.5 cm
Calibration	empty at 120.0 cm, full at 25.0 cm, water depth 95.0 cm	Settings ID	5C8FE58F (see Settings used for this report)

SUMMARY

NOW

82%

motor off

LAST FILL

+62 L

Tue 18:30 · 20 min

EMPTY -> FULL TAKES

~ 1 h 12 min

average of 16 fills

MOTOR TODAY

36 min

2 fill(s) · 7-day avg 35 min

USED TODAY

107 L

yesterday 111 L

BUSIEST HOUR

08:00–09:00


13 L per day

LAST NIGHT


Possible leak

-7 L between 01:00–05:00

LEVEL HISTORY, LAST 7 DAYS

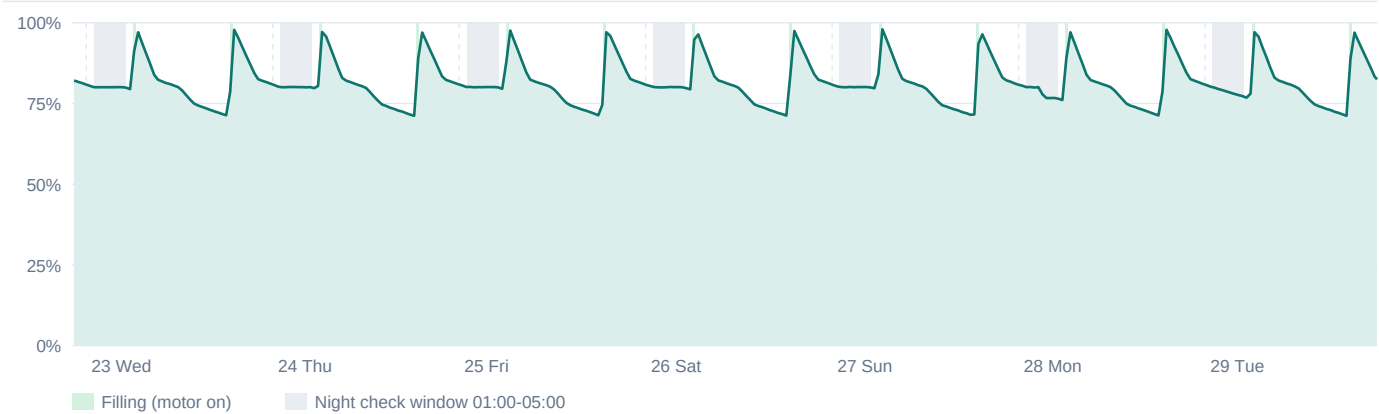


MOTOR RUN TIME PER DAY

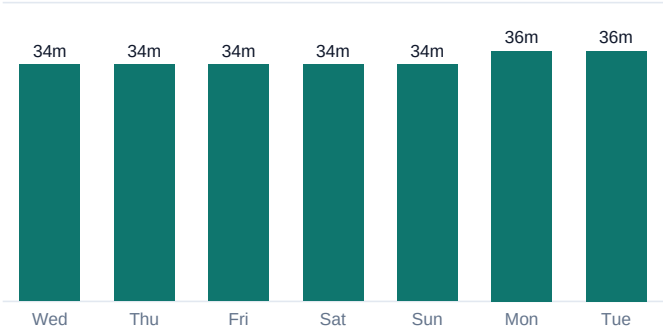


Total 4 h 02 min in 14 fills

WATER USED PER DAY

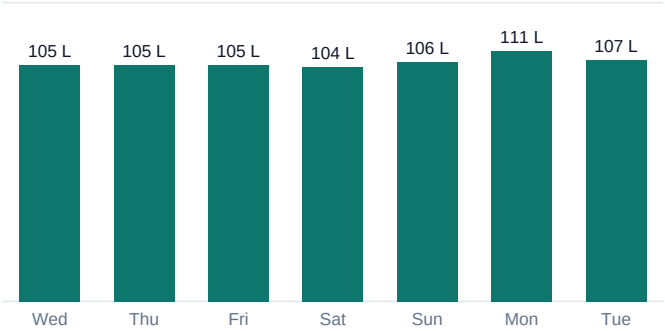

Total 743 L, average 106 L per day

USAGE BY HOUR OF DAY

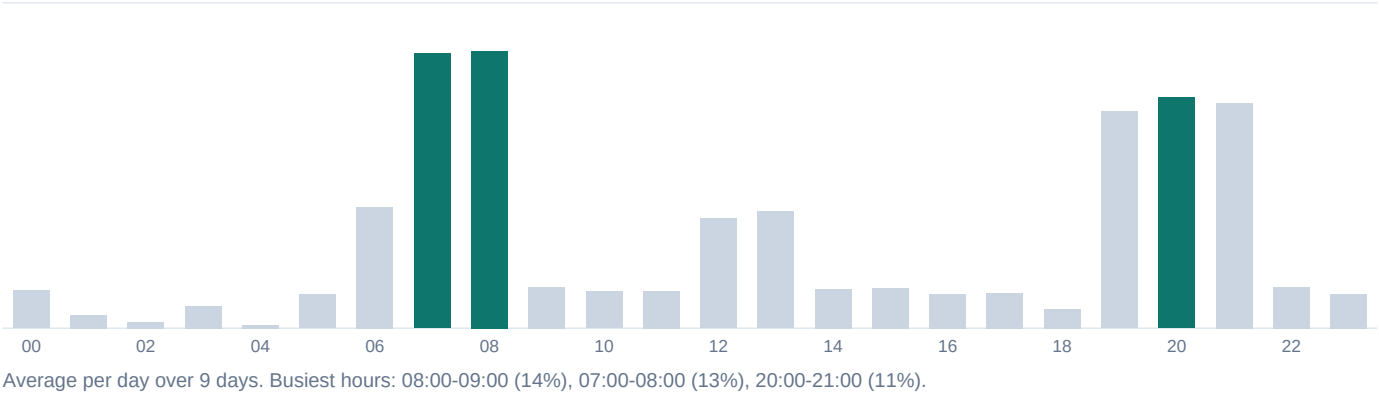

NIGHT LEAK CHECK

Night	Change	Per hour	Result
Tue, Sep 29	-7 L	2 L	Possible leak
Mon, Sep 28	-8 L	2 L	Water used (one drop)
Sun, Sep 27	-0 L	0 L	OK
Sat, Sep 26	+0 L	0 L	OK
Fri, Sep 25	-0 L	0 L	OK
Thu, Sep 24	+1 L	0 L	OK
Wed, Sep 23	+0 L	0 L	OK

Level change between 01:00 and 05:00. Possible leak: a steady drop of 1.5 cm (4 L) or more with no fill running. Water used (one drop): most of the drop within one hour, like a tap or flush.

RECENT FILLS (MOTOR RUNS)

Started	Duration	Added	Rise speed
Tue, Sep 29, 2026, 18:30	20 min	+62 L	1.3 cm/min
Tue, Sep 29, 2026, 06:00	16 min	+50 L	1.3 cm/min
Mon, Sep 28, 2026, 18:30	20 min	+62 L	1.3 cm/min
Mon, Sep 28, 2026, 06:00	16 min	+51 L	1.3 cm/min
Sun, Sep 27, 2026, 18:30	20 min	+62 L	1.3 cm/min
Sun, Sep 27, 2026, 06:00	14 min	+43 L	1.3 cm/min
Sat, Sep 26, 2026, 18:30	20 min	+62 L	1.3 cm/min
Sat, Sep 26, 2026, 06:00	14 min	+43 L	1.3 cm/min
Fri, Sep 25, 2026, 18:30	20 min	+62 L	1.3 cm/min
Fri, Sep 25, 2026, 06:00	14 min	+43 L	1.3 cm/min

HOW THESE NUMBERS ARE CALCULATED

- Level is measured by the ultrasonic sensor and recorded every 2 minutes.
- Filling (motor on): the level rises faster than 0.5 cm/min. Fills under 3 minutes or 3 cm are ignored. Every fill is counted as the motor.
- Water used: level drops outside fills, ignoring changes smaller than the sensor noise.
- Litres use the tank capacity of 225 L and assume straight tank walls.

SETTINGS USED FOR THIS REPORT

Setting	Value
Settings ID	5C8FE58F (matches the exported settings file with the same ID)
Society / building / tank	NYATI / YUCCA / Overhead Tank 1
Usage and location	Domestic, loft / bathroom
Tank	Loft 225 L, 103.5 × 72.5 × 38.5 cm
Rated capacity	225 L
Water depth when full	34.5 cm
Calibration: sensor to water	empty 120.0 cm, full 25.0 cm (range 95.0 cm)
Resolution	1 cm of water = ~ 2.4 L (1.1%)
Units in this report	centimetres
Low water alarm	10% of full
Night leak check	01:00-05:00, possible leak above 1.5 cm
Fill (motor) detection	rise faster than 0.5 cm/min
Recording	level saved every 2 min, fill detection from 10 s samples
Sensor reading	every 5 s (eco profile), median of 5, trigger pulse 100 microseconds
Power and radio	power saving, transmit power medium (13 dBm), hotspot on demand
Device	ESP8266 NodeMCU, firmware 2.10.0, watertank-3f2a.local