



SIMPLE DAQ SHIELD – every connection drawn as a wire

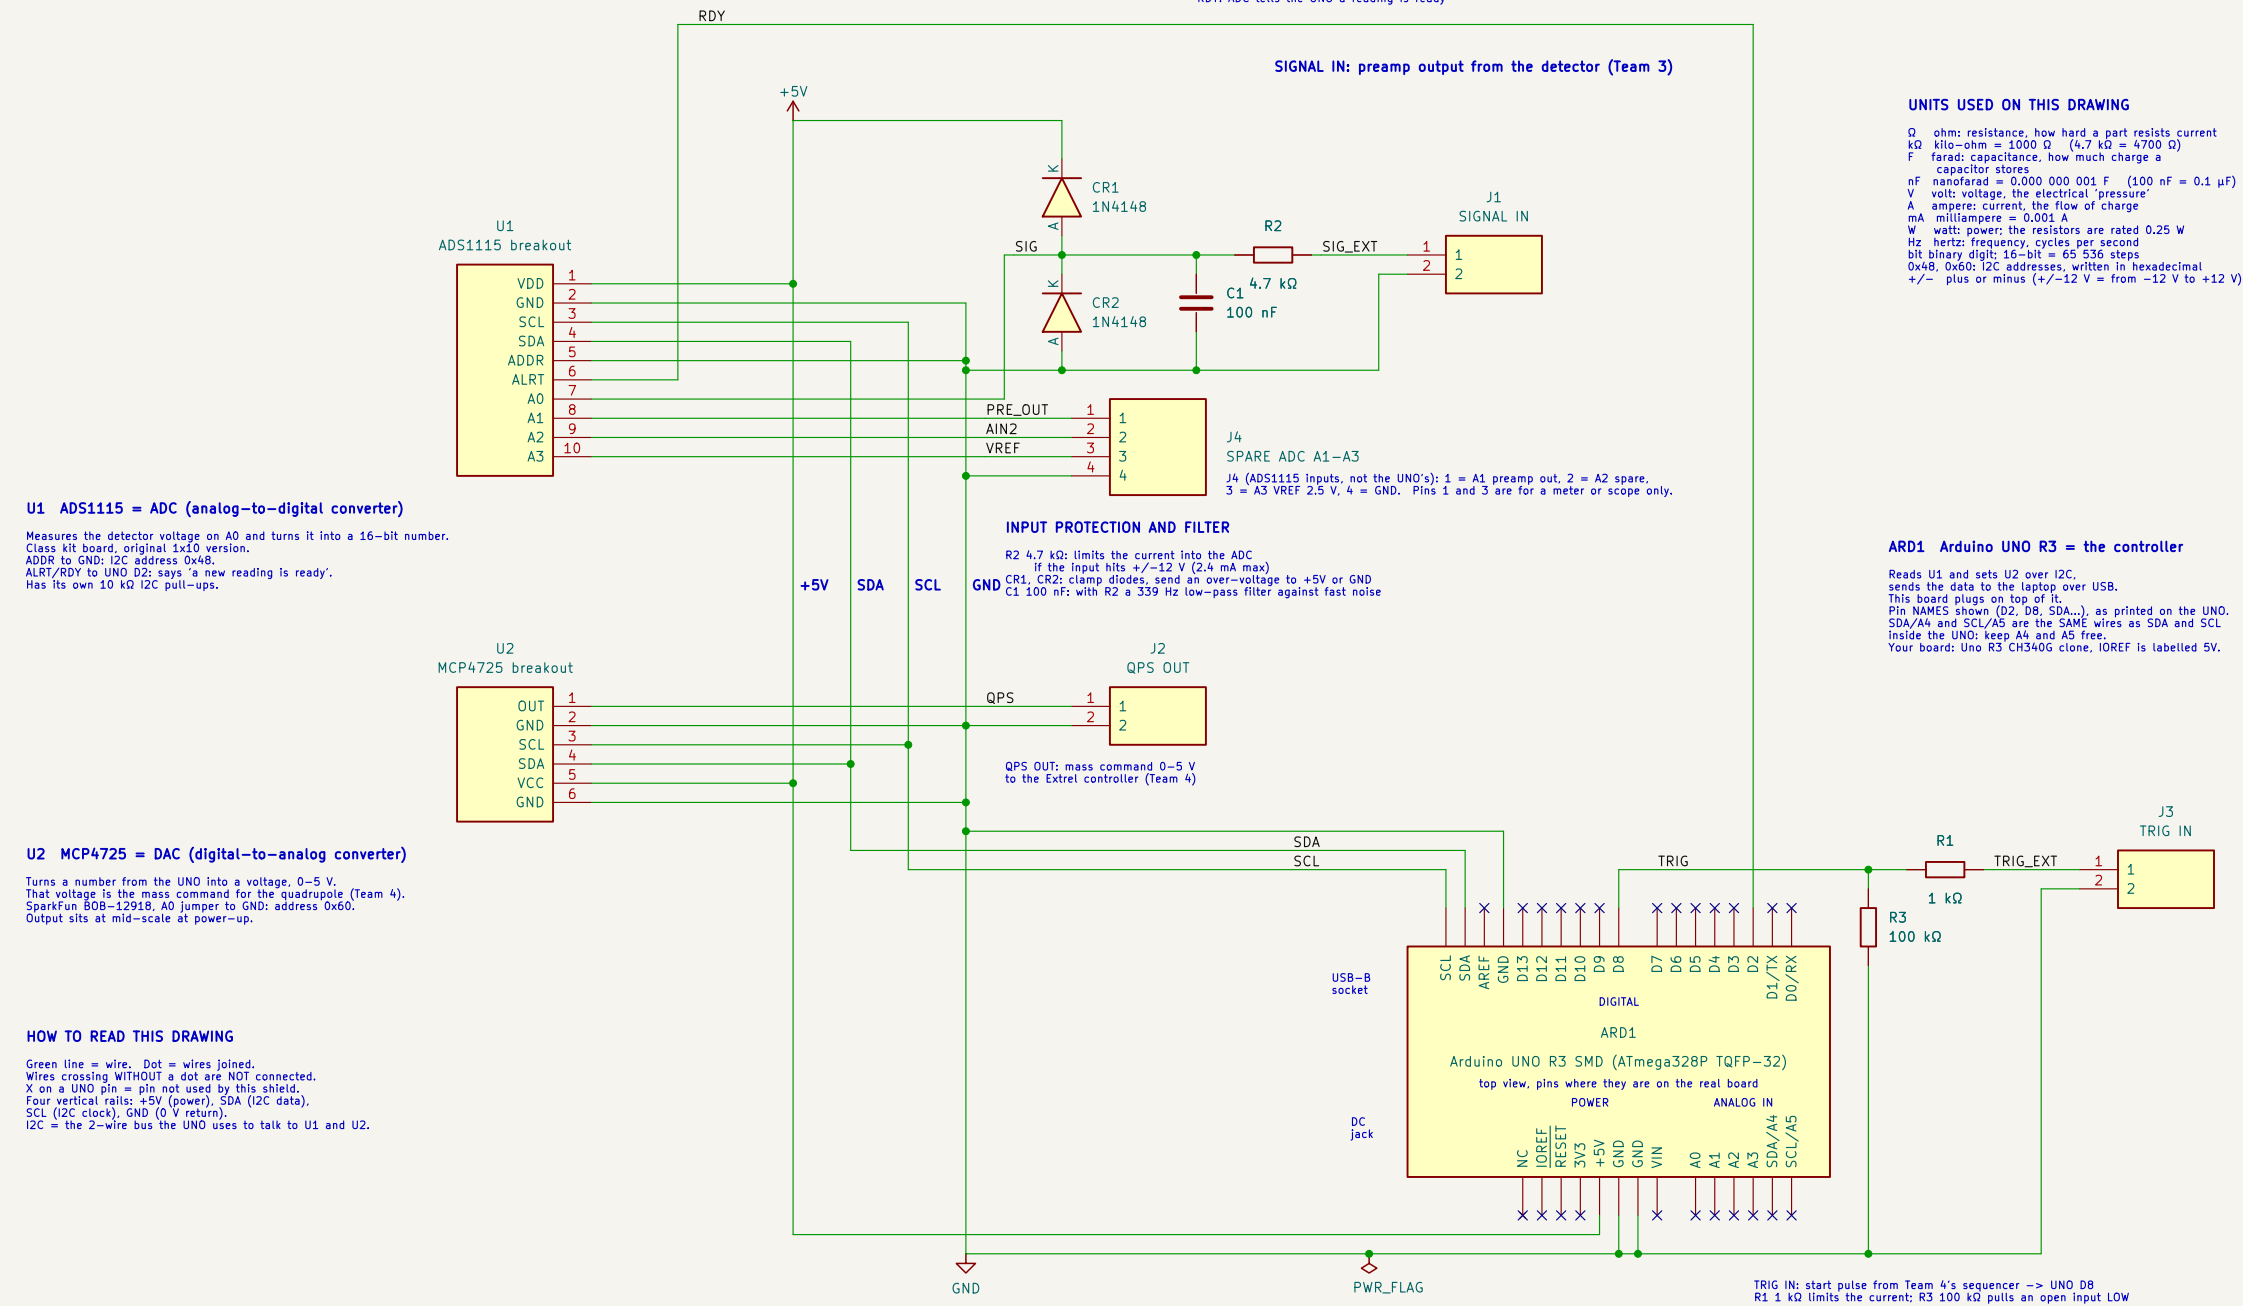

PREAMP (rev D): Faraday cup current → voltage for the ADS1115

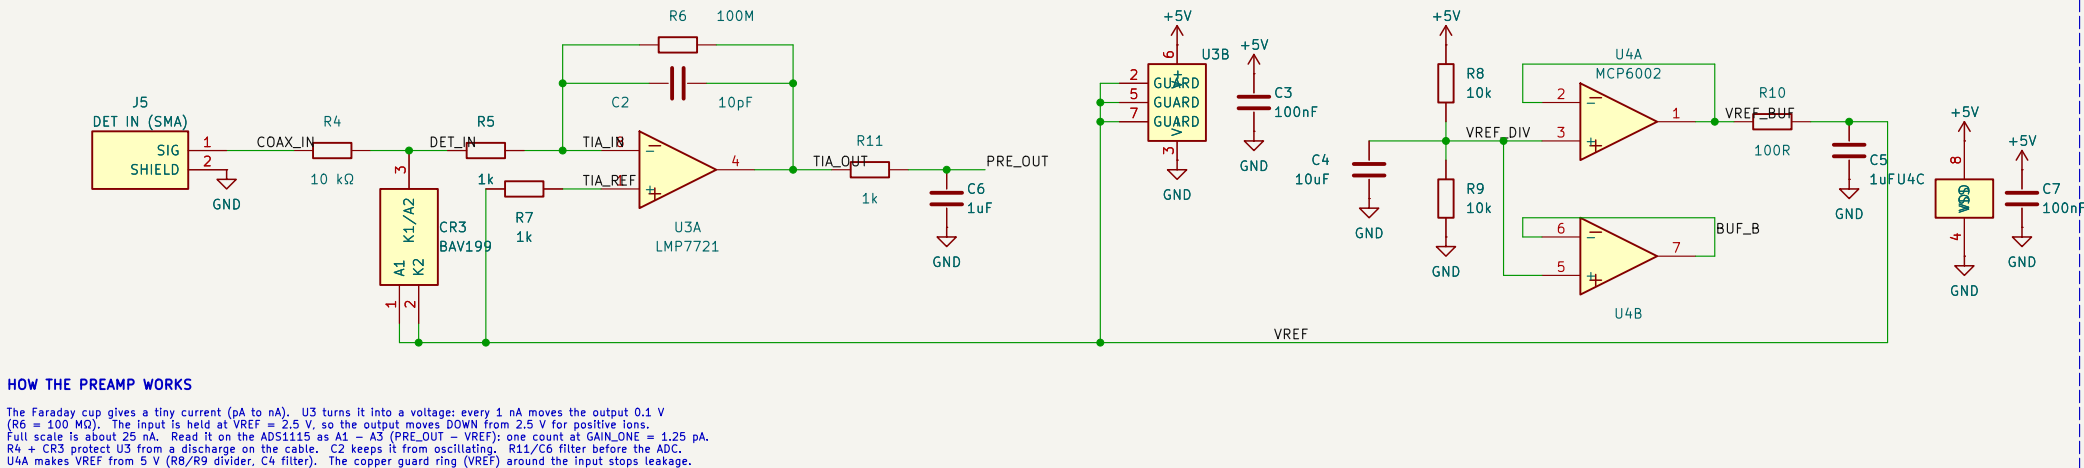

Firmware base: Grinias et al., J. Chem. Educ. 2016, 93, 1316		
Digi-Key and LCSC part numbers in BOM.csv. JLCPCB assembles the preamp SMD parts only.		
Team 5 scope: ADC side. MCP4725 mass command is fitted for Team 4's sequencer.		
Portable quadrupole mass spectrometer – data acquisition and control block		
MIE1001 Team 5 – Foundation of Imaging Engineering, Maastricht University (FSE, M4I)		
Sheet: /		
File: mie1001_daq_simple.kicad_sch		
Title: SIMPLE DAQ shield for Arduino UNO R3 – class breakout boards		
Size: A3	Date: 2026-09-24	Rev: D
KiCad E.D.A. 10.0.6		Id: 1/1