





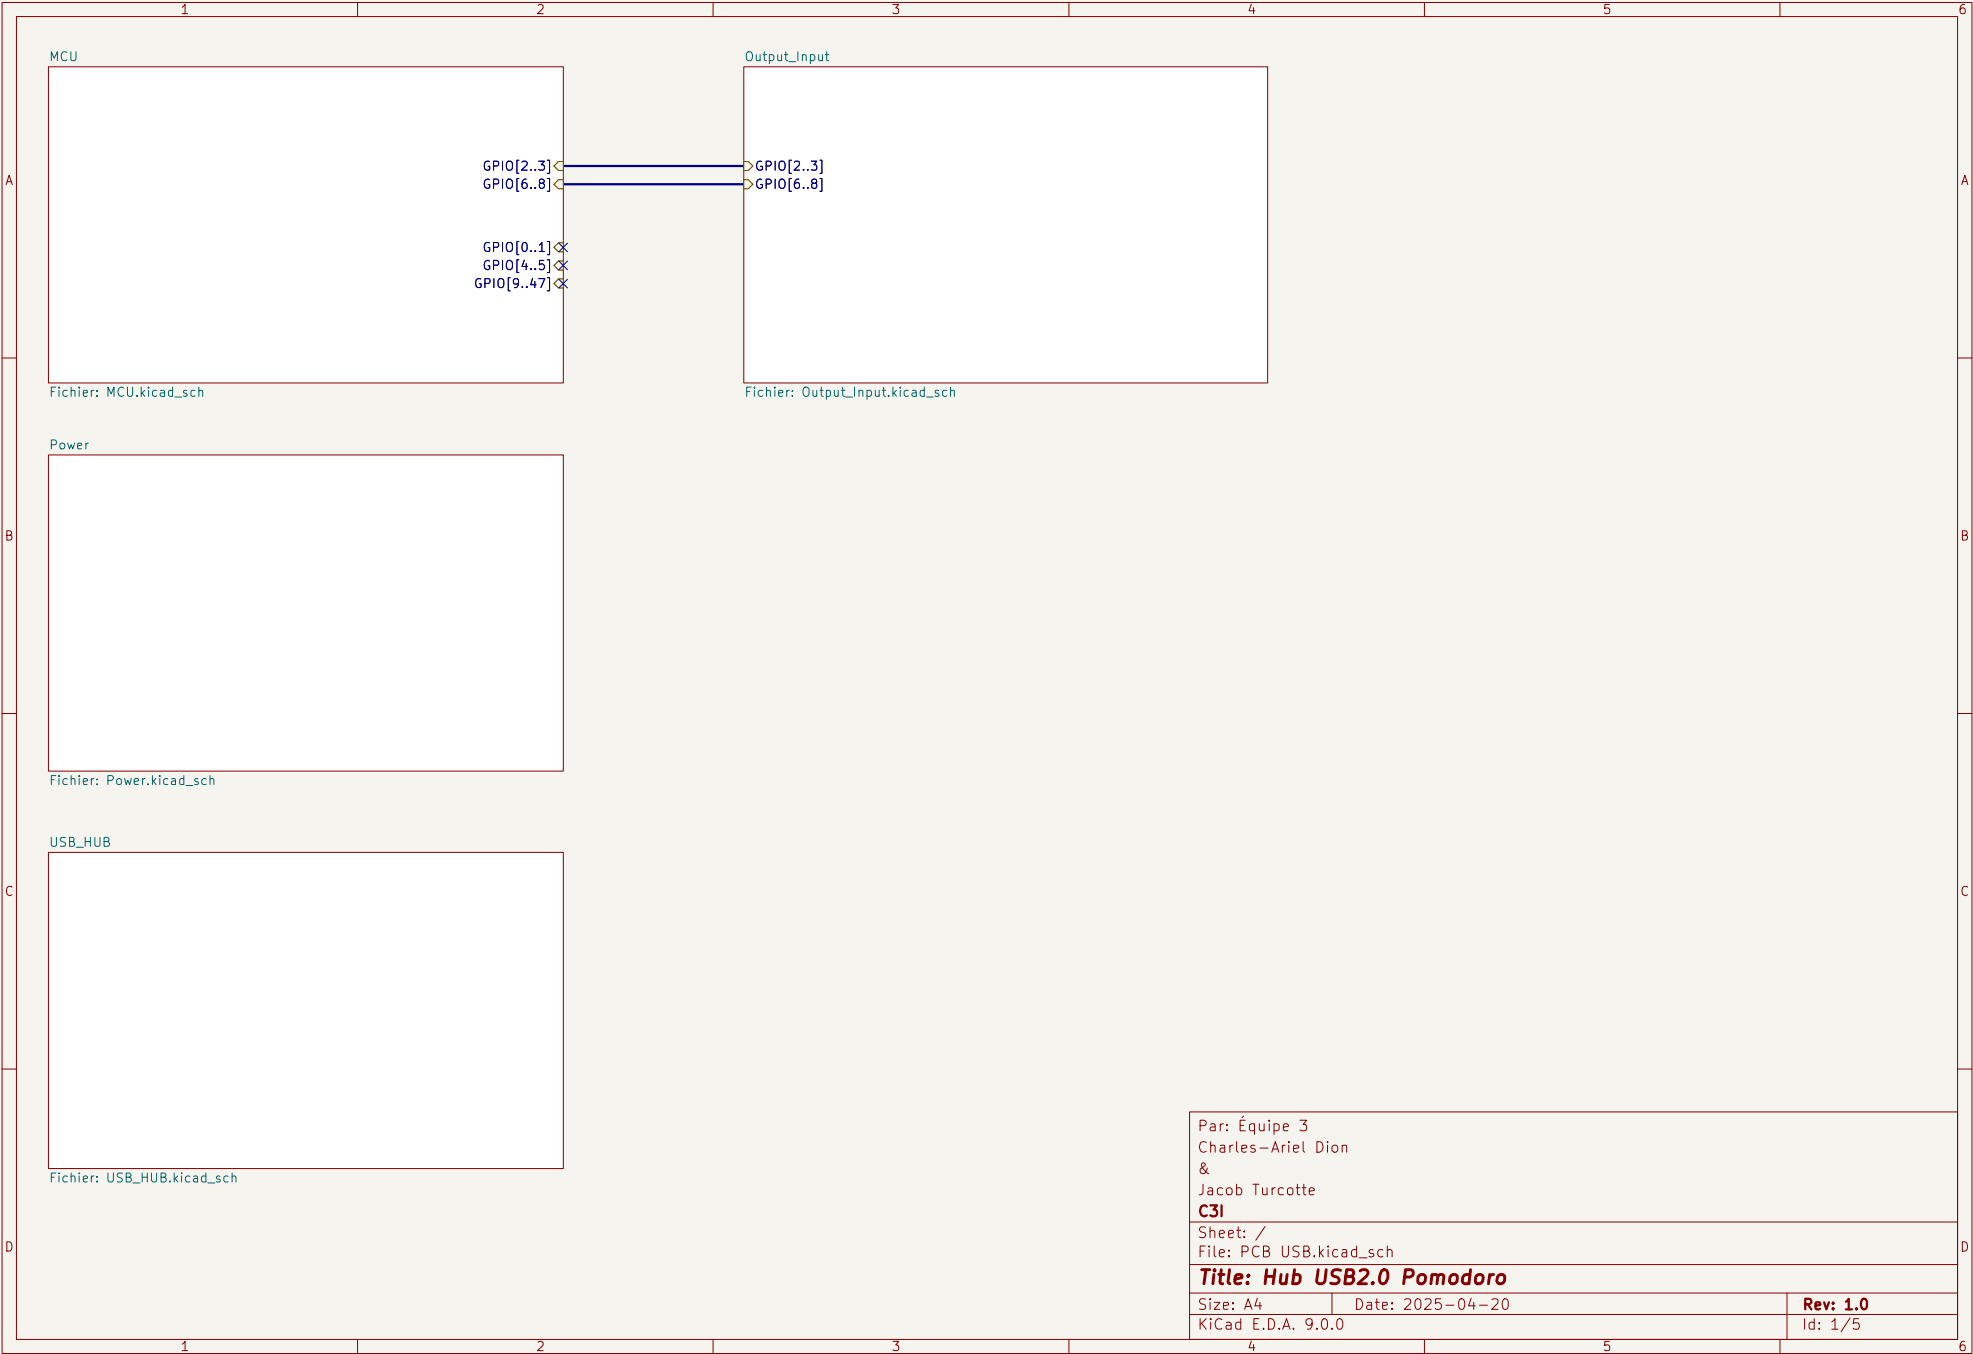

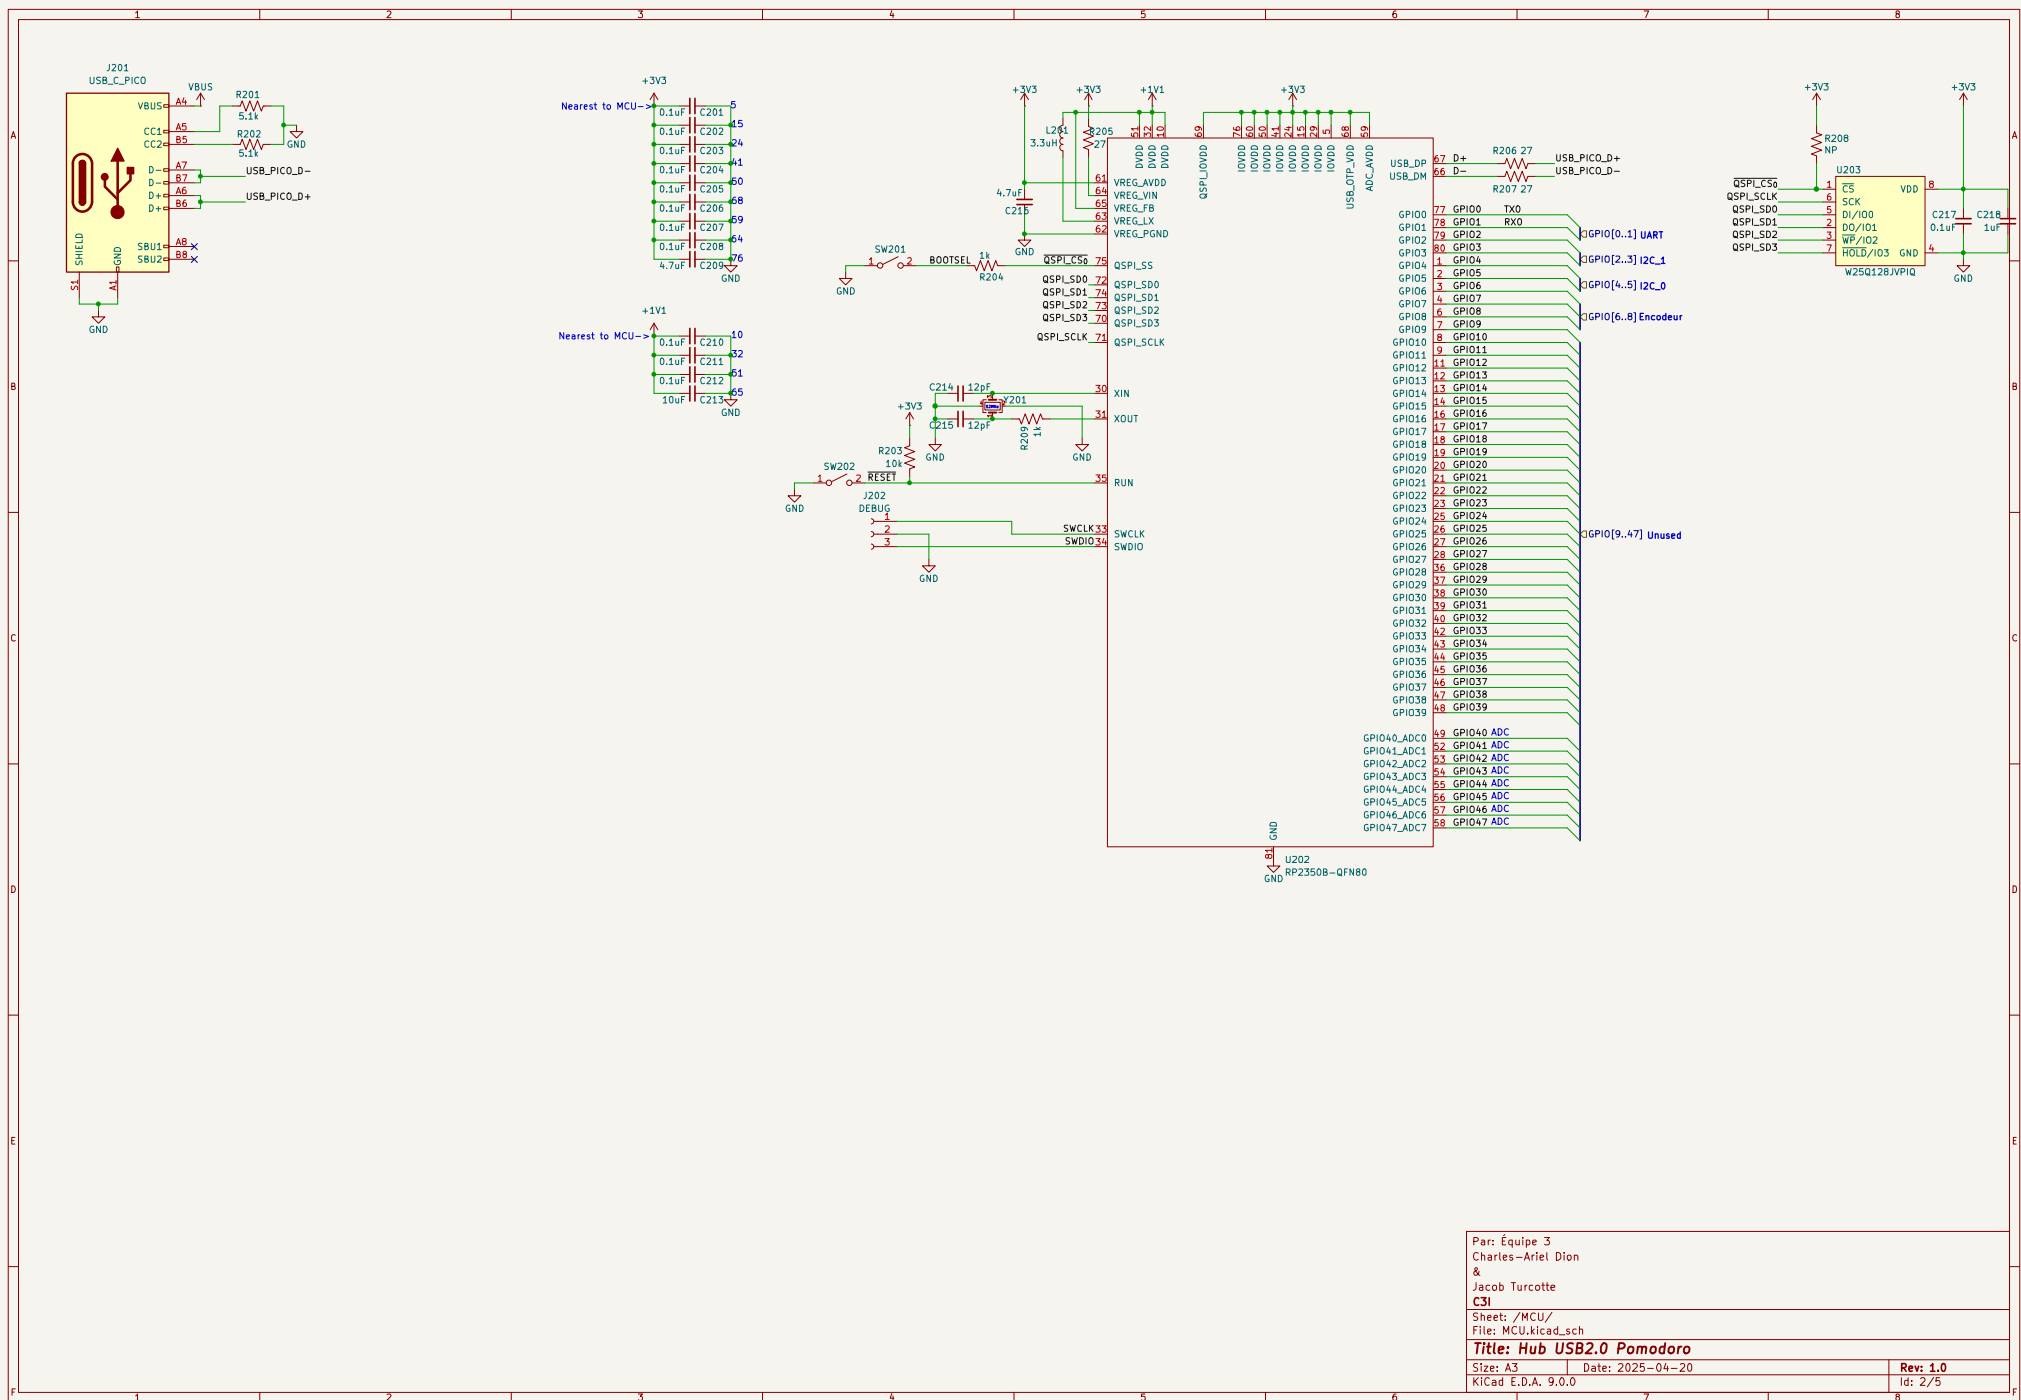

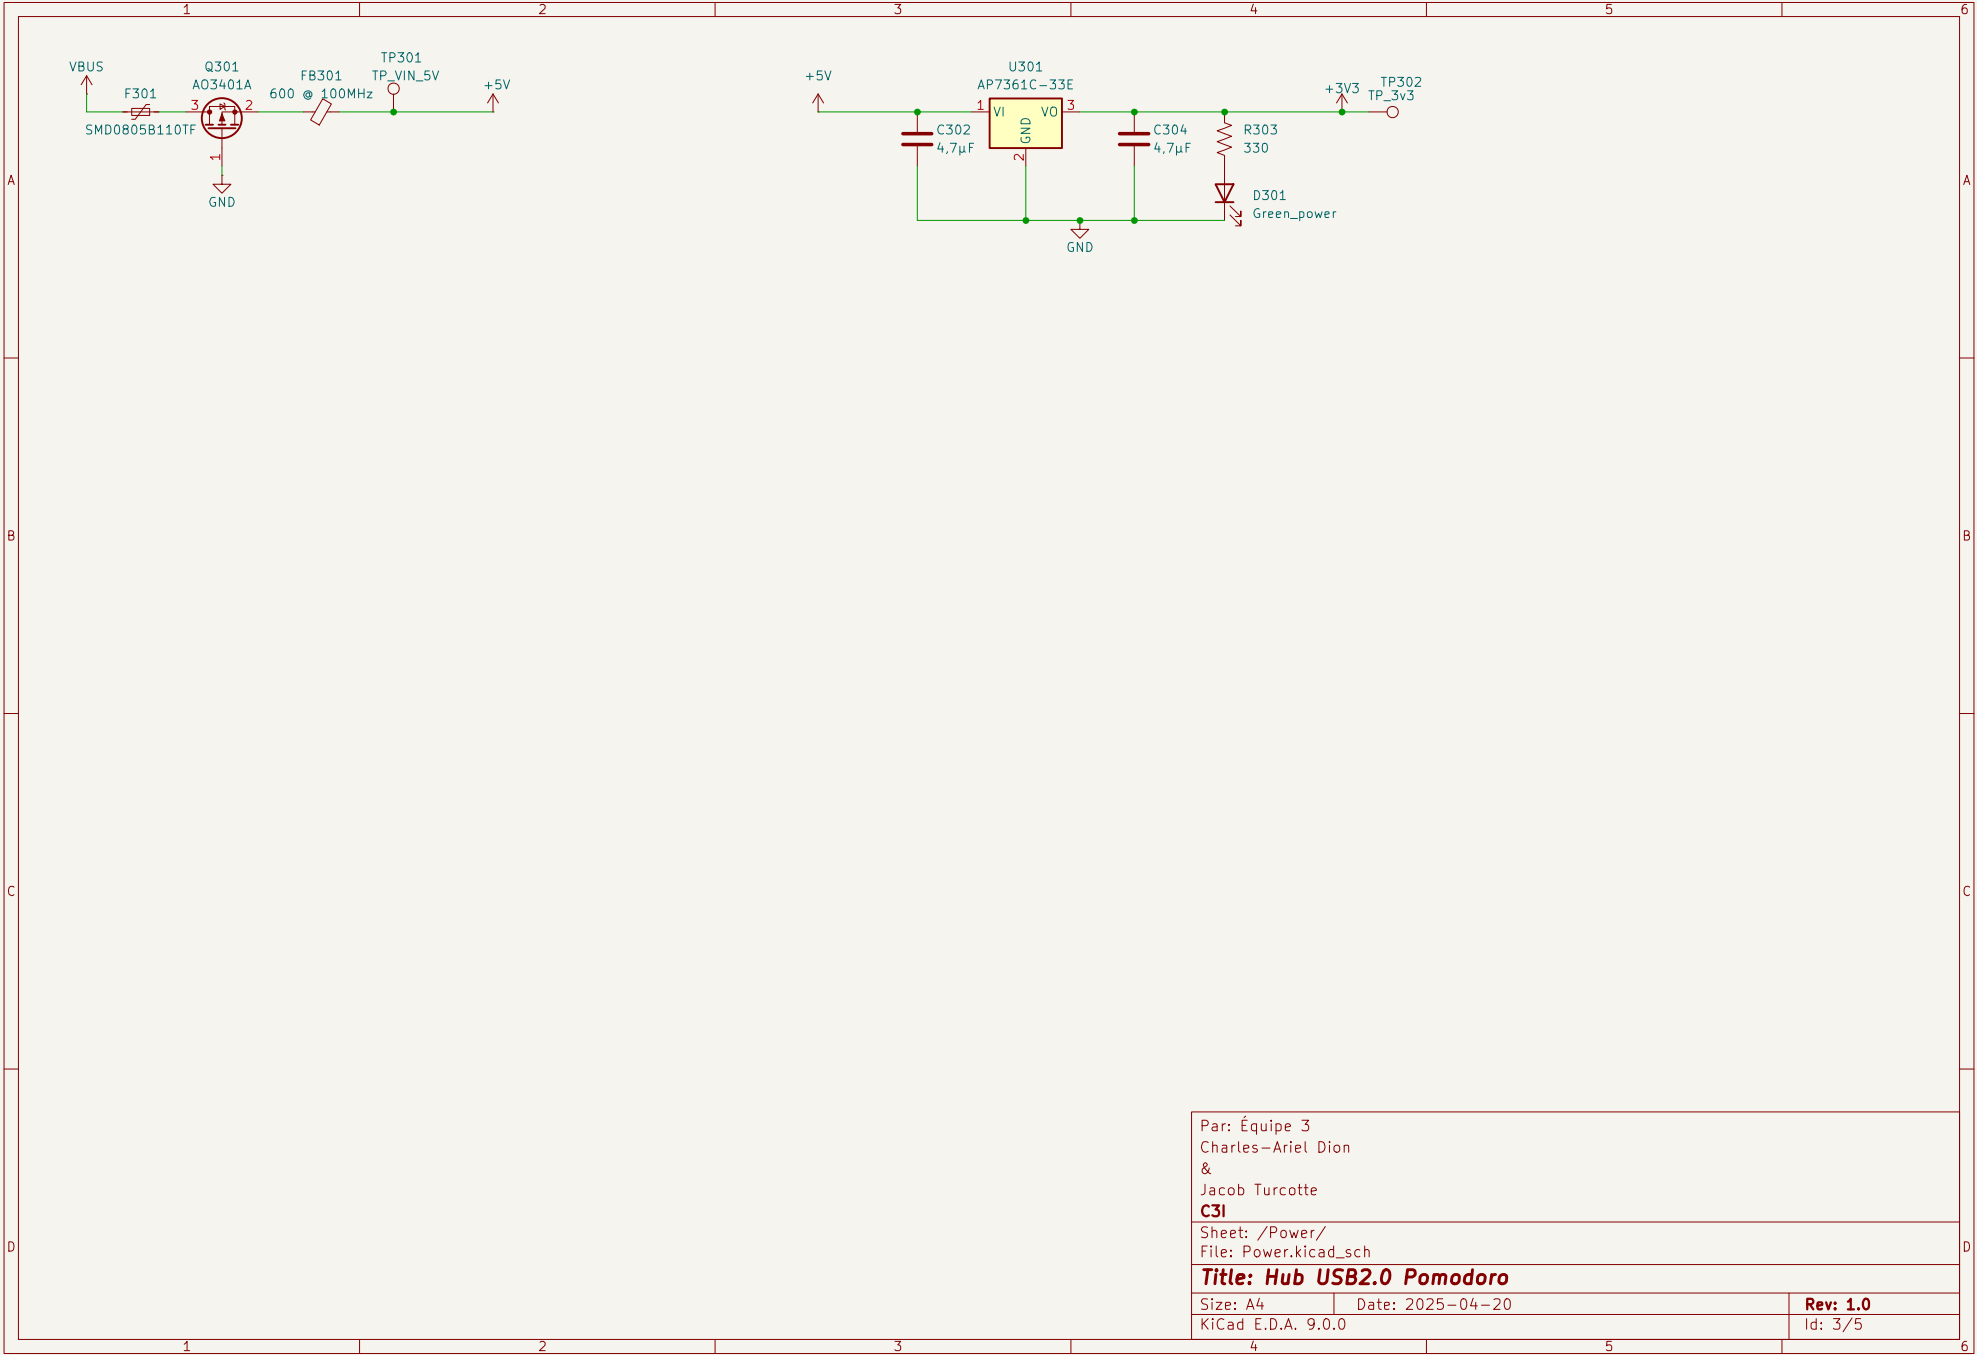




Par: Équipe 3 Charles-Ariel Dion & Jacob Turcotte C3I		
Sheet: /Power/ File: Power.kicad_sch		
Title: Hub USB2.0 Pomodoro		
Size: A4	Date: 2025-04-20	Rev: 1.0
KiCad E.D.A. 9.0.0		Id: 3/5

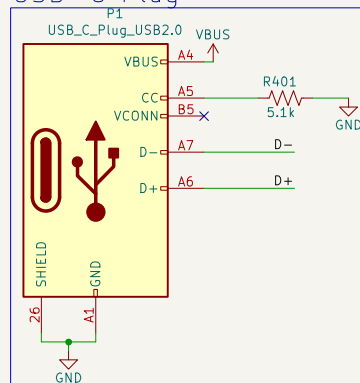


The schematic diagram illustrates the power section of the system. It features a DC-DC converter (U401) and a MOSFET driver (Q401).

DC-DC Converter (U401): This component is a switching regulator. Its input is connected to the +5V supply. The output is connected to the +3V3 supply. The converter is controlled by a pulse-width modulation (PWM) signal from the microcontroller (U101) through pin 104. The output of the converter is connected to the +3V3 supply through a diode (D+).

MOSFET Driver (Q401): This component is a MOSFET driver. Its gate is connected to the +5V supply through a resistor (F401). The drain is connected to the +5V supply through a resistor (FB401). The source is connected to the +3V3 supply. The MOSFET is controlled by a pulse-width modulation (PWM) signal from the microcontroller (U101) through pin 104.

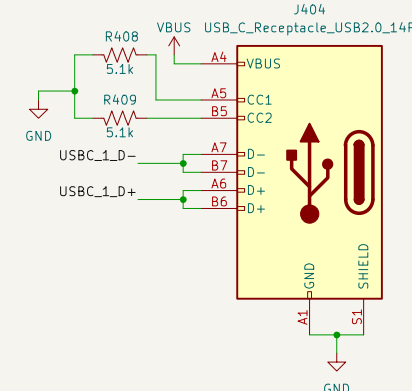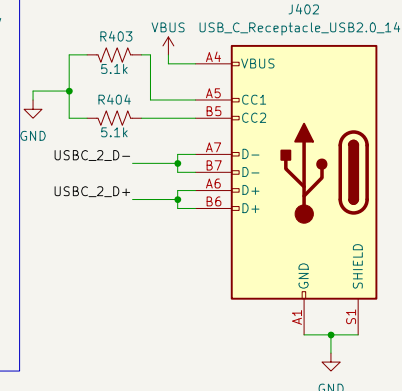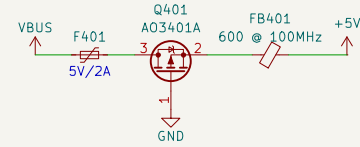


	H401 MountingHole
	H402 MountingHole
	H403 MountingHole
	H404 MountingHole
	H405 MountingHole
	H406 MountingHole
	H407 MountingHole

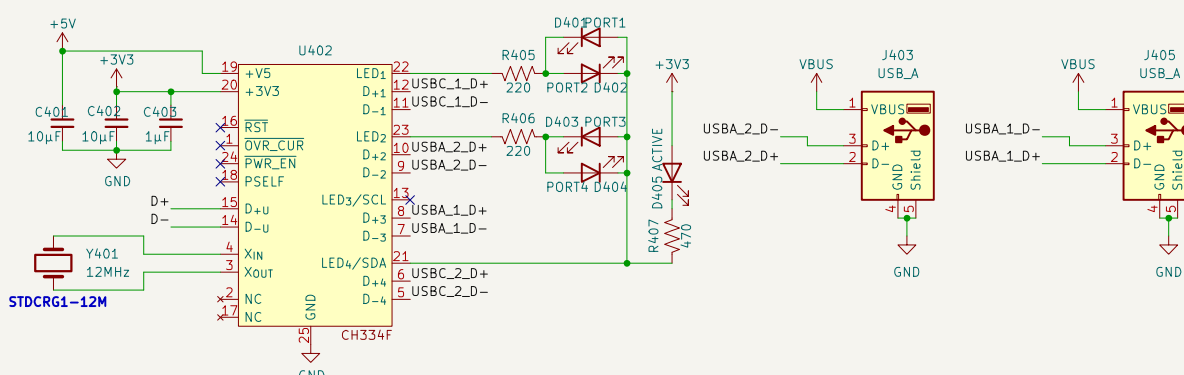

KiCad E.D.A. 9.0.0

Id: 4/5

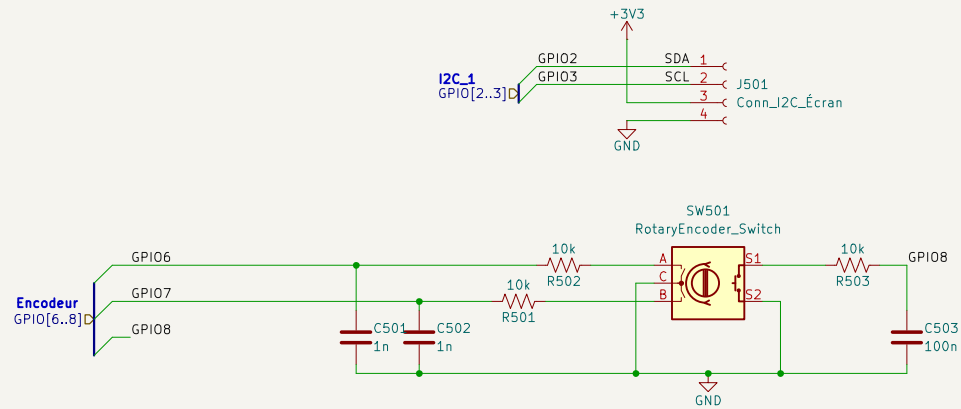

Par: Équipe 3 Charles-Ariel Dion & Jacob Turcotte C3I		
Sheet: /Output_Input/ File: Output_Input.kicad_sch		
Title: Hub USB2.0 Pomodoro		
Size: A4	Date: 2025-04-20	Rev: 1.0
KiCad E.D.A. 9.0.0		Id: 5/5