

A Modification of Nonlinear Theory with Equivalent Stiffness for Metal Wire Braid Reinforced Hose

Ma Pengsheng^a, Hu Muyuan^b, Zheng Bailin^{b,*}

^a*School Of Material Science And Engineering Tongji University, Shanghai, China*

^b*School Of Aerospace Engineering And Applied Mechanics, Tongji University, Shanghai, China*

Abstract

We conducted an experiment and put forward several modifications, based on the method proposed in Hachemis research of metal wire braid reinforced hose, in order to enhance the constitutive theory, which is discovered not keeping up with the experimental results when it shows far more non-linear mechanical behavior than the theory predict. We introduced a modifying matrix, from composites mechanics, to detach inter-wire contacts from wire elongation, seldom considered before. We also proposed a hypothesis opposite to Hachemis: the hoses braid angle decreased linearly, applied displacement load with constant loading rate, rather than locked at a certain degree. So that we introduce a modification coefficient k , accelerating the decrease of braid angle to match the linearity in force-displacement curve. Lateral contact is considered to be the factor of excessively decreased braid angle when the calculated curve perfectly meet the experimental one, with suitable k .

Keywords: braid, PTFE, hose, Elastic-Modulus, Model

1. Introduction

High pressure flexible hoses, reinforced by braided metallic or fabric wires, are utilized in a variety of engineering applications, to transmit fluid in aircrafts, automobiles and typical hydraulic systems. These hoses are practically employed in more severe conditions, where high pressure loads, commonly of the order of tens of MPa, are not static but periodically or randomly fluctuating, and furthermore thermal loading, vibration and large deformation are coupled with the pressure[1].

The construction of such a hose is illustrated in Fig.1. It comprises an inner tube core, mostly PTFE, covered with layers of high tensile steel wires wounding around it, such that the PTFE resists leakage and chemical corrosion while the steel wires layers act as the principle load-carrying elements. These reinforcement layers can be classified into helix-wounds and braids.

Braided structures can be categorized as diamond (1×1 repeat), regular (2×2 repeat) and hercules (3×3 repeat) based on the weave pattern [1] and the regular braids are most widely produced for high pressure flexible hose on circular braiding machines. Regular braids are also known as biaxial braids, consisting of two sets of braider strands, which are aligned in the bias angle to the axis, namely the braid angle, which play a pivot part in defining the performance of the hose under pressure.[1]

The helix-wound layers are wounded in pairs, one layer of each pair being wound left hand and the other right hand in order to achieve a torque balanced construction (i.e. minimal




Figure 1: Hose Structure

twist on pressurization)[1]. There are no intermediate layers of plastic and wires in the same layer are touching in order for maximum packing density.

In conventional braider, spindle carriers rotate along a circular track. Half of the carriers travel in clockwise direction, with the others in the reverse direction, similar to maypole arrangement (see Figure 1).As a result, the two sets of spindles interlace with each other at a bias angle to the tube axis, namely the braid angle, which play a pivot part in defining the performance of the hose under pressure.[1] The tube in Figure 1 is designed a hybrid structure with both the helix-wound reinforcement and the braid reinforcement, to have sufficient structural safety against extremely high pressure. They may be independently used in middle-high pressure hose. Braided fiber yarns, especially Kevlar [1], has been used instead of metallic wires, for its light weight. Effects have been made to model and characterize the mechanical and structural elements of the three reinforcement methods respectively.

2. Experimental Works

References

- [1] Rawal, A., Sibal, A., Saraswat, H., Dec. 2015. Tensile behaviour of regular triaxial braided structures. *Mechanics of Materials* 91, 277–289.

*I am corresponding author

Email addresses: charlie.yaha@gmail.com (Hu Muyuan), author.three@mail.com (Zheng Bailin)

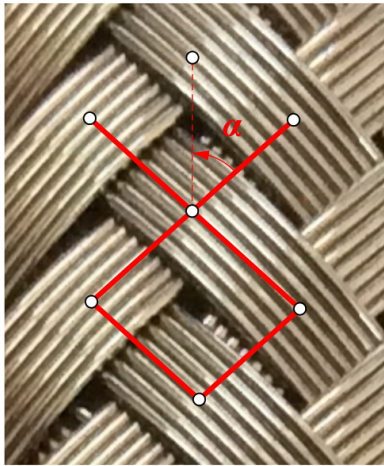


Figure 2: just have test