CS 305 Computer Networks

Chapter 3 Transport Layer (2)

Jin Zhang
Department of Computer Science and Engineering
Southern University of Science and Technology

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

Performance of rdt3.0

- rdt3.0 is correct, but performance is bad
- e.g.: link rate R=1 Gbps, prop. delay T_{pd}=15 ms, packet length L=8000 bit

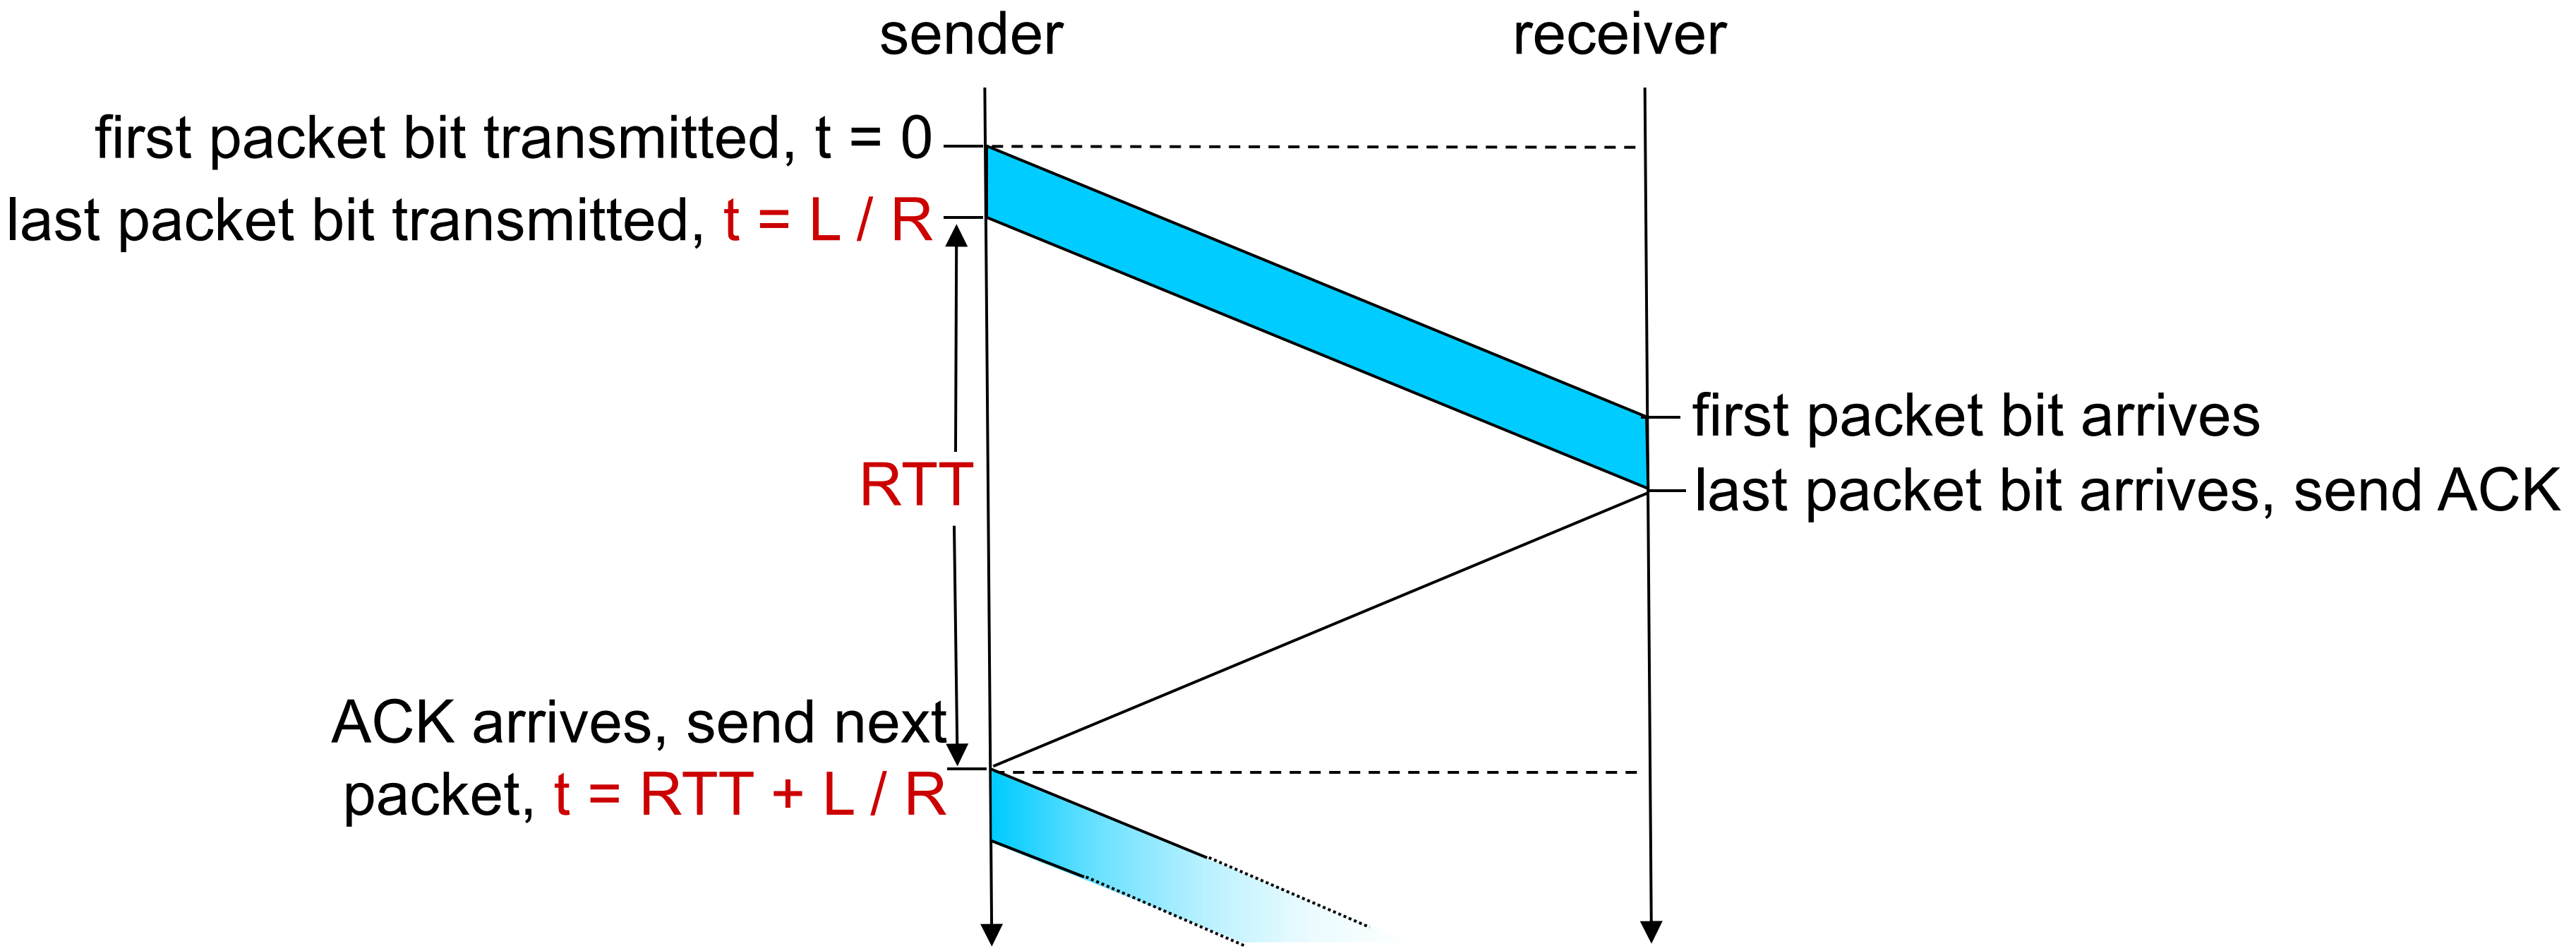

- Calculate U_{sender}: *utilization* – fraction of time sender busy sending

Performance of rdt3.0

- link rate R=1 Gbps, prop. delay T_{pd}=15 ms, packet length L=8000 bit

$$D_{trans} = t = \frac{L}{R} = \frac{8000 \text{ bits}}{10^9 \text{ bits/sec}} = 8 \text{ microsecs}$$

  - U_{sender}: *utilization* – fraction of time sender busy sending

$$U_{sender} = \frac{L / R}{RTT + L / R} = \frac{.008}{30.008} = 0.00027$$

  - RTT=30 msec, 1KB pkt every 30 msec: 33kB/sec throughput over 1 Gbps link
- network protocol limits use of physical resources!

Pipelined protocols

pipelining: sender allows multiple, "in-flight", yet-to-be-acknowledged pkts

- range of sequence numbers must be increased
- buffering at sender and/or receiver

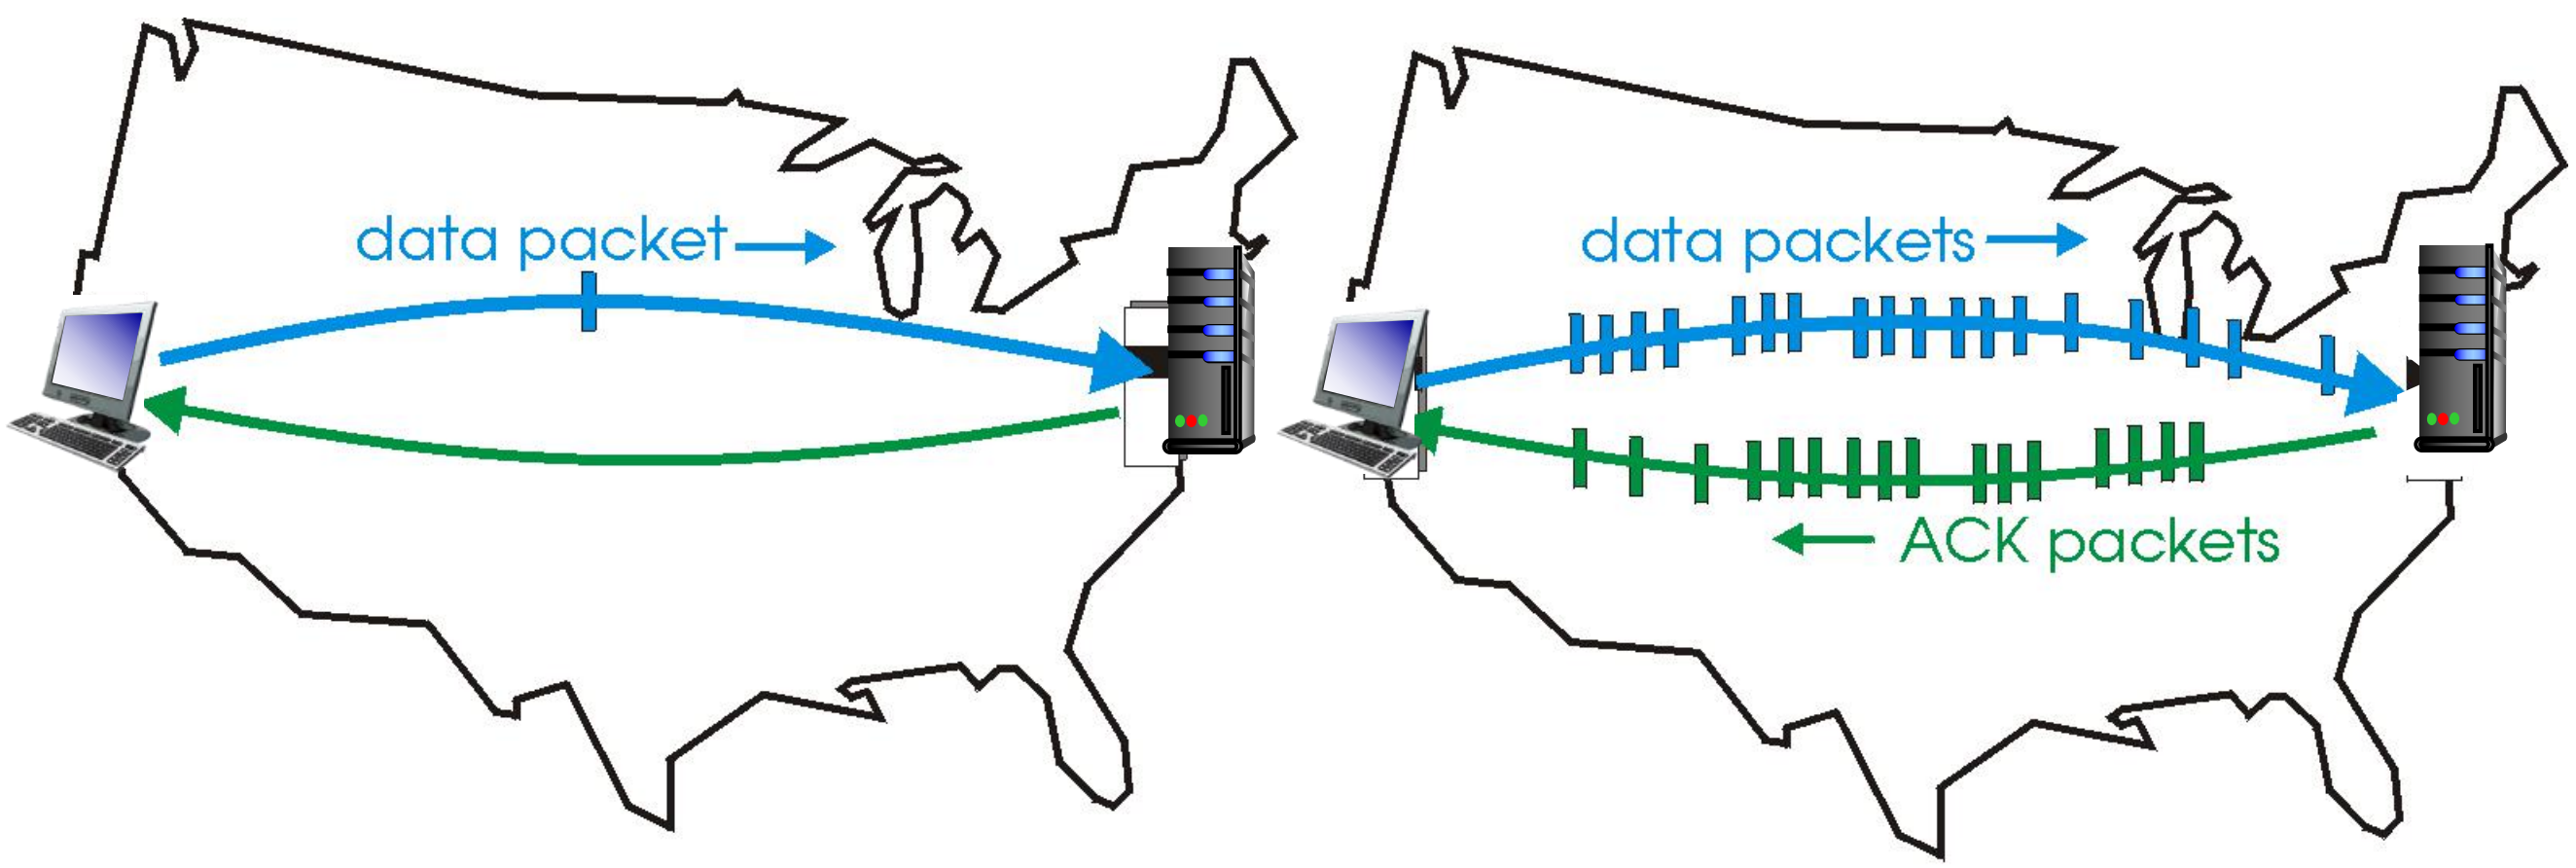

(a) a stop-and-wait protocol in operation (b) a pipelined protocol in operation

- two generic forms of pipelined protocols: *go-Back-N, selective repeat*

Pipelining: increased utilization

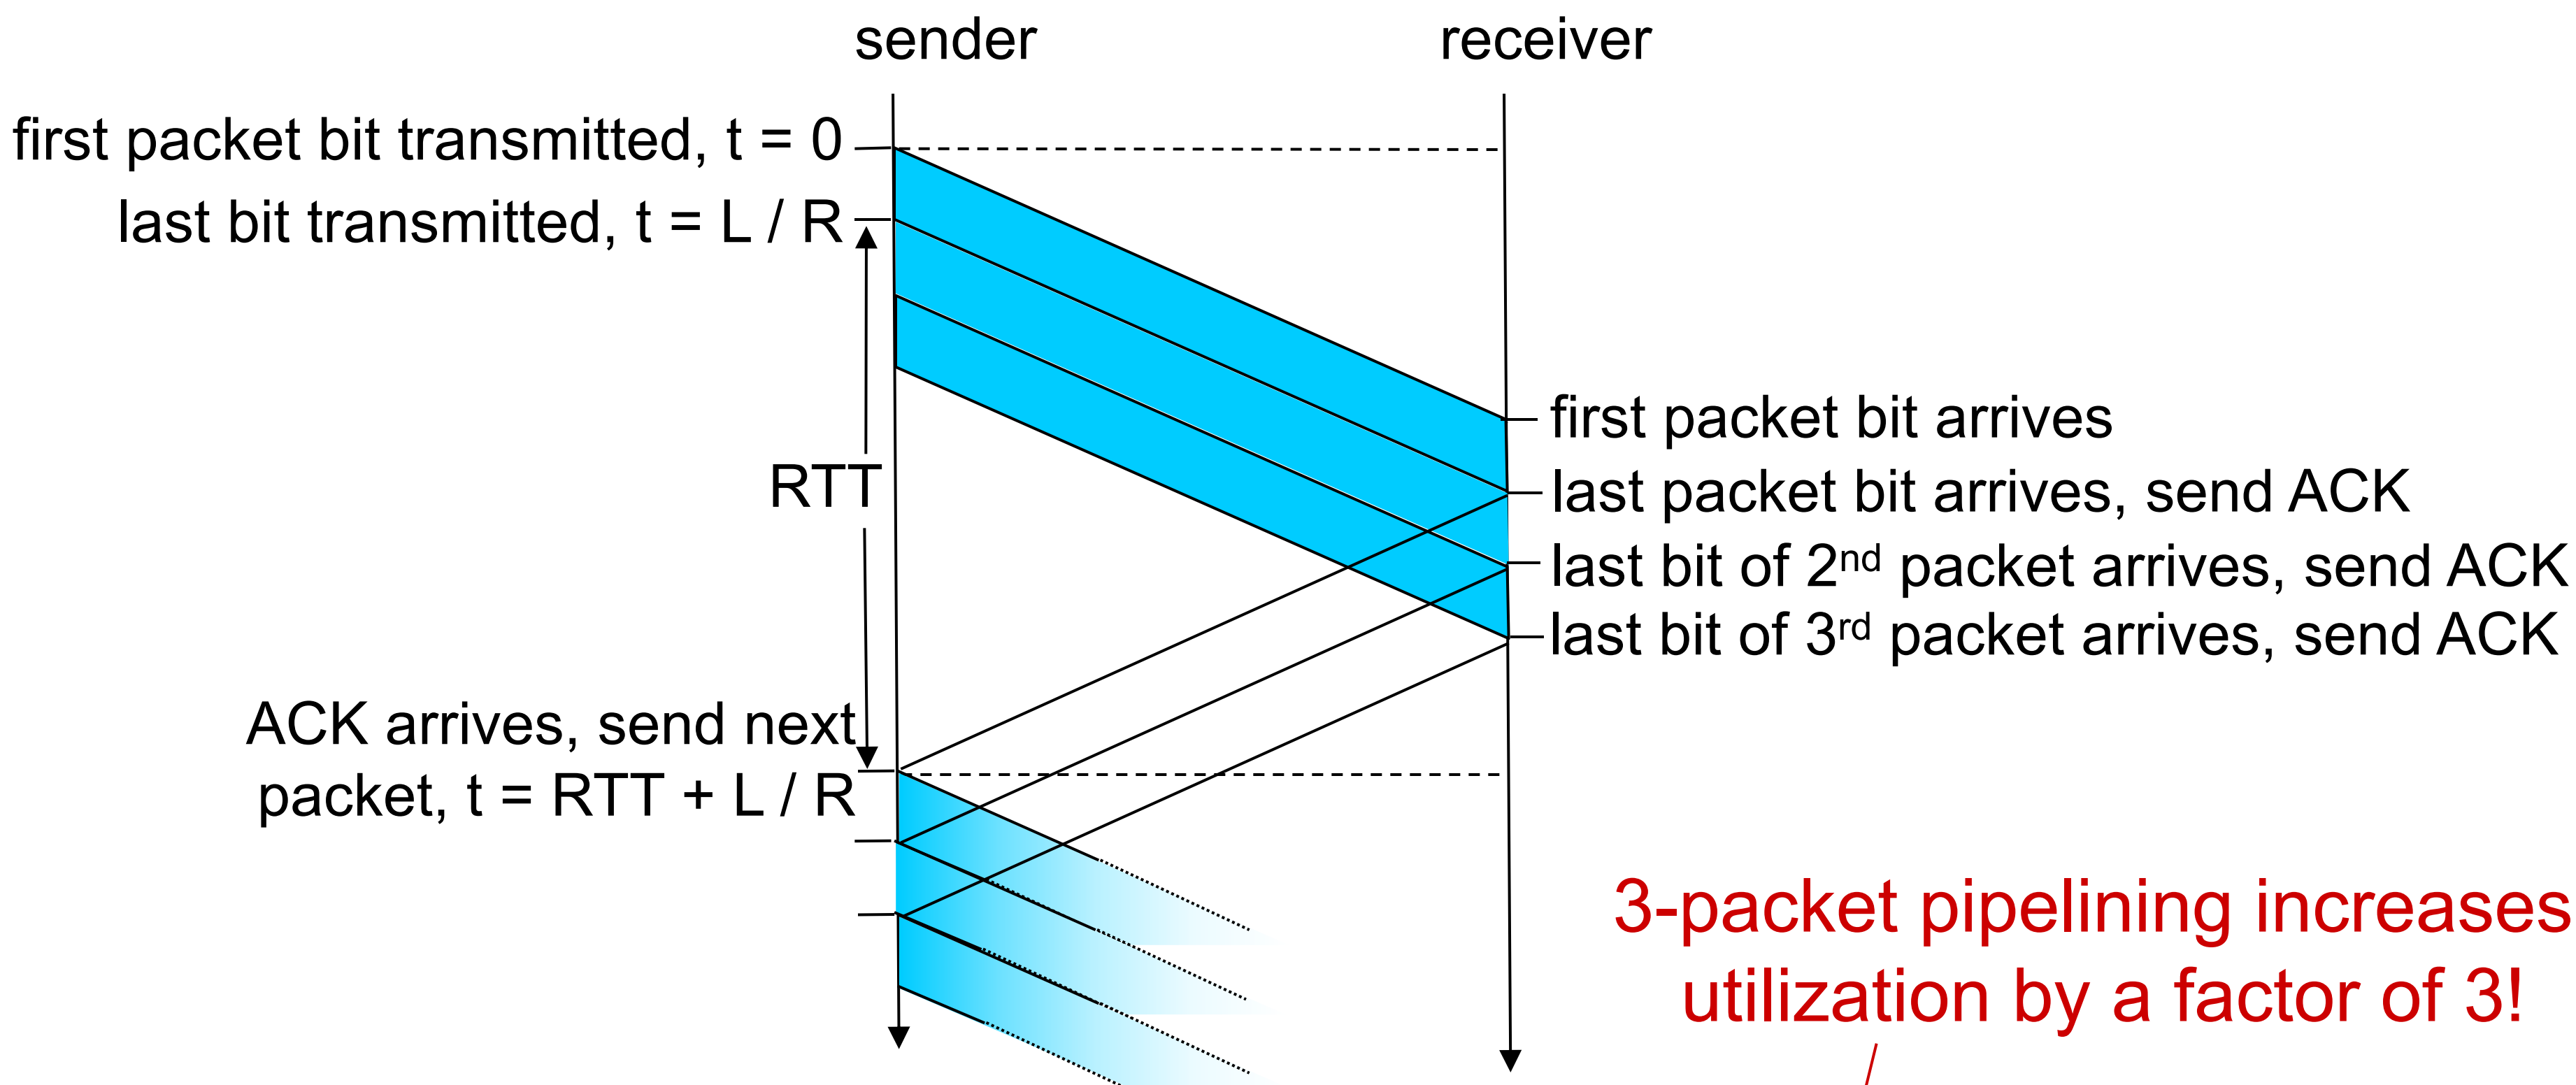

3-packet pipelining increases utilization by a factor of 3!

$$U_{sender} = \frac{3L / R}{RTT + L / R} = \frac{.0024}{30.008} = 0.00081$$

Go-Back-N overview

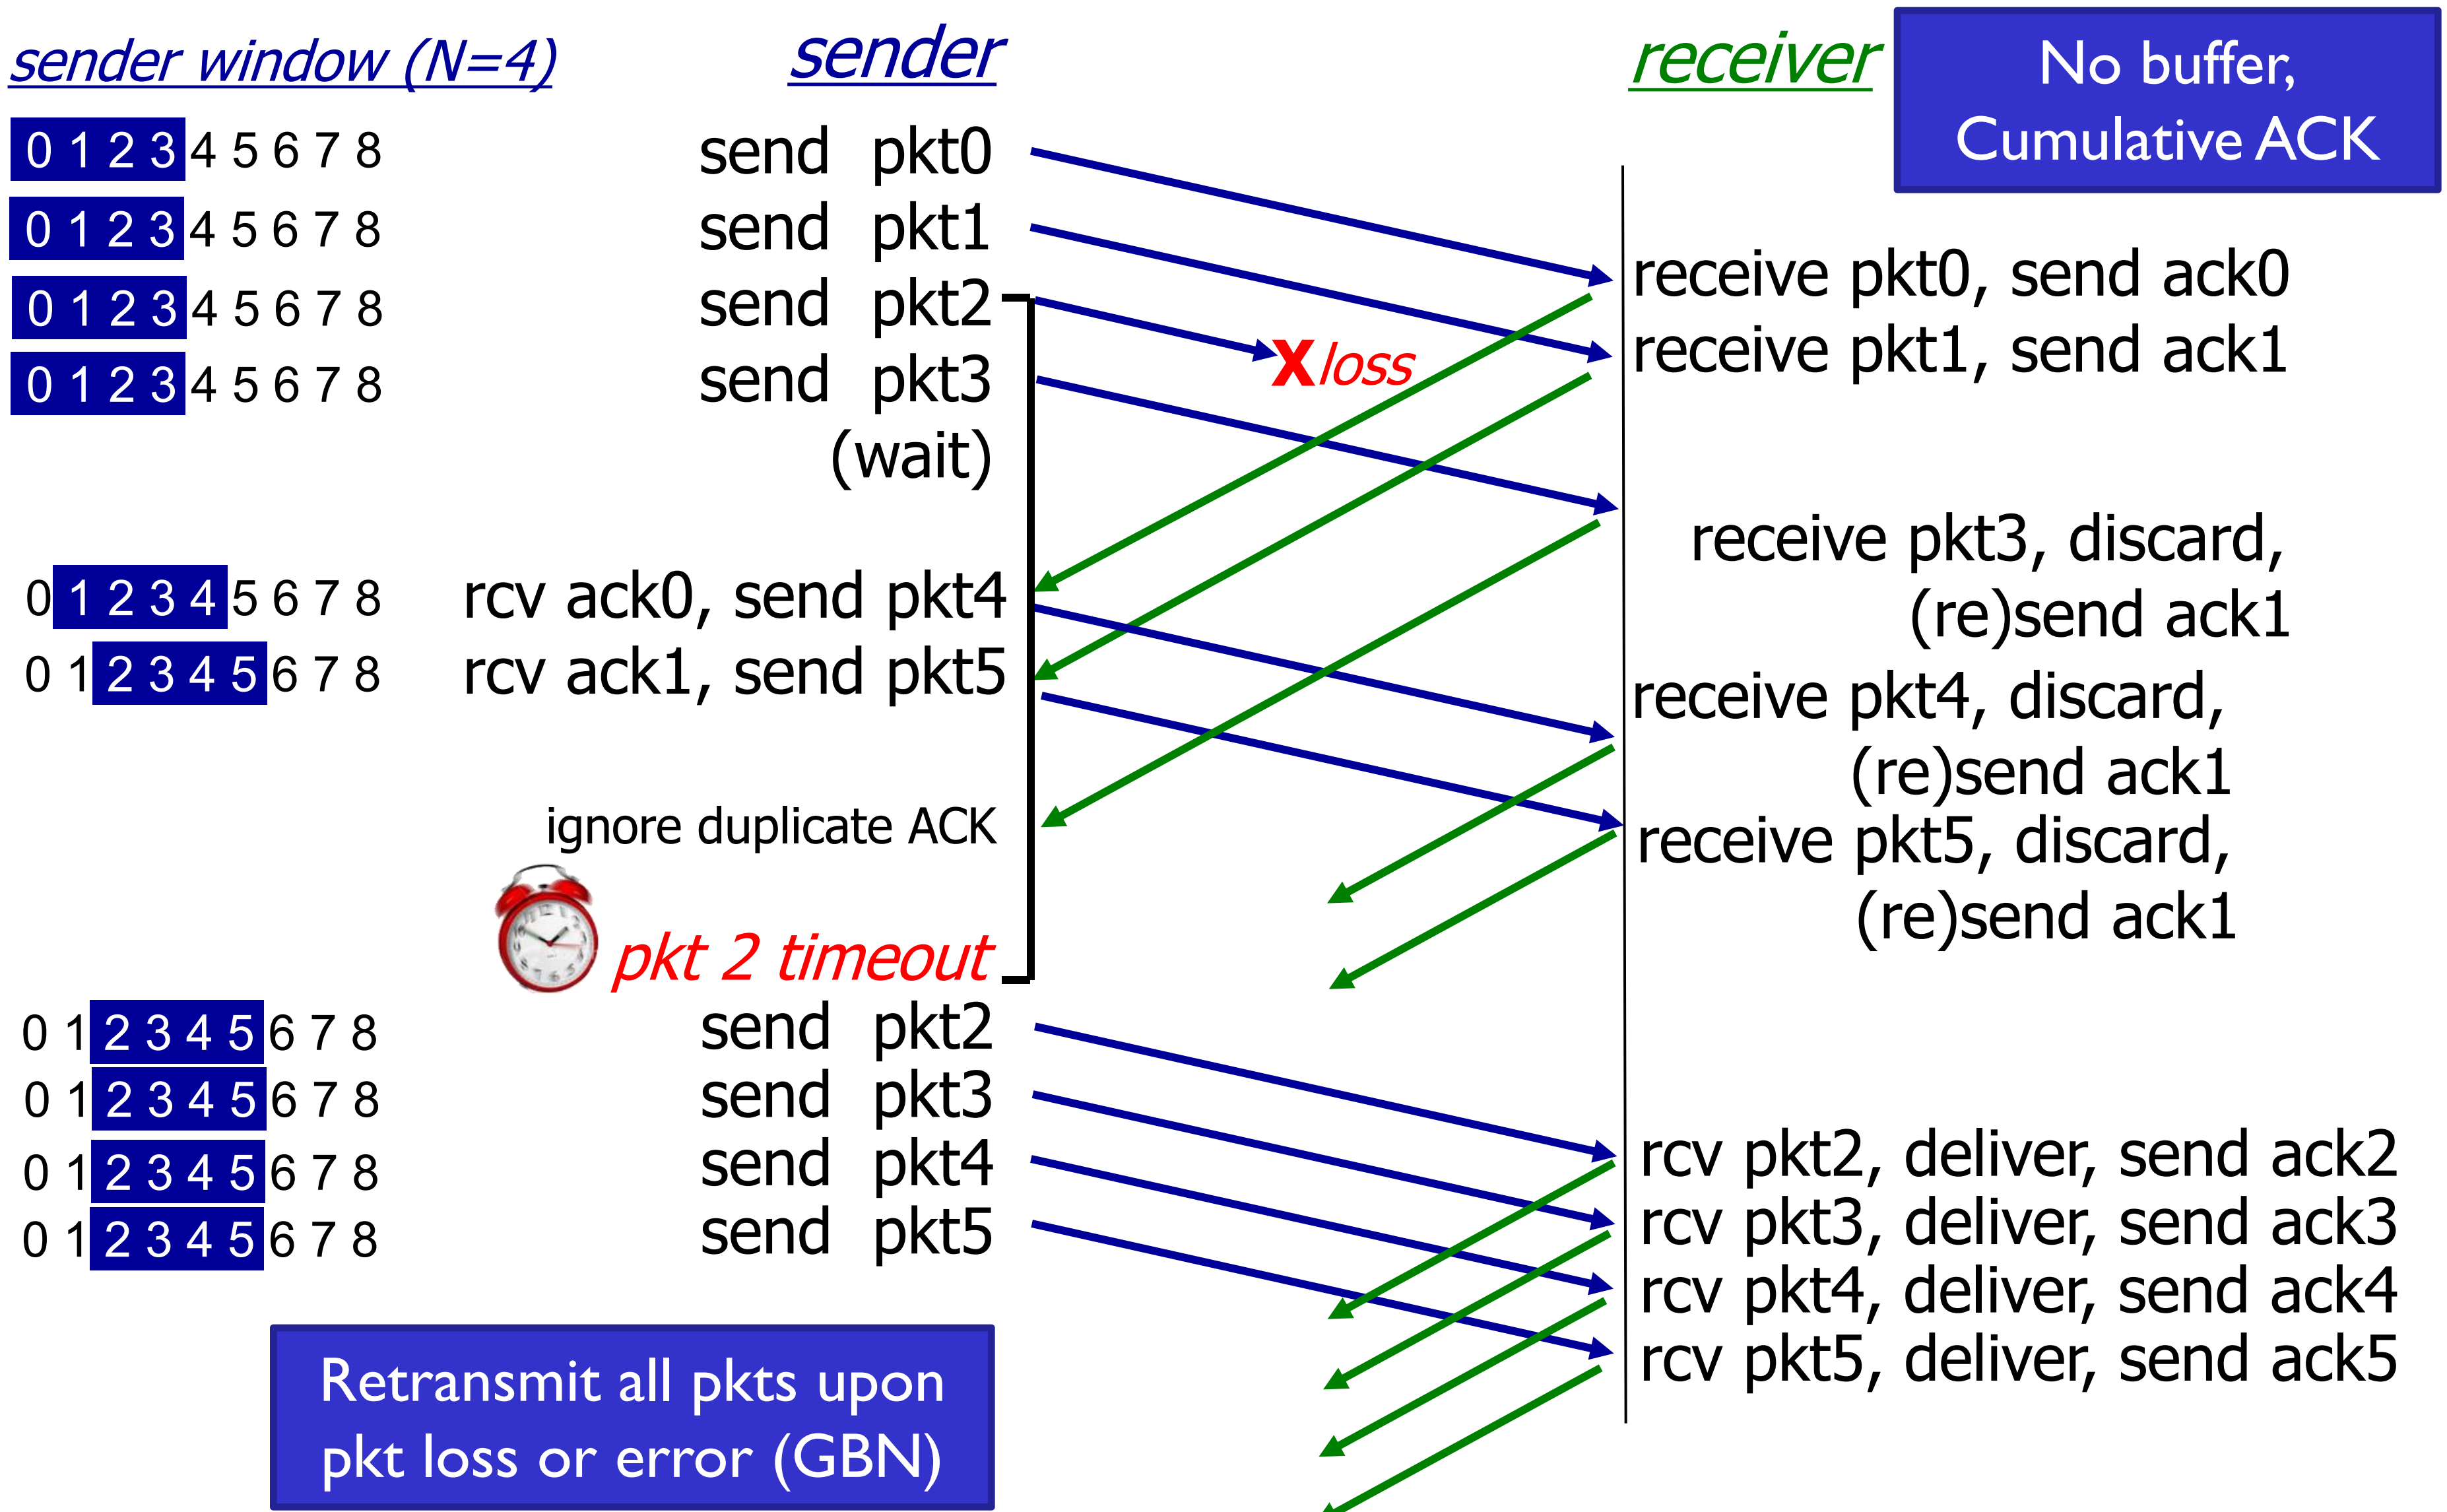

Go-Back-N: sender

- k-bit seq # in pkt header (not 0 or 1)
- At most N pkts in flight: window size = N, (N consecutive unacked pkts allowed

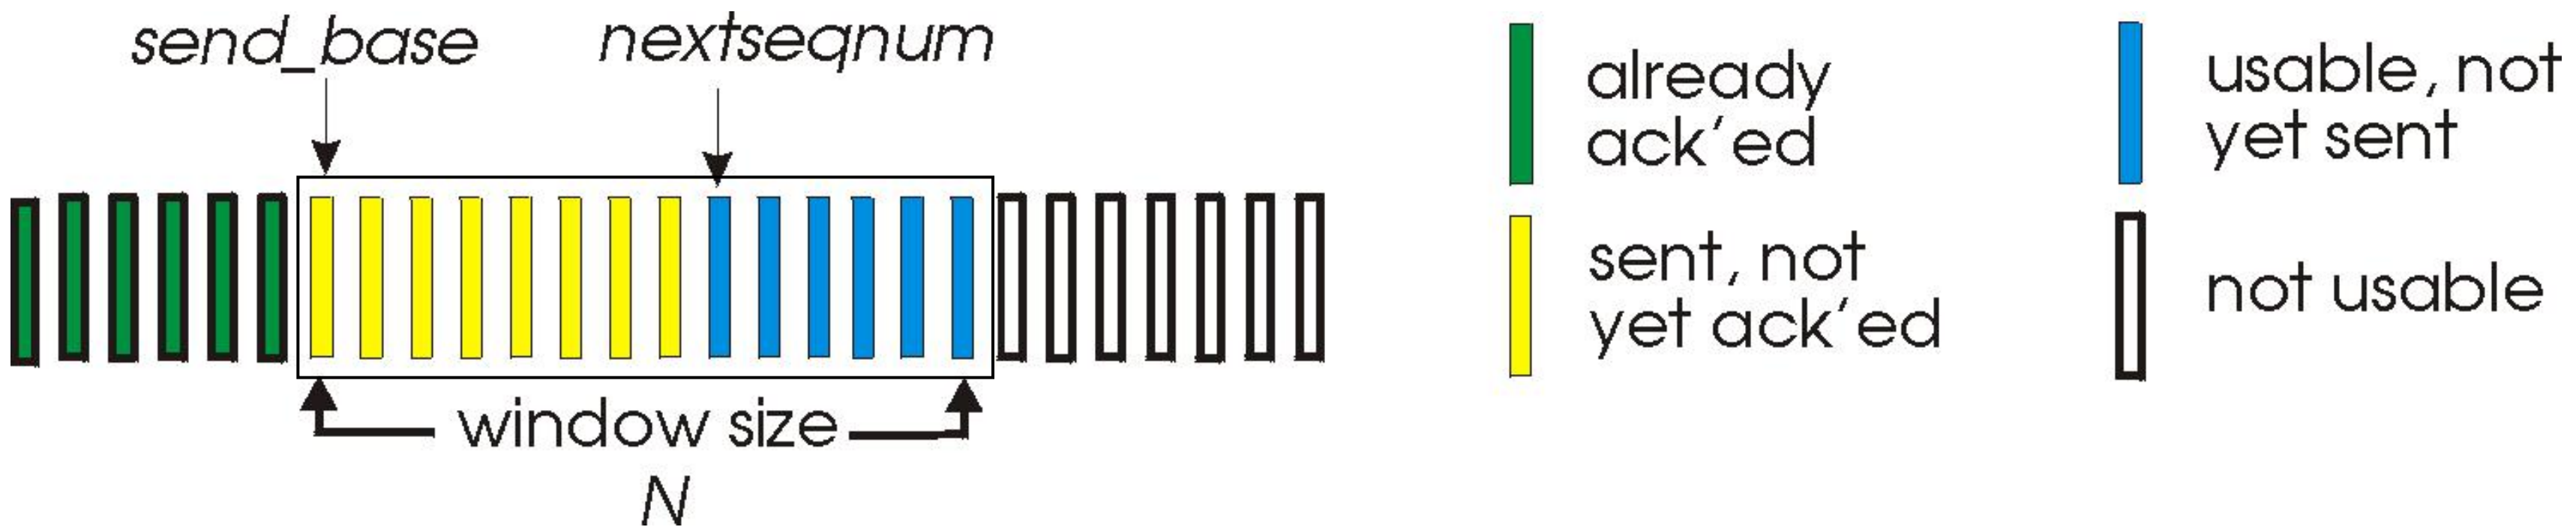

- ACK(n) means all pkts before pkt n are correctly received - *"cumulative ACK"*
  - Sender may receive duplicate ACKs (see receiver)
- timer for oldest in-flight pkt
- *timeout(n)*: retransmit packet n and all higher seq # pkts in window

GBN: sender extended FSM

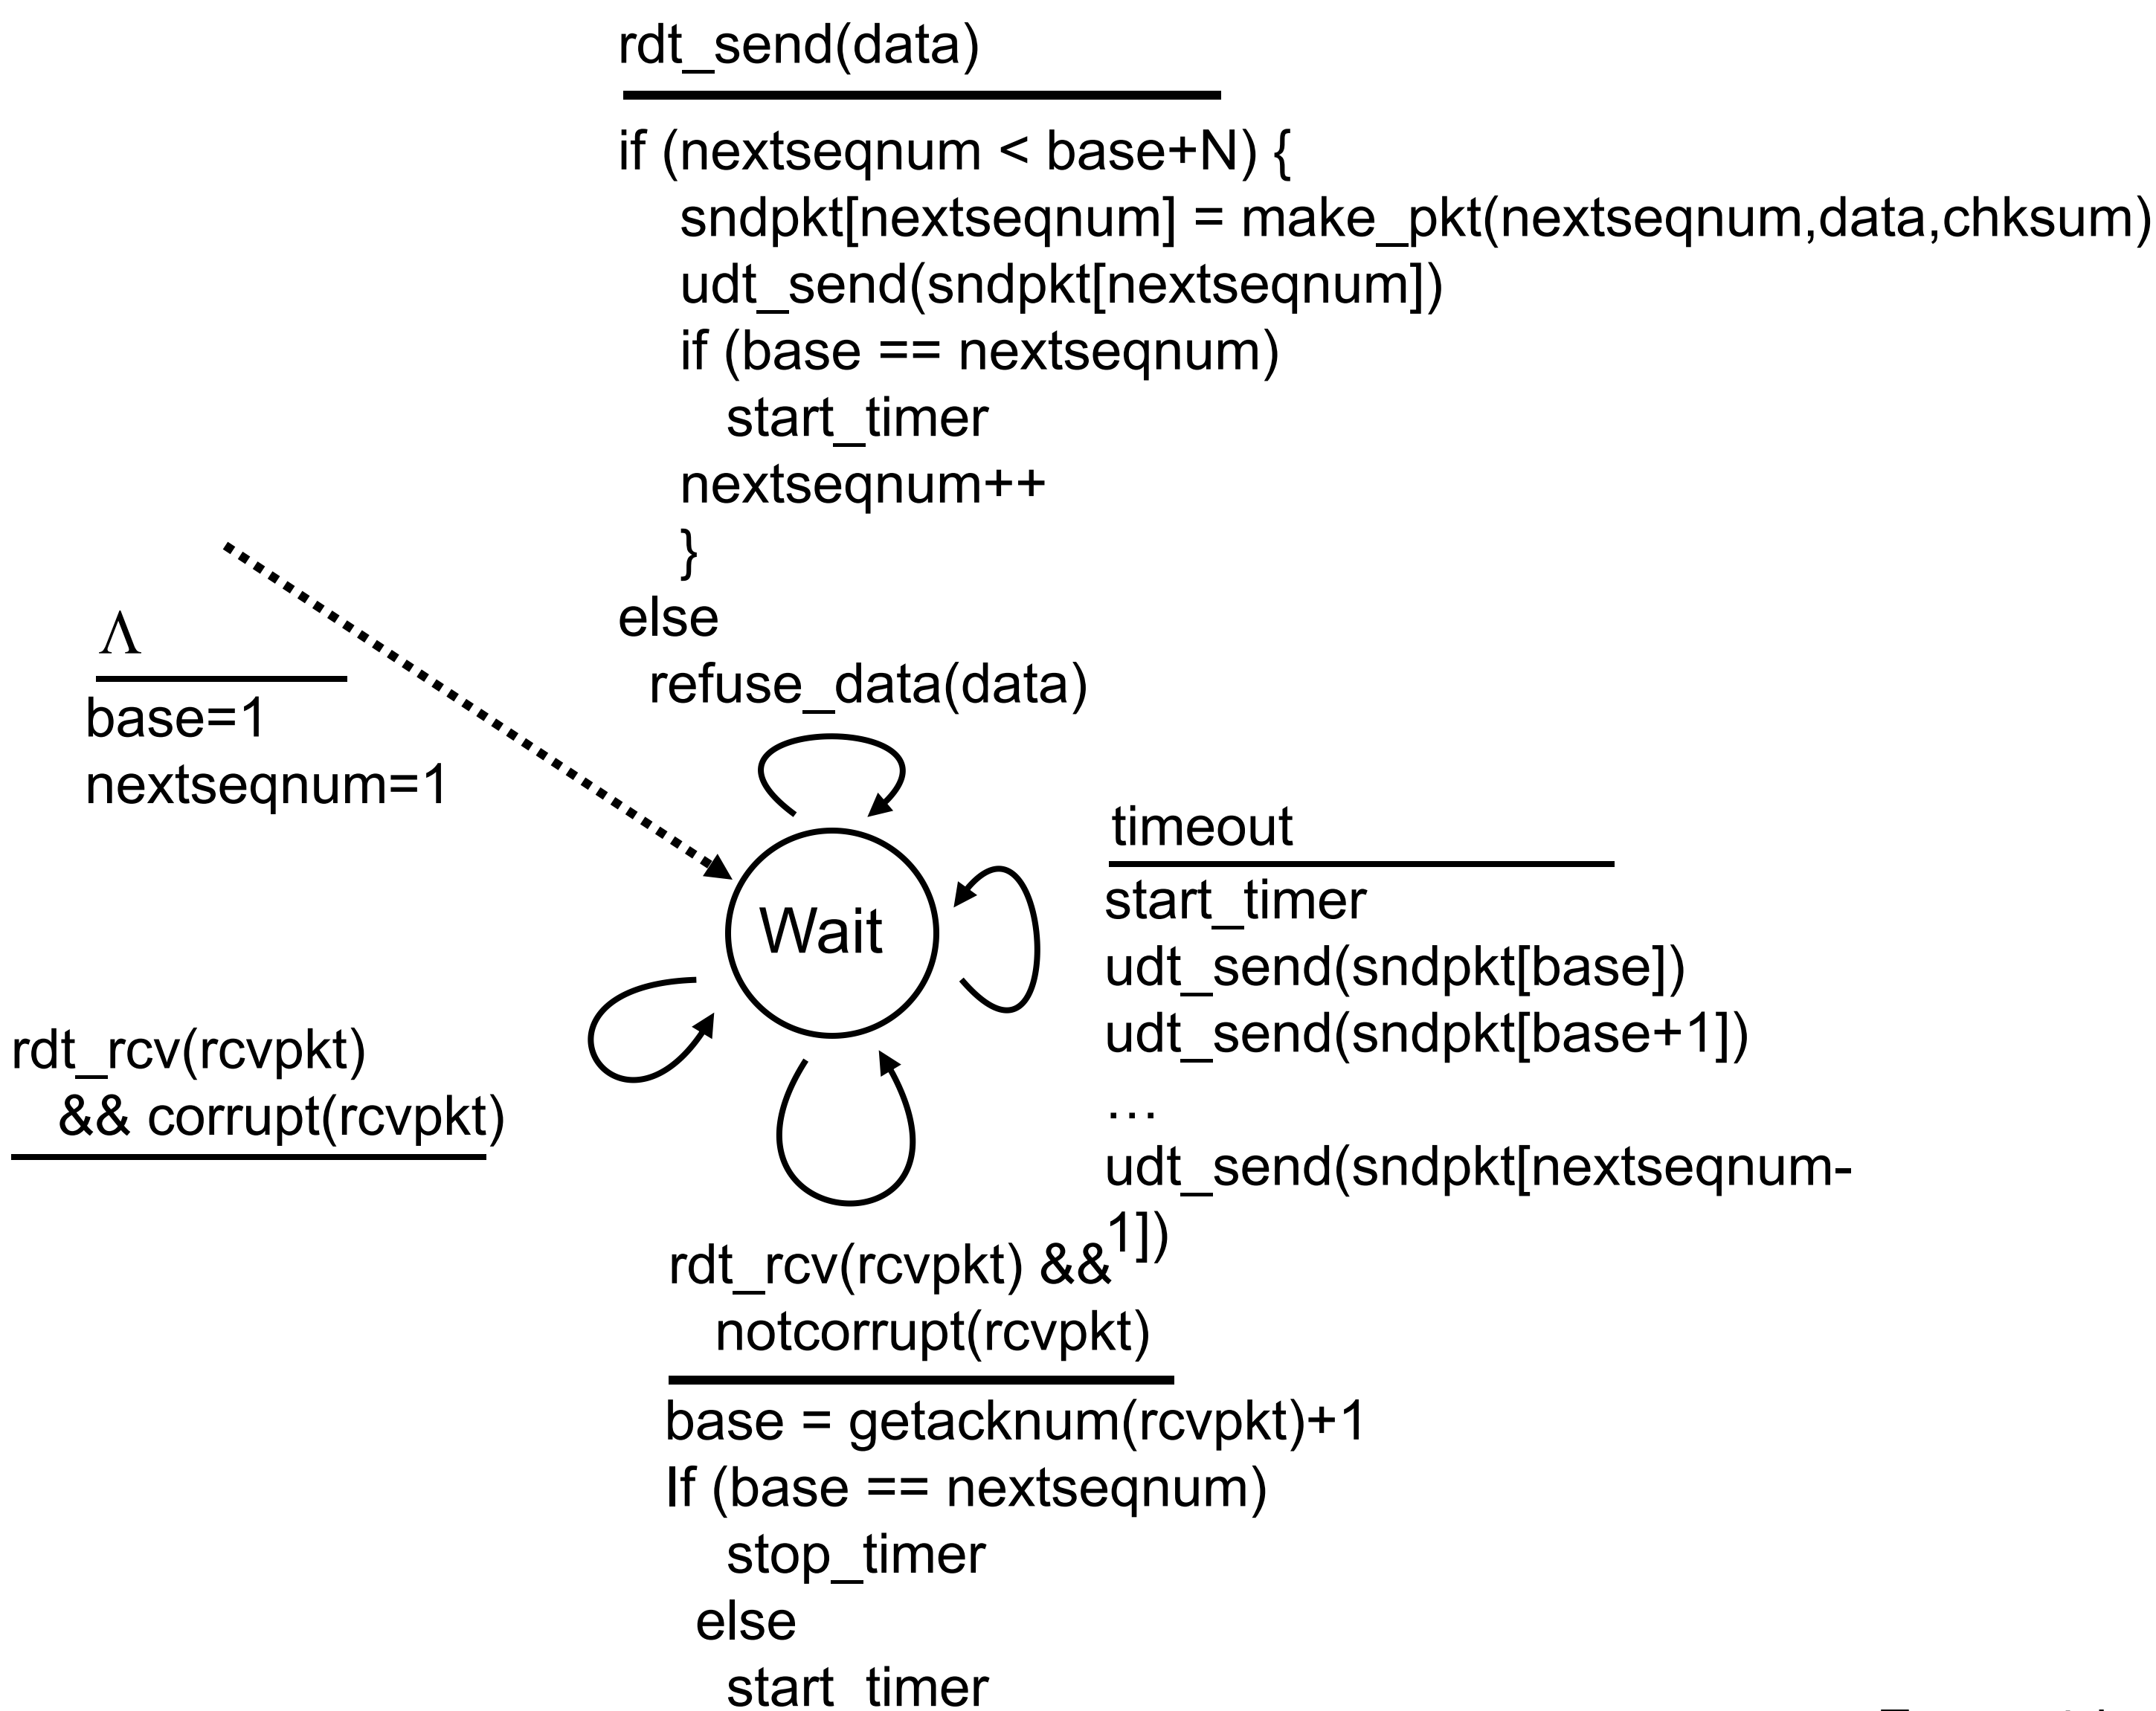

GBN: receiver extended FSM

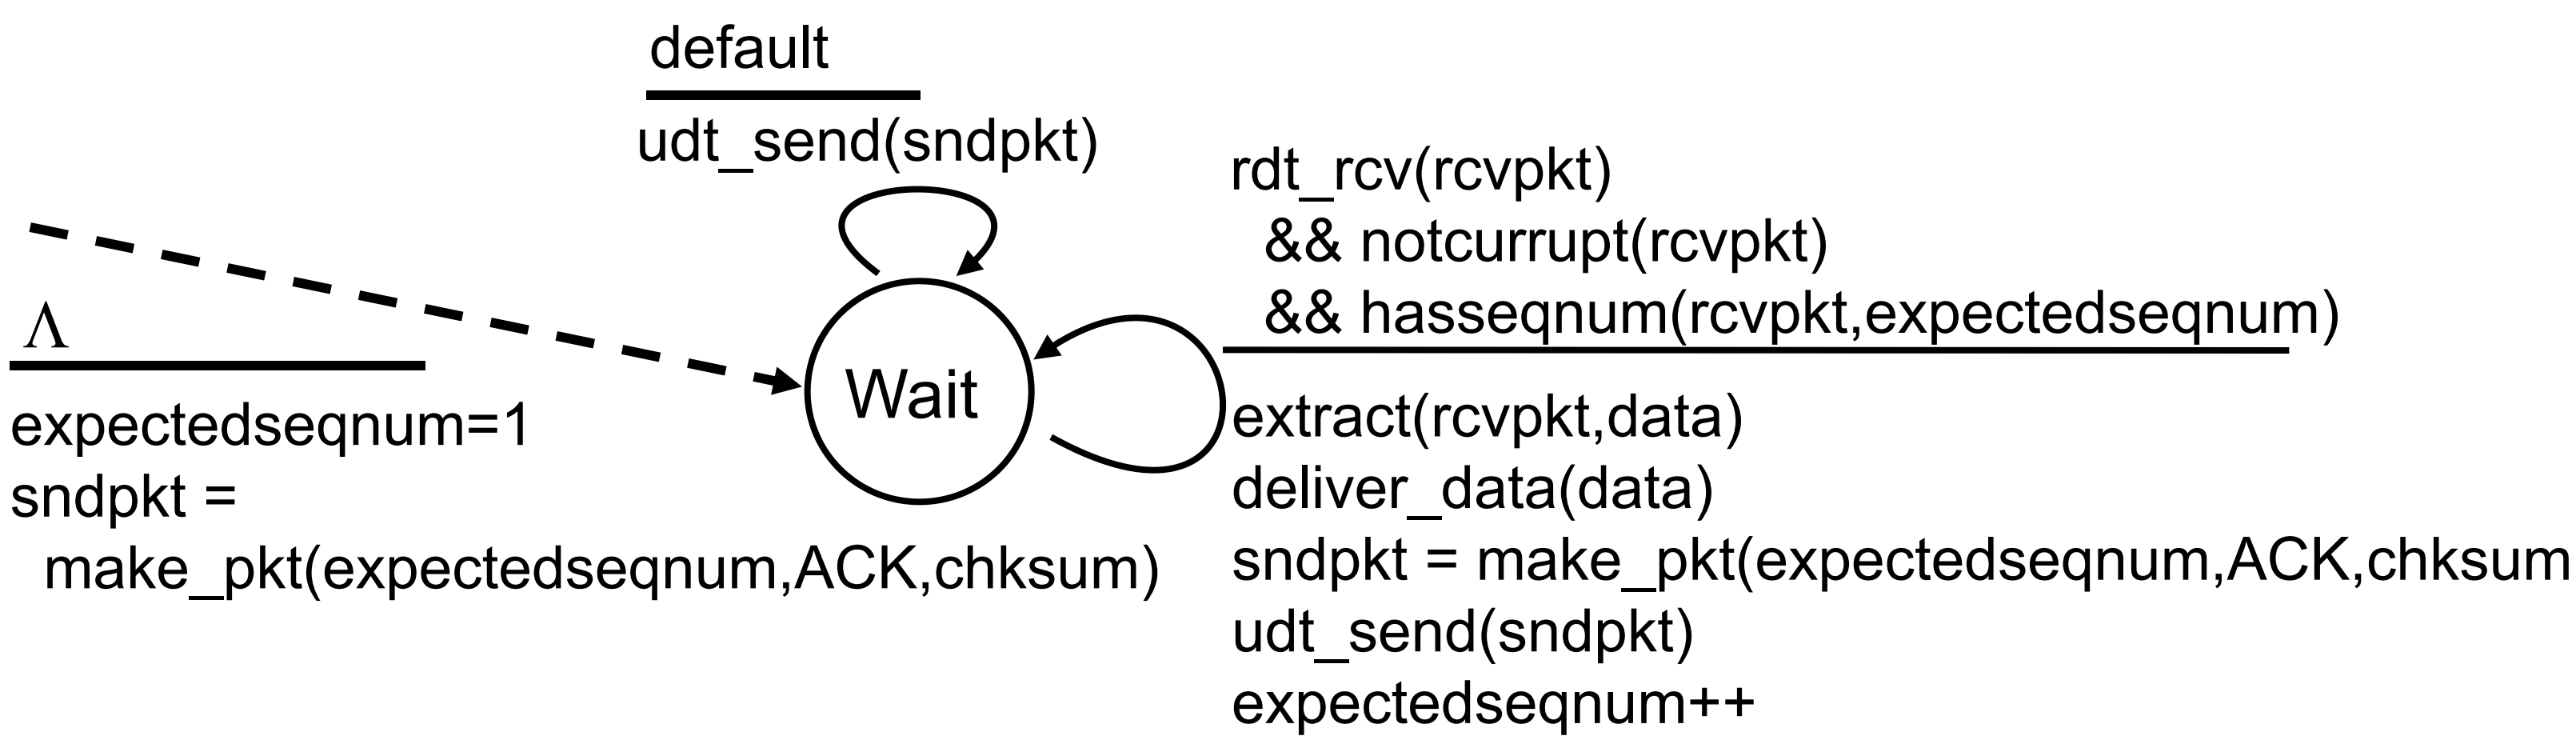

ACK-only: always send ACK for correctly-received pkt with highest *in-order* seq #

- may generate duplicate ACKs
- need only remember **`expectedseqnum`**

- out-of-order pkt:
  - discard (don't buffer): *no receiver buffering!*
  - re-ACK pkt with highest in-order seq #

Selective repeat

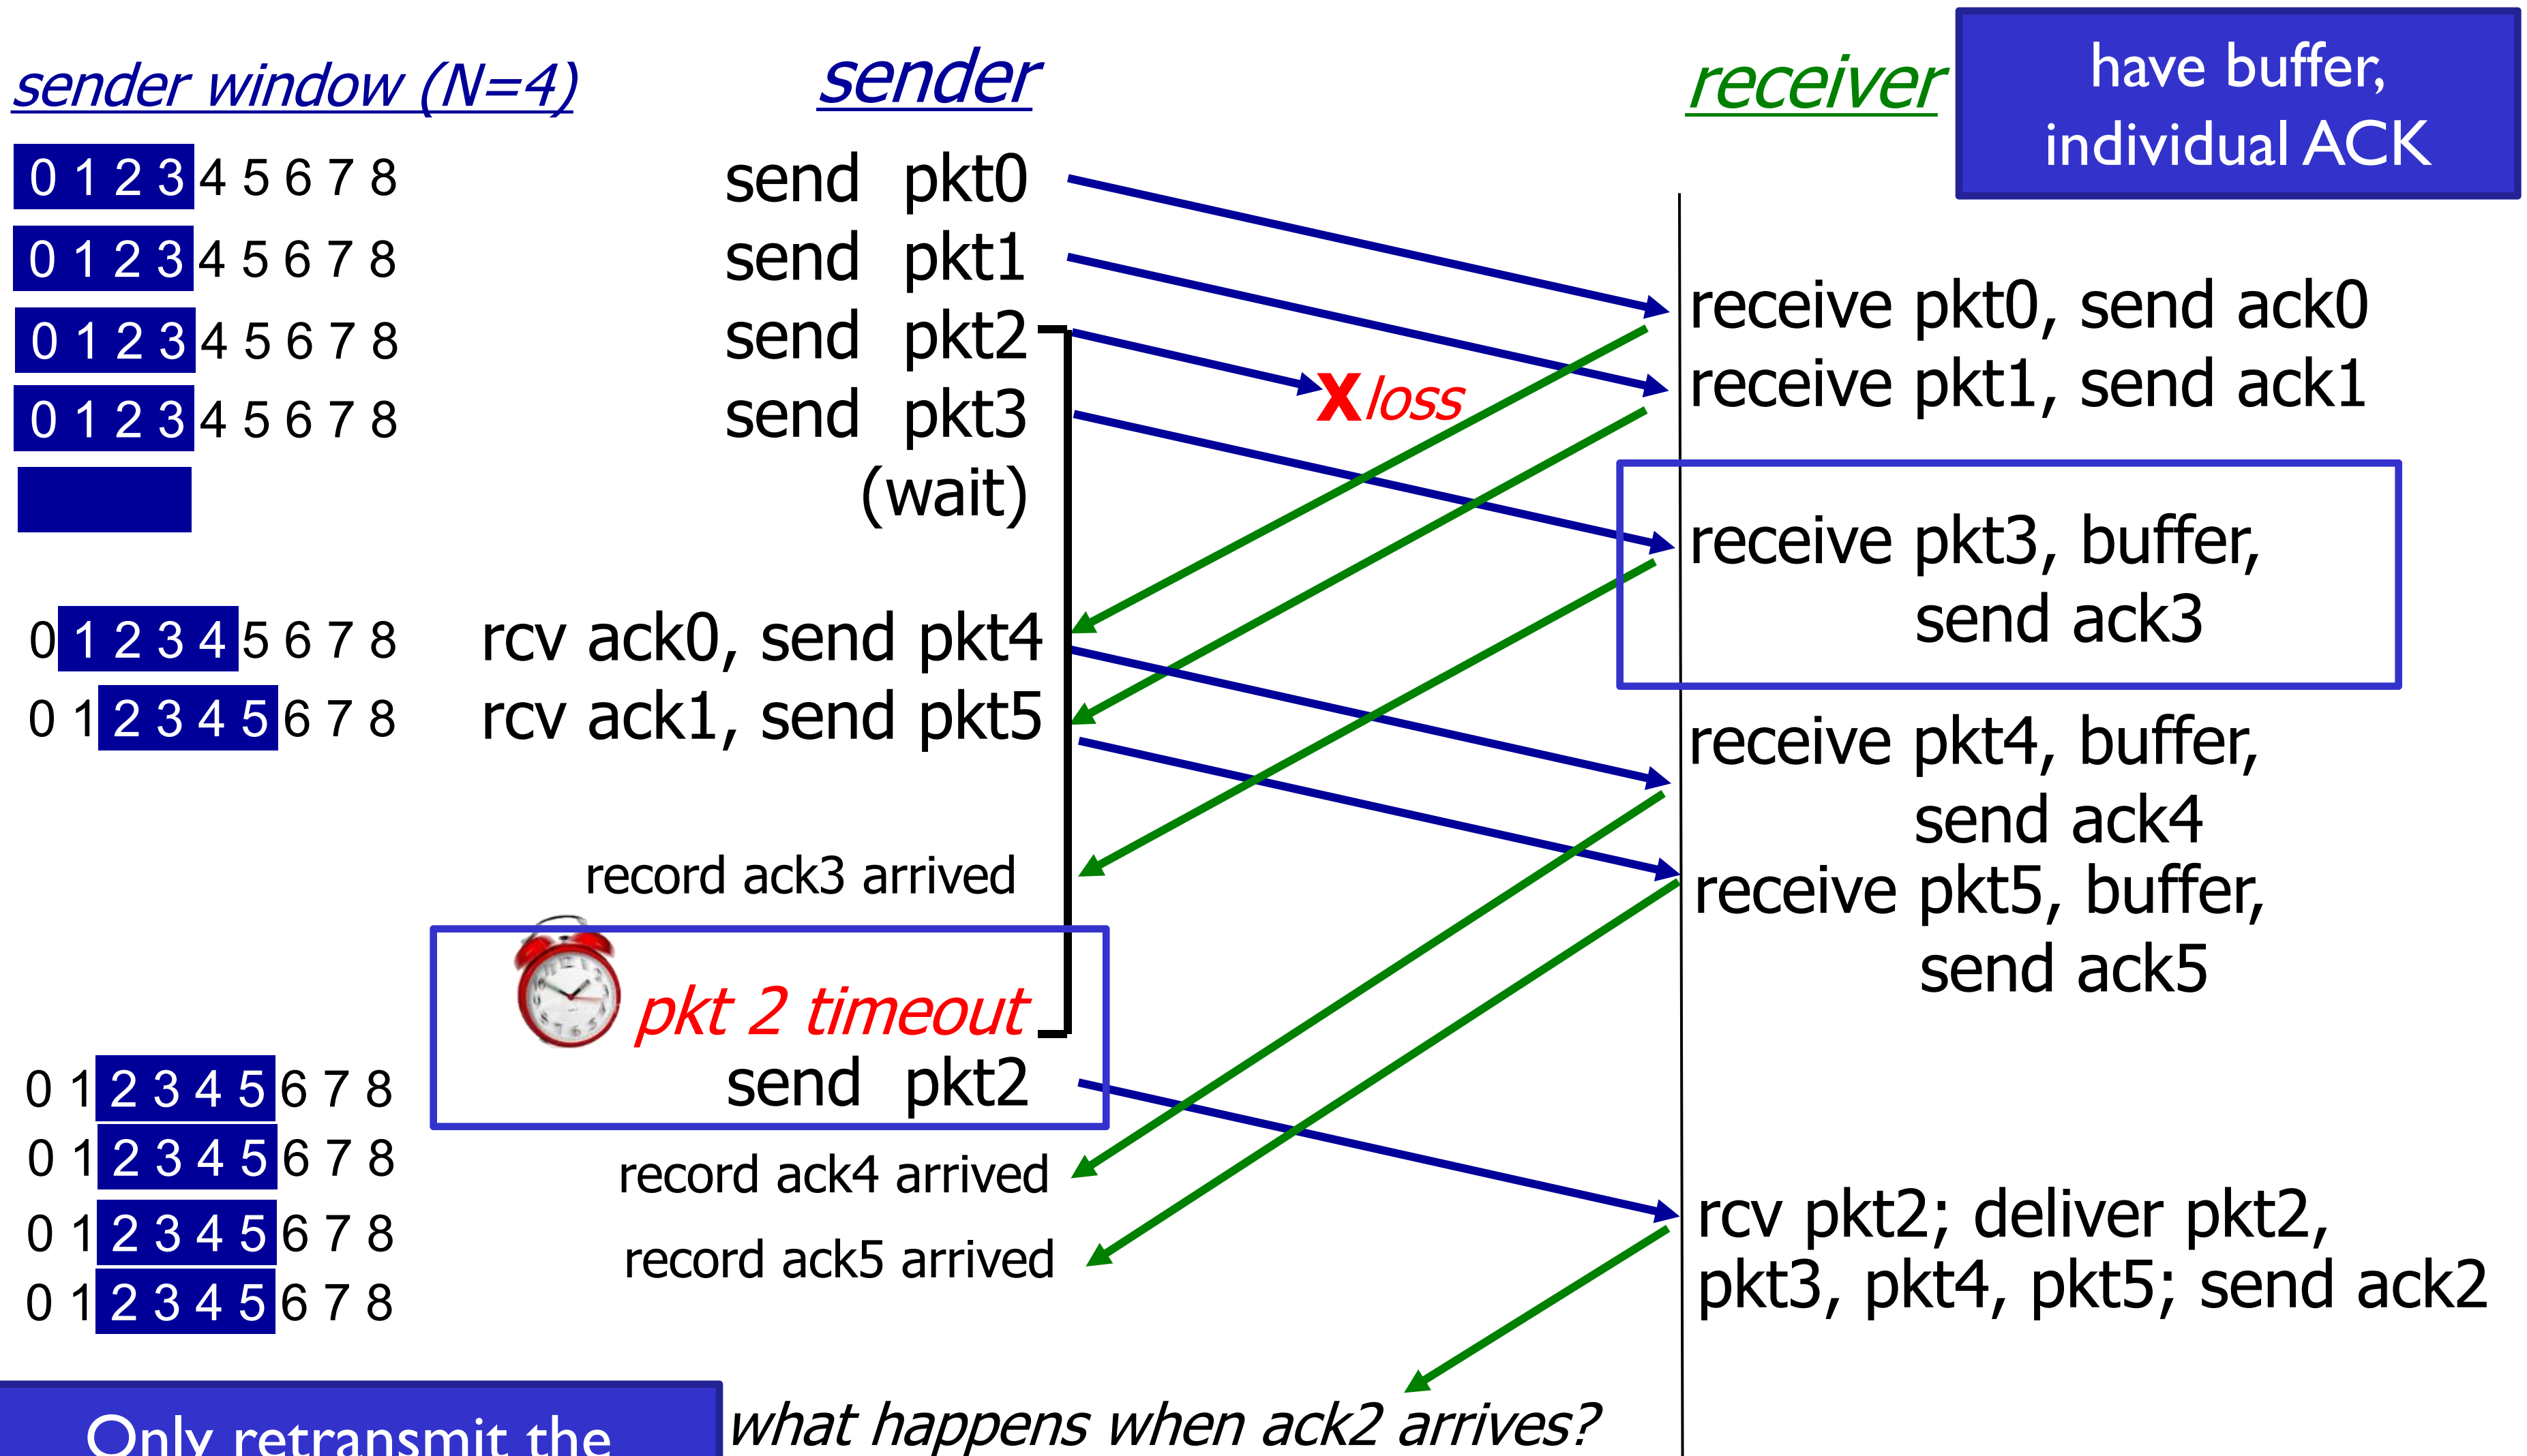

Only retransmit the unacked pkt (SR)

Selective repeat

- receiver *individually* acknowledges all correctly received pkts
  - buffers pkts, as needed, for eventual in-order delivery to upper layer
- sender only resends pkts for which ACK not received
  - sender timer for each unACKed pkt
- sender window
  - *N* consecutive seq #'s
  - limits seq #s of sent, unACKed pkts

Selective repeat: sender, receiver windows

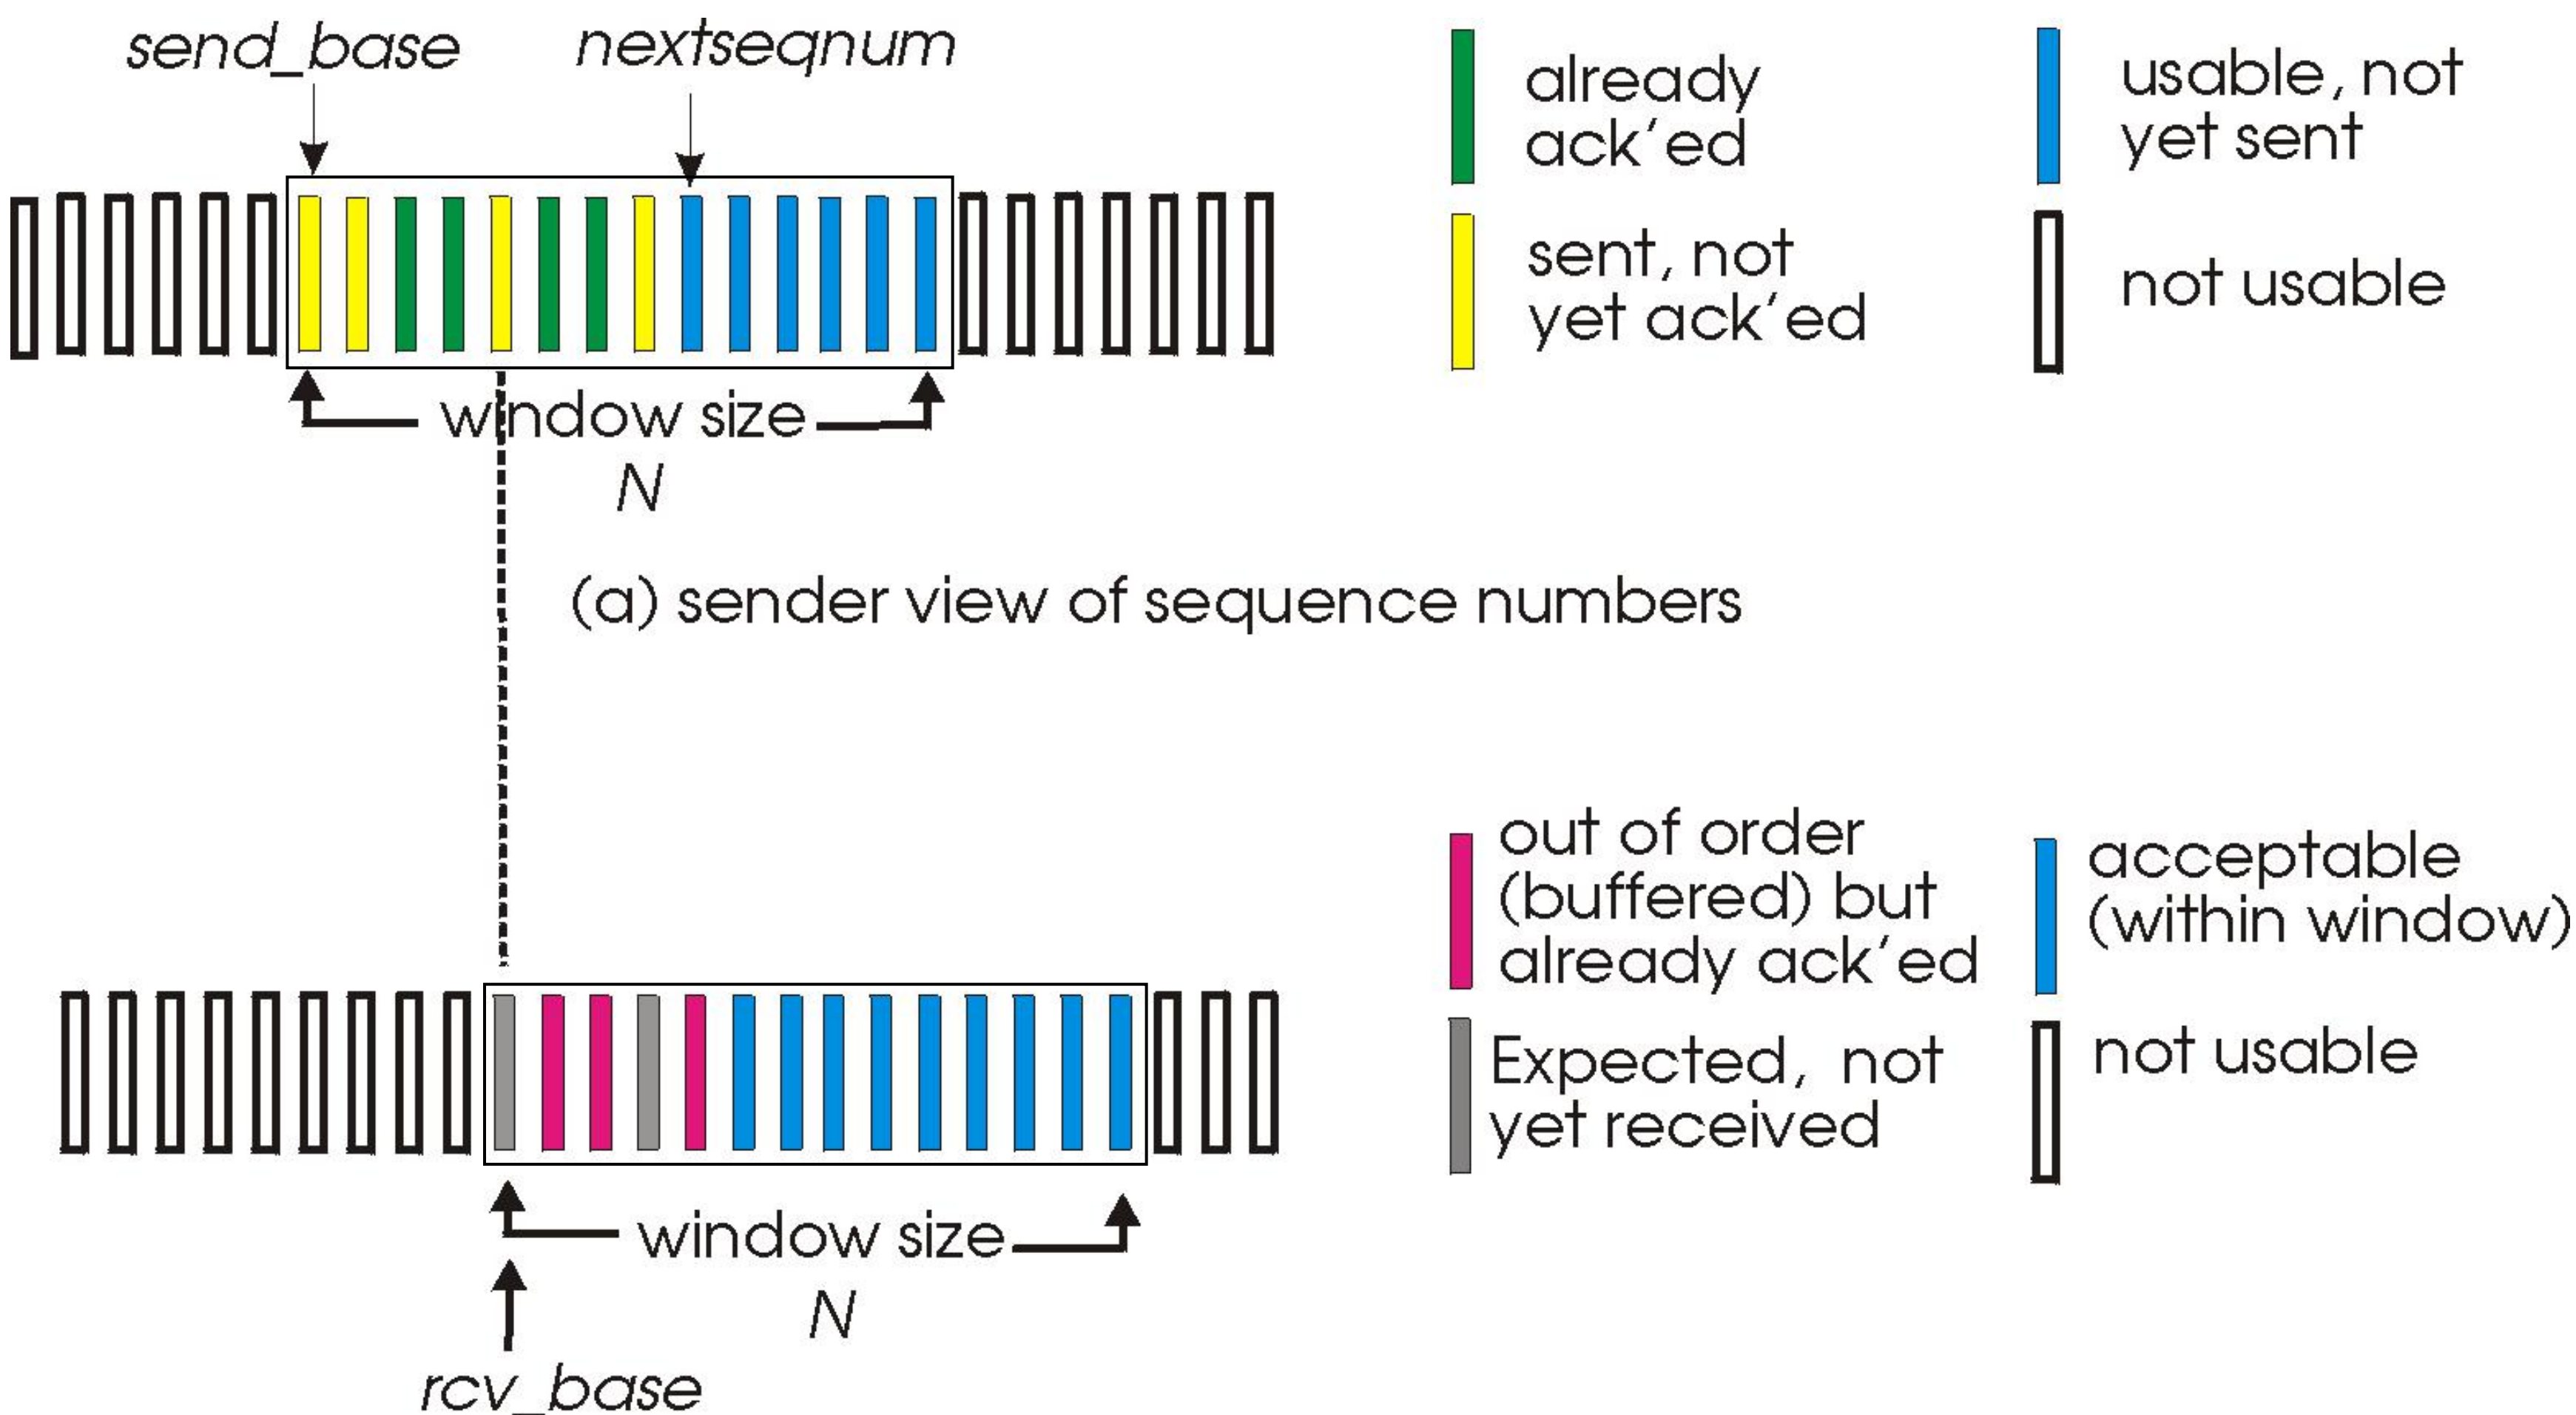

(a) sender view of sequence numbers

(b) receiver view of sequence numbers

Selective repeat

sender

data from above:

- if next available seq # in window, send pkt

timeout(n):

- resend pkt n, restart timer

ACK(n) in [sendbase,sendbase+N]:

- mark pkt n as received
- if n smallest unACKed pkt, advance window base to next unACKed seq #

receiver

pkt n in [rcvbase, rcvbase+N-1]

- send ACK(n)
- out-of-order: buffer
- in-order: deliver (also deliver buffered, in-order pkts), advance window to next not-yet-received pkt

pkt n in [rcvbase-N,rcvbase-1]

- ACK(n)

otherwise:

- ignore

GBN and SR comparison

<u>Go-back-N:</u>

- sender can have up to N unacked packets in pipeline
- receiver only sends *cumulative ack*
  - doesn't ack packet if there's a gap
- sender has timer for oldest unacked packet
  - when timer expires, retransmit *all* unacked packets

<u>Selective Repeat:</u>

- sender can have up to N unack'ed packets in pipeline
- rcvr sends *individual ack* for each packet
- sender maintains timer for each unacked packet
  - when timer expires, retransmit only that unacked packet

Selective repeat: dilemma

example:

- seq #'s: 0, 1, 2, 3
- window size=3
- receiver sees no difference in two scenarios!
- duplicate data accepted as new in (b)

Q: what relationship between seq # size and window size to avoid problem in (b)?

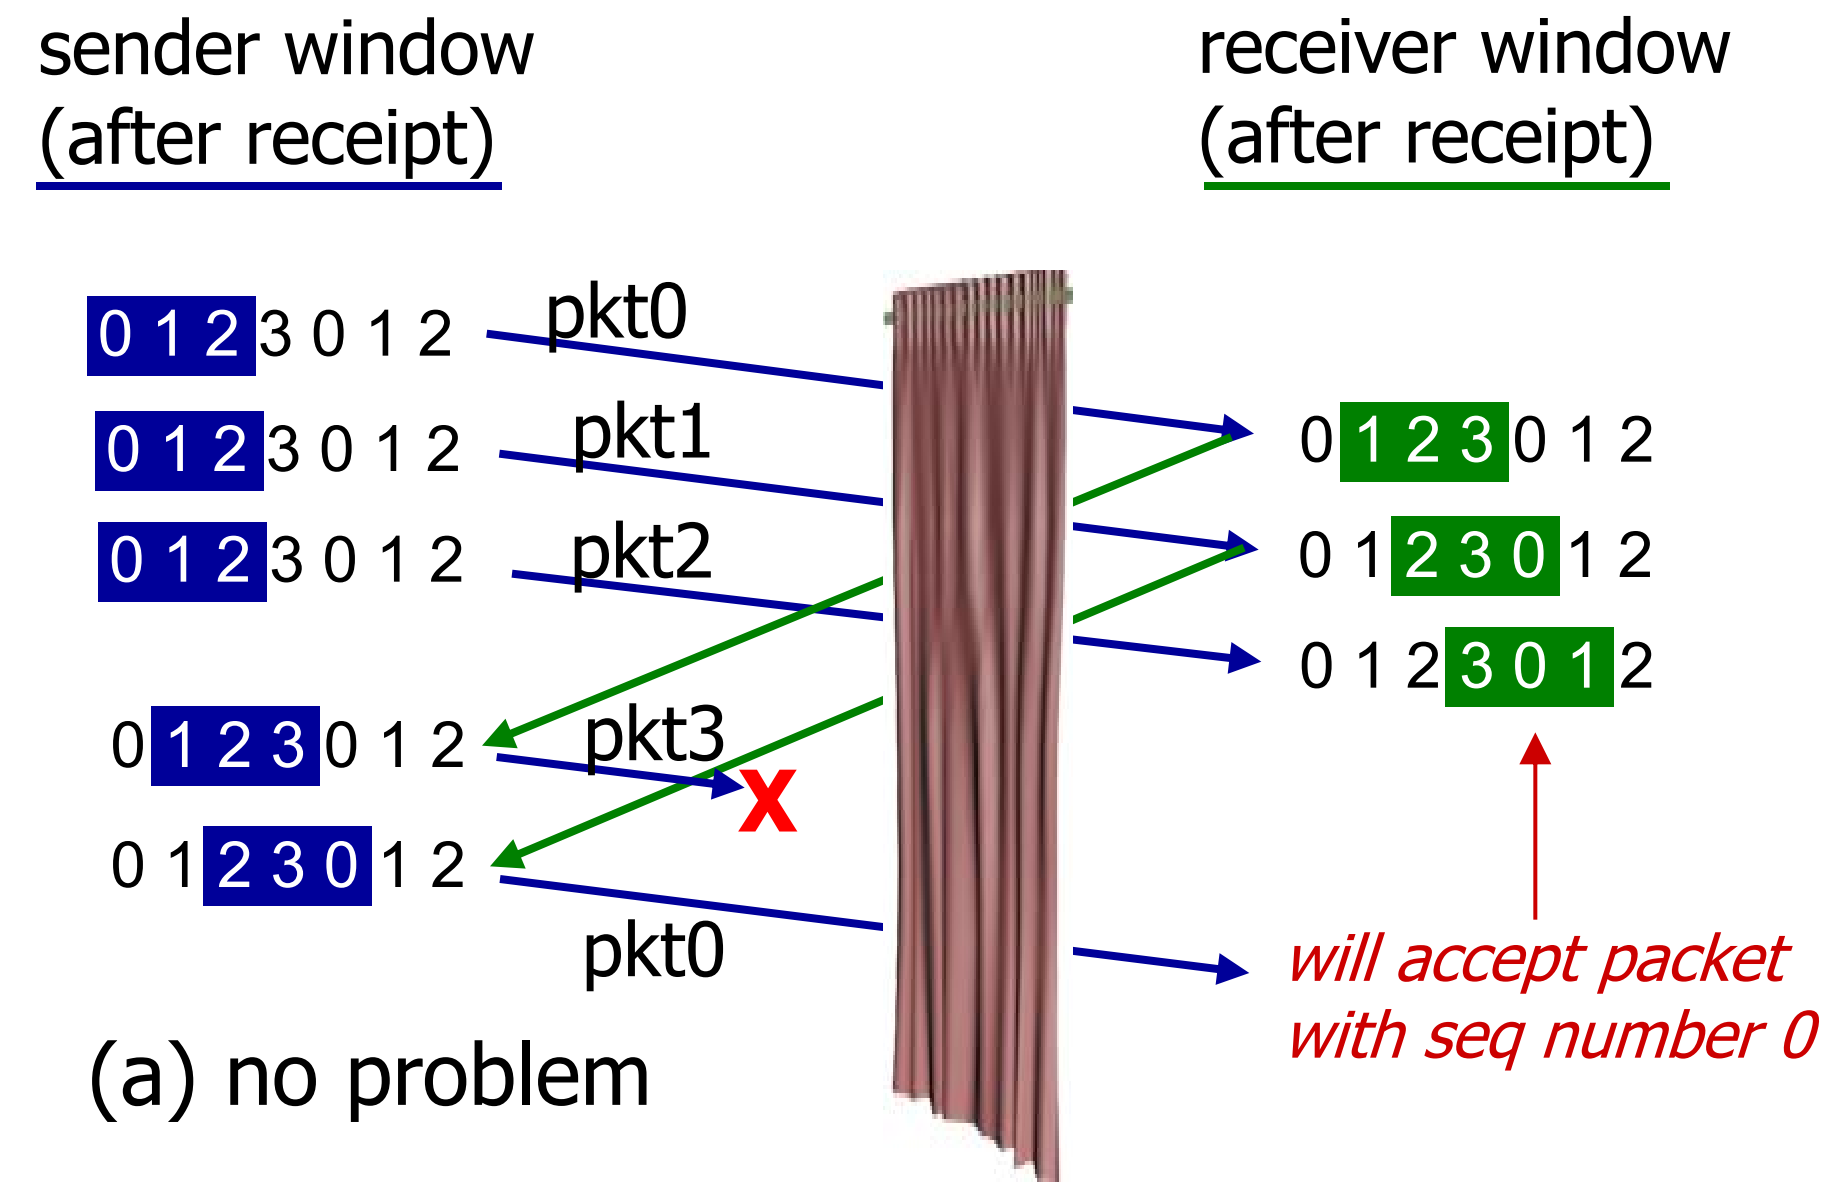

receiver can't see sender side.
receiver behavior identical in both cases!
something's (very) wrong!

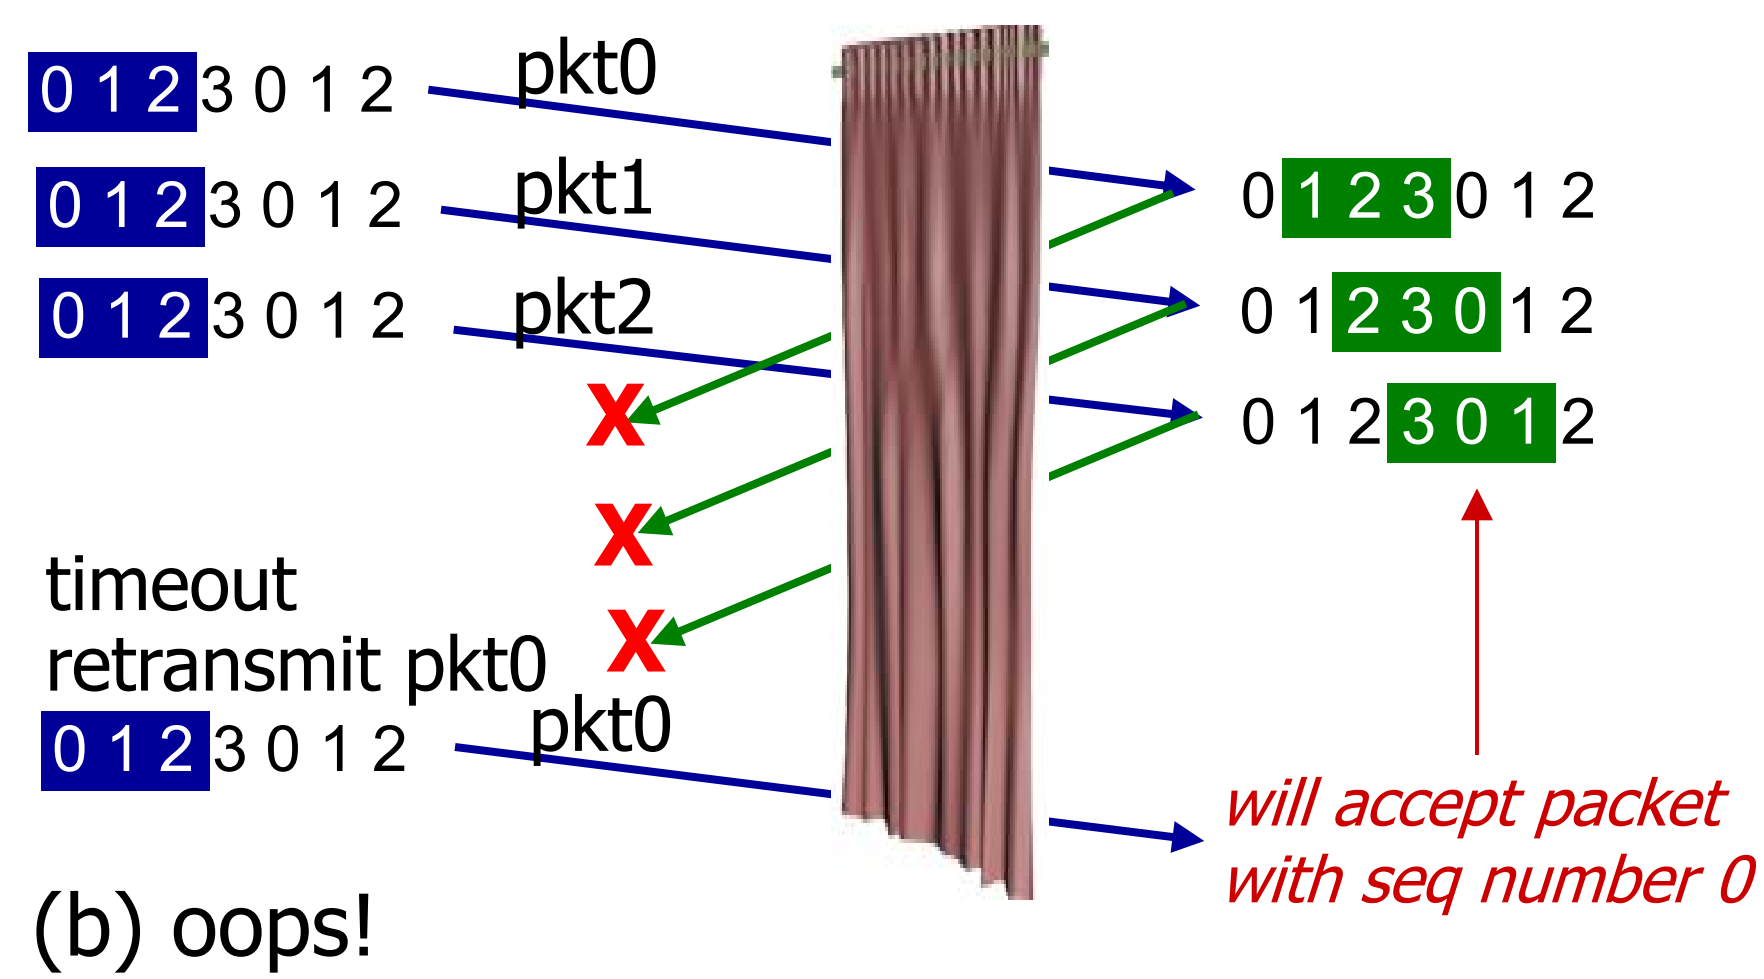

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

TCP: Overview RFCs: 793,1122,1323, 2018, 2581

- point-to-point:
  - one sender, one receiver
- reliable, in-order *byte stream:*
  - no "message boundaries"
  - Seq # and Ack # are in unit of byte, or pkt
- pipelined:
  - TCP congestion and flow control set window size
- full duplex data:
  - bi-directional data flow in same connection
  - MSS: maximum segment size
- connection-oriented:
  - handshaking (exchange of control msgs) inits sender, receiver state before data exchange
- flow controlled:
  - sender will not overwhelm receiver

TCP seq. numbers, ACKs

seq # is the next byte expected from other side

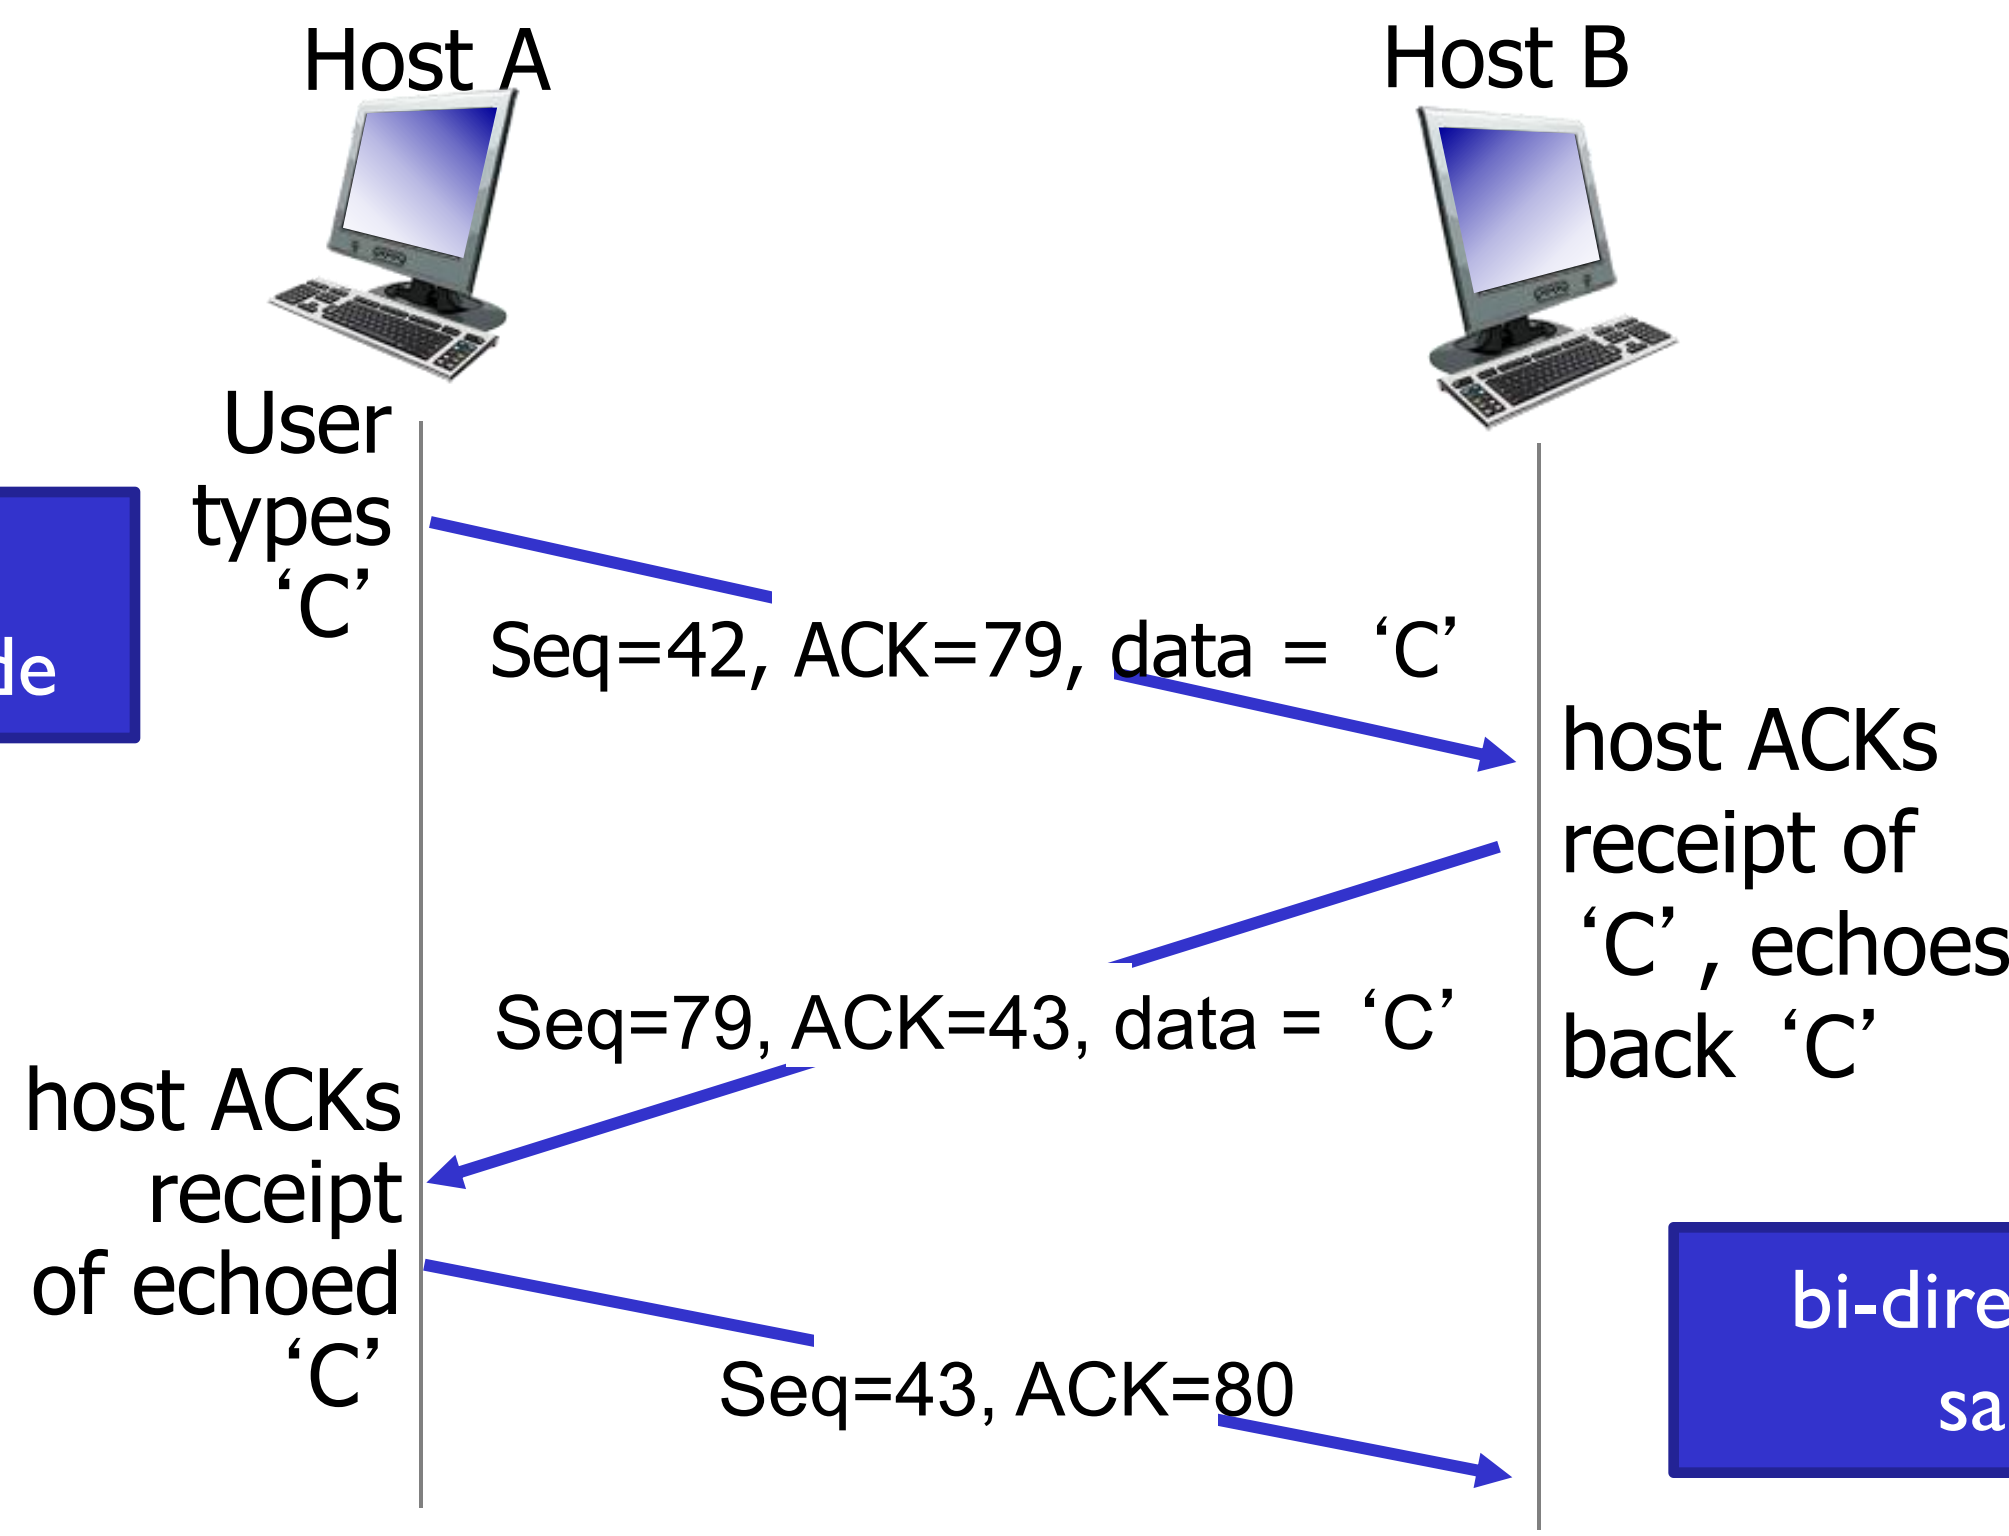

bi-directional data flow in same connection

simple telnet scenario

TCP without retransmission

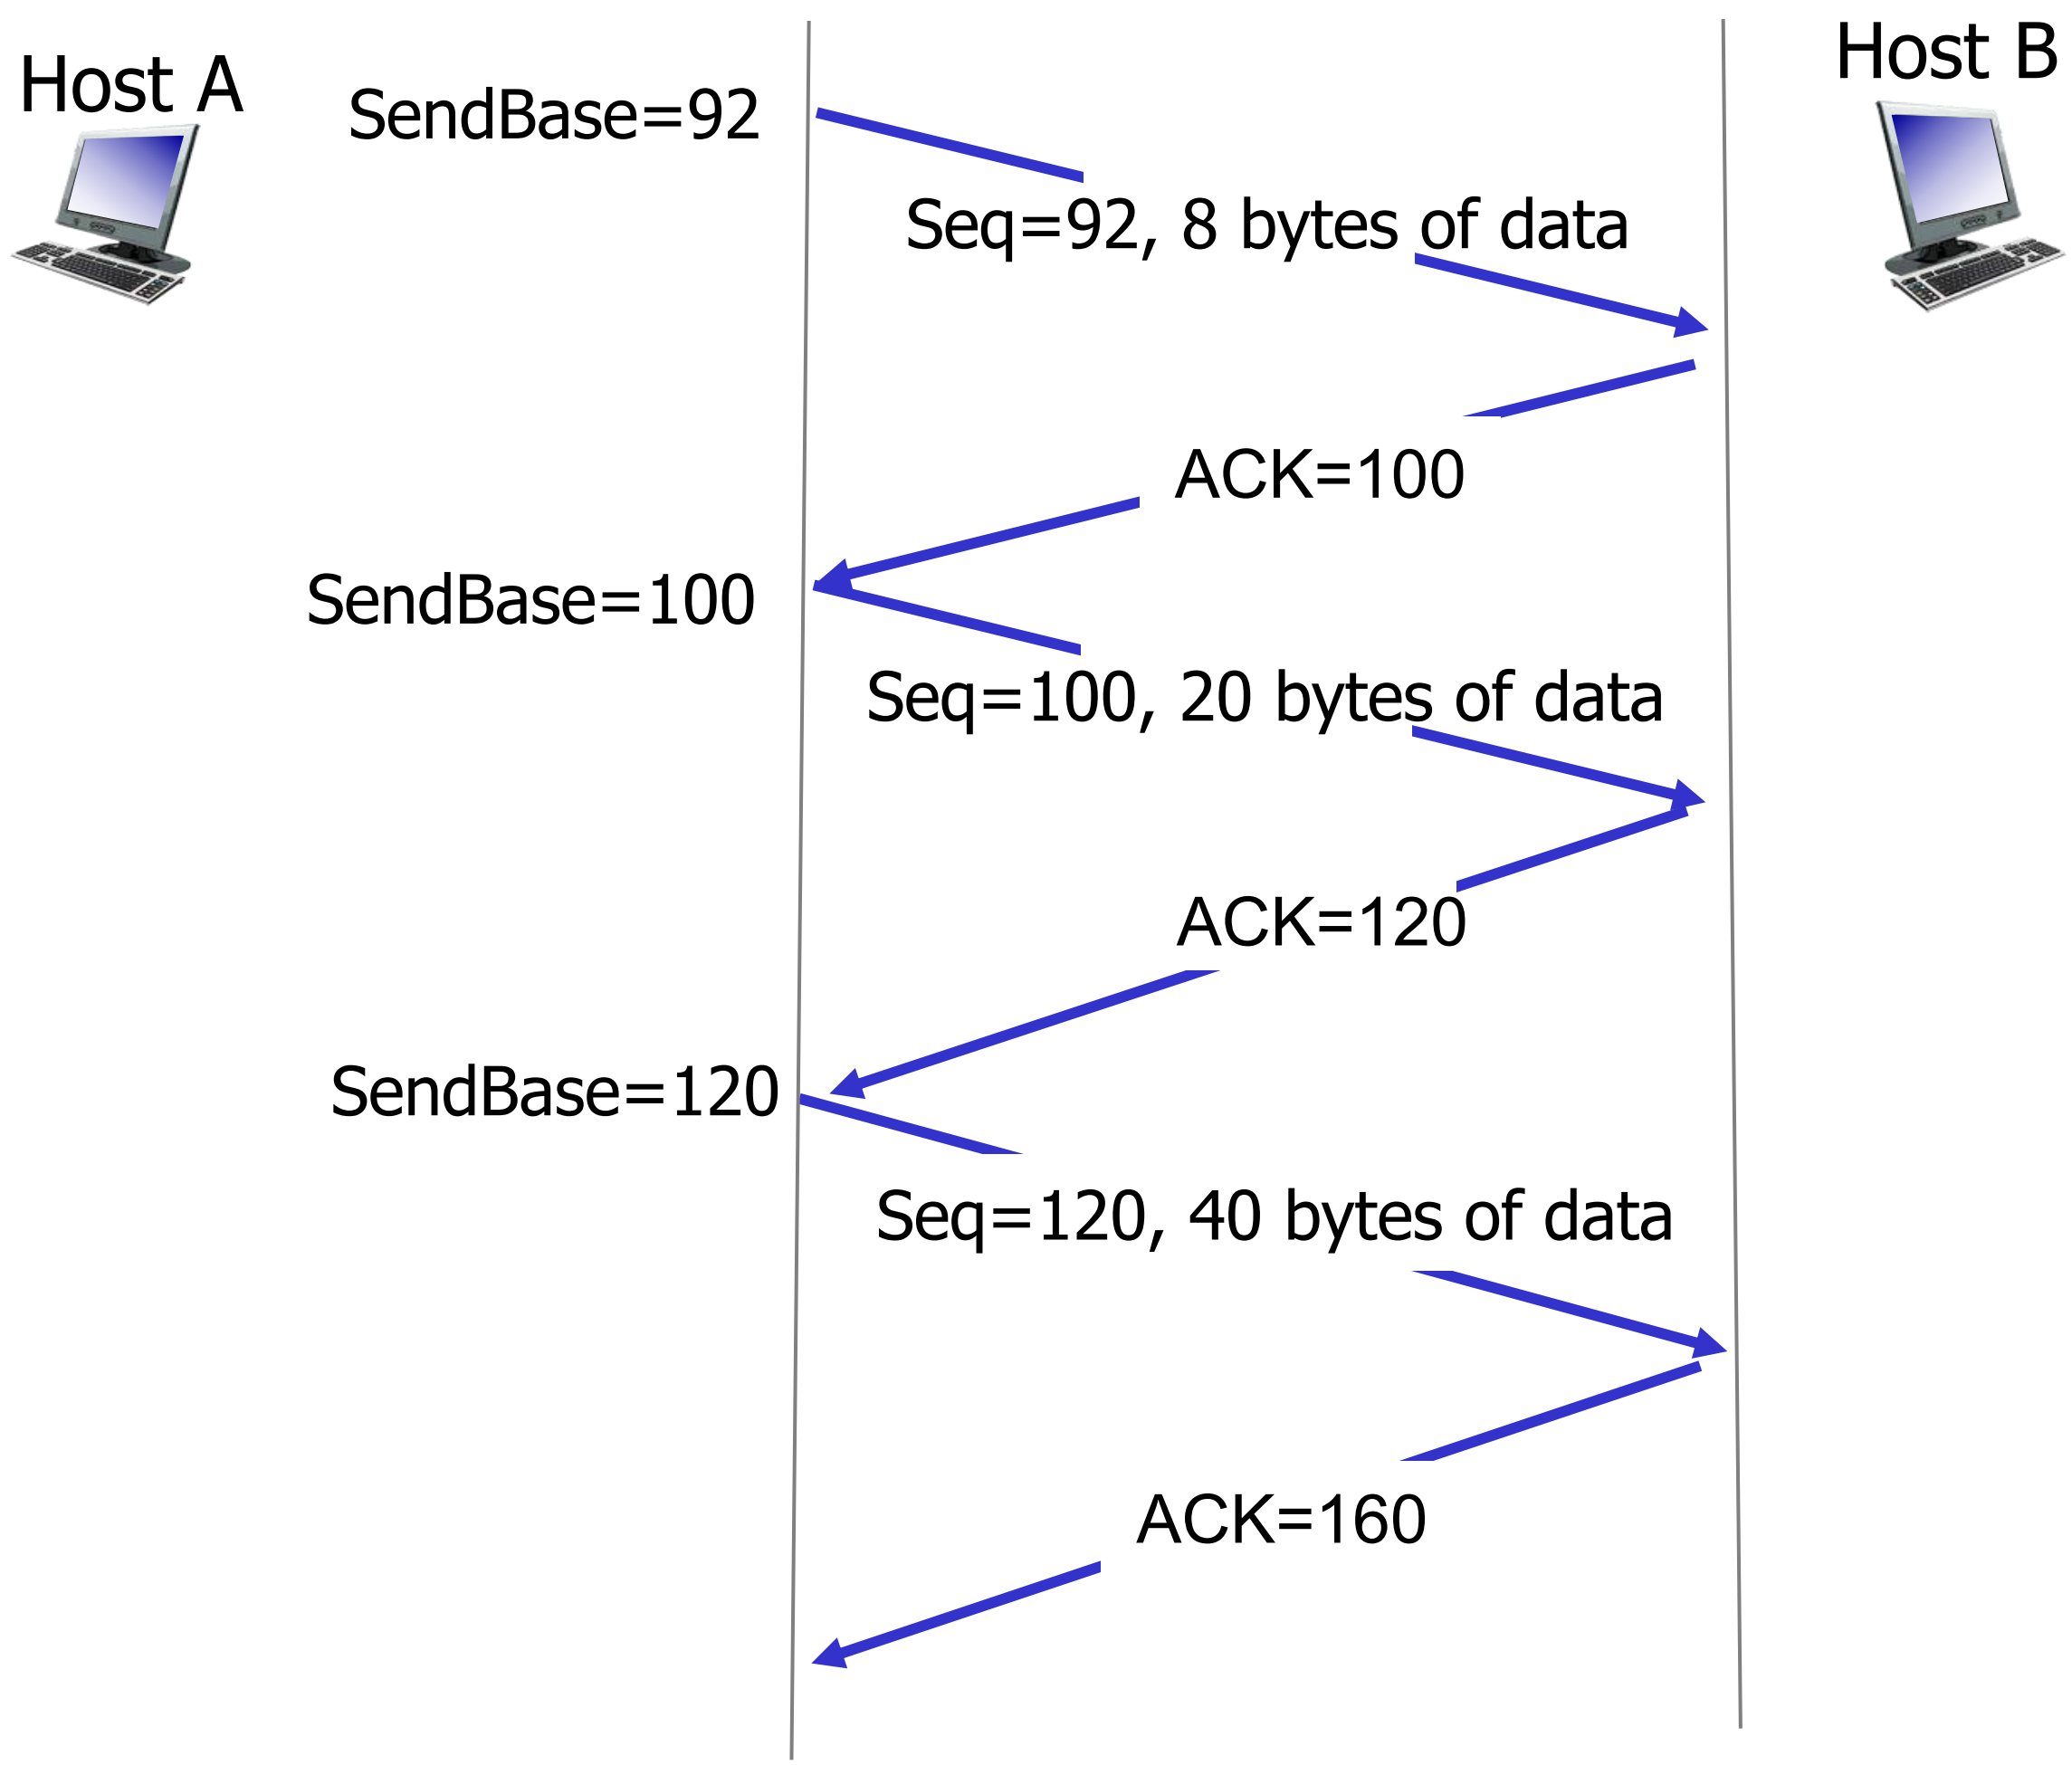

TCP seq. numbers, ACKs

sequence numbers:

- byte stream "number" of first byte in segment's data

acknowledgements:

- seq # of next byte expected from other side
- cumulative ACK

Q: how receiver handles out-of-order segments

- A: TCP spec doesn't say, - up to implementor

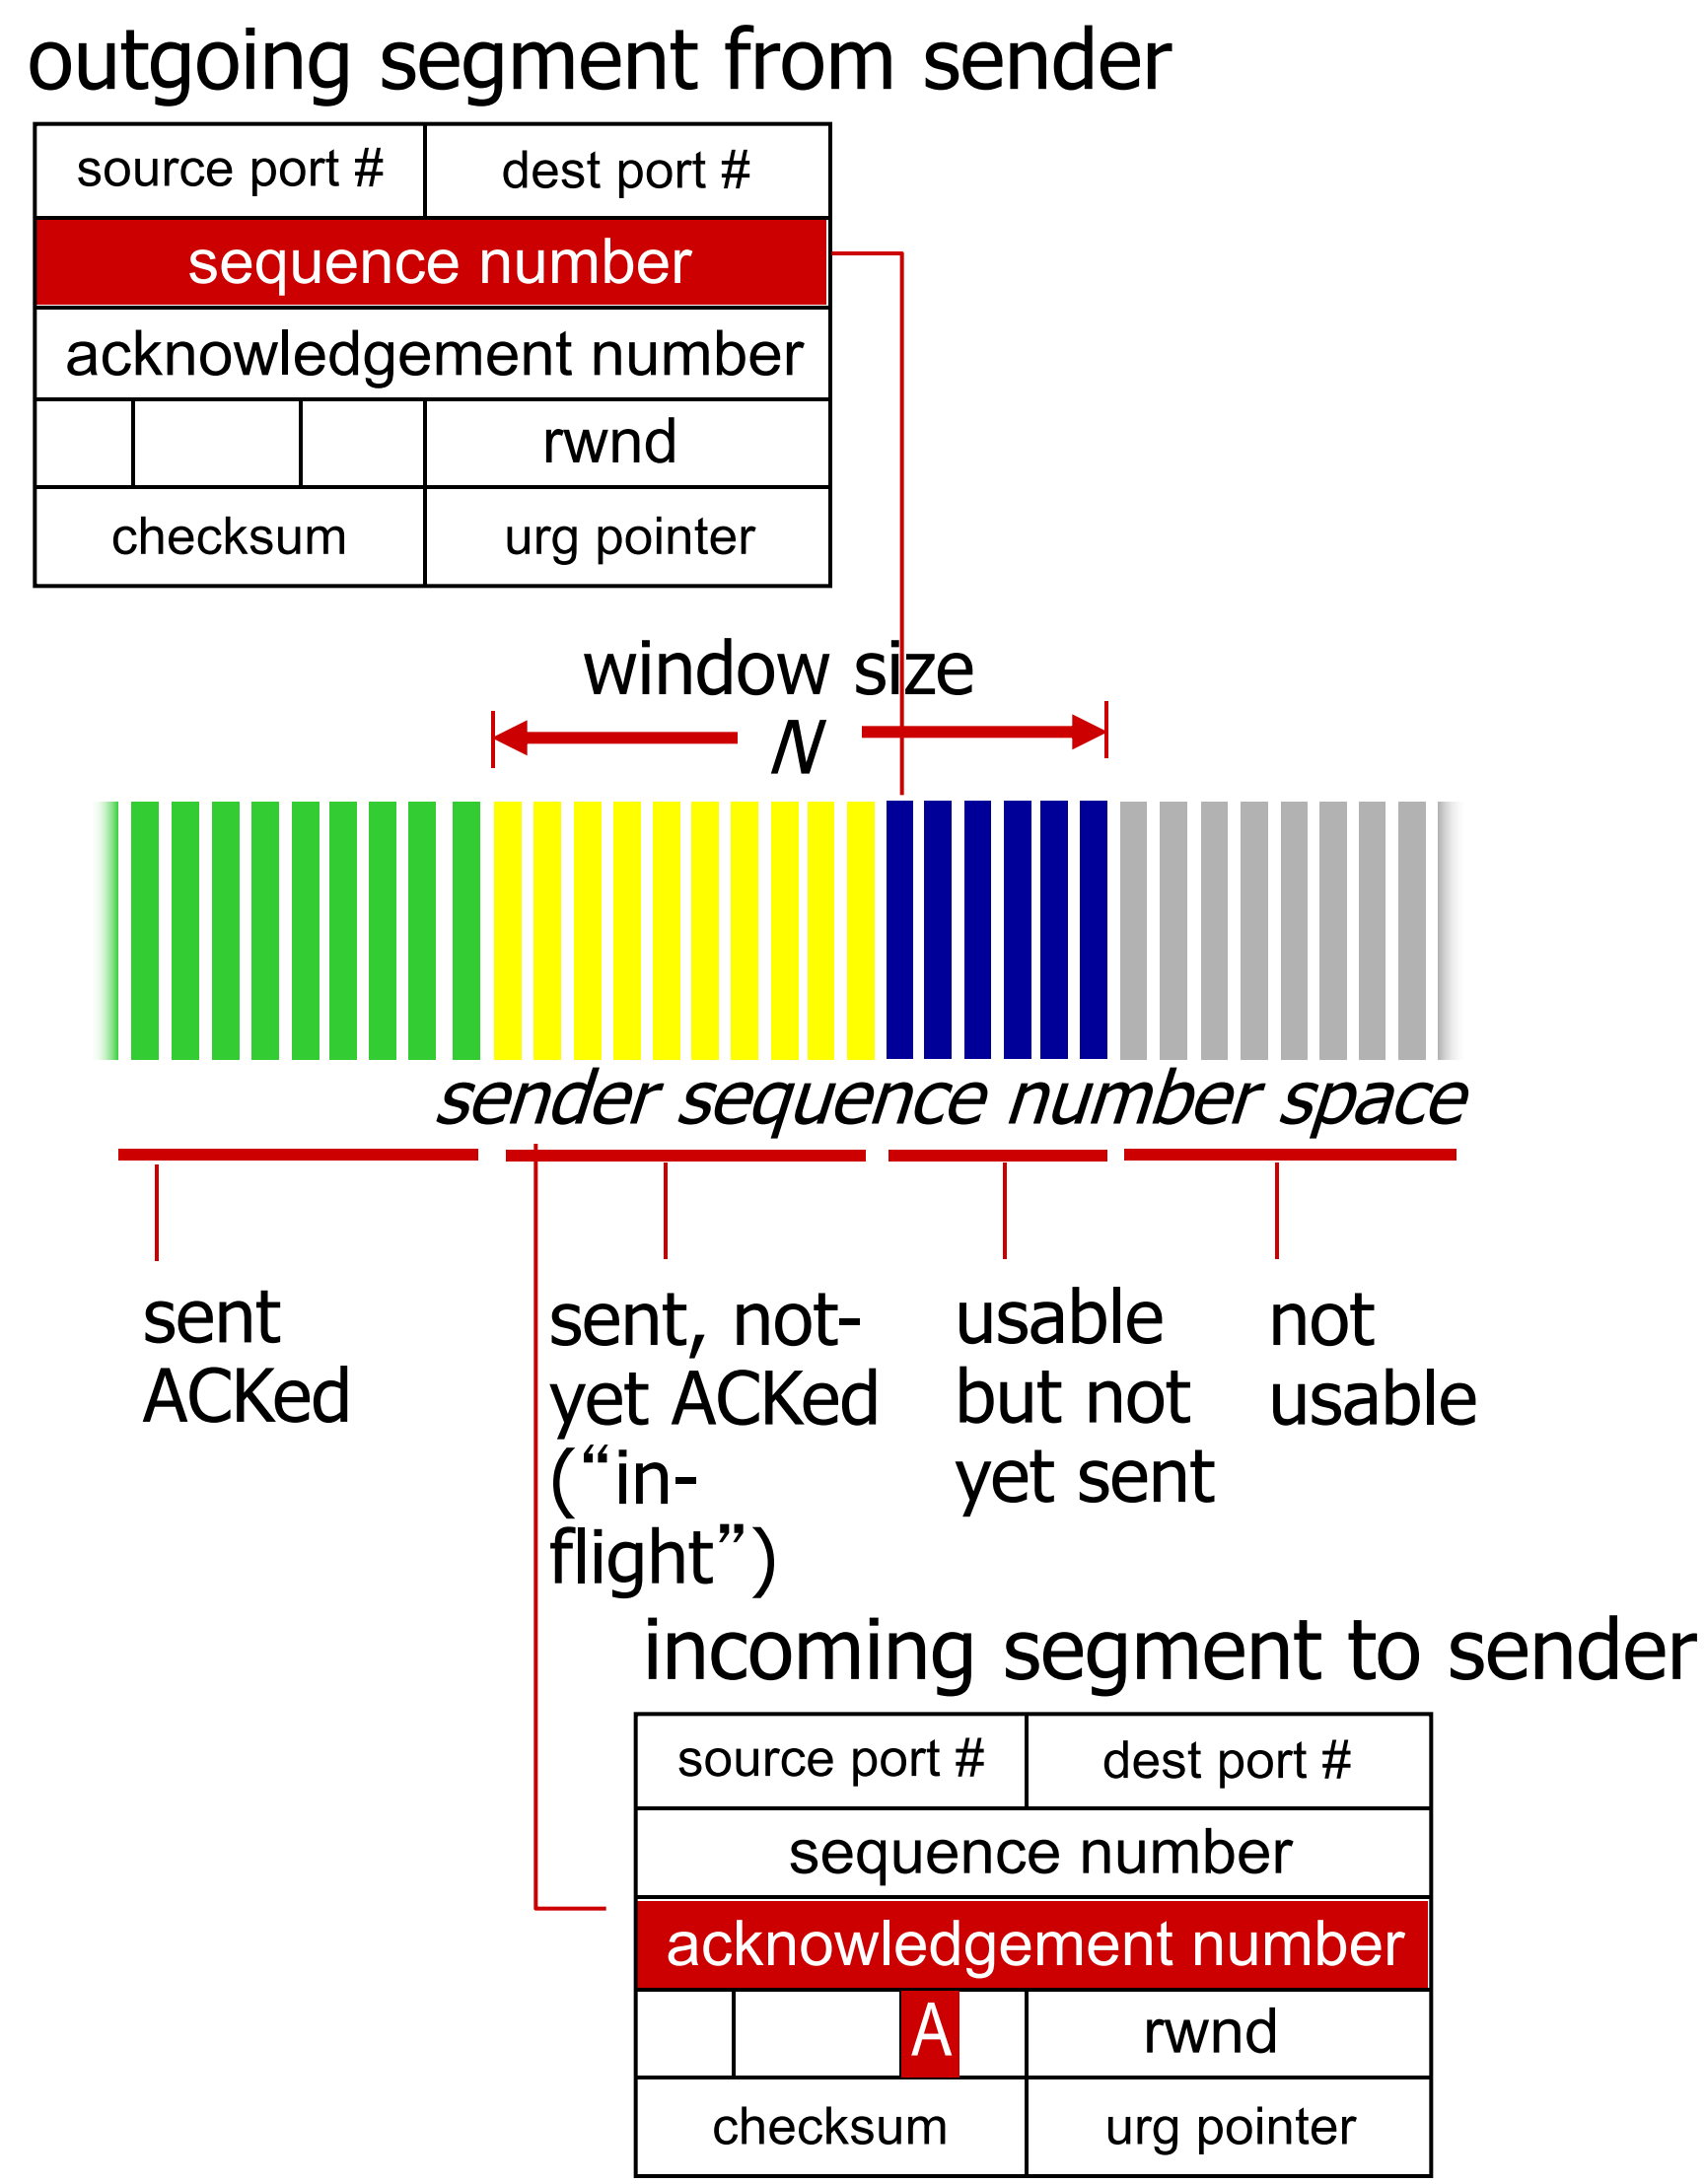

TCP segment structure

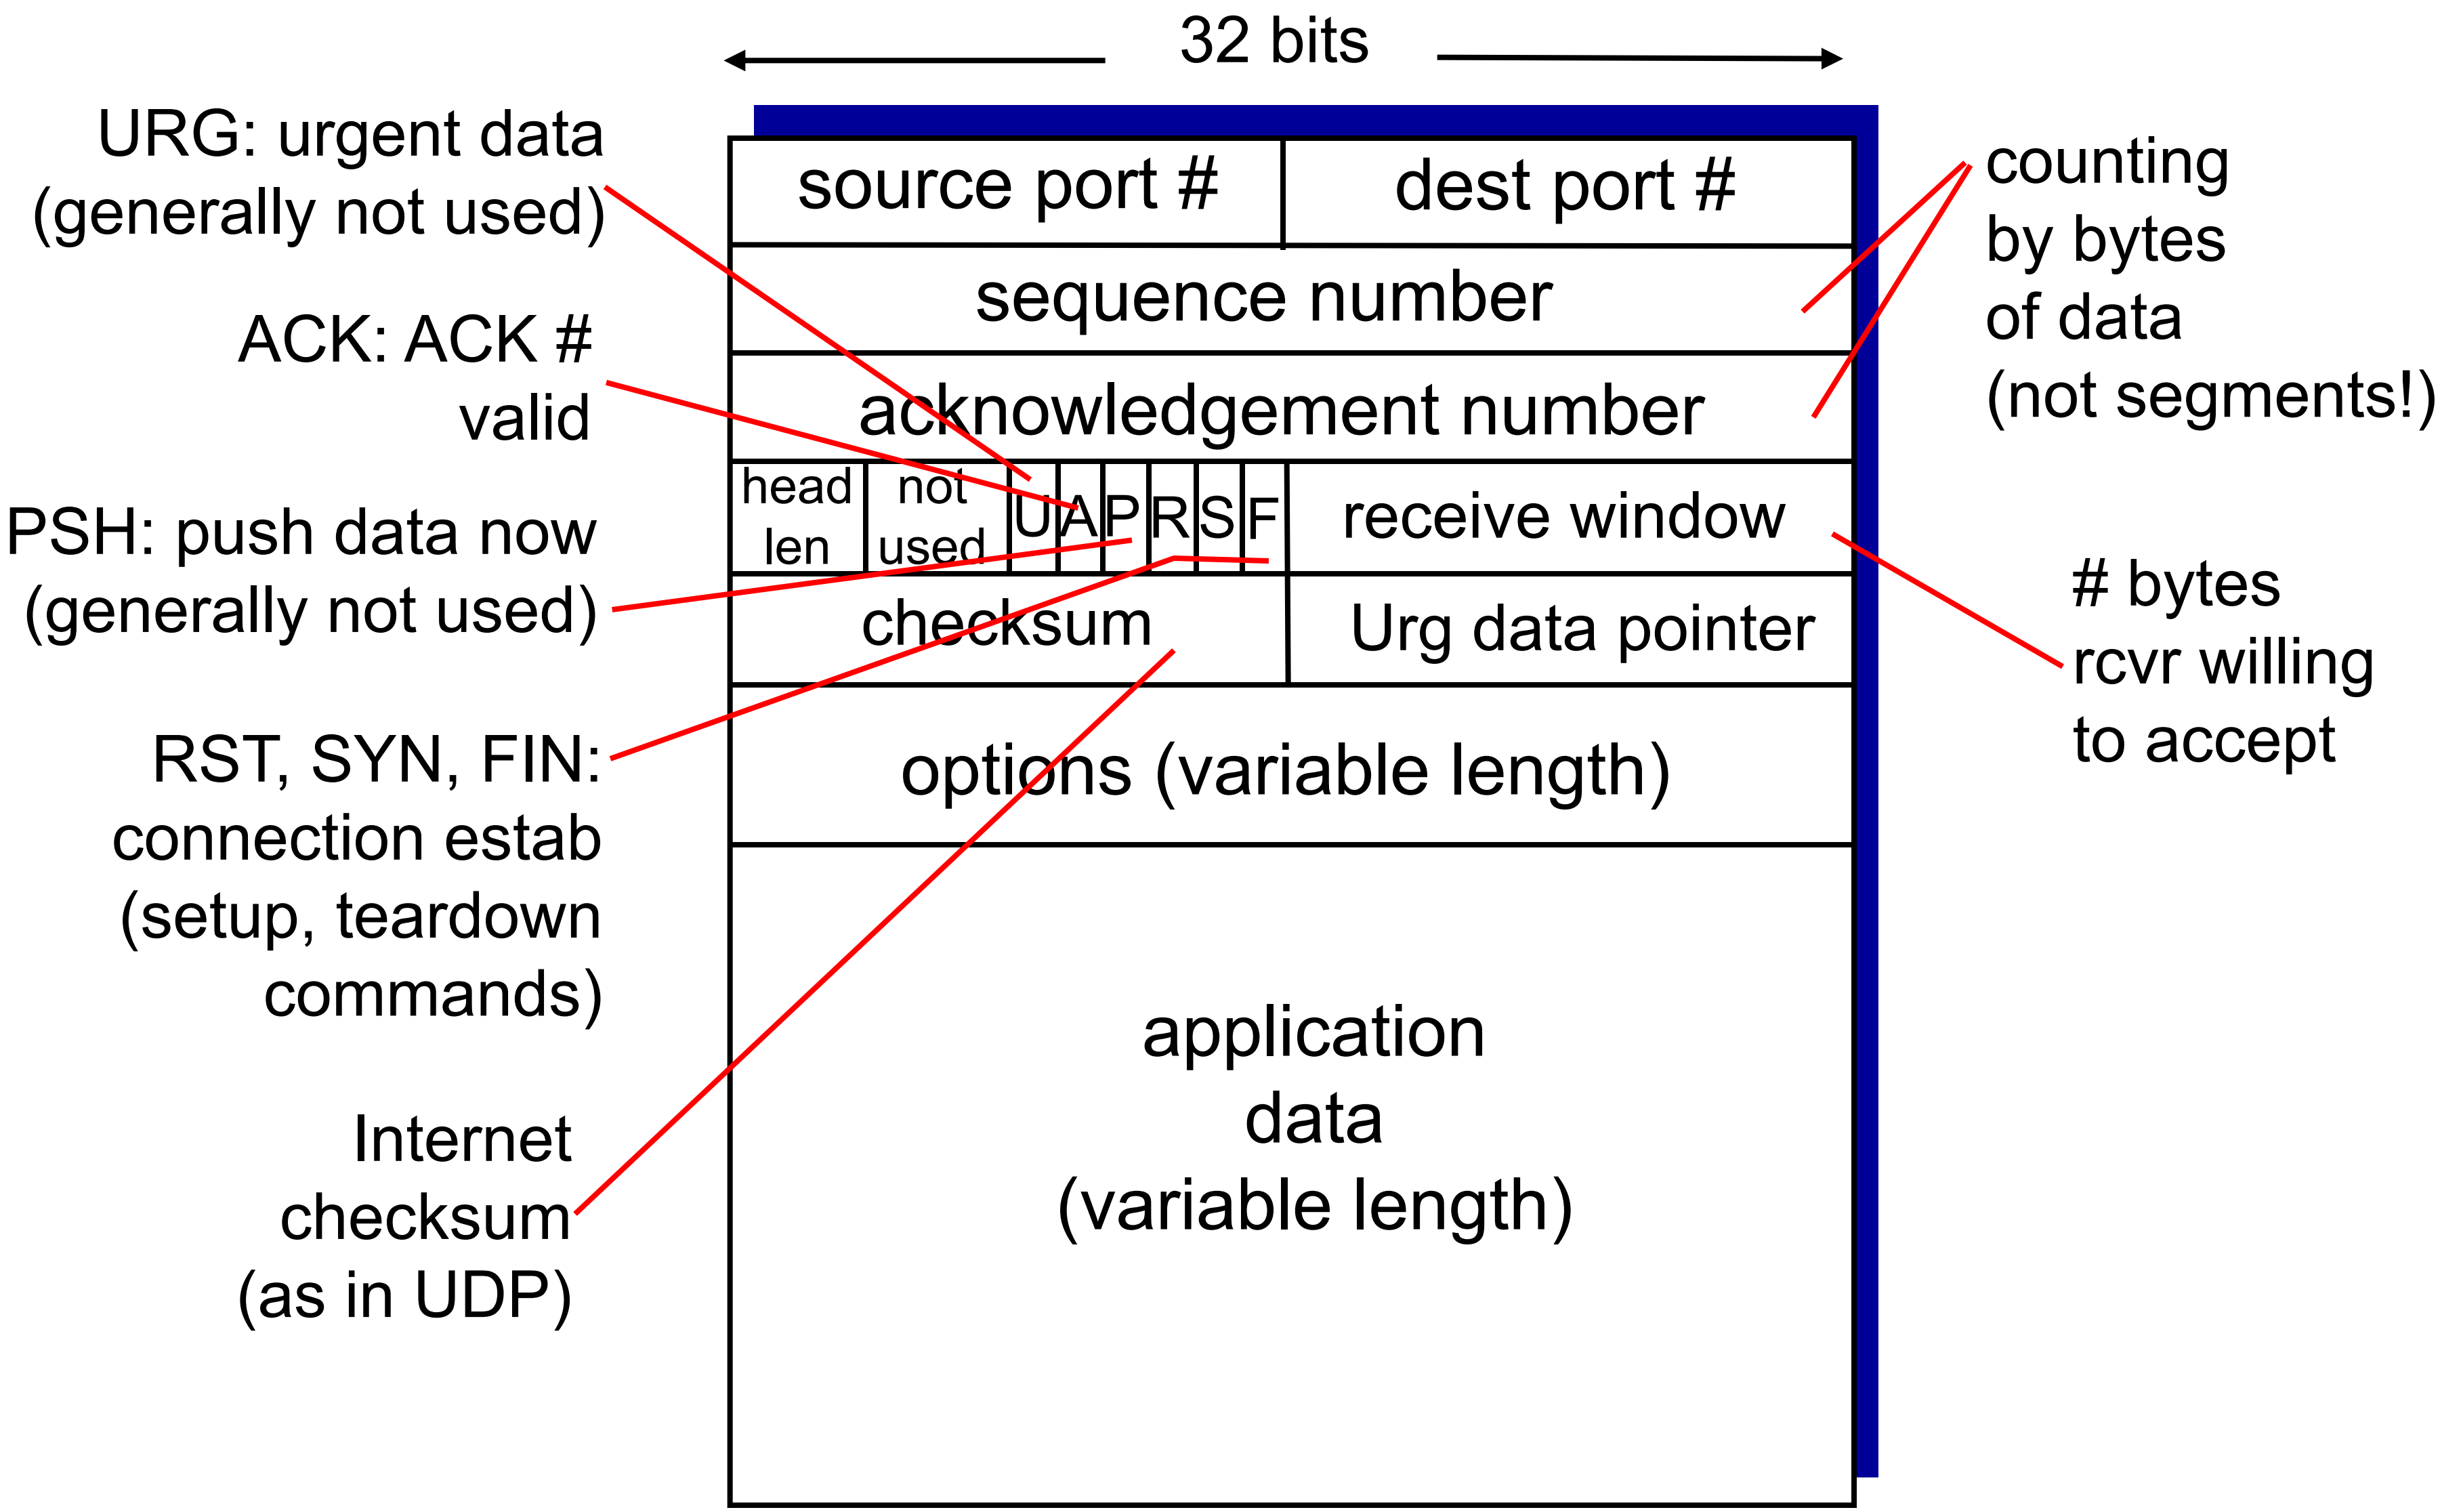

TCP round trip time, timeout

Q: how to set TCP timeout value?

- longer than RTT
  - but RTT varies
- *too short:* premature timeout, unnecessary retransmissions
- *too long:* slow reaction to segment loss

Q: how to estimate RTT?

- **`SampleRTT`**: measured time from segment transmission until ACK receipt
  - ignore retransmissions
- **`SampleRTT`** will vary, want estimated RTT "smoother"
  - average several *recent* measurements, not just current **`SampleRTT`**

TCP round trip time, timeout

```
EstimatedRTT = (1- α)*EstimatedRTT + α*SampleRTT
```

- exponential weighted moving average
- influence of past sample decreases exponentially fast
- typical value: $\alpha = 0.125$

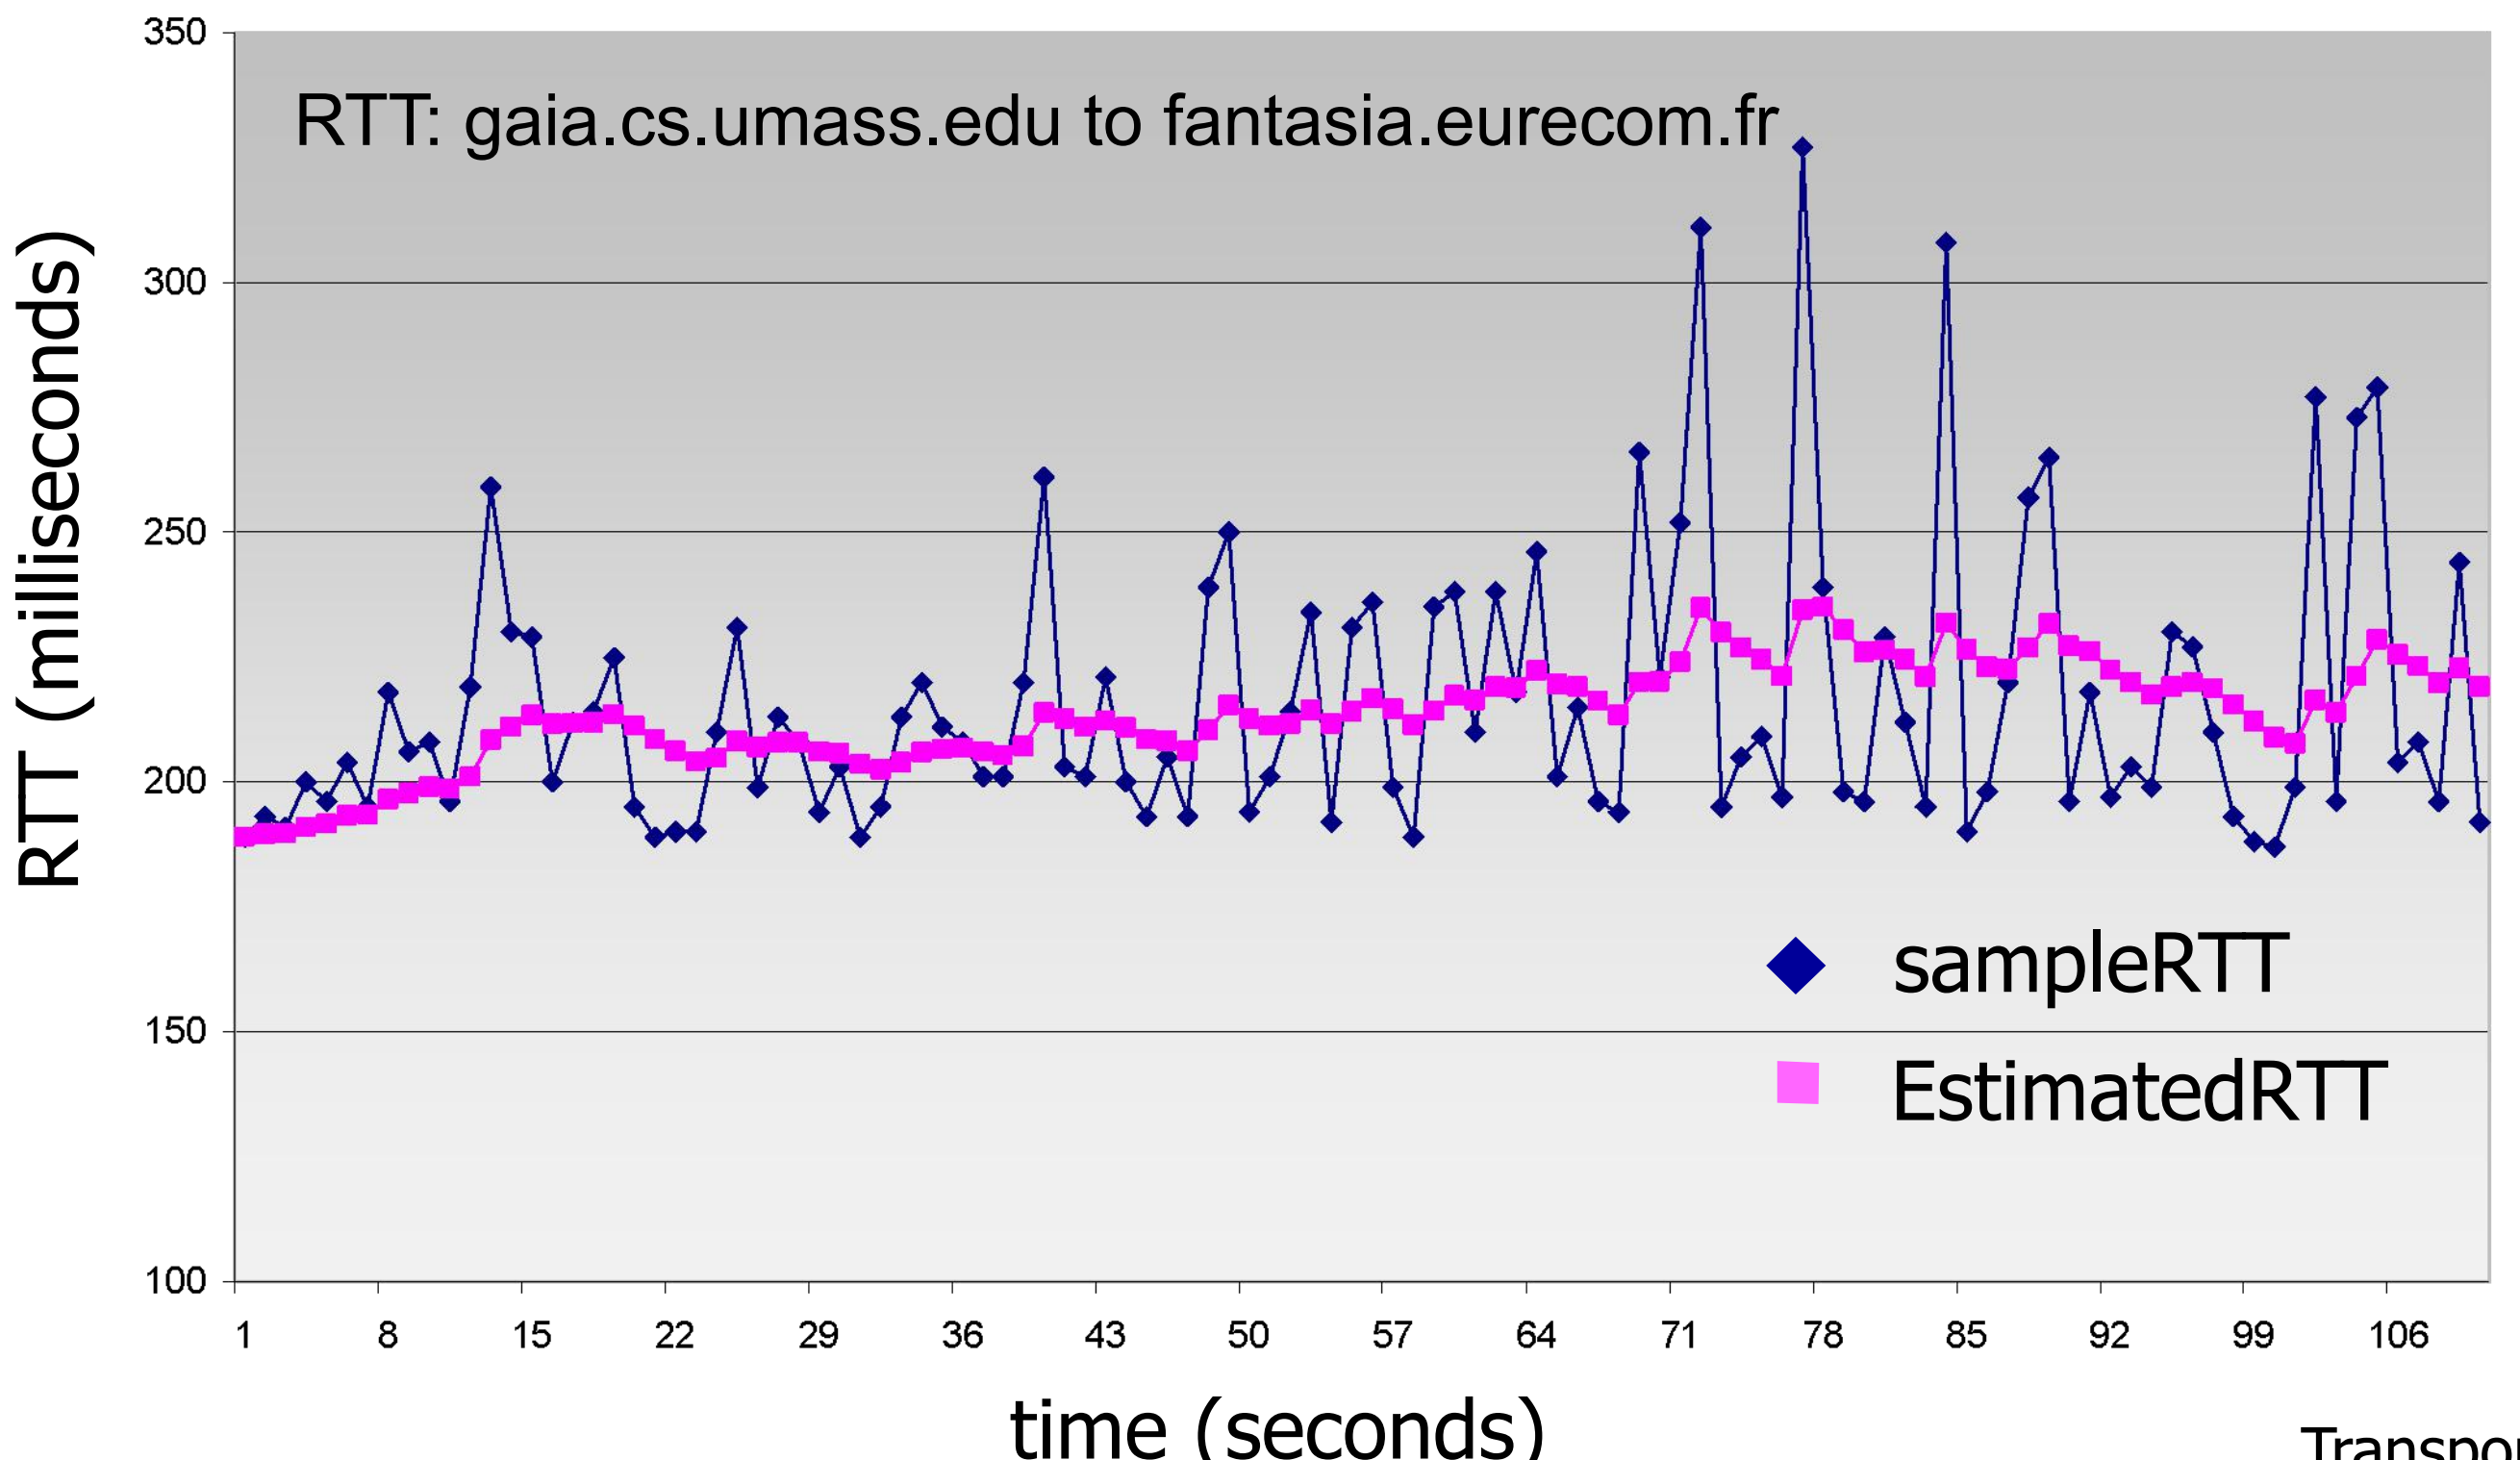

TCP round trip time, timeout

- timeout interval: **`EstimatedRTT`** plus "safety margin"
  - large variation in **`EstimatedRTT`** **`->`** larger safety margin
- estimate SampleRTT deviation from EstimatedRTT:

```
DevRTT = (1-β)*DevRTT +
              β*|SampleRTT-EstimatedRTT|

              (typically, β = 0.25)
```

```
TimeoutInterval = EstimatedRTT + 4*DevRTT
```

estimated RTT

"safety margin"

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

TCP reliable data transfer

- TCP creates rdt service on top of IP's unreliable service
  - pipelined segments
  - cumulative acks
  - single retransmission timer
  - Similar with Go-Back-N
- retransmissions triggered by:
  - timeout events
  - duplicate acks

let's initially consider simplified TCP sender:
- ignore duplicate acks
- ignore flow control, congestion control

TCP without retransmission

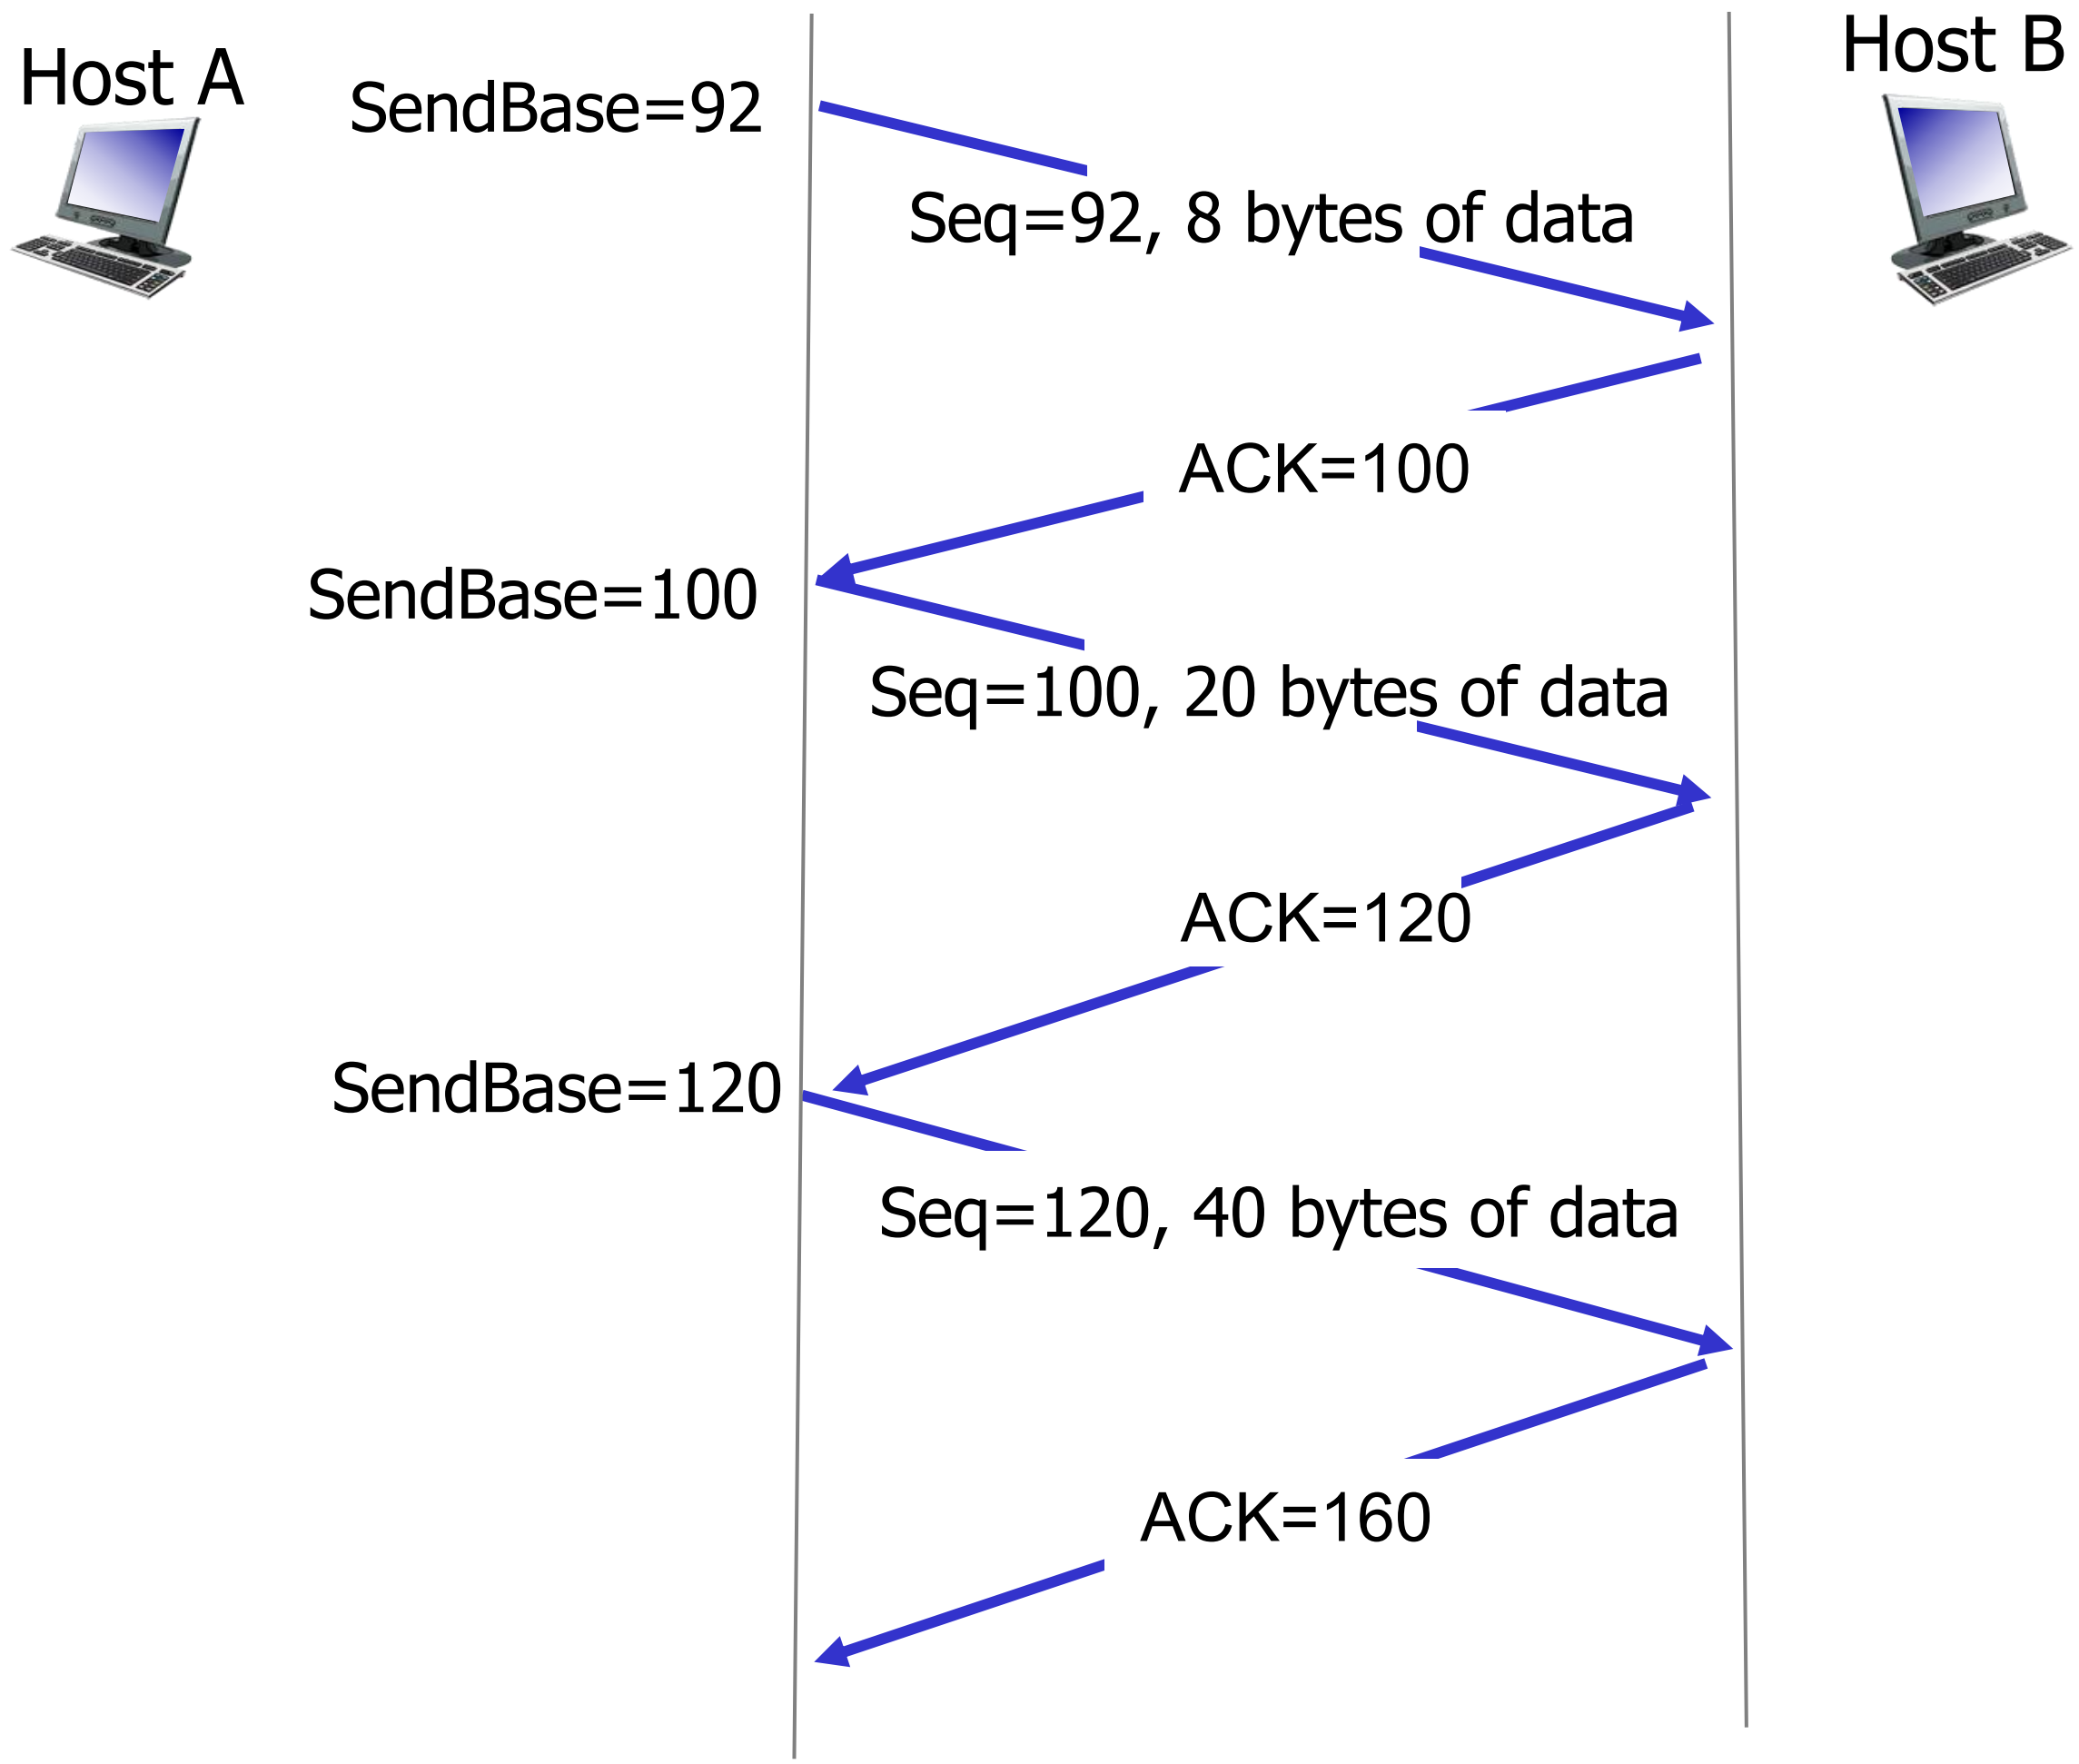

TCP sender events:

data rcvd from app:

- create segment with seq #
- seq # is byte-stream number of first data byte in segment
- start timer if not already running
  - think of timer as for oldest unacked segment
  - expiration interval: **`TimeOutInterval`**

timeout:

- retransmit segment that caused timeout
- restart timer

ack rcvd:

- if ack acknowledges previously unacked segments
  - update what is known to be ACKed
  - start timer if there are still unacked segments

TCP: retransmission scenarios

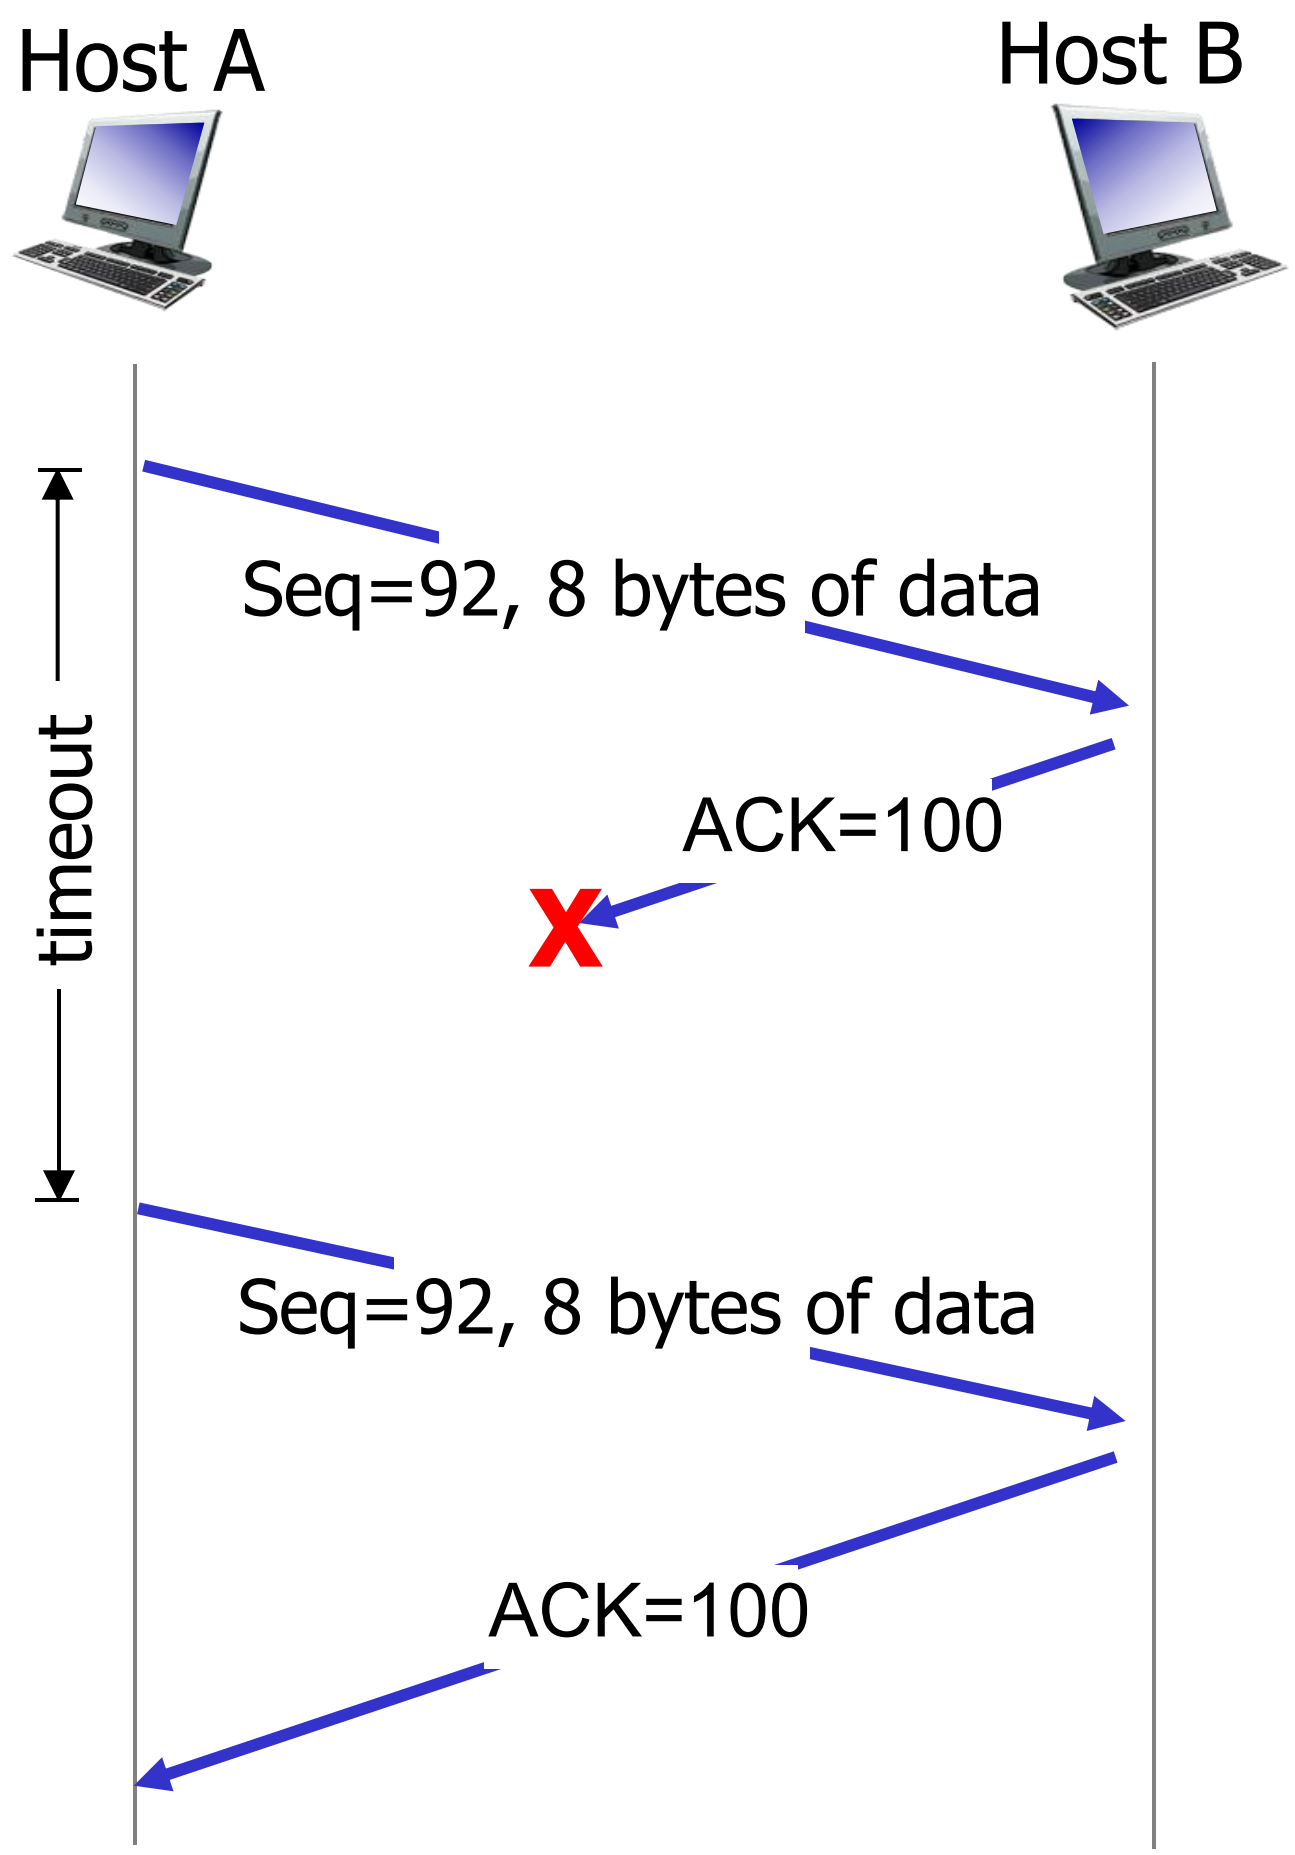

lost ACK scenario

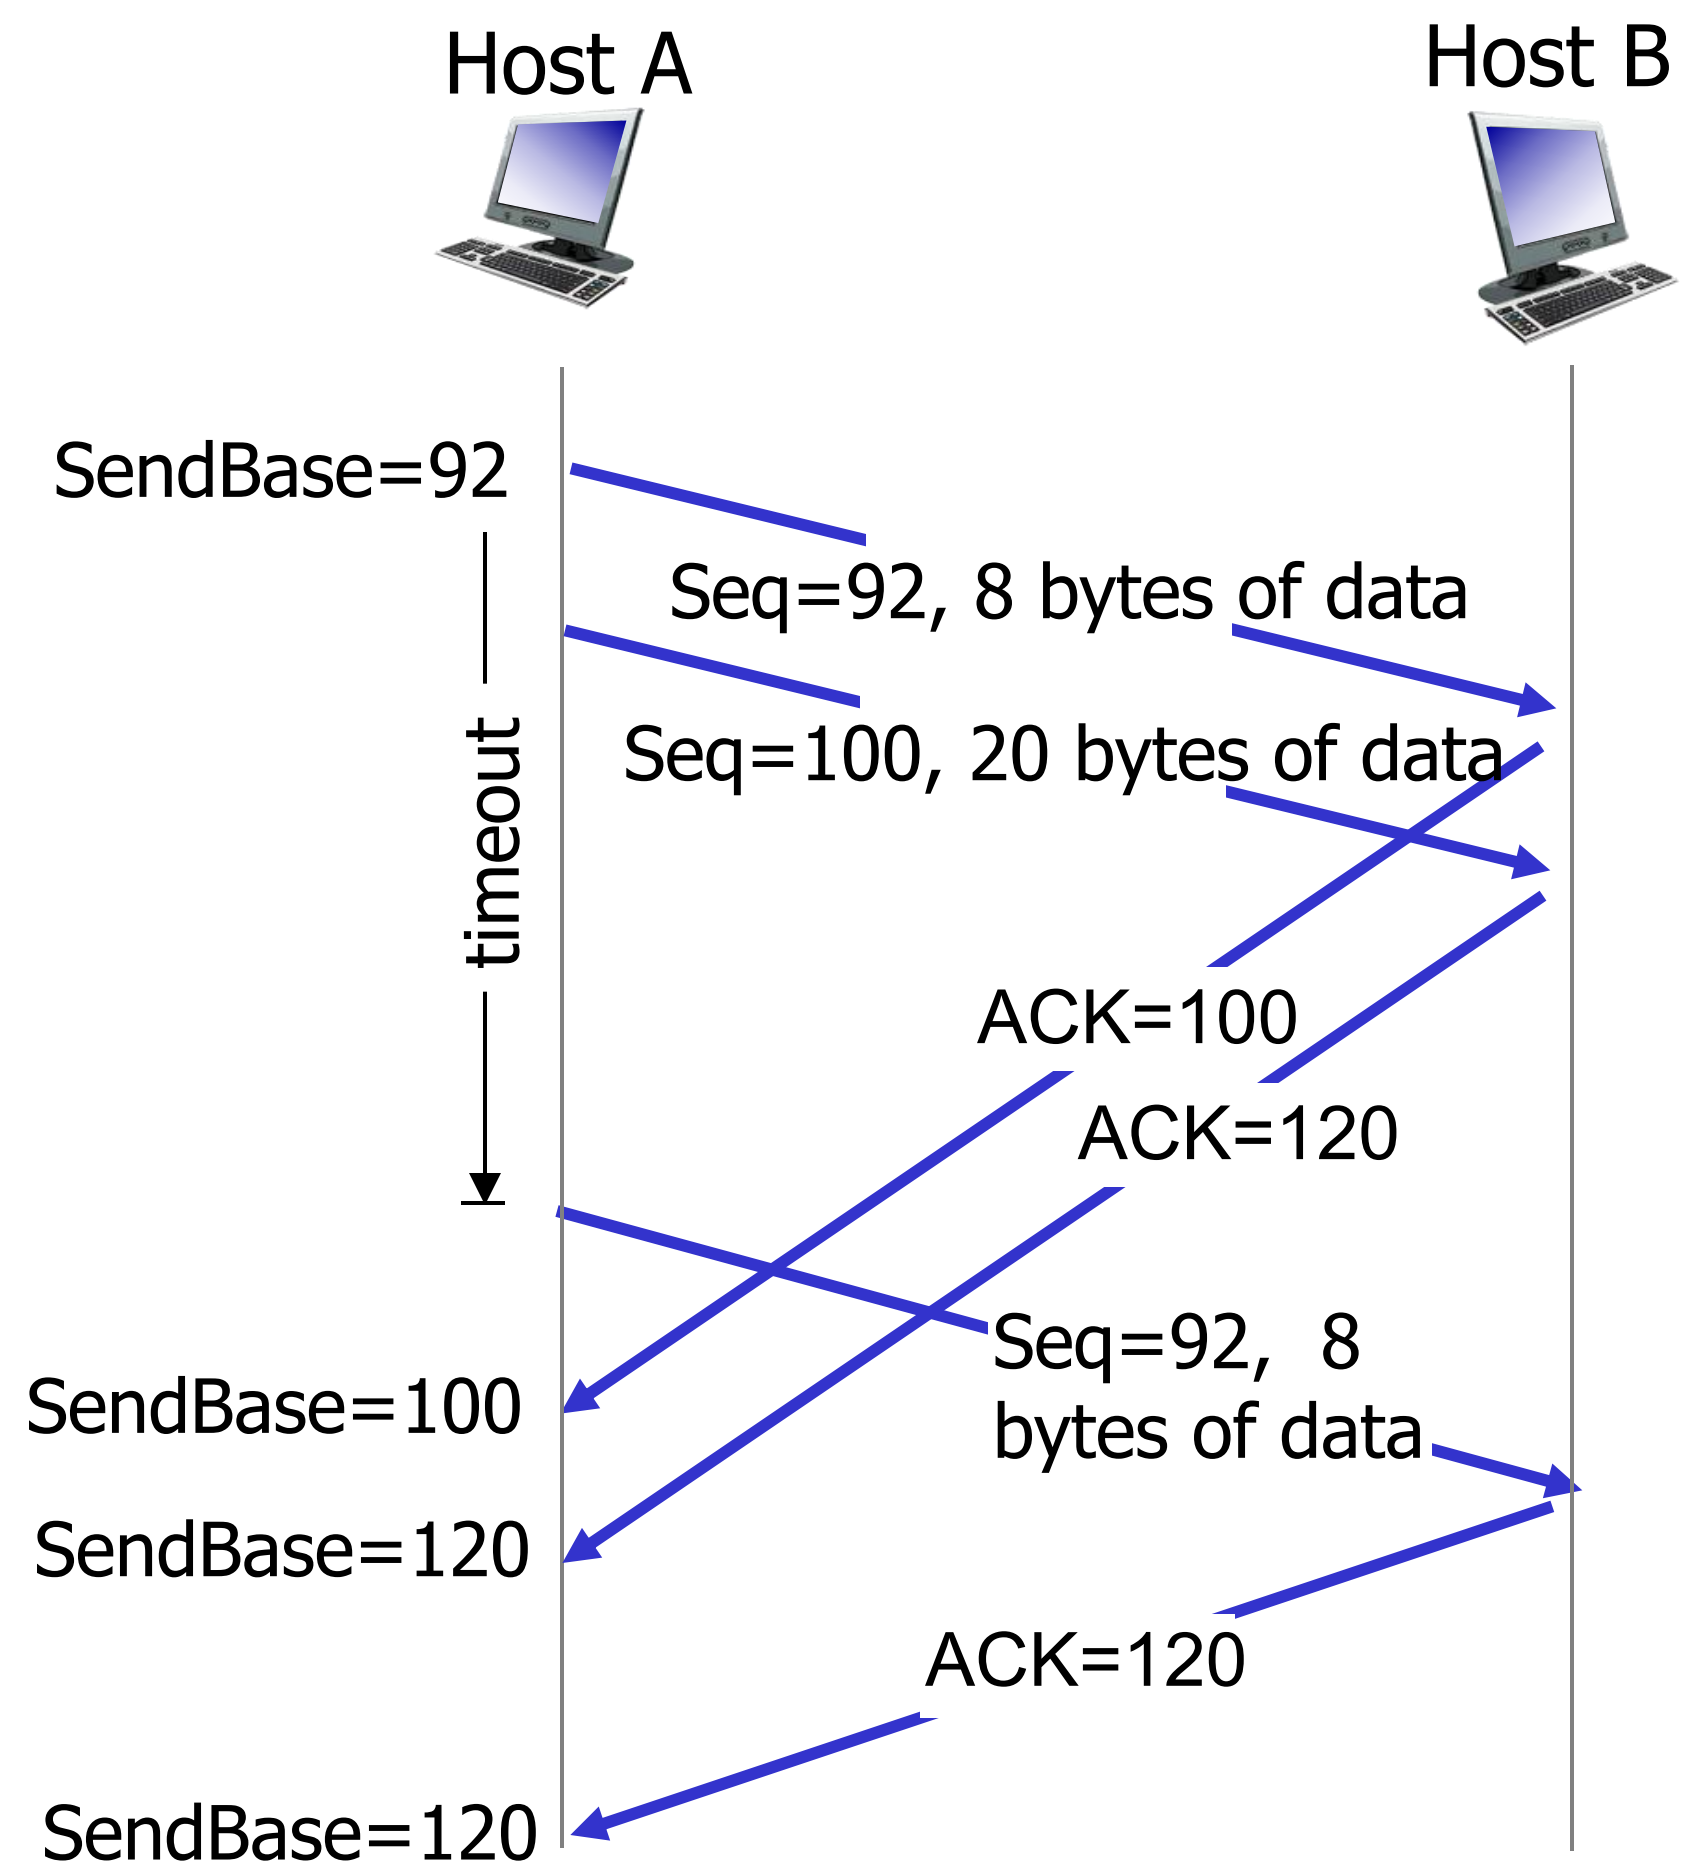

premature timeout

TCP: retransmission scenarios

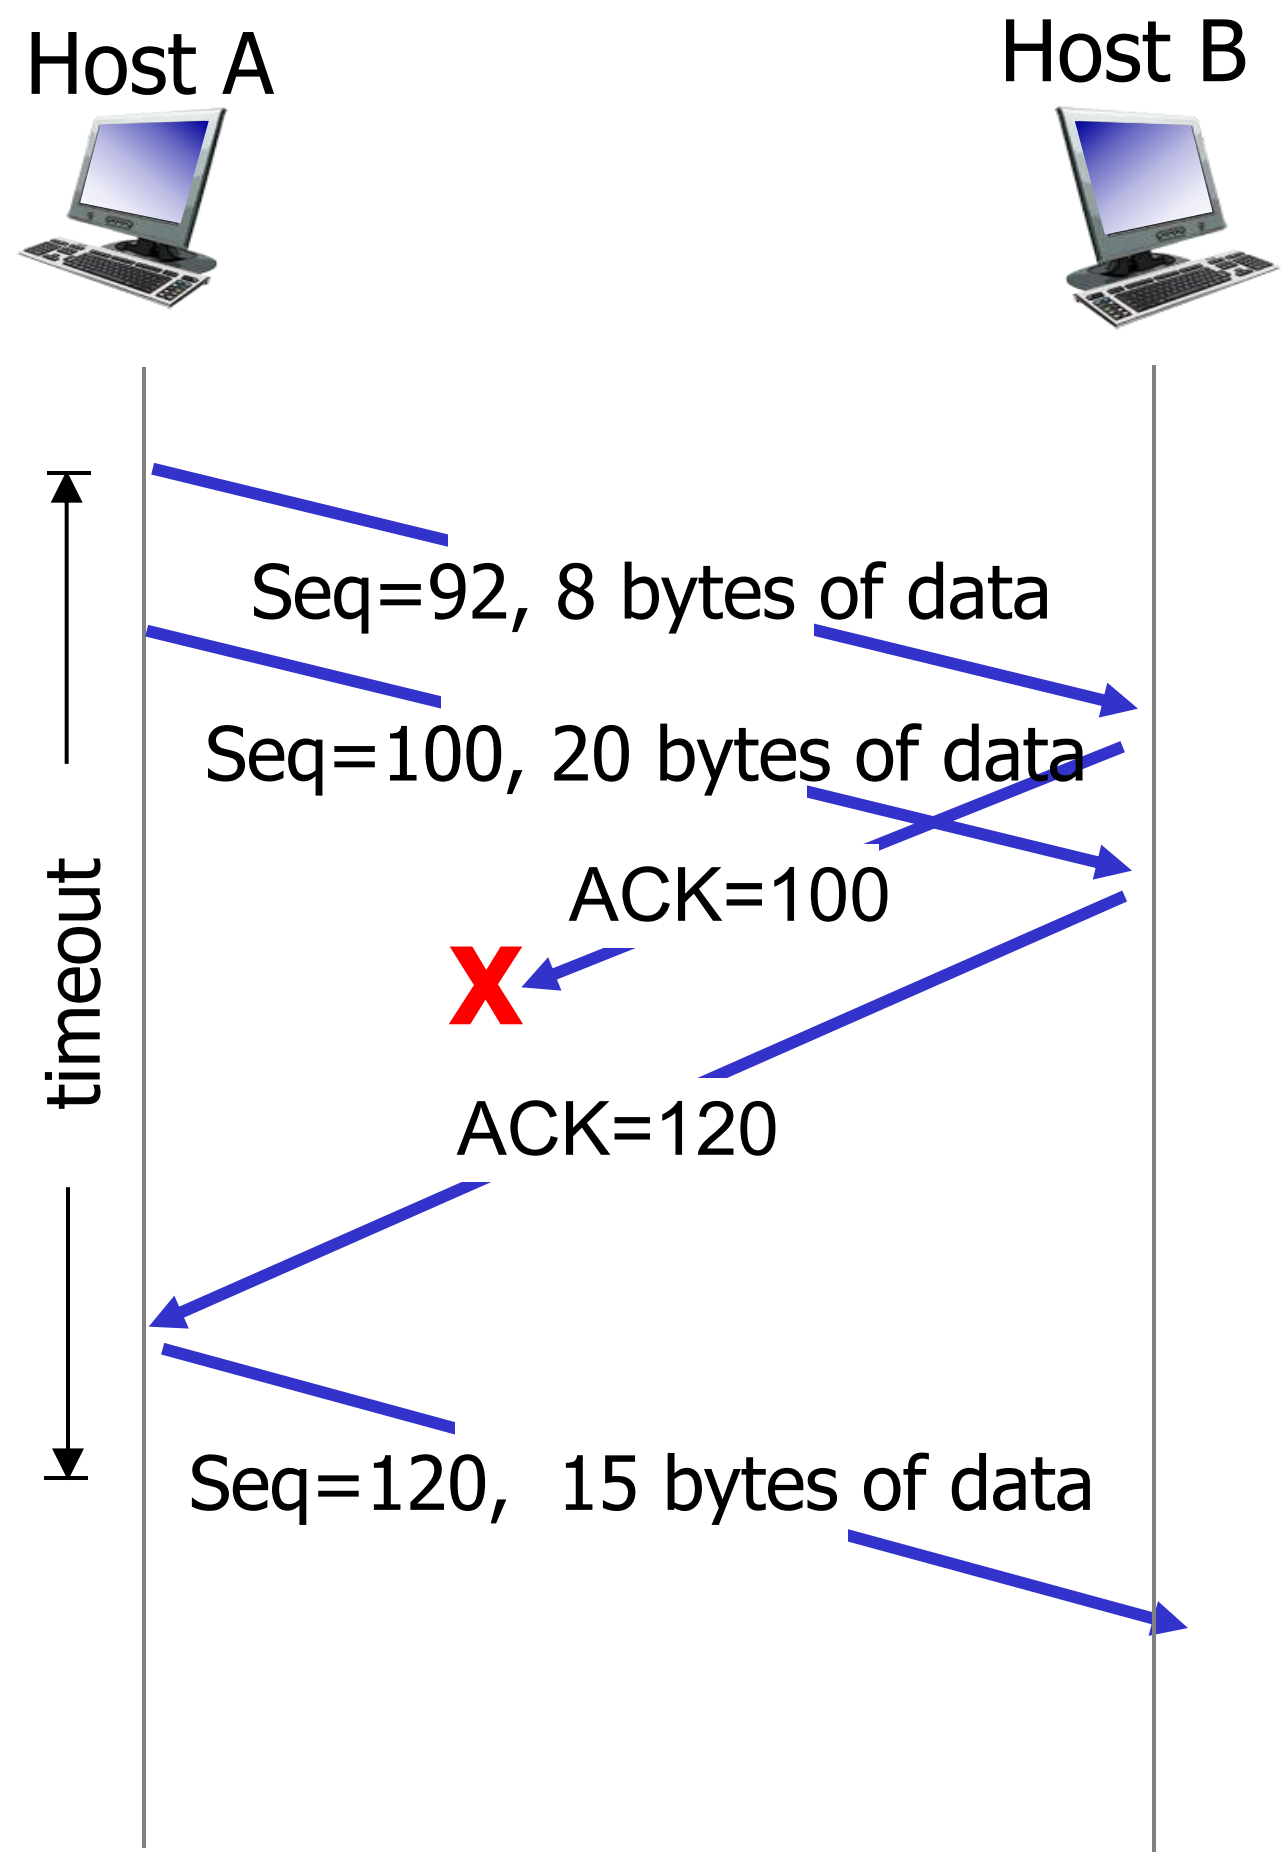

cumulative ACK

TCP receiver [RFC 1122, RFC 2581]

event at receiver	*TCP receiver action*
arrival of in-order segment with expected seq #. All data up to expected seq # already ACKed	delayed ACK. Wait up to 500ms for next segment. If no next segment, send ACK
arrival of in-order segment with expected seq #. One other segment has ACK pending	cumulative ACK. immediately send single cumulative ACK, ACKing both in-order segments
arrival of out-of-order segment higher-than-expect seq. # . Gap detected	immediately send *duplicate ACK,* indicating seq. # of next expected byte
arrival of segment that partially or completely fills gap	immediate send updated ACK, provided that segment starts at lower end of gap

delayed and cumulative ACK

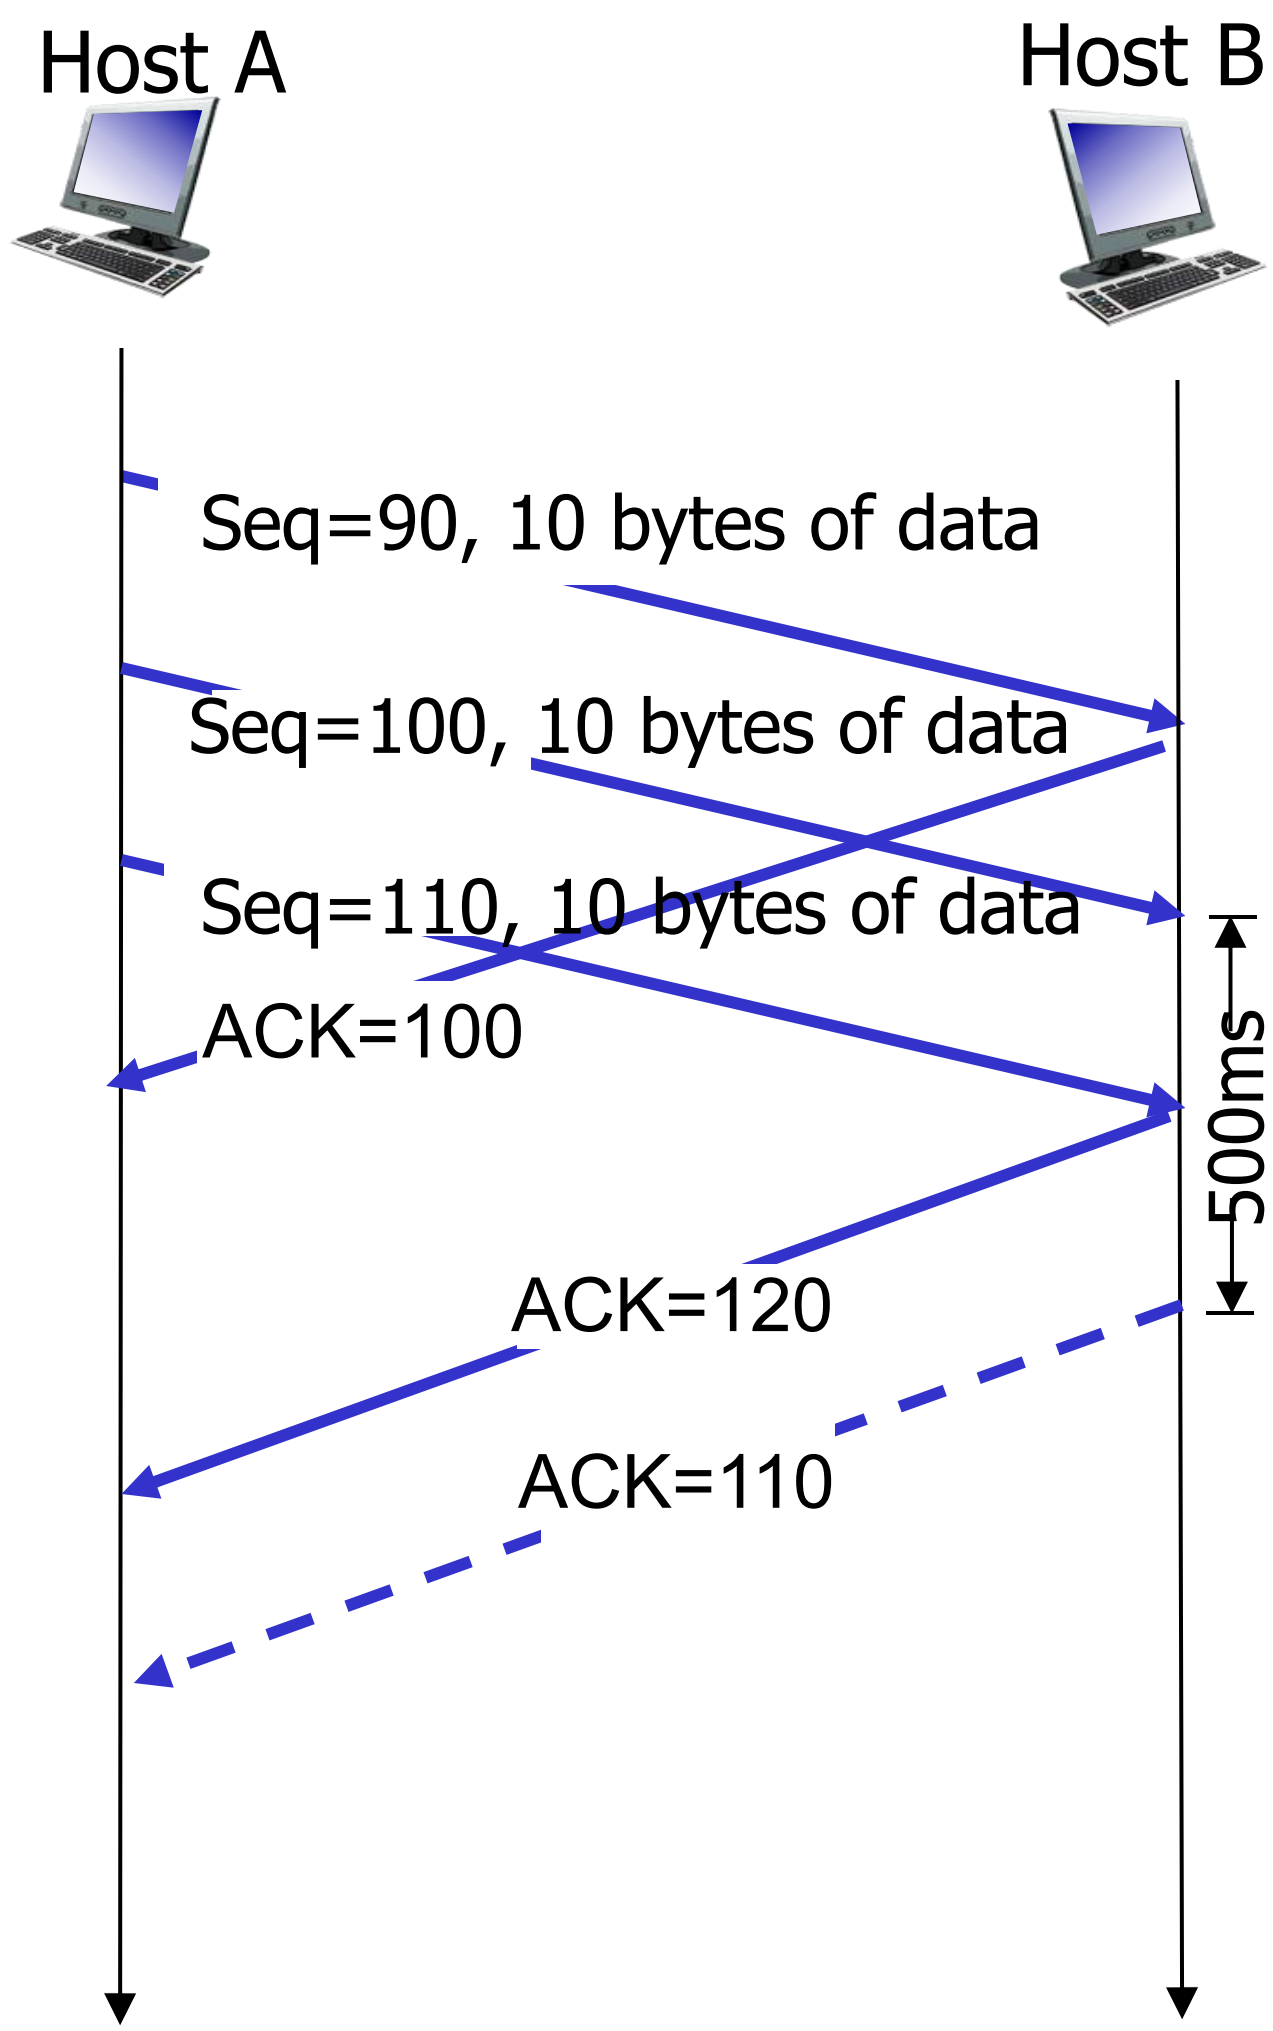

all bytes until 100 are ACKed

Delayed ACK: delay the ACK for 500ms

cumulative ACK: when another pending ACK together

delayed and cumulative ACK

duplicate ACK

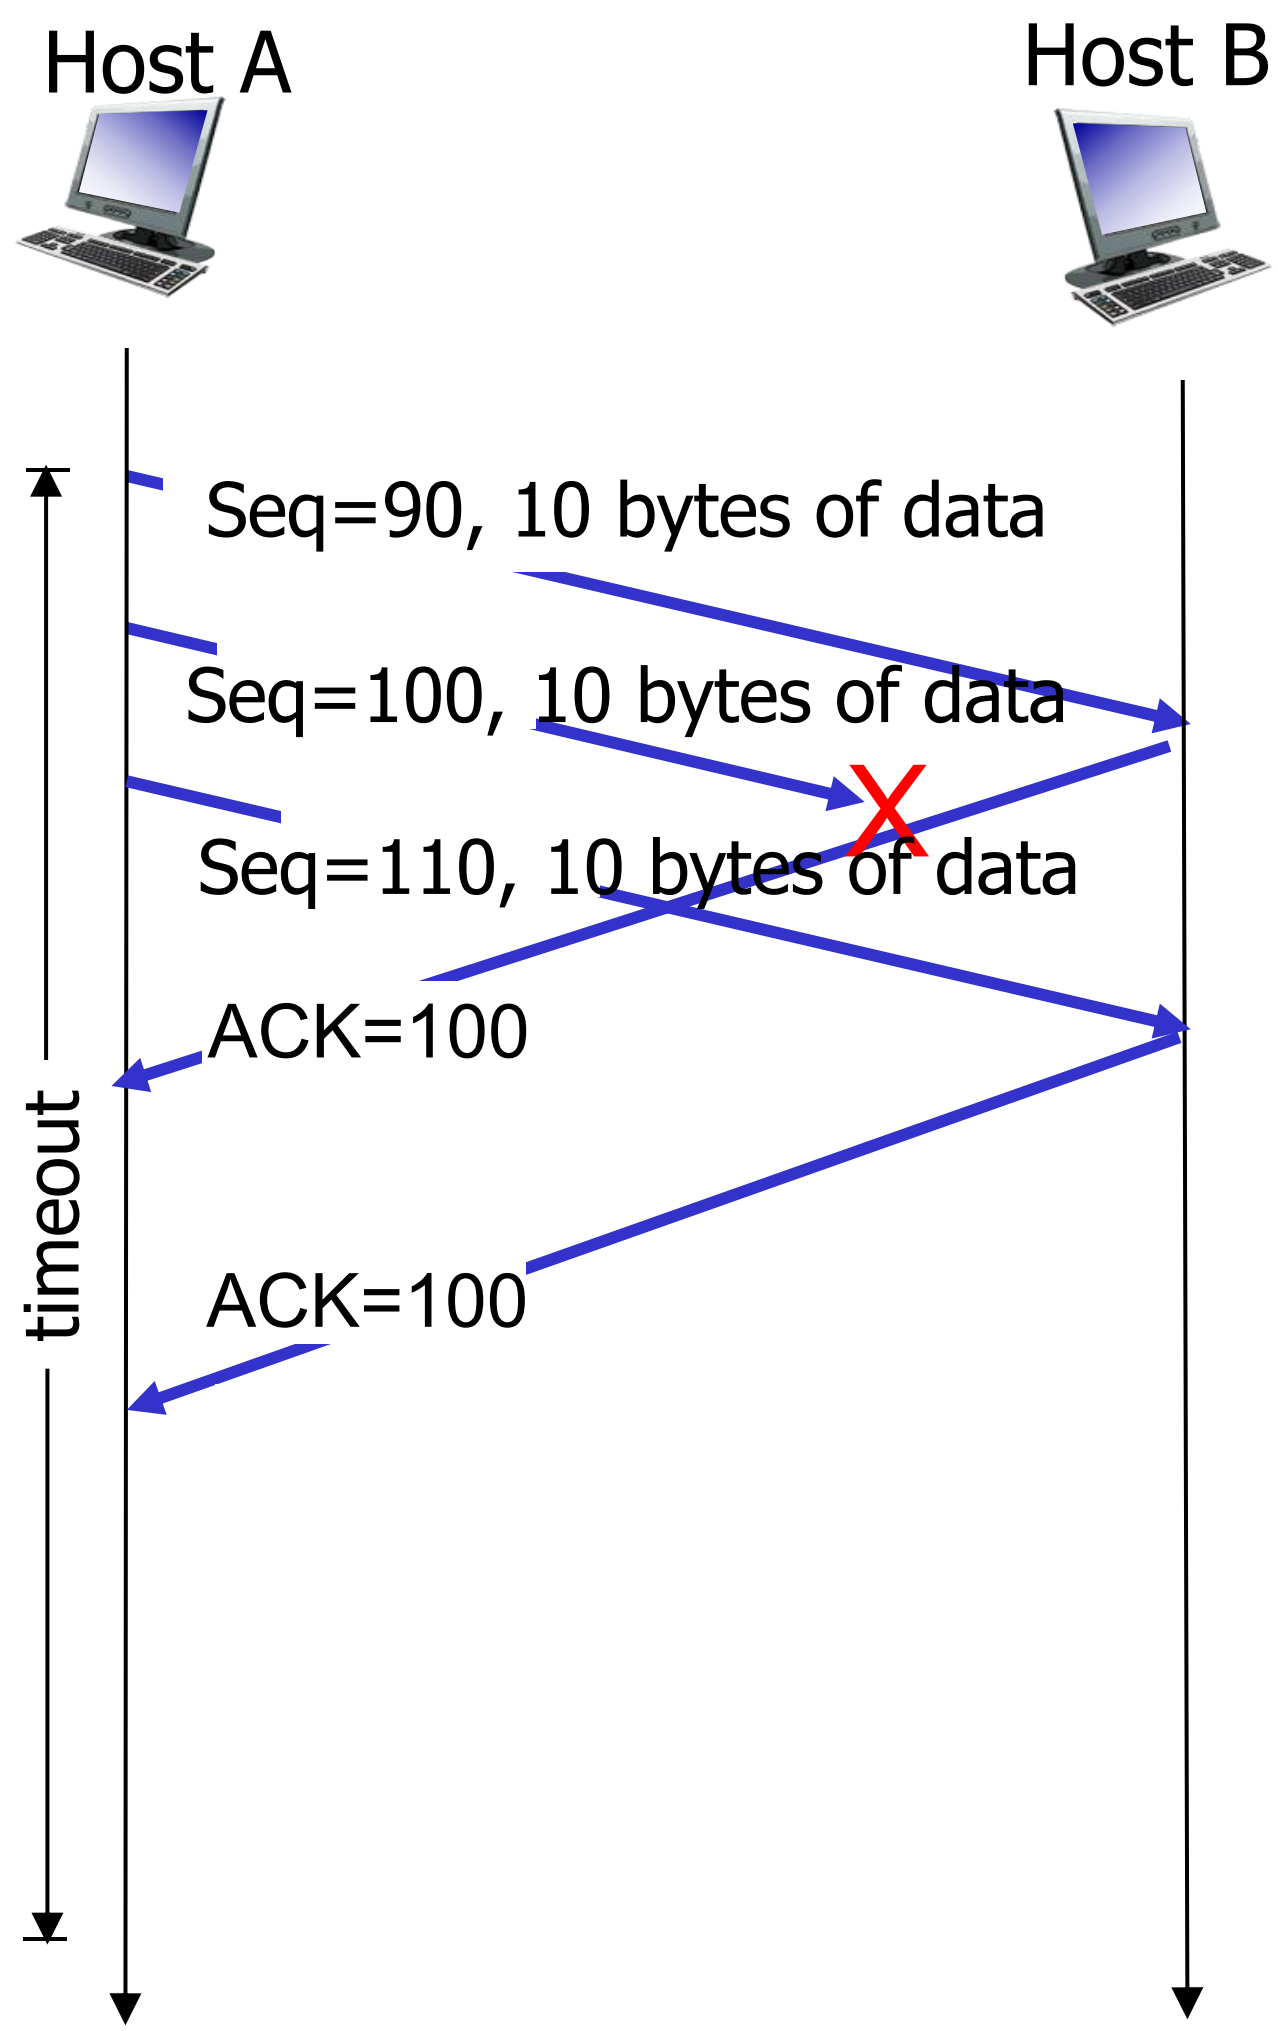

duplicate ACK: expecting seq=100, seq=110 arrives, a gap means data loss, immediately send dup ACK

Updated ACK

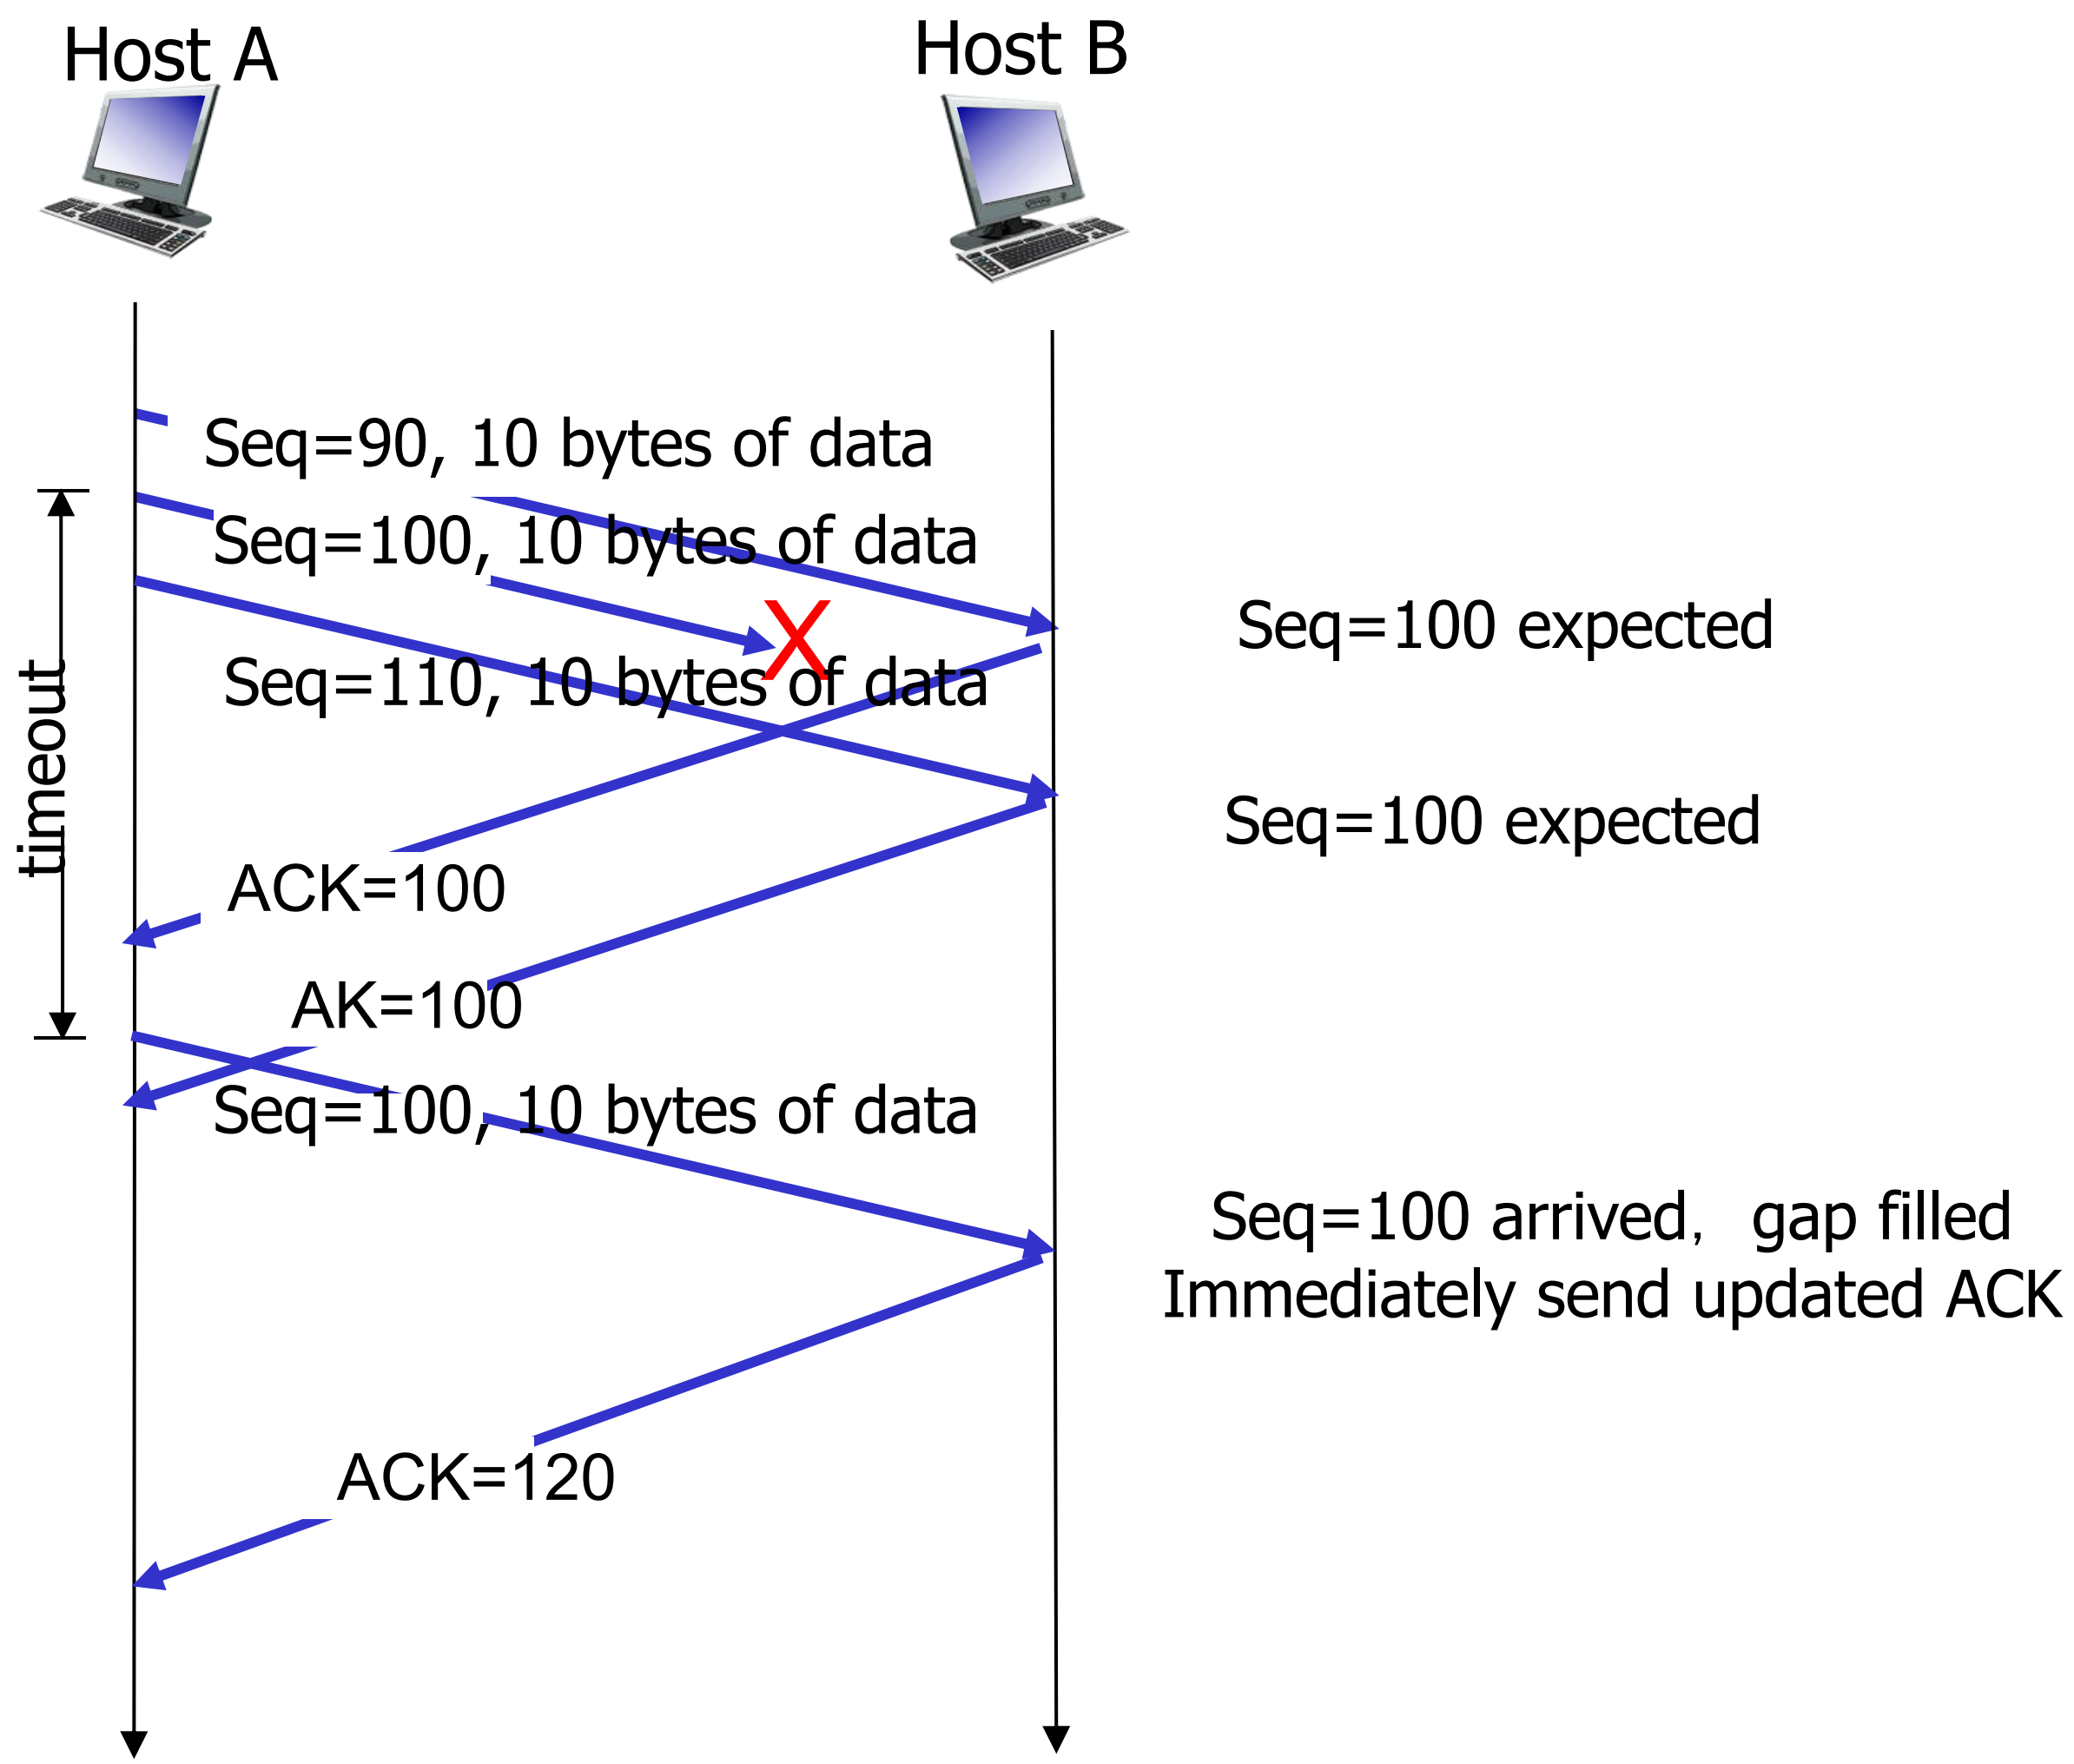
Host A
Host B
Seq=90, 10 bytes of data
Seq=100, 10 bytes of data
X
Seq=110, 10 bytes of data
timeout
Seq=100 expected
Seq=100 expected
ACK=100
AK=100
Seq=100, 10 bytes of data
Seq=100 arrived, gap filled
Immediately send updated ACK
ACK=120

TCP fast retransmit

- time-out period often relatively long:
  - long delay before resending lost packet
- detect lost segments via duplicate ACKs.
  - sender often sends many segments back-to-back
  - if segment is lost, there will likely be many duplicate ACKs.

TCP fast retransmit

if sender receives 3 ACKs for same data ("triple duplicate ACKs"), resend unacked segment with smallest seq #

- likely that unacked segment lost, so don't wait for timeout

TCP fast retransmit

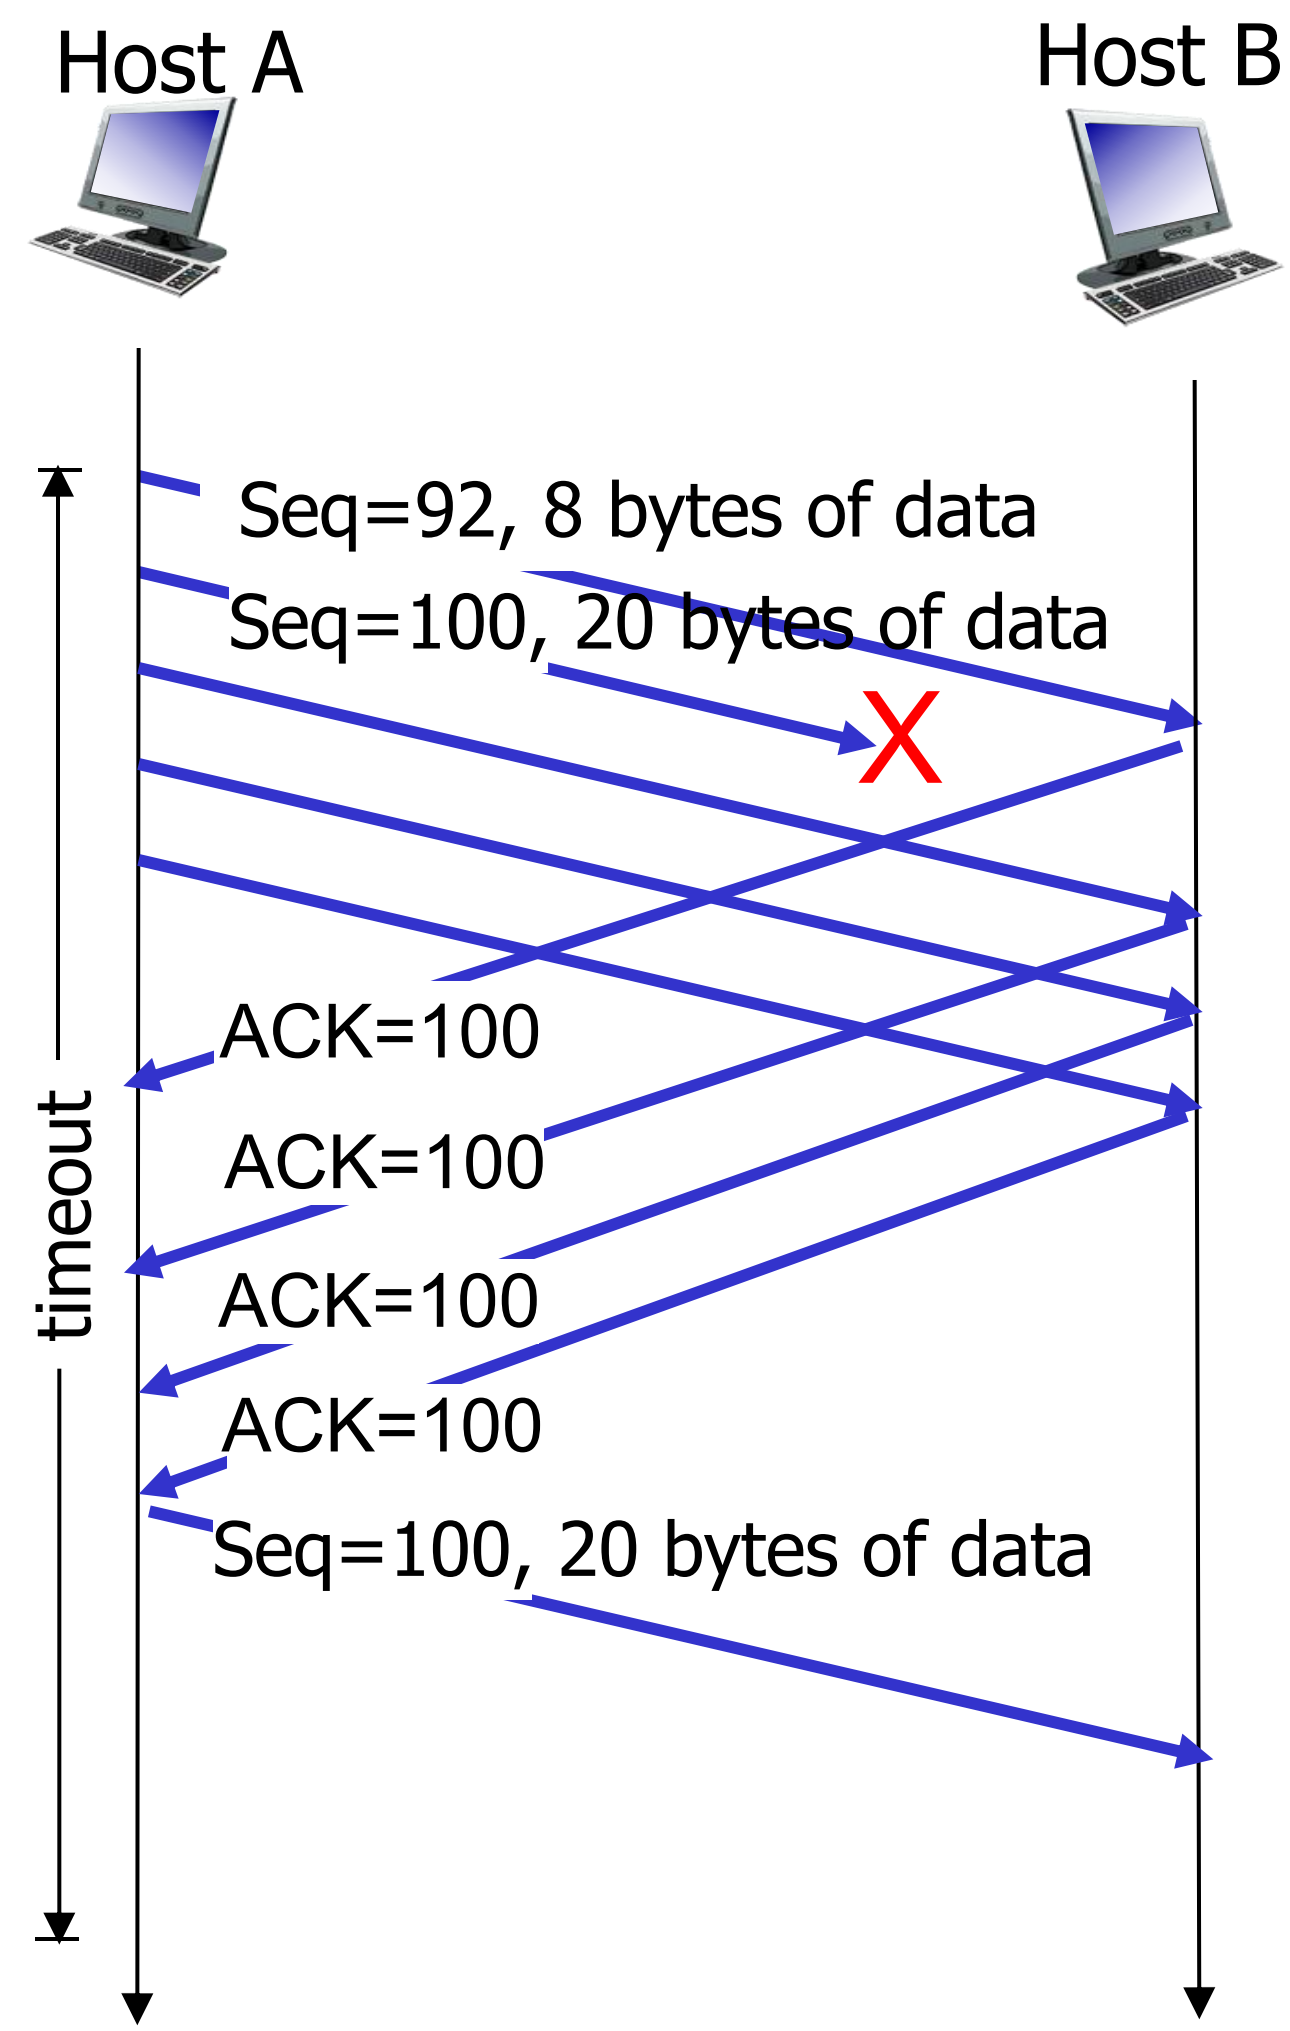

fast retransmit after sender receipt of triple duplicate ACK

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

TCP flow control

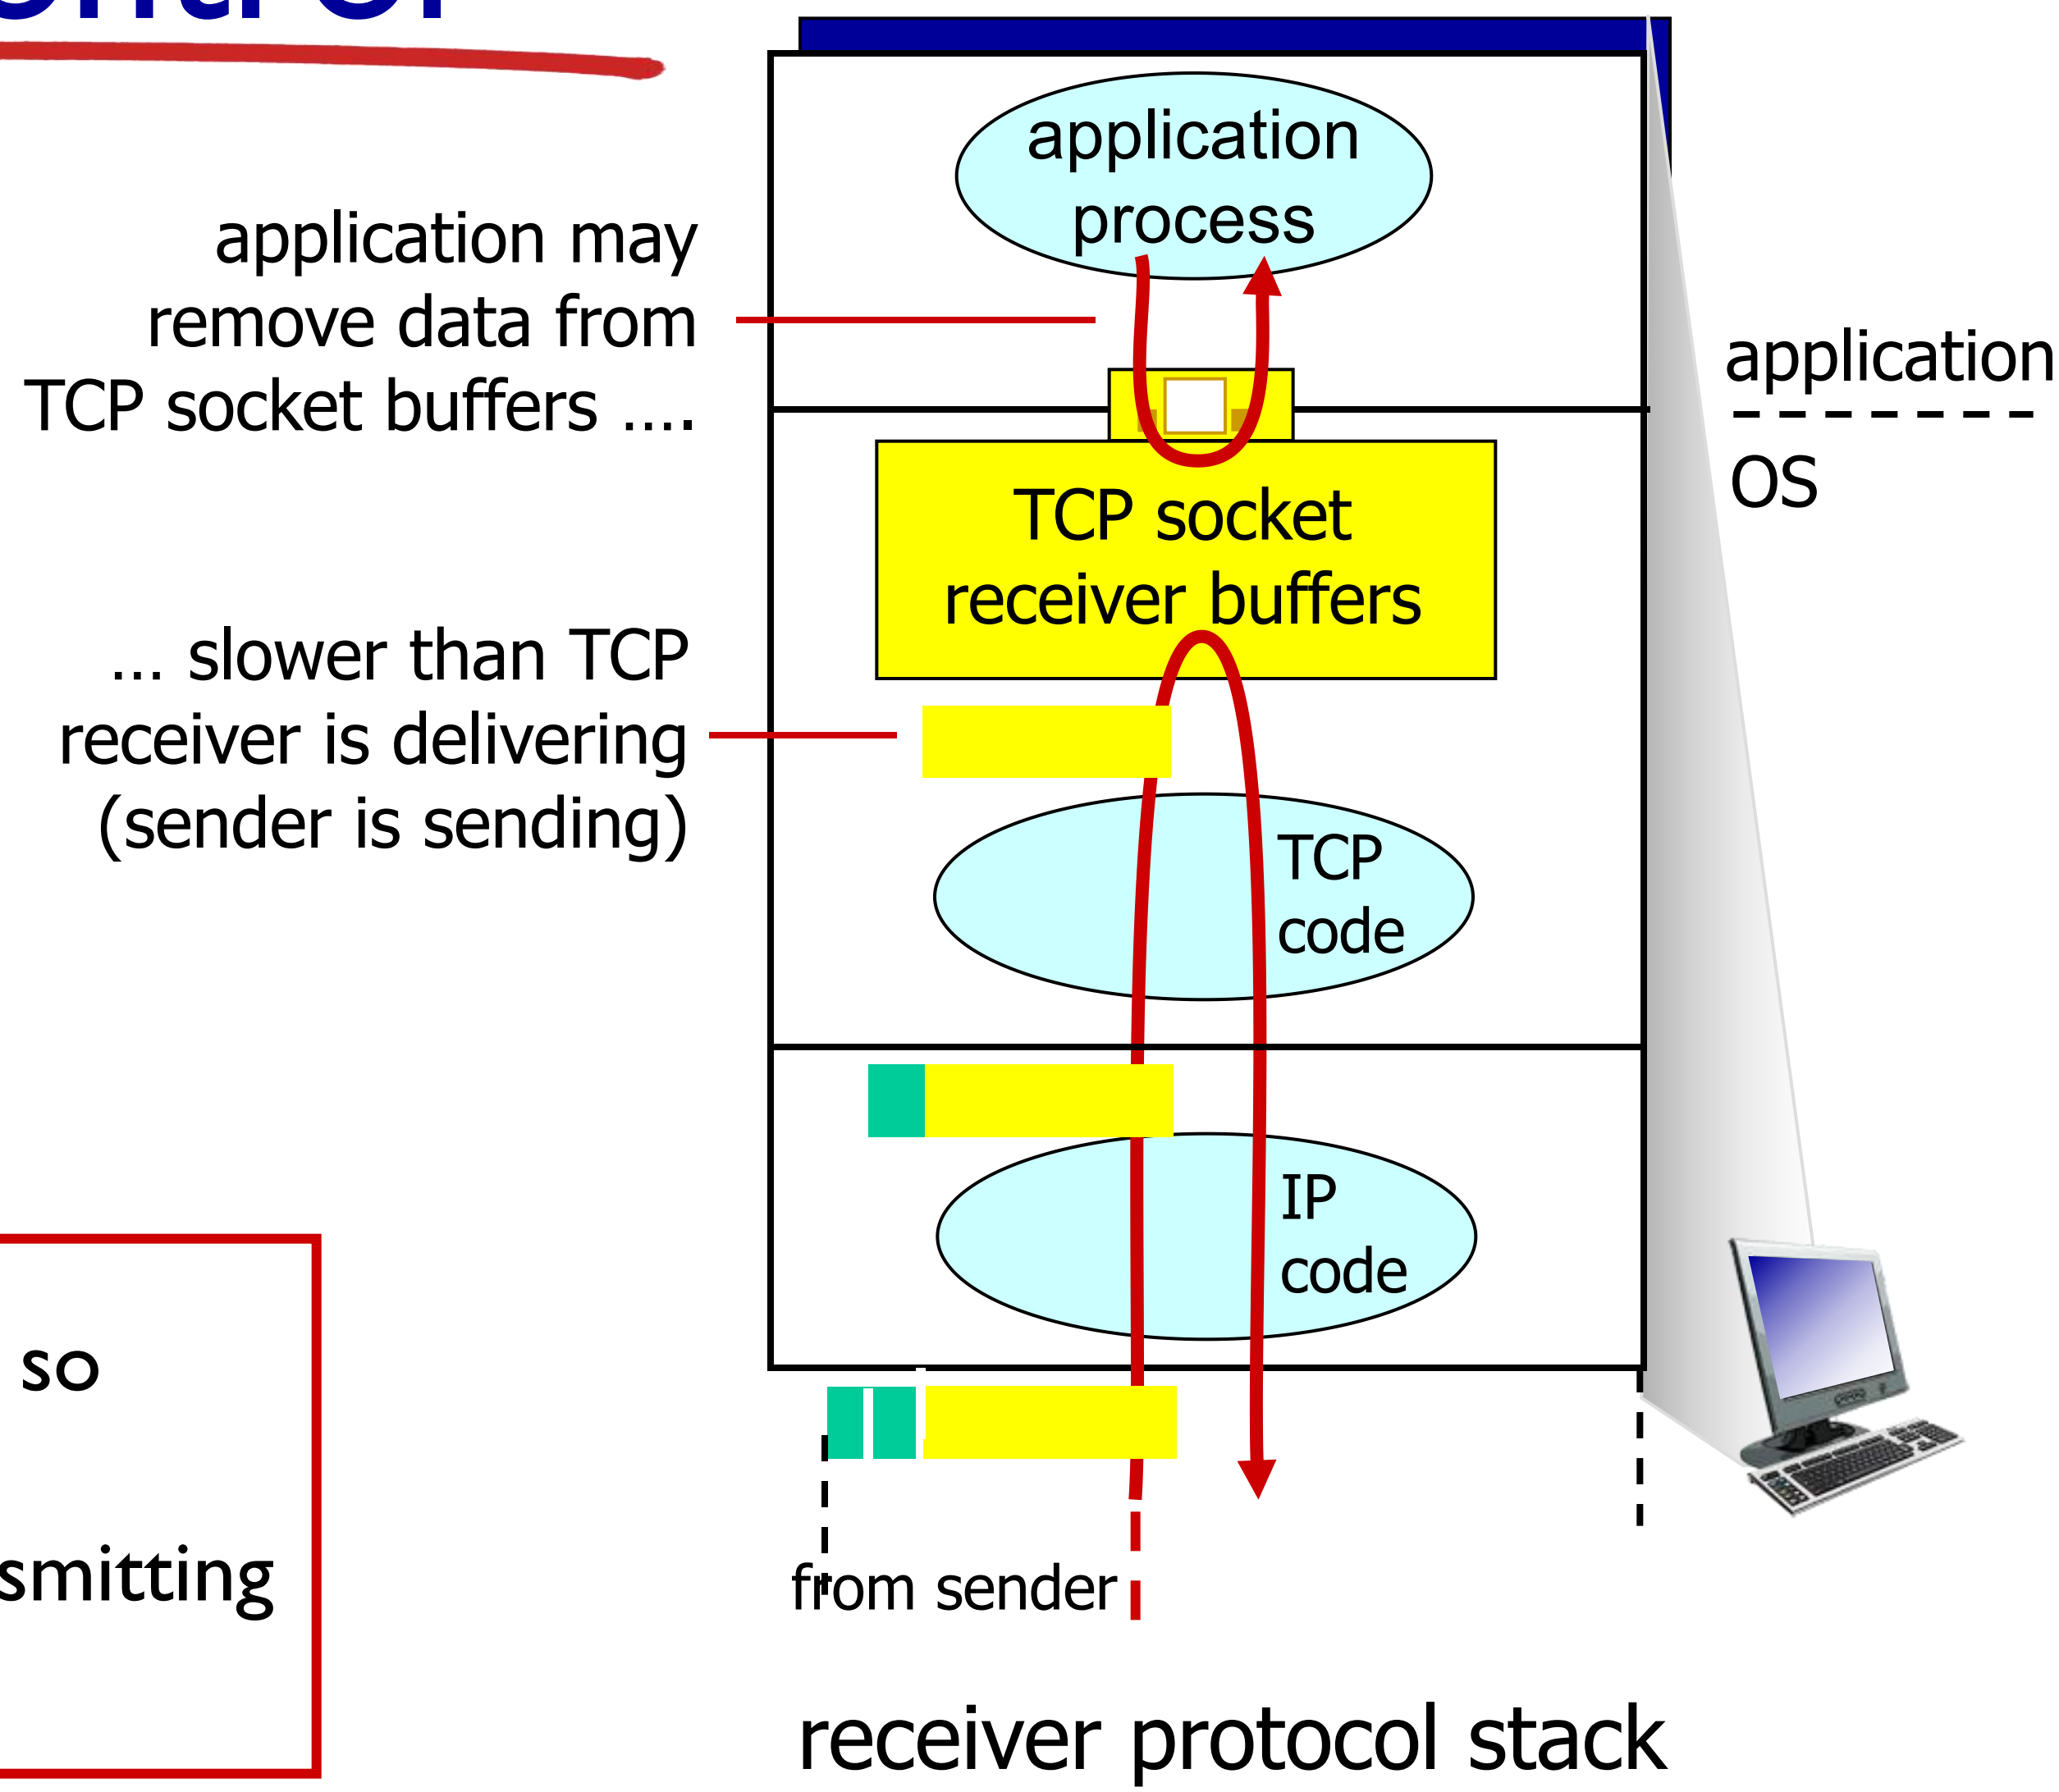

flow control

receiver controls sender, so sender won't overflow receiver's buffer by transmitting too much, too fast

TCP flow control

- receiver "advertises" free buffer space by including **`rwnd`** value in TCP header of receiver-to-sender segments
  - **`RcvBuffer`** size set via socket options (typical default is 4096 bytes)
  - many operating systems autoadjust **`RcvBuffer`**
- sender limits amount of unacked ("in-flight") data to receiver's **`rwnd`** value
- guarantees receive buffer will not overflow

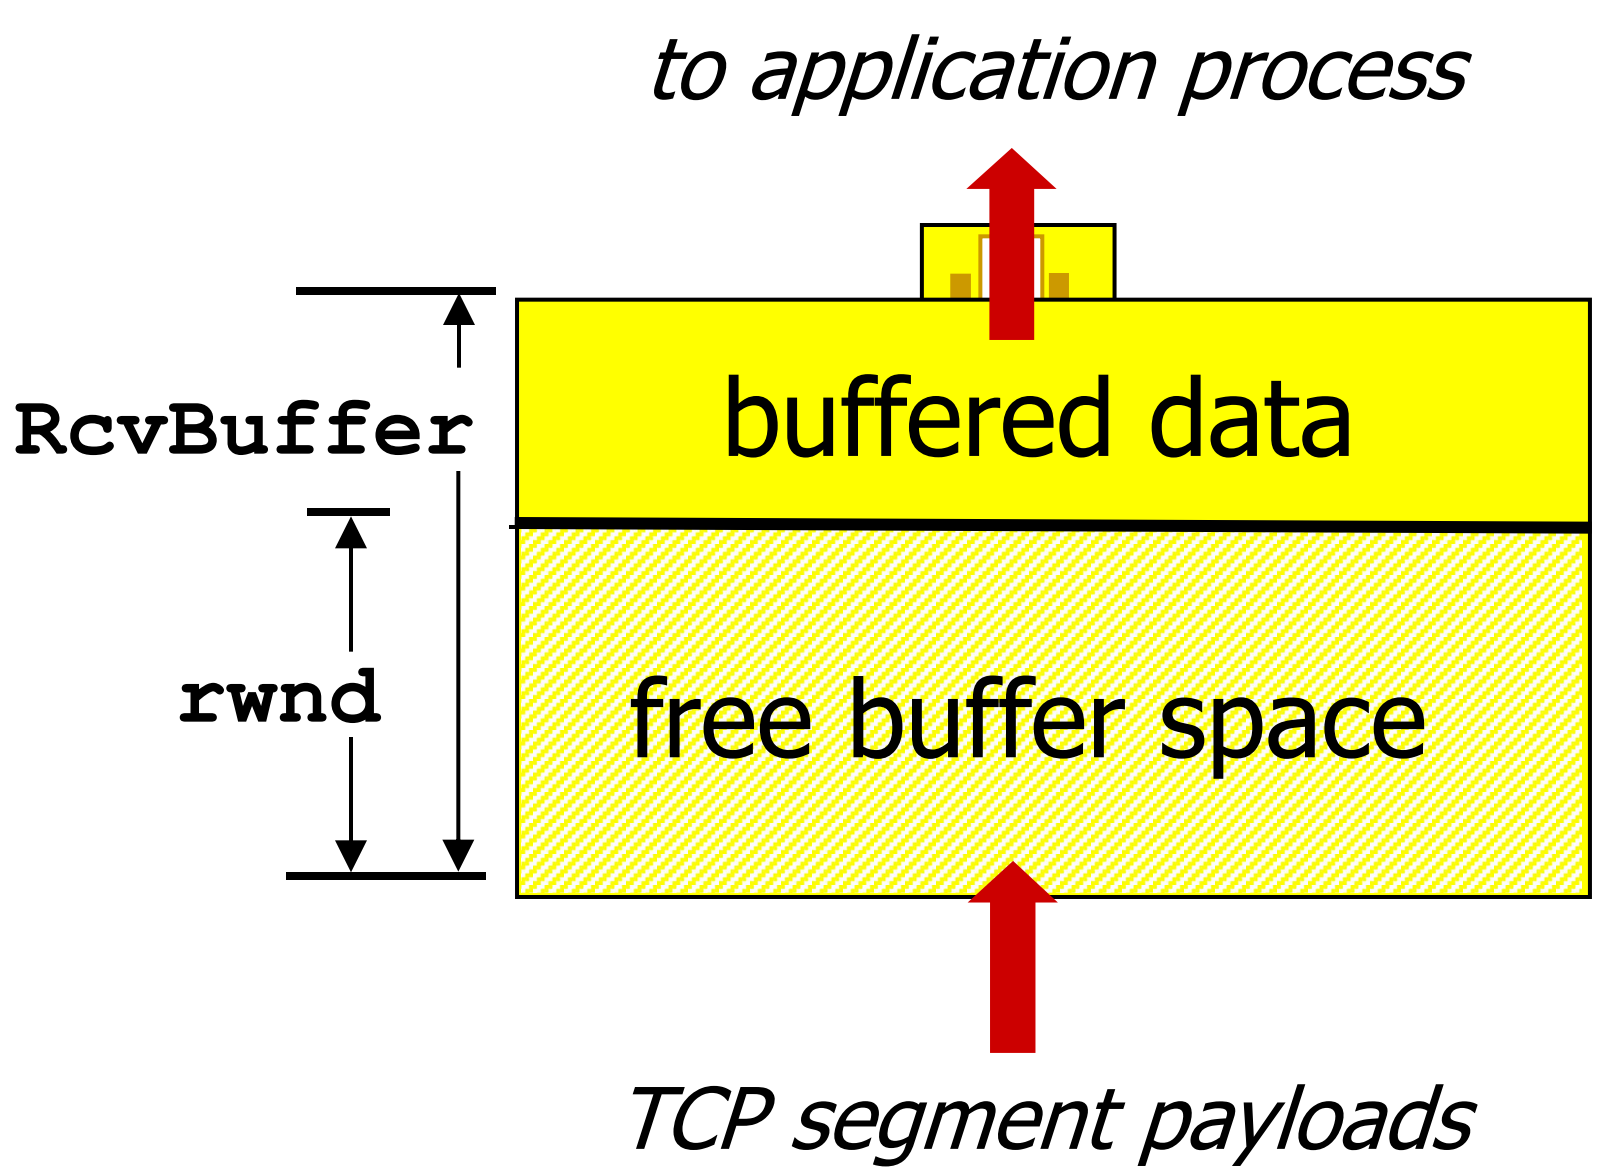

receiver-side buffering

Chapter 3 outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

Connection Management

before exchanging data, sender/receiver "handshake":

- agree to establish connection (each knowing the other willing to establish connection)
- agree on connection parameters

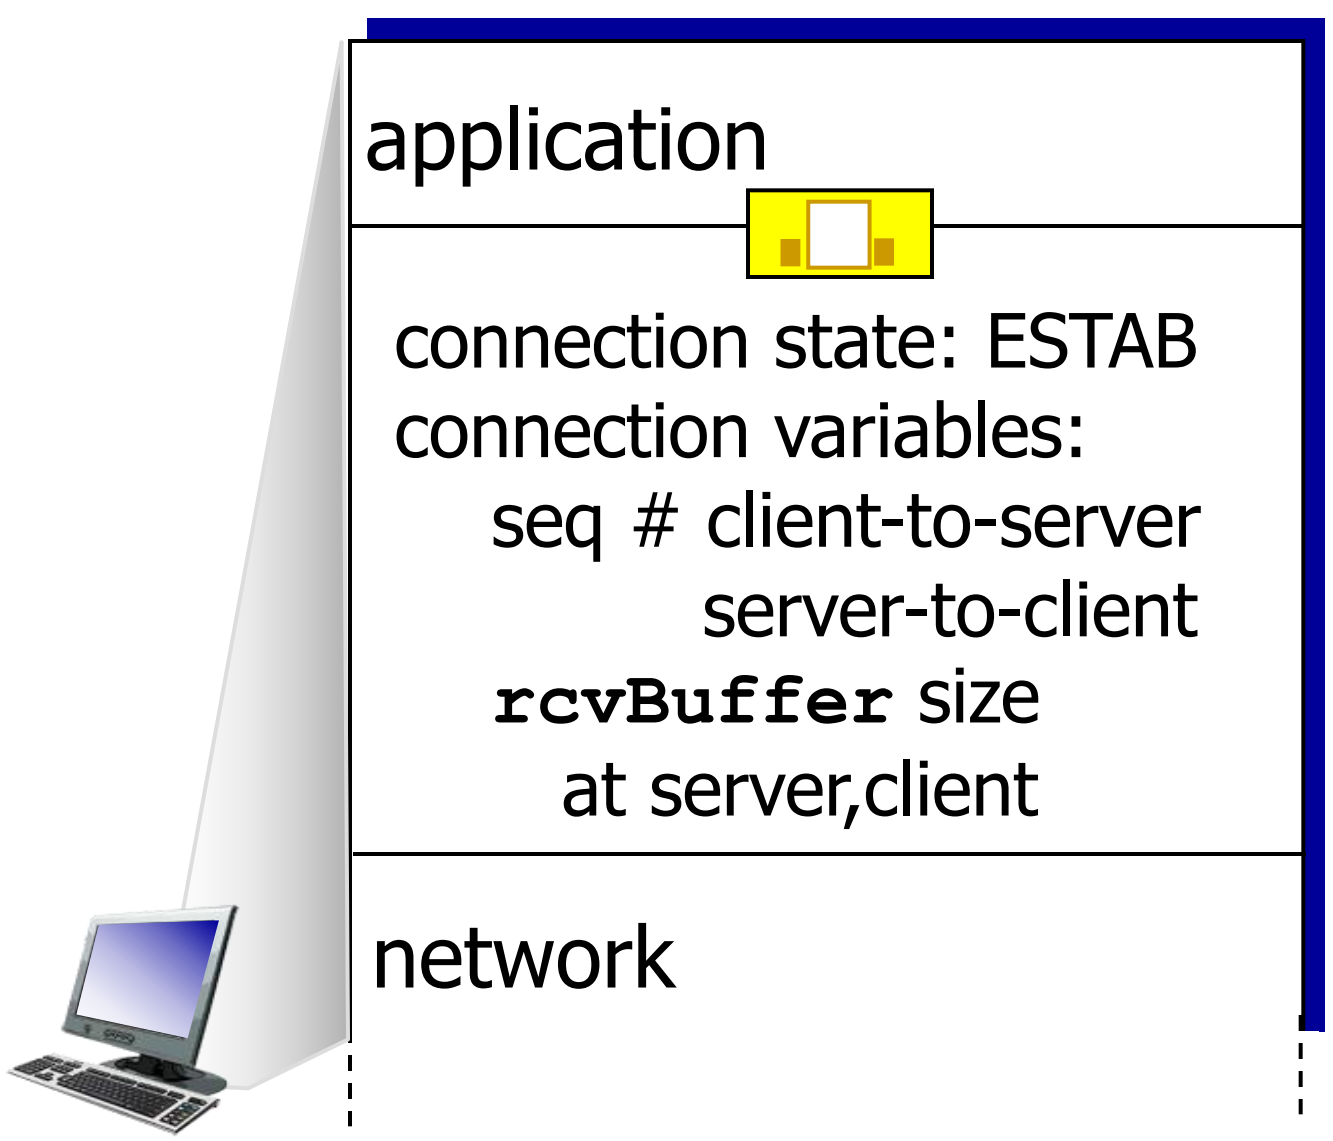


```
Socket clientSocket =
  newSocket("hostname","port
   number");
```

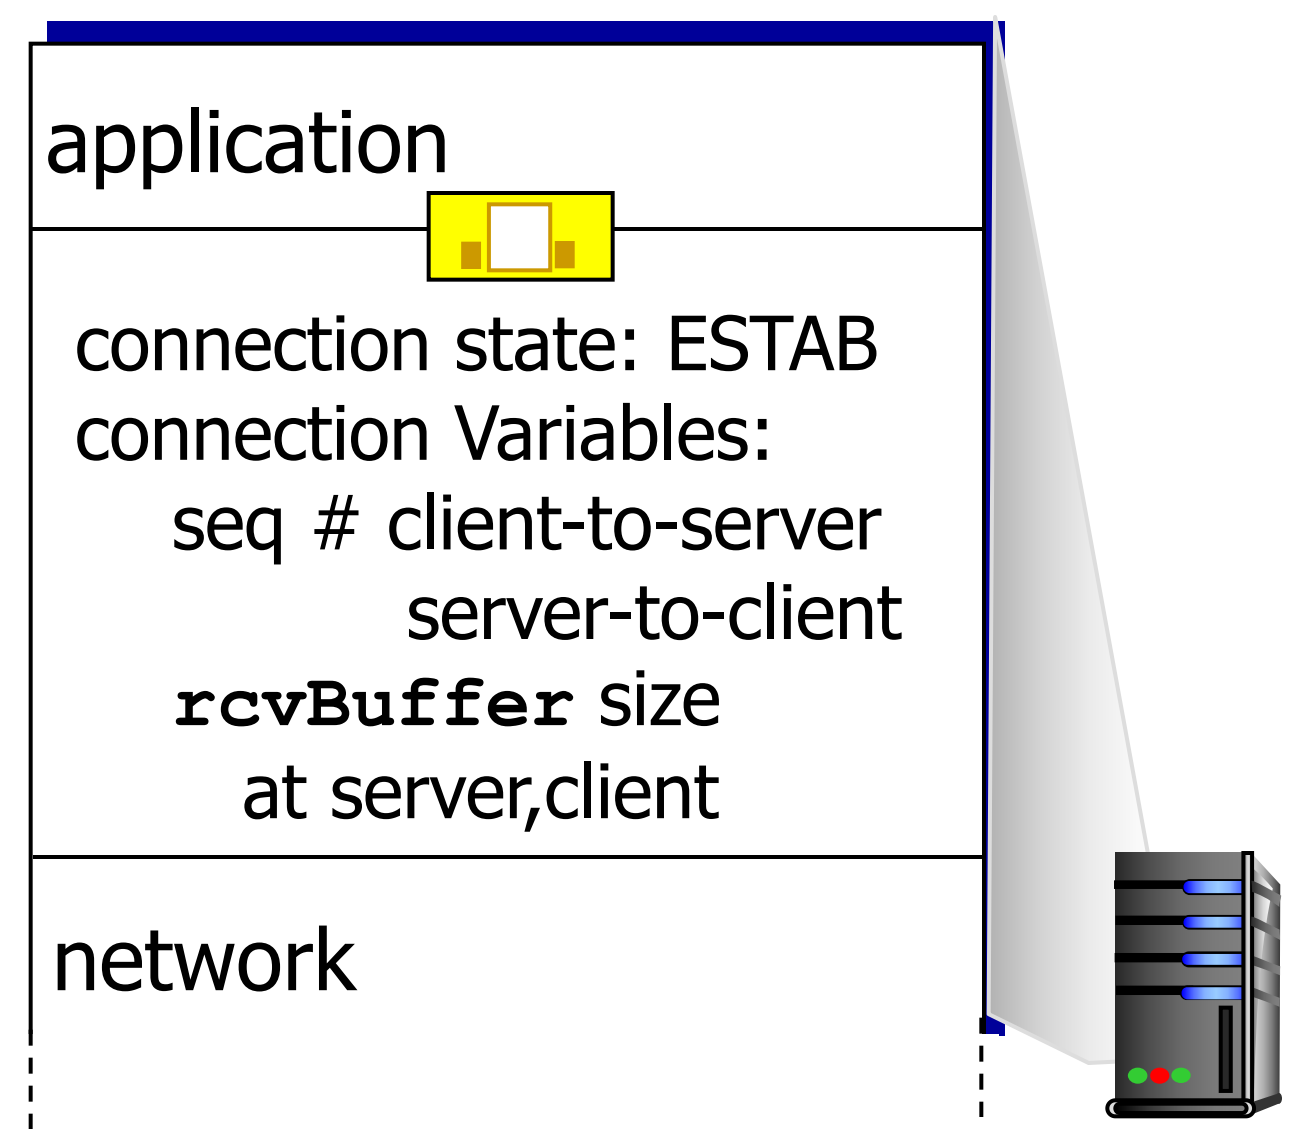


```
Socket connectionSocket =
  welcomeSocket.accept();
```

Two general's problem

- A1 and A2 need to attack B simultaneously
- A1 and A2 should agree on the attack time first
- Communication between A1 and A2 may be captured by B
- How can they agree on the attack plan?

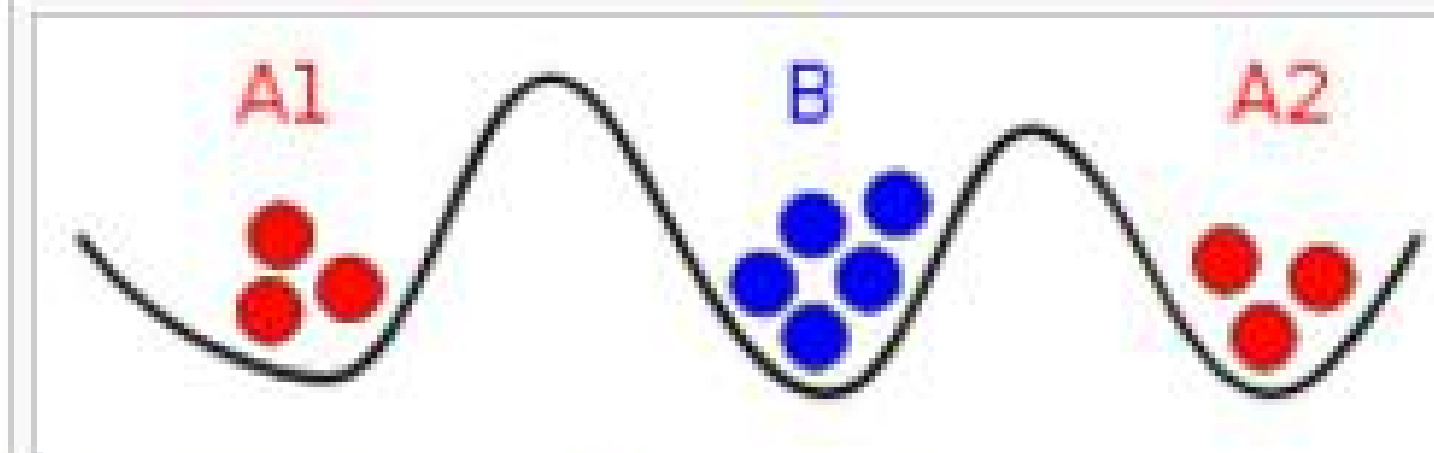

Positions of the armies. Armies A1 and A2 need to communicate but their messengers may be captured by army B.

Two general's problem (From wiki)

- The result is: no matter how many rounds of confirmation are made, no may to guarantee they agreed on the plan.

- How about A1 and A2 are the radio transceiver?
  - 3-way handshaking is enough

Agreeing to establish a connection

3-way handshake:

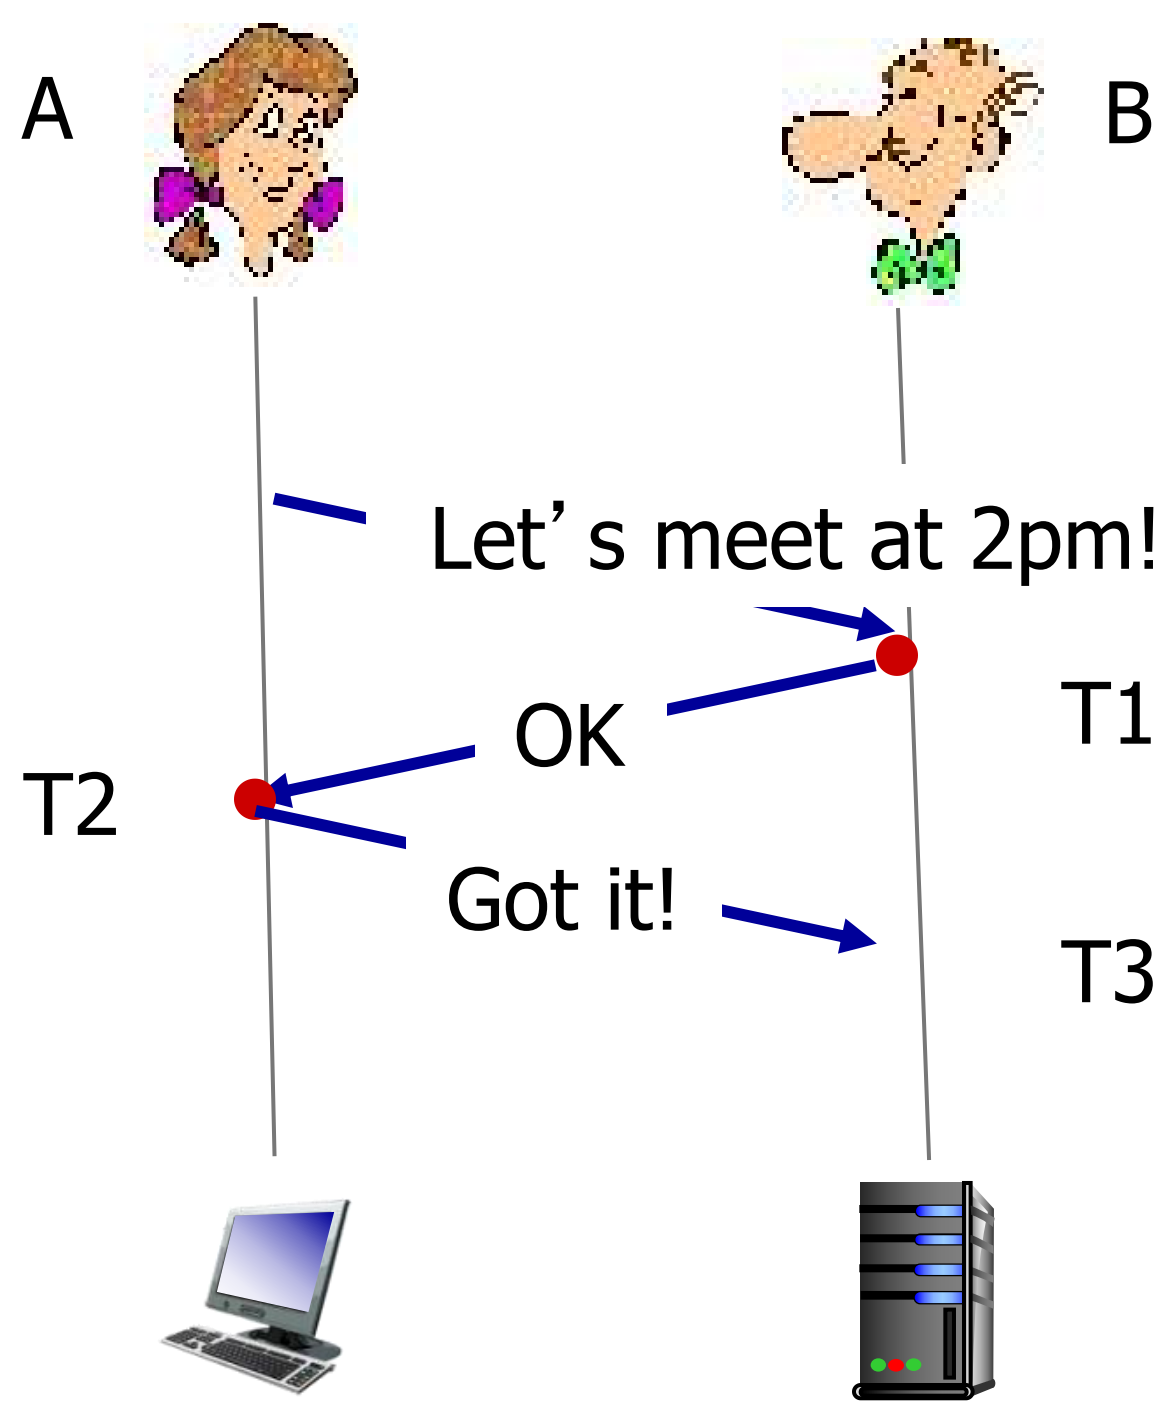

- T1 : B knows A’s transmitter and B’s receiver is OK
- T2: A knows A’s transceiver and B’s transceiver is OK, B has no more information than T1
- T3: Both A and B know their transceiver are OK, they can start the communication!

TCP 3-way handshake

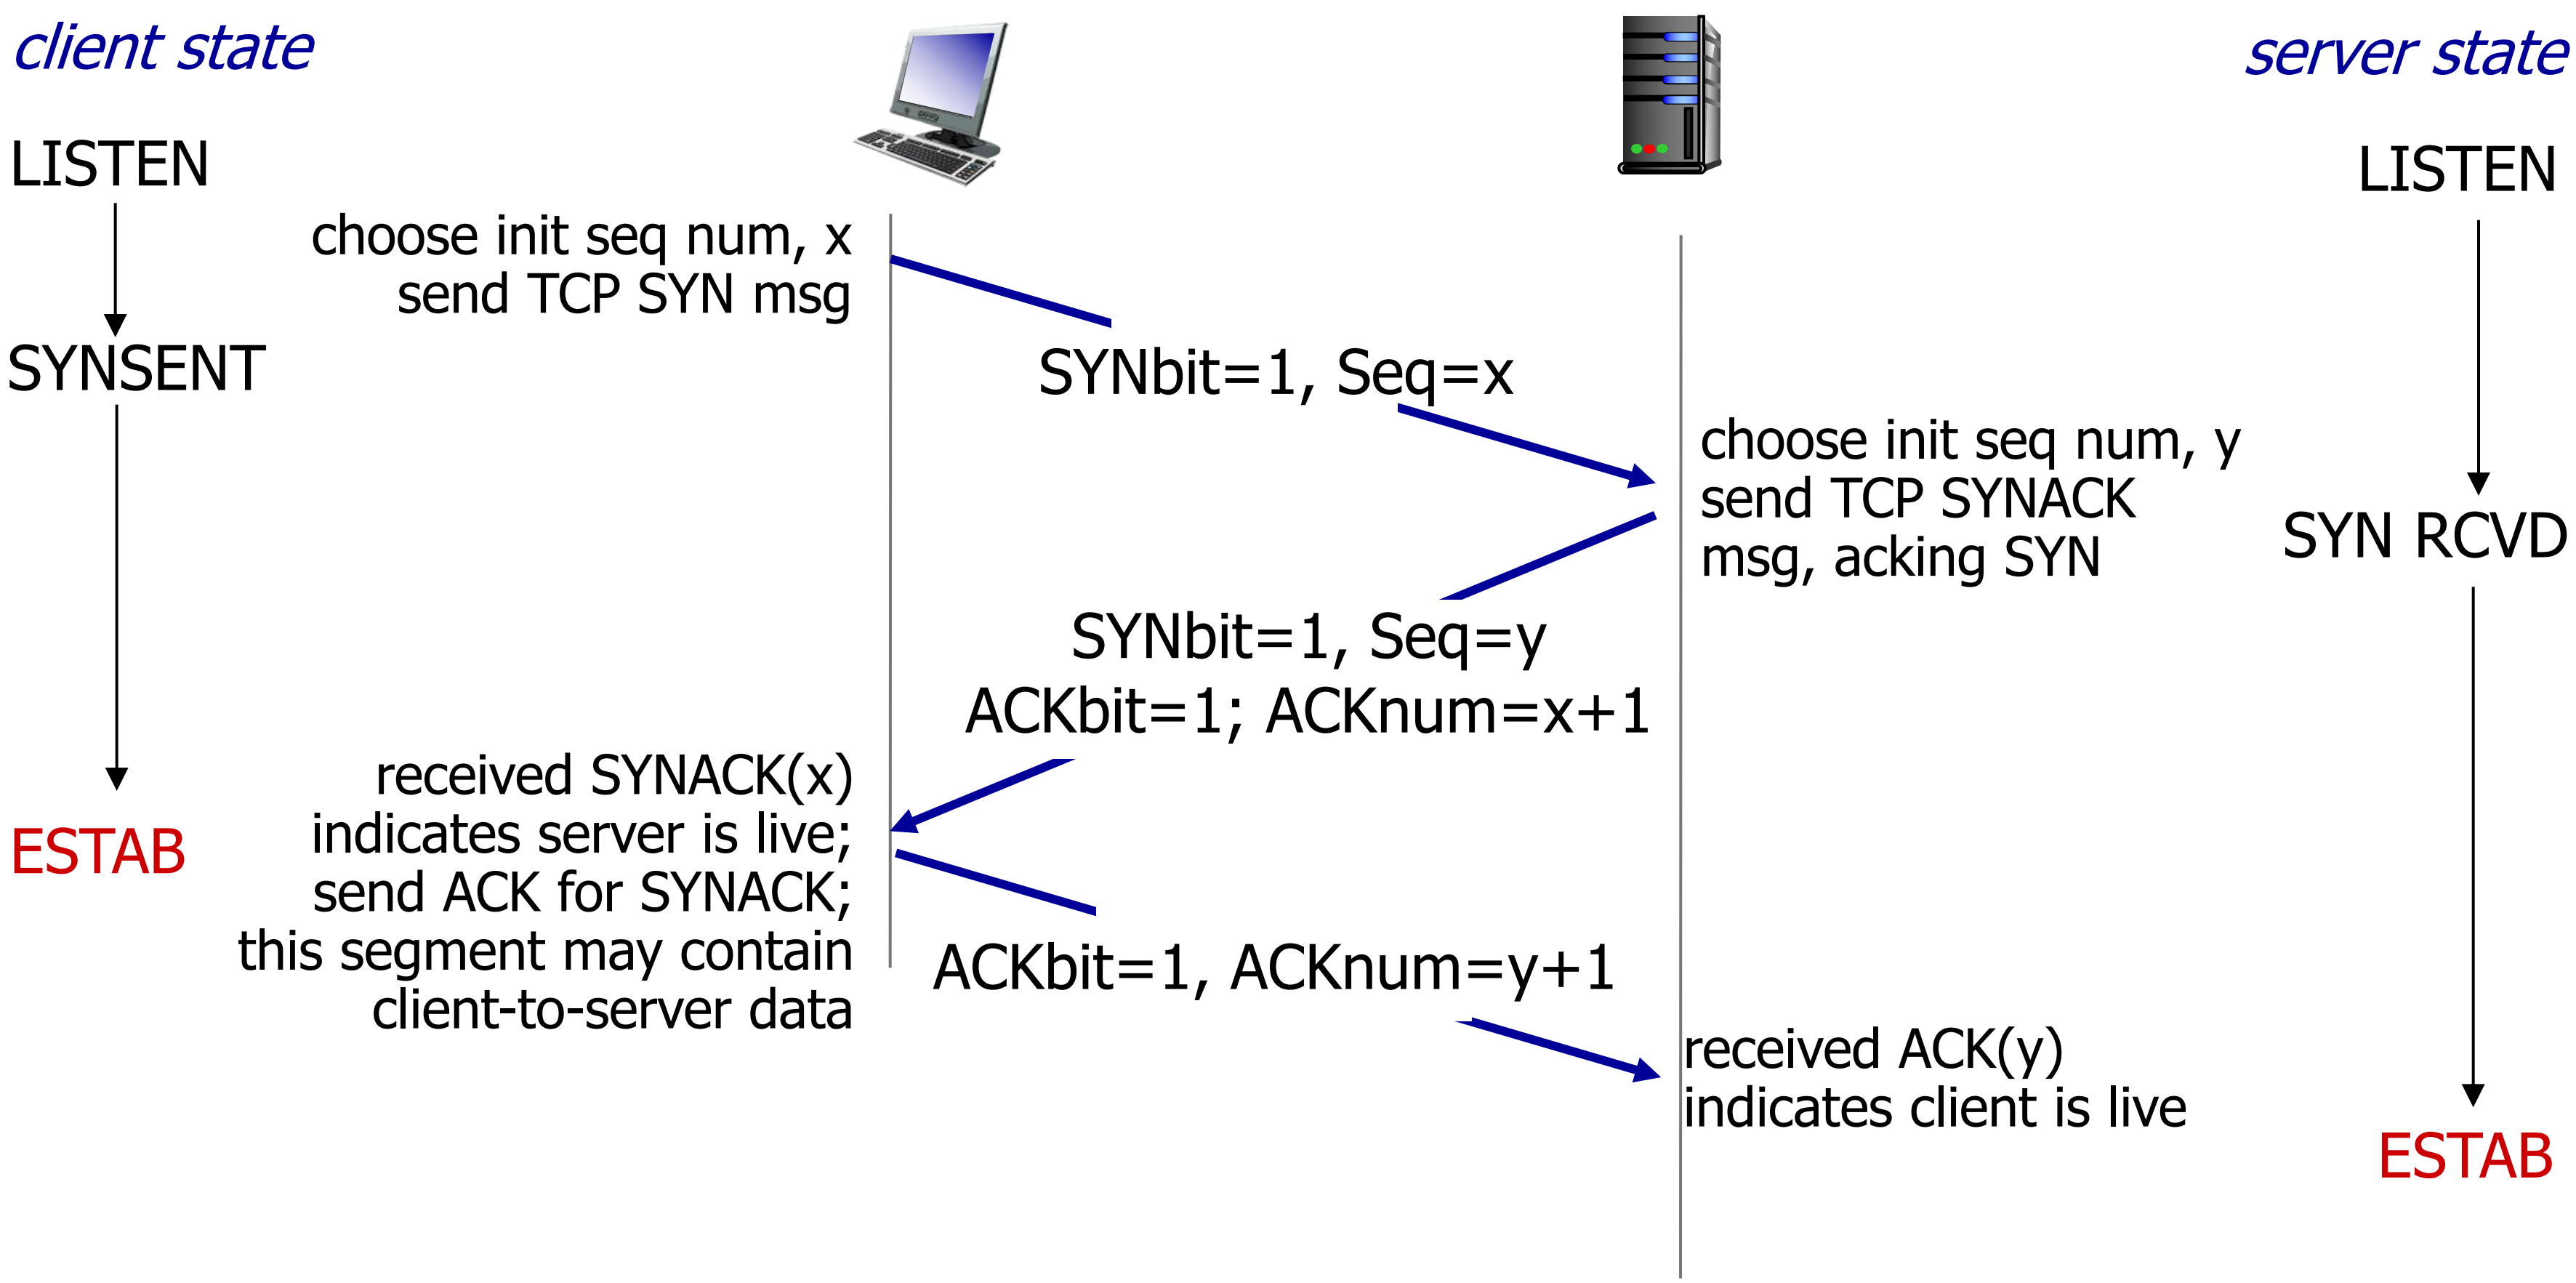

TCP: closing a connection

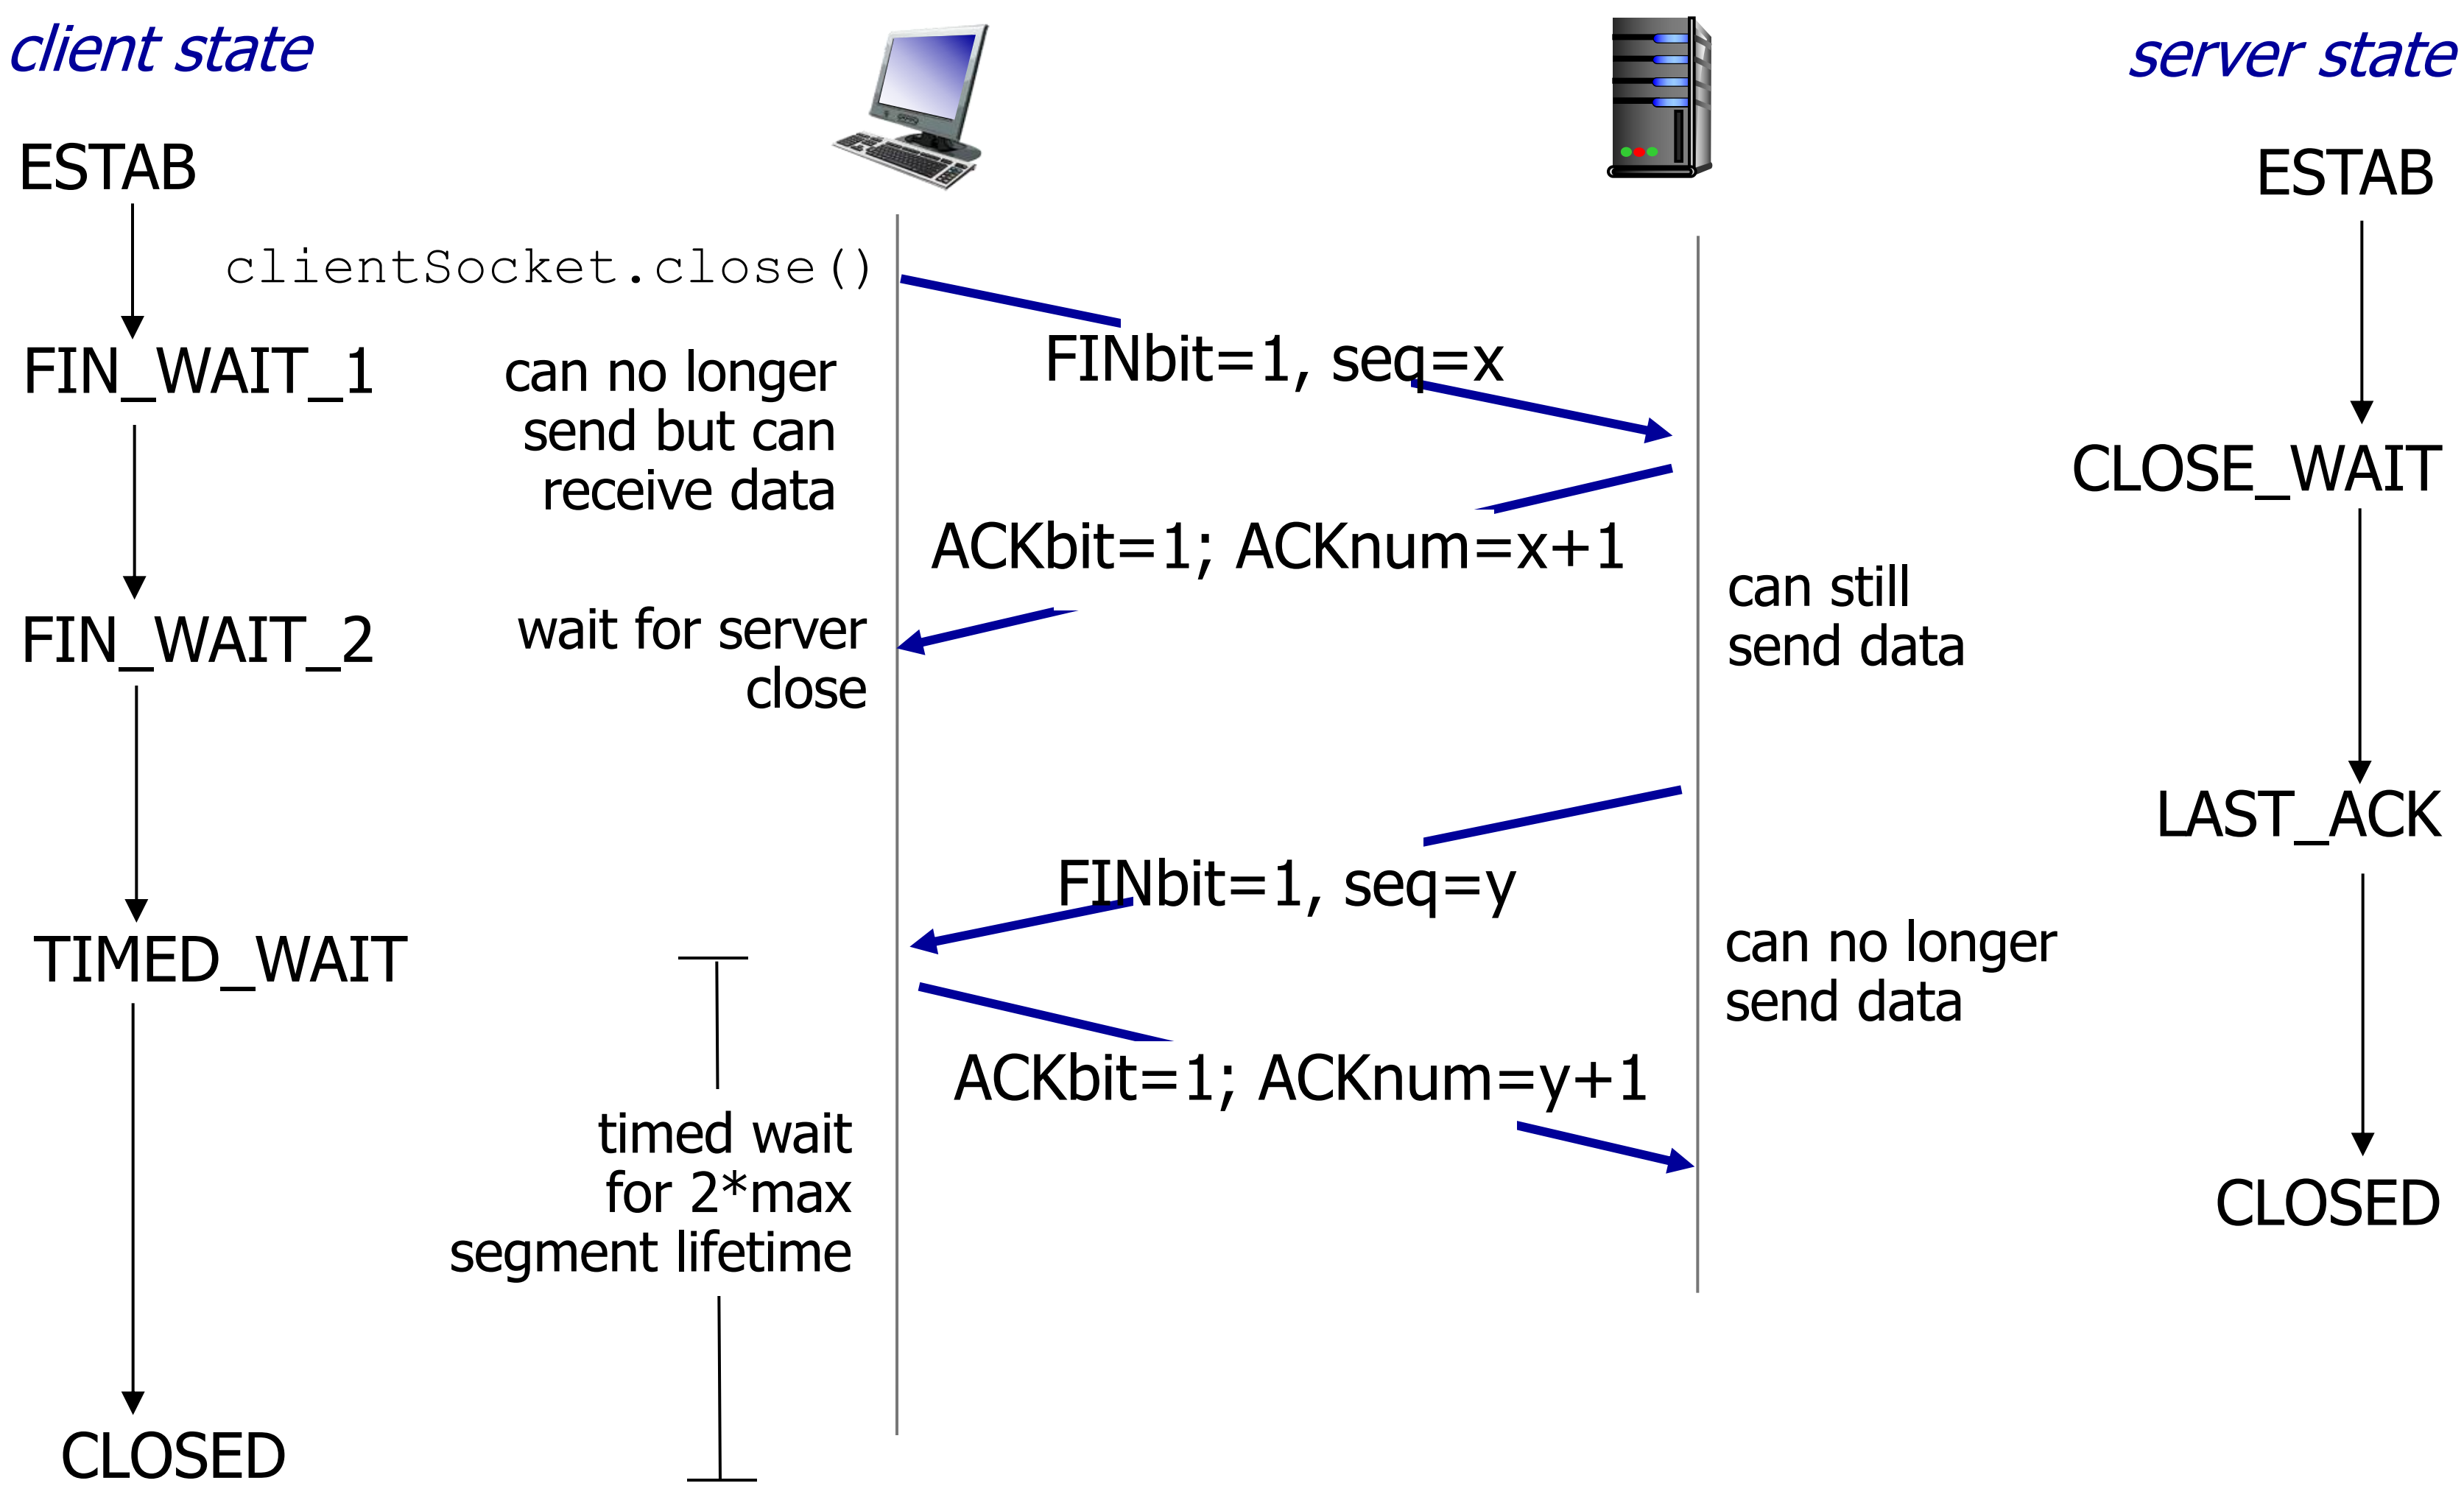

TCP: closing a connection

- Four-way handshaking

- client, server each close their side of connection
  - send TCP segment with FIN bit = 1
- respond to received FIN with ACK
  - on receiving FIN, ACK can be combined with own FIN

- Why FIN and ACK can not be sent in one msg as SYNACK in connection establishment?
  - The other side may still have packets need to be sent. It can not send FIN until the transmission is finished.