5频合路器技术规格书1

KXT-FF-11 • 誊清自工厂 Word 原稿


下表按工厂 Word 原稿排版。合并单元格与原稿一致。数字按 Word 中显示的指标誊清。

项目	1	2	3	4	5
频率范围(MHz)	703-748MHZ	758-803MHZ	2500-2570MHZ	2620-2690MHZ	3300-3800MHZ
带宽(MHz)	45MHZ	45MHZ	70 MHZ	70MHZ	500MHZ
插入损耗(dB)	1.7dB	1.7dB	1.7dB	1.7dB	1.0dB
驻波比	≤1.3				
带内波动（dB）	1.5dB				0.7dB
带外抑制（dB）	≥80@758-803 ≥80@2500-2570 ≥80@2620-2690 ≥80@3300-3800	≥80@703-748 ≥80@2500-2570 ≥80@2620-2690 ≥80@3300-3800	≥80@703-748 ≥80@758-803 ≥80@2620-2690 ≥80@3300-3800	≥80@703-748 ≥80@758-803 ≥80@2500-2570 ≥80@3300-3800	≥80@703-748 ≥80@758-803 ≥80@2500-2570 ≥80@2620-2690
工作温度(℃)	-30～+60				
平均功率容量(W)	80W				
工作湿度（%）	5～95				
接口形式	N-F/SMA-F				
外观	黑色油漆				
外形尺寸	215*184*44				

说明

- 来源文件：5频合路器技术规格书1.doc
- 特性阻抗：原稿写了 50 Ω 的，以原稿为准；原稿没写的，N 与 SMA 口按 50 Ω。
- 室内型铝合金腔体。测试条件 25 °C、50 Ω、矢量网络分析仪。出货附该件测试报告。
- 原稿没有互调指标。若订单选择低互调档，按 PIM3 ≤ −150 dBc @ 2×43 dBm 测试并写入报告。
- 外形图按同一份 Word 规格书第 2 页机械图。
- 询价：sales@cavityfilter.com

外形图（原稿第 2 页）

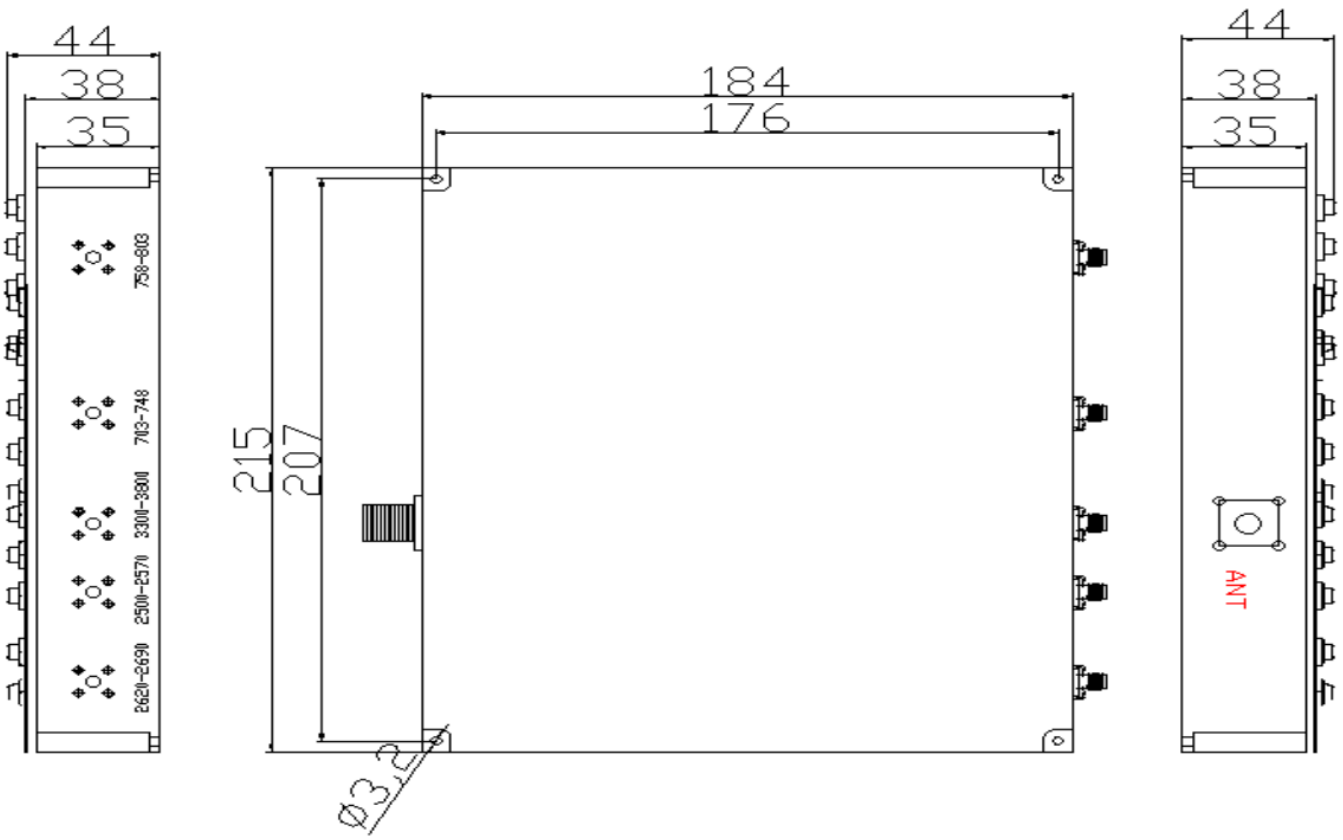

5-band Cavity Combiner, 703–3800 MHz

KXT-FF-11 • Transcribed from the factory Word file

The table follows the factory Word sheet, including merged cells. Figures are those displayed in Word.

Item	1	2	3	4	5
Frequency (MHz)	703-748MHZ	758-803MHZ	2500-2570MHZ	2620-2690MHZ	3300-3800MHZ
Bandwidth (MHz)	45MHZ	45MHZ	70 MHZ	70MHZ	500MHZ
Insertion loss (dB)	1.7dB	1.7dB	1.7dB	1.7dB	1.0dB
VSWR	⩽1.3				
Ripple (dB)	1.5dB				0.7dB
Rejection (dB)	⩾80@758-803 ⩾80@2500-2570 ⩾80@2620-2690 ⩾80@3300-3800	⩾80@703-748 ⩾80@2500-2570 ⩾80@2620-2690 ⩾80@3300-3800	⩾80@703-748 ⩾80@758-803 ⩾80@2620-2690 ⩾80@3300-3800	⩾80@703-748 ⩾80@758-803 ⩾80@2500-2570 ⩾80@3300-3800	⩾80@703-748 ⩾80@758-803 ⩾80@2500-2570 ⩾80@2620-2690
Operating temperature (°C)	-30～+60				
Average power (W)	80W				
Humidity (%)	5～95				
Connector	N-F/SMA-F				
Finish	黑色油漆				
Outline	215*184*44				

Notes

- Source file: 5频合路器技术规格书1.doc
- Impedance: where the source states 50 Ω, that stands. Where it is silent, N and SMA ports are 50 Ω.
- Indoor aluminum cavity. Tested at 25 °C in a 50 Ω system on a vector network analyzer. A test report ships with the unit.
- The source sheet has no PIM limit. If the order selects the low-PIM option, PIM3 is tested to ⩽ −150 dBc @ 2×43 dBm and reported.
- The outline drawing is page 2 of the same Word file.
- Enquiries: sales@cavityfilter.com

Outline (source sheet, page 2)

