



ORASR Routing Distribution and Gate Reliability (seed 42)

Routing distribution

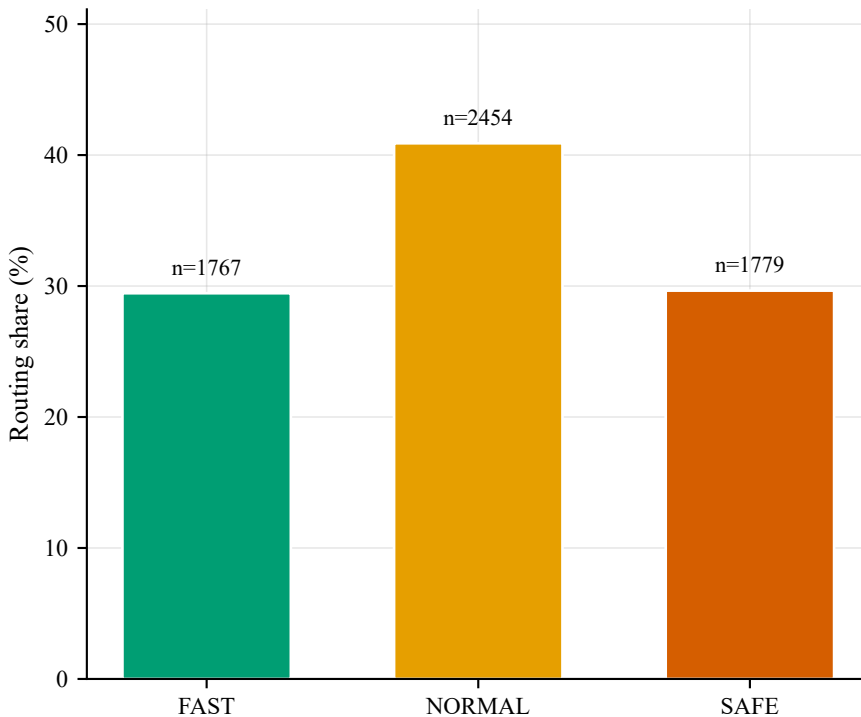

Per-lane gate reliability

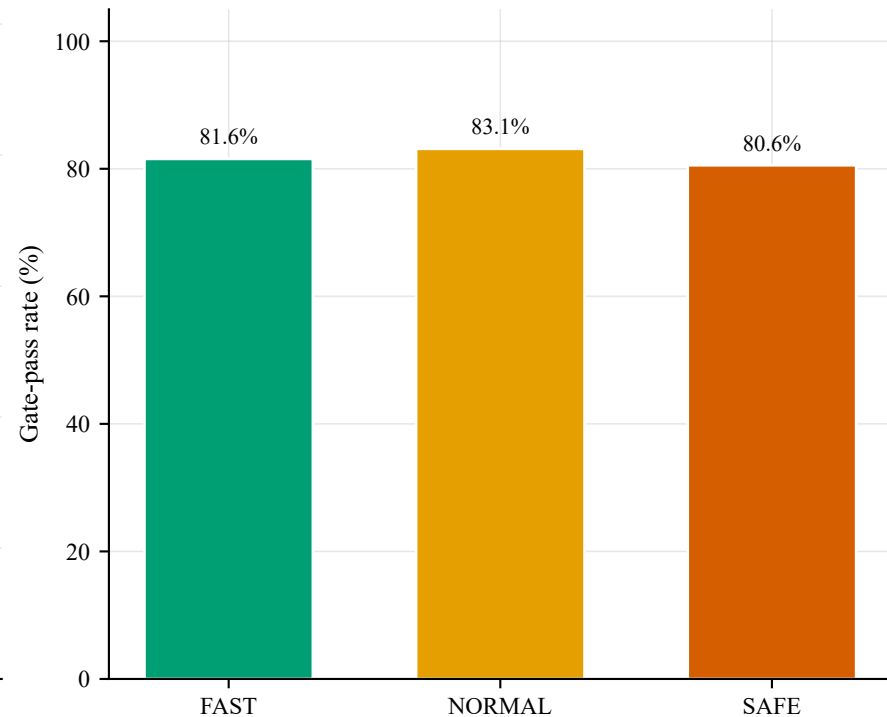

Robustness cohort with a deterministic malformed-input mix; pass rate = fraction with engine safe==true per lane. Boolean gates carry no per-item confidence, so a probabilistic calibration diagram is not backed by results and is intentionally not shown.