


WIA1005 VLAN, SSH, Port-Security

In this activity, you need to configure all the devices and verify the network connectivity.

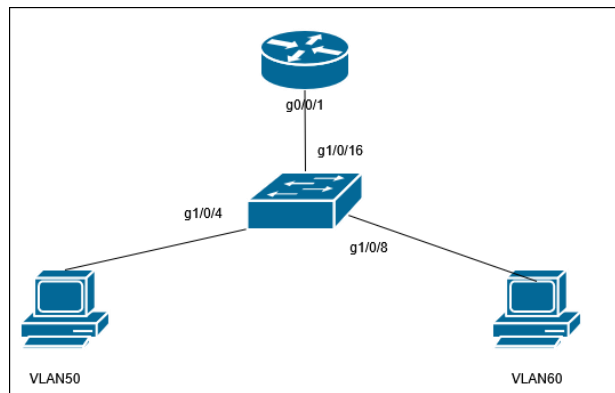

VLAN and IP Addressing Information

VLAN ID	Name	IPv4 Network Address
50	UM1	10.1.5.0/26
60	UM2	10.1.5.64/27
999	UM3	10.1.5.96/29

IPv4

- Assign last host to the Router and first host to PC for VLAN50 and 60.

VLAN 999 is native VLAN

- IPv4 - Assign first host to the Switch and last host to the Router.

SSH

- Configure SSH on the switch using the information below:
- Given the domain name is **cisco.com**. The length of RSA keys is 1024 and the username is admin with the secret password cisco.

Port-Security

- Configure port-security on access port using the information below:
- Limit only ONE devices to access to the port. The MAC address is dynamically learned and added to the running configuration. Disable the port when a violation occurs.
- Ensure all devices can ping each other.
- Ensure all group members understand the configuration tasks.