

DATA AVAILABILITY

Evaluation of barrier lake breach floodS: insights from recent case studies in China

By Zuyu Cheny, Qiang Zhang, Shujing Chen, Lin Wang, Xingbo Zhou, 2019, WIERs



Breach of the Baige barrier lake on November 12, 2018 on Jinsha River, China. Photo by Shuangfeng Jia.

Abstract

China has seen frequent barrier lake breach hazards since 2000. Several cases have monitored with complete breach flood hydrographs that enabled the improvement to the existing dam breach analysis methods by merging hydraulics and soil mechanics expertise. Some novel improvements to the analytical methods have been published. This paper focuses on the authors' improved hyperbolic soil erosion and lateral enlargement models, and a numerical algorithm that allows easy calculation of the breach flood hydrograph. The calculated peak flows using this improved method are in general agreement with field measurements and are less sensitive to input parameters. The research outcomes have been incorporated into a spreadsheet DB-TWIER, coded in Microsoft Excel and available for downloading from the web. It is self-explanatory and almost self-tutorial. This software is particularly useful in emergencies when a quick and easy evaluation of the breach flood is required. Four well-documented large-scale barrier lake breach cases have been analyzed against the measured data. Among them, the historical Yigong barrier lake breach, with its 94,013 m³/s peak flow has shed light on our knowledge of combating disastrous natural hazards. The latest Baige barrier lake breach, happened on November 12, 2018 in the upper reach of the Jinsha river with a documented peak flow of 31,000 m³/s, offers another significant case reviewed in this paper.

1. INTRODUCTION

Breaches of barrier lakes are common natural disasters worldwide (Schuster & Costa, 1986; Lin et al.,

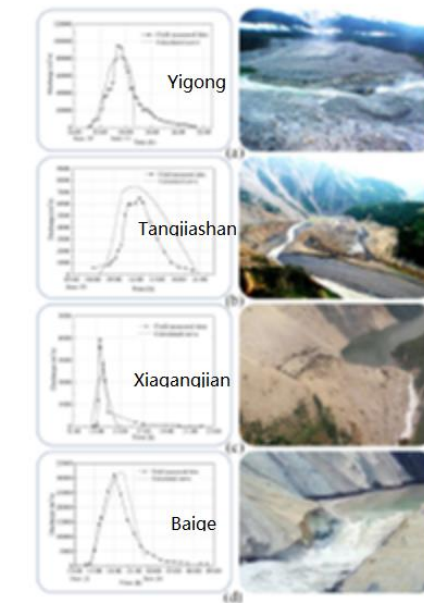


FIGURE 3. Comparison between calculated and measured hydrographs
(a) Yigong, (b) Tangqiaoshan, (c) Xiaoganqian, (d) Baige

TABLE 5 Summary of the sensitivity studies

Case	Physics of the parameters	Sub-case	Parameters		Peak flow, Q_p , m ³ /s	η %
			Sensitivity studies	Target case		
A	Hydraulic parameters	A-1	$m=0.6, C=1.35$		7,829.65	2.89
		A-2	$m=0.5, C=1.35$	$m=0.8, C=1.43$	7,858.80	3.27
		A-3	$m=0.5, C=1.69$		8,300.19	9.07
B	Hyperbolic erosion model	B-1	$a=1.0, b=0.0005$	$a=1.1, b=0.0007$	9,475.62	24.52
		B-2	$a=0.9, b=0.0003$		13,524.99	77.73
C	Power erosion model	C-1	$a_1=8, b_1=1.2$		7,512.91	-1.28
		C-2	$a_1=10, b_1=1.2$		10,357.93	36.11
		C-3	$a_1=8, b_1=1.3$		15,192.20	99.63
D	Linear erosion model	D-1	$a_1=0.3$		20,619.35	170.95
		D-2	$a_1=0.2$		13,707.17	80.12
		D-3	$a_1=0.1$		4,769.04	-37.33
E	Shear strength parameters	E-1	$c=50, \phi=35^\circ$	$c=25, \phi=22^\circ$	6,954.75	-8.61
		E-2	$c=10, \phi=15^\circ$		7,413.23	-2.59

Data files for the above cases are contained in ABCD.RAR

Contact Us

Lin Wang, College of Water Resources and Hydropower Engineering, Xi'an University of Technology, Xi'an 710048, China; e-mail: ruoshuiya@163.com

READ ME

Welcome to DB-IWHR. This set of data supports the paper:

Article ID: WAT21408

Article DOI: 10.1002/wat2.1408

Article: Evaluation of barrier lake breach floods: insights from recent case studies in China

Journal: WIREs Water

Author: Zuyu Chen, Qiang, et al. 2019.

If your Excel has not loaded the VBA facilities, please work following the instruction in the file 'To enable VBA in Excel.pdf'.