


General Description

The KSPD2CU2B-L is a highly sensitive Silicon optical crystal diode in durable , hermetically sealed TO-18 metal can which provide years of reliable performance , even under demanding conditions such as use outdoors.

Features

- Narrow angular response
- Durable
- High reliability in demanding environments
- Blue enhanced
- Meet RoHS

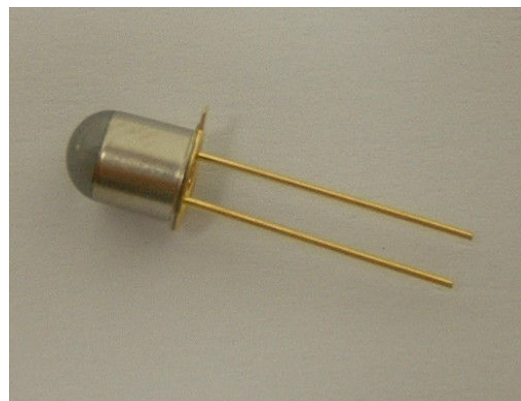

Applications

- Optical counters
- Optical detectors
- Infrared sensors
- Encoders
- Smoke detectors

MAXIMUM RATINGS

(Ta=25°C)

Item	Symbol	Rating	Unit
Reverse Breakdown Voltage	V _{BR}	35	V
Power Dissipation	P _d	150	mW
Operating temp.	T _{opr}	-30 ~ +85	°C
Storage temp.	T _{stg}	-40 ~ +130	°C
Soldering temp. *1	T _{sol}	260 ≤ 3s	°C

* 1 For MAX. 5 secends at the position of 2mm from the resin edge.


ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25°C)


Item	Symbol	Condition	Min	Typ	Max	Unit
Open circuit Voltage	V _{oc}	Ee=1mW/sr VR=5V*2	-	0.4	-	V
Reverse Light Current	I _L	Ee=1mW/sr VR=5V*2	8	15	-	uA
Dark curren	I _D	Ee=0mW/sr VR=5V	-		10	nA
Rise Time/ Fall Time	tr/ / tf	Ee=0mW/sr V=5V f=1MHZ	-	10/10	-	nS
Capacitance	C _t	Ee=0mW/sr V=5V f=1MHZ	-	11	-	pF
Spectral sensitivity	λ	-	450	-	1050	nm
Peak wavelength	λ _p	-	-	940	-	nm
Half angle	Δθ	-	-	±15	-	deg.

* 2 Illumination is applied by a tungsten lamp of 940nm infrared.



Power Dissipation vs. Ambient Temperature

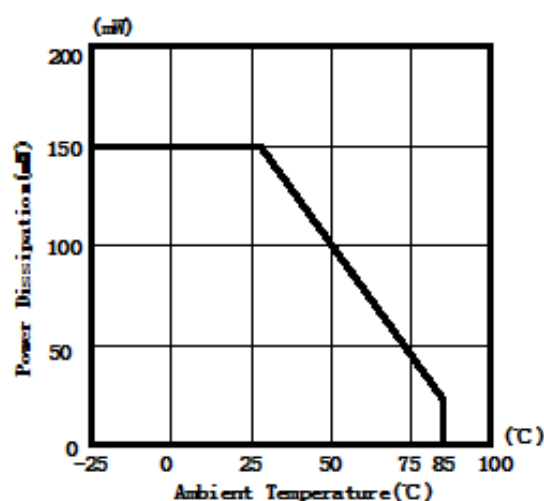


Reverse Dark Current vs. Ambient Temperature

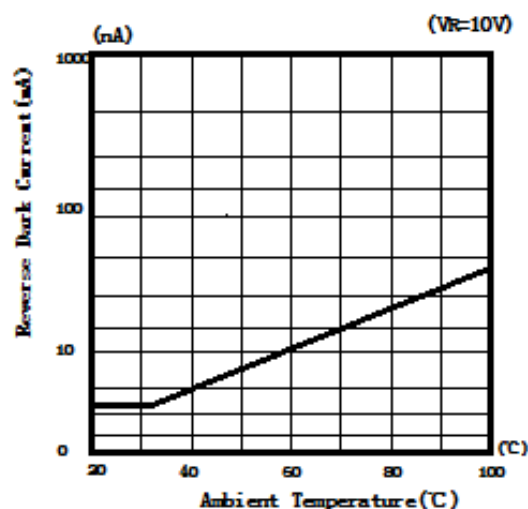


Spectral Sensitivity

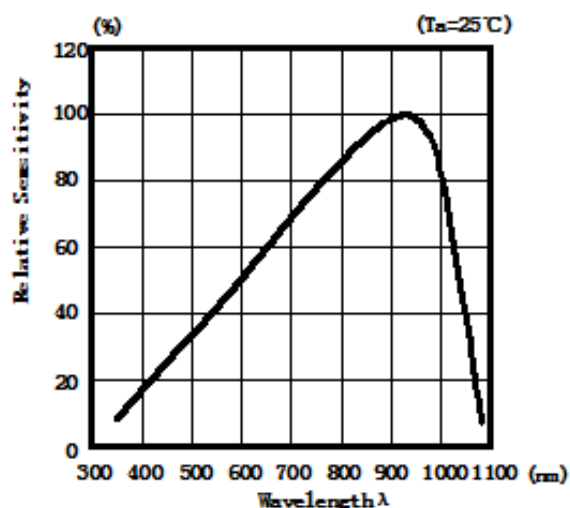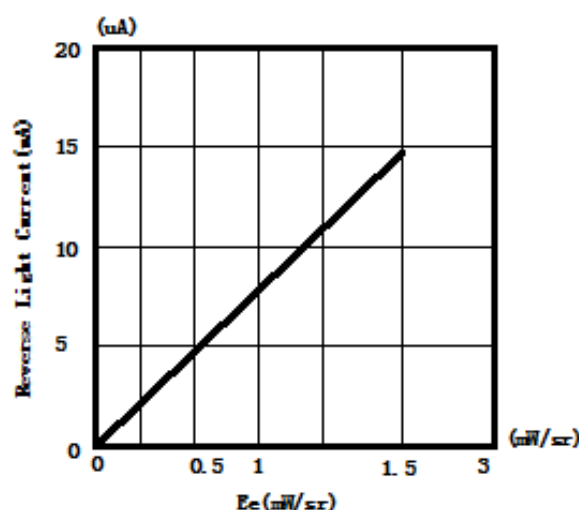
Reverse Light Current vs. E_e


Terminal Capacitance vs. Reverse Voltage

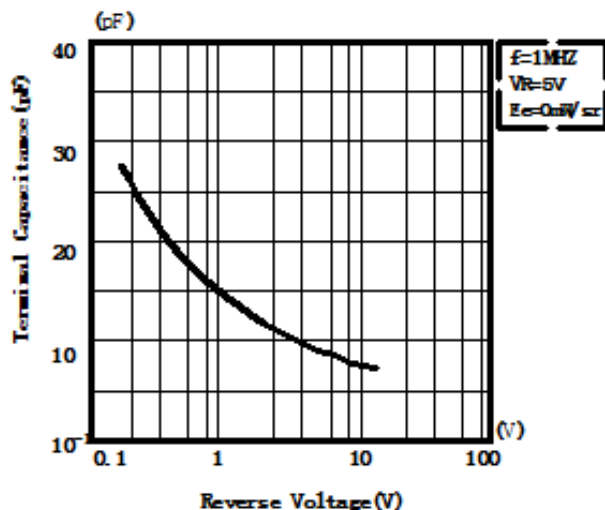

Directive Characteristics

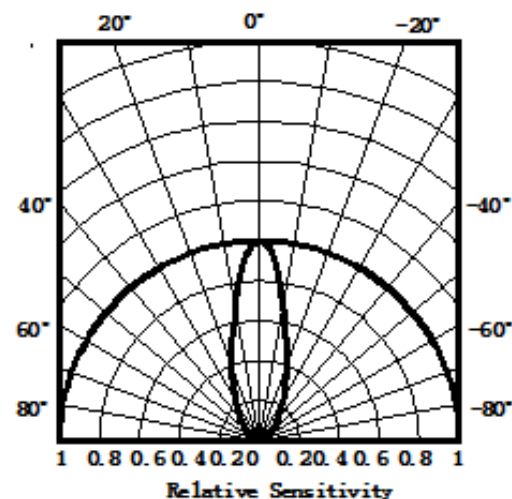

DIMENSIONS

(Unit: mm)

