


版本	更 改 内 容	拟定	日期
V0	首版发行	Jason	2024-12-20
V1	增加34pin排针接口，修改PCB外形	Jason	2025-2-22

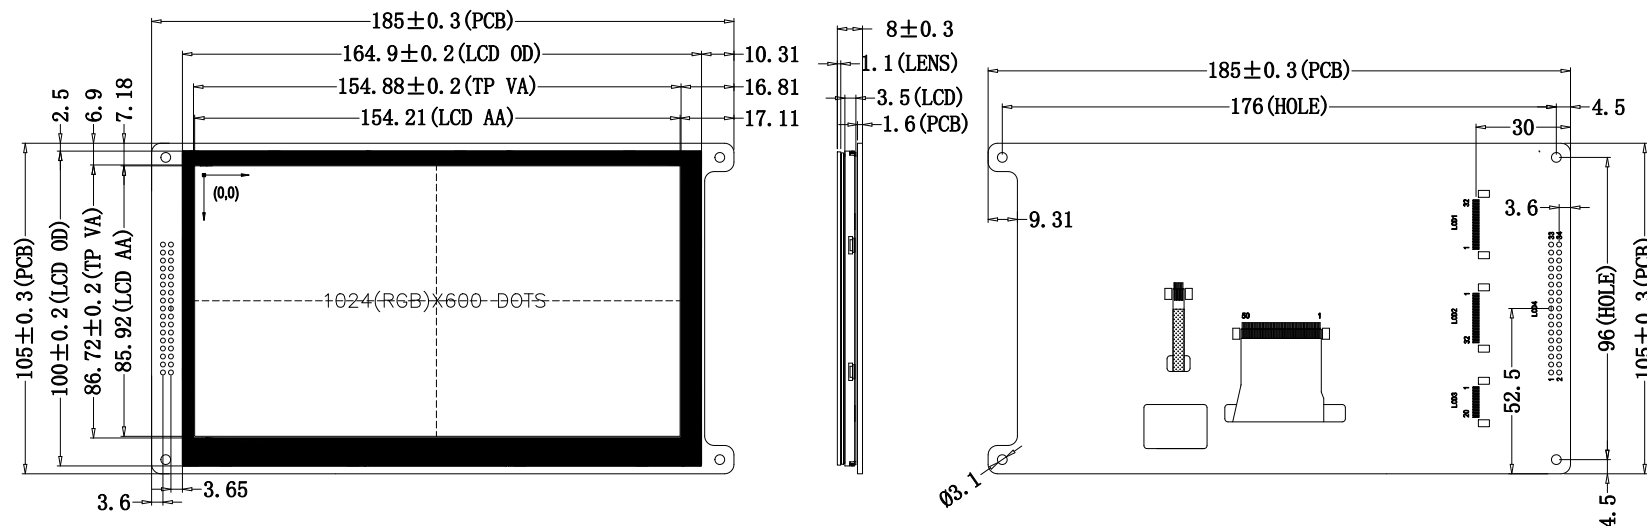

NO.	SYMBOL
1	5V
2	5V
3	GND
4	GND
5	SPI_CS
6	SPI_MOSI
7	SPI_SCLK
8	NC
9	LCD_RST
10	SPI_MISO
11	CTP_INT
12	CTP_SCL
13	CTP_SDA
14	CTP_RST
15	NC
16	GND
17	NC
18	NC
19	NC
20	GND

NO.	SYMBOL
1	LCD_CS
2	LCD_RS
3	LCD_WR
4	LCD_RD
5	LCD_RST
6	LCD_DB0
7	LCD_DB1
8	LCD_DB2
9	LCD_DB3
10	LCD_DB4
11	LCD_DB5
12	LCD_DB6
13	LCD_DB7
14	LCD_DB8
15	LCD_DB9
16	LCD_DB10
17	LCD_DB11
18	LCD_DB12
19	LCD_DB13
20	LCD_DB15
21	GND
23	BL_CTR
24	3.3V
25	3.3V
26	GND
27	GND
28	5V
29	NC
30	CTP_SDA
31	CTP_INT
32	NC
33	CTP_RST
34	CTP_SCL

NO.	SYMBOL
1	CTP_SCL
2	CTP_RST
3	CTP_INT
4	CTP_SDA
5	NC
6	5V
7	GND
8	GND
9	3.3V
10	3.3V
11	BL_CTR
12	LCD_D15
13	LCD_D14
14	LCD_D13
15	LCD_D12
16	LCD_D11
17	LCD_D10
18	LCD_D9
19	LCD_D8
20	LCD_D7
21	LCD_D6
22	LCD_D5
23	LCD_D4
24	LCD_D3
25	LCD_D2
26	LCD_D1
27	LCD_D0
28	LCD_RST
29	LCD_RD
30	LCD_WR
31	LCD_RS
32	LCD_CS

NO.	SYMBOL
1	GND
2	LCD_RST
3	LCD_D15
4	LCD_D14
5	LCD_D13
6	LCD_D12
7	LCD_D11
8	LCD_D10
9	LCD_D9
10	LCD_D8
11	LCD_D7
12	LCD_D6
13	LCD_D5
14	LCD_D4
15	LCD_D3
16	LCD_D2
17	LCD_D1
18	LCD_D0
19	LCD_RD
20	LCD_WR
21	LCD_RS
22	LCD_CS
23	NC
24	CTP_SCL
25	CTP_RST
26	CTP_SDA
27	CTP_INT
28	BL_CTR
29	5V
30	GND
31	3.3V
32	GND



DISPLAY TYPE:	7.0''IPS	TOUCH DRIVER:	-	PIXEL PITCH:	0.1506mm X 0.1432mm	产品型号:	WKS70WSV107-WCT				
DISPLAY MODE:	Normally Black	OPERATING TEMP:	-20° C TO +70° C	LCM BRIGHTNESS:	350 cd/m2	部品型号:	LCM外形图			确认:	
VIEWING DIRECTION:	ALL VIEW	STORAGE TEMP:	-30° C TO +80° C	BACK LIGHT:	LED WHITE (3X7=21)	版本:	V1	单位:	mm	审核:	
Dot matrix:	1024(RGB)X600 DOTS	STRUCTURE:	LCD + CTP + PCB	MATERIAL NOTE	ROHS REQUEST	日期:	2025-2-22	比例:	1:1	设计:	Jason
THIS DRAWING IS PROPERTY OF WAIKEN SMART CO. LTD. IT CANNOT BE REPRODUCED WITHOUT PERMISSION.						Unmarked Tolerance:			±0.20 mm	页码:	1 OF 1