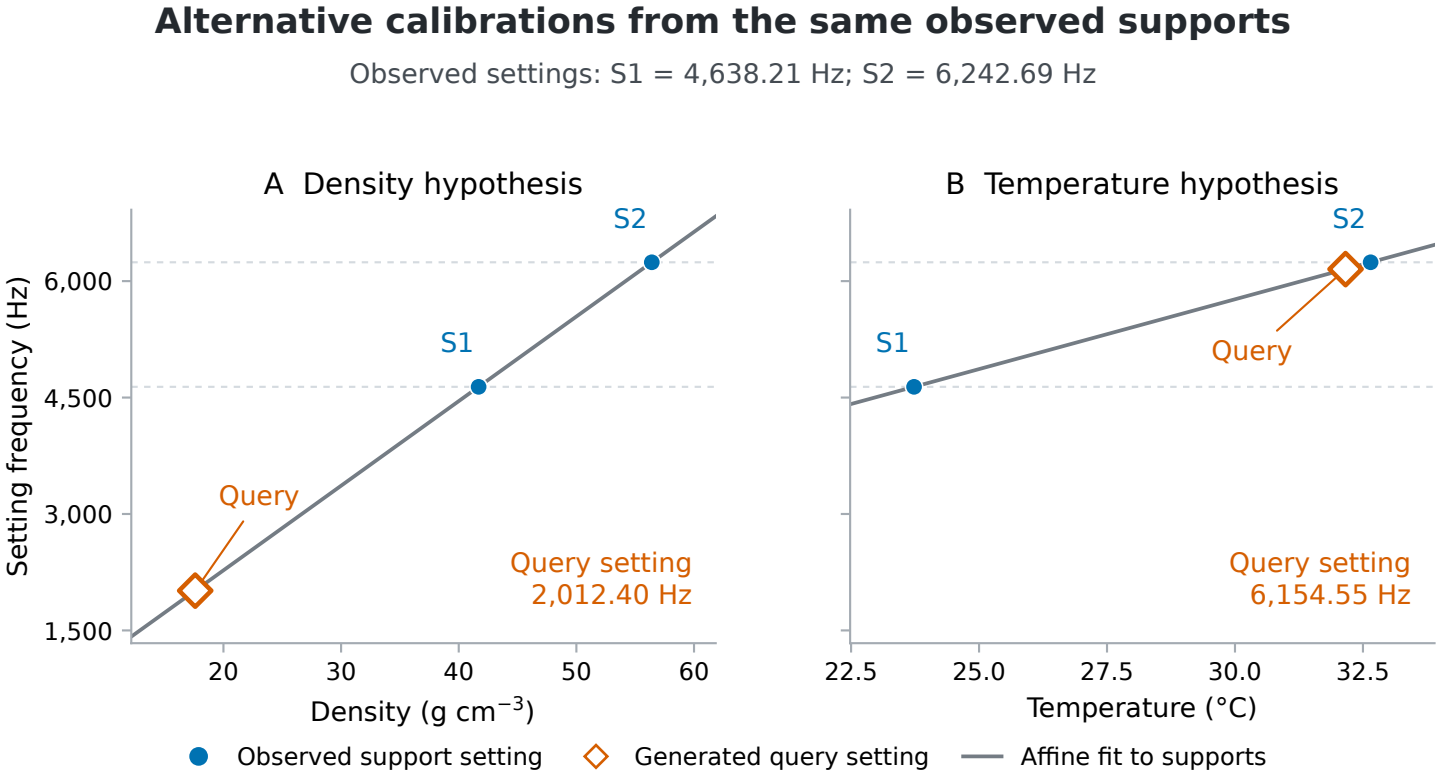
Alternative calibrations from the same observed supports
Observed settings: S1 = 4,638.21 Hz; S2 = 6,242.69 Hz
A Density hypothesis
B Temperature hypothesis
Setting frequency (Hz)
6,000
4,500
3,000
1,500
S2
S1
Query
Query setting
2,012.40 Hz
20
30
40
50
60
Density (g cm^{-3})
S2
S1
Query
Query setting
6,154.55 Hz
22.5
25.0
27.5
30.0
32.5
Temperature (°C)
Observed support setting
Generated query setting
Affine fit to supports
Recorded measurements and support settings are retained; only query labels are generated.