

Date of publication xxxx 00, 0000, date of current version xxxx 00, 0000.

Digital Object Identifier 10.1109/ACCESS.2024.Doi Number

Design and Simulation of a Broadband, Low-loss, Tunable Transmittance Optical Filter Using Sb₂Se₃ Phase Change Material

CHETTANAT PADUNGATTHAKIJ¹, SURAWUT WICHARN^{2,*}, (Member, IEEE),
SUEBTARKUL SUCHAT³, AND PRATHAN BURANASIRI^{1,4}

¹Artificial Intelligence Photonics Advanced Research Laboratory, Department of Physics, School of Science, King Mongkut's Institute of Technology Ladkrabang, Bangkok 10520 Thailand

²Department of Physics, Faculty of Science, Srinakharinwirot University, Bangkok 10110 Thailand

³Department of Physics, Faculty of Science and Technology, Phranakhon Rajabhat University, Bangkok 10220 Thailand

⁴Electronic and Optoelectronic Device Research Unit, School of Science, King Mongkut's Institute of Technology Ladkrabang, Bangkok 10520 Thailand

Corresponding author: Surawut Wicharn (surawutw@g.swu.ac.th).

This work was supported in part by the funding from School of Science, KMITL (CN-1-2568-010).

ABSTRACT We propose a transmittance-amplitude filters that operate around 1064 nm wavelengths antimony triselenide (Sb₂Se₃). Sb₂Se₃ is a phase change material (PCM) that has low absorption in the infrared spectrum, large and stable refractive index contrast between phases, and high optical endurance. Existing PCM-based near-infrared filters have high absorption which results in low transmission efficiency. We provide the reasoning for selecting long-pass edge-filter design and compare its performance to other planar thin-film designs and similar optical devices using transfer matrix method simulation. At 1064 nm, the proposed five-unit-cell edge-filter design has 93.6% transmittance in amorphous and 0.2% in crystalline phase, a 93.4% contrast with ~200 nm FWHM. The design shows minimal optical degradation after simulating 1.5×10⁶ phase switching cycles. We show the transmittance amplitude of the design can be tuned in a step from peak 93% to 0% by changing the phase of each Sb₂Se₃ layer. The thickness in each layer can be optimized to increase the optical performance across the 900–1200 nm wavelengths.

INDEX TERMS Antimony triselenide, Optical designs, Optical filters, Phase change materials, Thin films

I. INTRODUCTION

The term phase change material (PCM) can have different meanings depending on the research field. In energy storage, the term refers to materials that can store and release its thermal energy through changes in its state of matter, e.g. from solid to liquid state [1]. However, in the fields of electronics and photonics, the term refers to a solid-state material that changes its crystal structure when depending on the temperature, such as from amorphous to crystalline phase when temperature rise above transition temperature (T_{trans}). This change leads to a high contrast in complex refractive index $\tilde{n}$ between the initial and post-transitioned phases, where $\tilde{n} = n + ik$ comprises of the real refractive index n and the imaginary extinction coefficient k [2]. The refractive index contrast is an order of magnitude larger than the contrast from applied electric field or Kerr effect (light intensity) [3], this

property makes PCMs ideal for photonic applications that require the modulation of optical performance. Some examples are reconfigurable metasurfaces [2, 4-6], optical limiters [3, 7-11], optical switches [12-14], optical filters [15-18], and absorbers [19, 20].

The classification of PCM can be done by its behaviour post phase transition. It is considered a volatile PCM if the phase reverts back to pre-transition phase when the temperature falls below T_{trans} . It is considered a non-volatile PCM if it maintains its post-transition phase even when temperature falls below T_{trans} . One of the most common volatile PCM is vanadium dioxide (VO₂), it undergoes metal-to-insulation transition (MIT) at 68 °C, the lowest among any PCMs. VO₂ has a relatively large complex refractive index contrast (Δn) in the near-IR and IR spectra [21], but its biggest downside is the large absorption due to high extinction coefficients in both

phases. A common non-volatile PCMs are chalcogenide glasses called $\text{Ge}_2\text{Sb}_2\text{Te}_5$ (GST) and $\text{Ge}_2\text{Sb}_2\text{Se}_4\text{Te}$ (GSST). GST beings one of the earliest and most studied PCM [22], it has large refractive index contrast between amorphous and crystalline phases, relative low T_{trans} at $\sim 145^\circ\text{C}$ when compared to other non-volatile PCMs [3, 23]. Meanwhile GSST has lower extinction coefficients than either GST or VO_2 . But it has higher T_{trans} at $\sim 242^\circ\text{C}$, and the Δn is also lower [23].

With that being said, antimony triselenide (Sb_2Se_3) is a non-volatile PCM which originated from solar-energy applications, but it has very few research in the field of photonics. Sb_2Se_3 unique properties are its near-zero extinction coefficients in near IR and IR spectra, which result in low absorption. Sb_2Se_3 has high and stable refractive index contrast, and very high phase switching endurance in an order of 10^6 – 10^7 cycles [24, 25]. Its transition temperature is in between GST and GSST, at $\sim 186^\circ\text{C}$ [24, 26]. These properties make Sb_2Se_3 an attractive PCM for low-loss, reconfigurable devices used as optical switches or programmable circuits in optical waveguides [4–6, 13, 16, 22, 27]. However, Sb_2Se_3 usage in free-space tunable-transmittance filter has not been explored much [17].

Although PCM-based switchable filter is not a new research topic, the transmission is high in ON mode (transmitted state) and low in OFF mode (reflected/absorbed state), which create a high transmission contrast. However, ON mode performance suffers due to the existence of extinction coefficients in conventional PCMs [15, 28], as explained earlier. And existing Sb_2Se_3 -based filters are on-chip waveguide-based or metasurface structures [5, 14, 29]; which while having excellent transmission property due to large design flexibility, have complex fabrication process. A planar thin-film filter is easier to design and fabricate; however, we could only find one Sb_2Se_3 -based planar filter design. The design is Fabry–Pérot resonant cavity that required Ag mirrors. FP design has high transmittance contrast but suffers from narrow high-contrast region, and Ag has large extinction coefficient in IR spectrum which create high optical loss. So, there exist a research gaps for PCM-based, multilayer, planar thin-film design that can be switched to have very high transmission in ON mode or low transmission in OFF mode.

In this work, we investigate Sb_2Se_3 as PCM in planar thin-film designs using transfer matrix method simulation. The goal is to create a low-loss, broadband, transmittance-amplitude tunable optical filter centered around 1064 nm. We select this wavelength since it is from ND:YAG laser, commonly used in laboratory setup (1064 nm) and should make the transition to experimental validation easy. The design process is shown starting from simple, one-layer antireflection thin-film to multilayer, long-pass edge-filter film. This design approach can also be used for other filtering application in NIR wavelengths, e.g. night-vision camera [15], gas imaging [17], optical coherence tomography [28].

II. THEORIES

A. OPTICAL PROPERTIES OF ANTIMONY TRISELENIDE

Antimony triselenide (Sb_2Se_3) is an orthorhombic chalcogenide non-volatile phase change material (PCM) characterized by quasi-one-dimensional ribbons. While its amorphous phase consists of a disordered network of distorted motifs, crystallization restores long-range order along the ribbon direction. This thermally driven transition can be triggered by nanosecond to microsecond optical or electrical pulses [22, 24]. The process is reversible and has high endurance, with optical switching reaching 10^6 to 10^7 cycles [24, 25]. As an optical device, Sb_2Se_3 enables repeatable toggling between high and low transmission modes, provided that local heating remains below the melting or ablation threshold [4, 25].

The complex refractive index $\tilde{n}$ of any phase change material at wavelength λ is:

$$\tilde{n}_p(\lambda) = n_p(\lambda) + ik_p(\lambda) \quad (1)$$

where p denotes the phase of Sb_2Se_3 which can be either amorphous (*amo*) or crystalline (*cry*) phase. Dispersive models, such as Tauc-Lorentz or multi-oscillator fits are often used to represent the measured n_p and k_p over the spectral range of interest. However, in this work, linear interpolation is used because all the datasets used have measurement interval of less than 4 nm. Figure 1 shows their complex refractive indices from 300 to 1700 nm using the dataset from Delaney, et al. [22], where the complex refractive indices at 1064 nm are $\tilde{n}_{\text{amo}} = 3.370 + 0.000i$ and $\tilde{n}_{\text{cry}} = 4.308 + 0.010i$. The blue lines represent real refractive index (n) and the red lines represent imaginary extinction coefficient (k). In amorphous phase, the refractive index increases from ~ 2.4 at 300 nm to a peak of ~ 4.0 at 600 nm and gradually decreases to a stable value of ~ 3.3 above 1200 nm, indicating a strong dispersion near the band edge of visible spectrum and a weaker dispersion in the NIR spectrum. The extinction coefficient starts from ~ 2.1 at 300 nm and drops to zero at ~ 850 nm. In the crystalline phase, the refractive index at the UV wavelengths is around the same value as the amorphous phase but reaches a higher peak of ~ 5.1 at around 660 nm; it then drops to a stable value of ~ 4.1 in the NIR spectrum. The absorption index of crystalline phase peaks at ~ 3.1 in the near-UV spectrum and rapidly approaches zero above 900 nm.

The refractive index contrasts ($\Delta n = n_c - n_a$) are large and stable from the visible through IR spectra, and the extinction coefficients are large in the near-UV region but fall to zero around the NIR spectrum for both phases, with the crystalline phase exhibiting higher absorption in the visible spectrum. Thus, when compared to other PCMs, Sb_2Se_3 has several advantages when operating in the NIR and IR wavelengths. The large Δn and low k starting from NIR wavelengths enable a device to operate in two modes with little to no optical loss, and a stable Δn also helps with broadband designs.

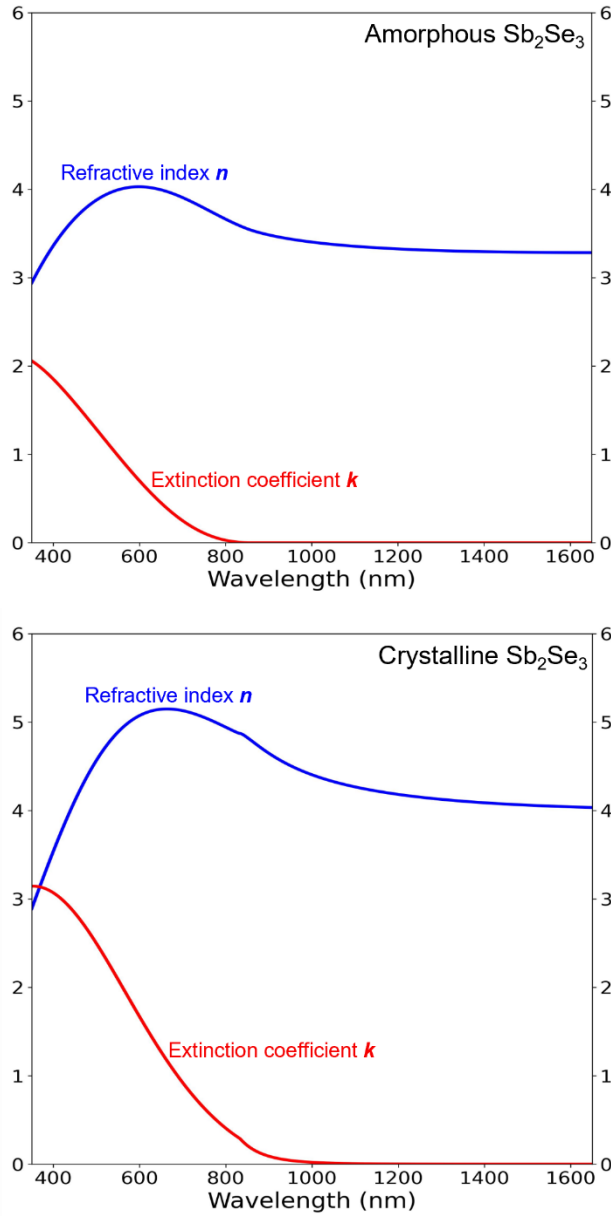


FIGURE 1. Complex refractive index of Sb_2Se_3 . Graphs are plotted from experimental data of [22].

B. SINGLE-LAYER ANTIREFLECTION DESIGN

The goal of designing most optical devices is to either create antireflection or high-reflection conditions. For a two-mode optical device, such as a transmittance **amplitude** tunable filter, we can consider the reflection in the ON mode first, and then the reflectance contrast ΔR between the ON and OFF modes. The simplest antireflection from a planar thin-film design is one film layer deposited on top of a substrate; both the film and the substrate should have zero absorption. The diagram in the top right corner of Fig. 2 shows that a single-layer film reflects light at two interfaces: the bottom interface between the film and substrate (R_1) and the top interface between the air and film (R_2). Antireflection occurs from the destructive

interference between R_1 and R_2 , with a complete AR condition requiring the same amplitude and a phase difference of π radian (optical path length of $\lambda/2$). Because R_1 propagates through the thin film layer twice (while transmitted down and reflected backup), the optical thickness (OT) of the film only needs to be equal to half of the optical path length, $OT = \lambda/4$, this also known as quarter-wave optical thickness (QWOT). The optical thickness is related to the physical thickness t by the following equation:

$$OT(\lambda) = n(\lambda) t, \quad (2)$$

where $n(\lambda)$ is the refractive index of the film at λ . For a single-layer AR device, the thin-film physical thickness t must be

$$t = \frac{OT}{n} = \frac{\lambda/4}{n}. \quad (3)$$

Another method for calculating the thickness required for the AR condition is to consider the reflection of the device. The reflectance R of only the substrate is related to the Fresnel coefficient r by

$$R = |r|^2 = \left| \frac{n_a - n_s}{n_a + n_s} \right|^2, \quad (4)$$

where n_a is the air refractive index, and n_s is the refractive index of substrate. If a single-layer film is placed on top of a substrate, the film and substrate layers can be combined into an effective reflectance index n_r [30], defined as

$$n_r = n_f \frac{(n_s + n_f) + (n_s - n_f)e^{-i2\theta}}{(n_s + n_f) - (n_s - n_f)e^{-i2\theta}}, \quad (5)$$

where n_f is the film refractive index, i is the imaginary unit, and θ is the phase thickness which is related to optical thickness and physical thickness t by the angular wavenumber $k_0 = 2\pi/\lambda$:

$$\theta = k_0 OT = k_0 nt. \quad (6)$$

By replacing n_s in Eq. 4 with n_r from Eq. 5, the reflectance of a single-layer device becomes:

$$R = |r|^2 = \left| \frac{n_a - n_r}{n_a + n_r} \right|^2. \quad (7)$$

Antireflection happens when $R = 0$ or $n_r = n_a$. This condition occurs when the phase thickness θ is in multiple of $\pi/2$ radians:

$$\theta = Z \frac{\pi}{2}, \quad (8)$$

where Z denotes even integer. If this condition is satisfied, Eq. 5 can be simplified with Euler's identity ($\exp^{-i\pi} = -1$) to:

$$n_r = n_f \frac{(n_s + n_f) - (n_s - n_f)}{(n_s + n_f) + (n_s - n_f)} = \frac{n_f^2}{n_s}. \quad (9)$$

By substituting this into Eq. 7, the refractive indices for antireflection condition becomes:

$$n_a n_s = n_f^2 \quad (10)$$

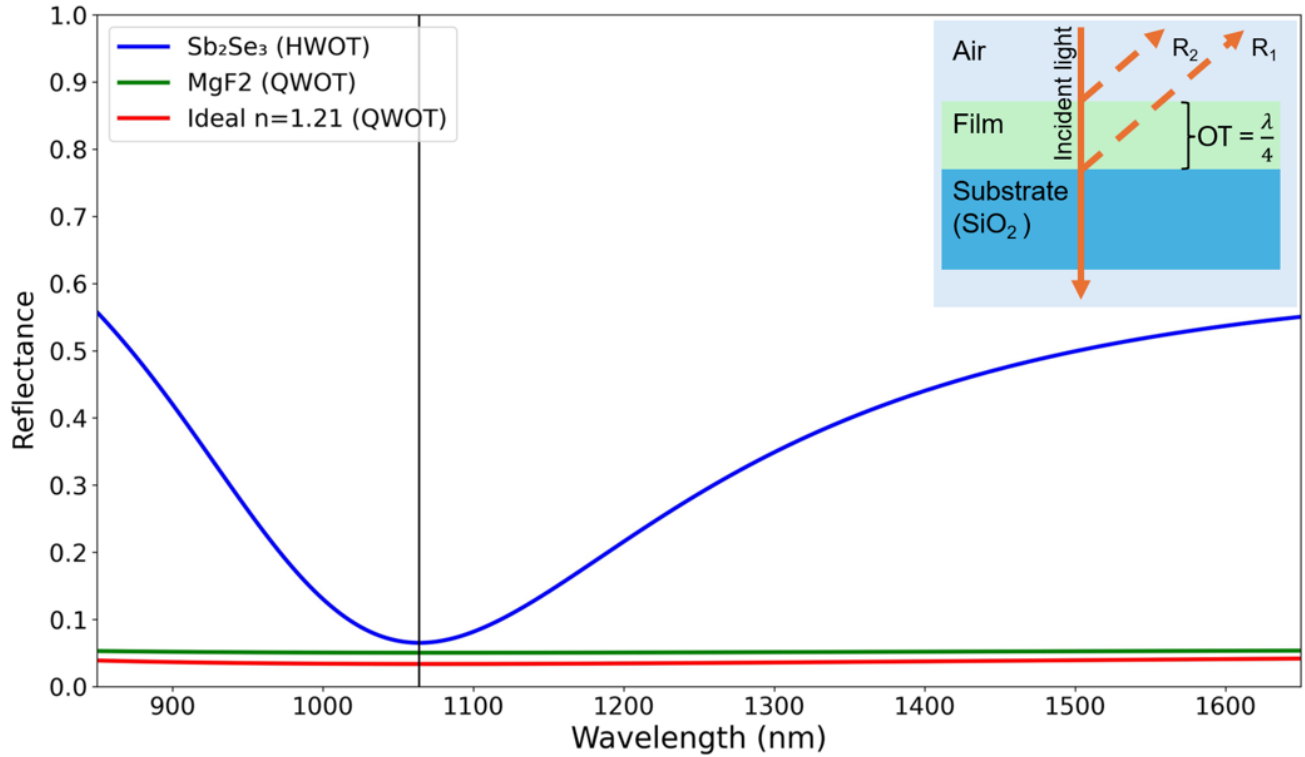


FIGURE 2. The reflectance of a single-layer design with different refractive index and thickness, the black vertical line indicates 1064 nm. At this wavelength, HWOT-thick Sb_2Se_3 (blue) has the highest reflection $R = 6.5\%$. QWOT-thick MgF_2 (green) $R = 5.0\%$. An ideal QWOT-thick film with $n_{\text{ideal}} = 1.21$ (red) has the lowest reflectance, $R = 3.4\%$. Cross-section diagram of the QWOT-thick structure is shown in the top-right corner.

Another condition is the relative refractive index between the air, film, and substrate, which must be in the following order: $n_{\text{air}} < n_f < n_{\text{substrate}}$. Light shifts its phase by π radian when reflected from a lower to a higher refractive index medium. The reflected light at the air-film interface (R_2) will always undergo a π radian phase shift since n_a will be the lowest in most cases. Therefore, R_1 must undergo the same phase shift to create destructive interference.

These two conditions limit material selections for a perfect antireflection, since there is only one ideal refractive index (n_{ideal}) for each n_s . The refractive index of Sb_2Se_3 is higher than that of substrate (silica; SiO_2) at every wavelength. So, if Sb_2Se_3 is QWOT, the reflection from R_1 still travels 2QWOT (π radian) further than R_2 but only R_2 has its phase shifted by π radian during reflection, so the two R 's have a phase difference of 0 radian, a constructive interference. To minimize reflection, the Sb_2Se_3 thickness can be increased to twice the QWOT ($OT = \lambda/2$), this is called half-wave optical thickness (HWOT) and is equivalent to an absentee layer. For example, at the reference wavelength $\lambda_0 = 1064$ nm, if we use 3-mm-thick SiO_2 as the substrate ($n_s = 1.46$) [31], the ideal QWOT-film thickness is calculated from Eq.10 to be $n_{\text{ideal}} = 1.21$. The material with the closest refractive index is MgF_2 ($n_{\text{MgF}_2} = 1.38$) [32]. A slight difference from ideal value causes the reflection to be slightly higher, as illustrated in Fig. 2. The reflectance of the Sb_2Se_3 (blue) is the highest, at 6.5%, because the PCM layer is an absentee layer, so the reflection is

equivalent to a standalone 3-mm SiO_2 substrate. An ideal film (red) still exhibits small reflectance because of the reflection in the substrate-air layer in the back.

C. MULTILAYER ANTIREFLECTION DESIGN


Two-layer design with each layer thickness being QWOT (Q/Q design) is also be used to create antireflection conditions. The Fresnel reflection coefficient r from Eq. 7 can be expanded to

$$r = \frac{n_a - n_{r2}}{n_a + n_{r2}} = \frac{n_a - \left(\frac{n_{f2}^2}{n_{r1}}\right)}{n_a + \left(\frac{n_{f2}^2}{n_{r1}}\right)} = \frac{n_a - \left(\frac{n_{f2}^2}{n_{f1}/n_s}\right)}{n_a + \left(\frac{n_{f2}^2}{n_{f1}/n_s}\right)}, \quad (11)$$


where n_f begins from the substrate side and increases toward the air side ($n_s / n_{f1} / n_{f2} / n_a$), n_{r2} is the effective reflectance index of the entire structure [30], and n_{r1} is the effective reflectance index of only the substrate (n_s) and bottom film (n_{f1}). Similar to Eq. 7, the antireflection condition of the two-layer design occurs when $n_a = n_{r2}$ or

$$n_a = \frac{n_{f2}^2}{n_{f1}/n_s}, \quad (12)$$

$$\frac{n_a}{n_s} = \frac{n_{f2}^2}{n_{f1}^2}. \quad (13)$$

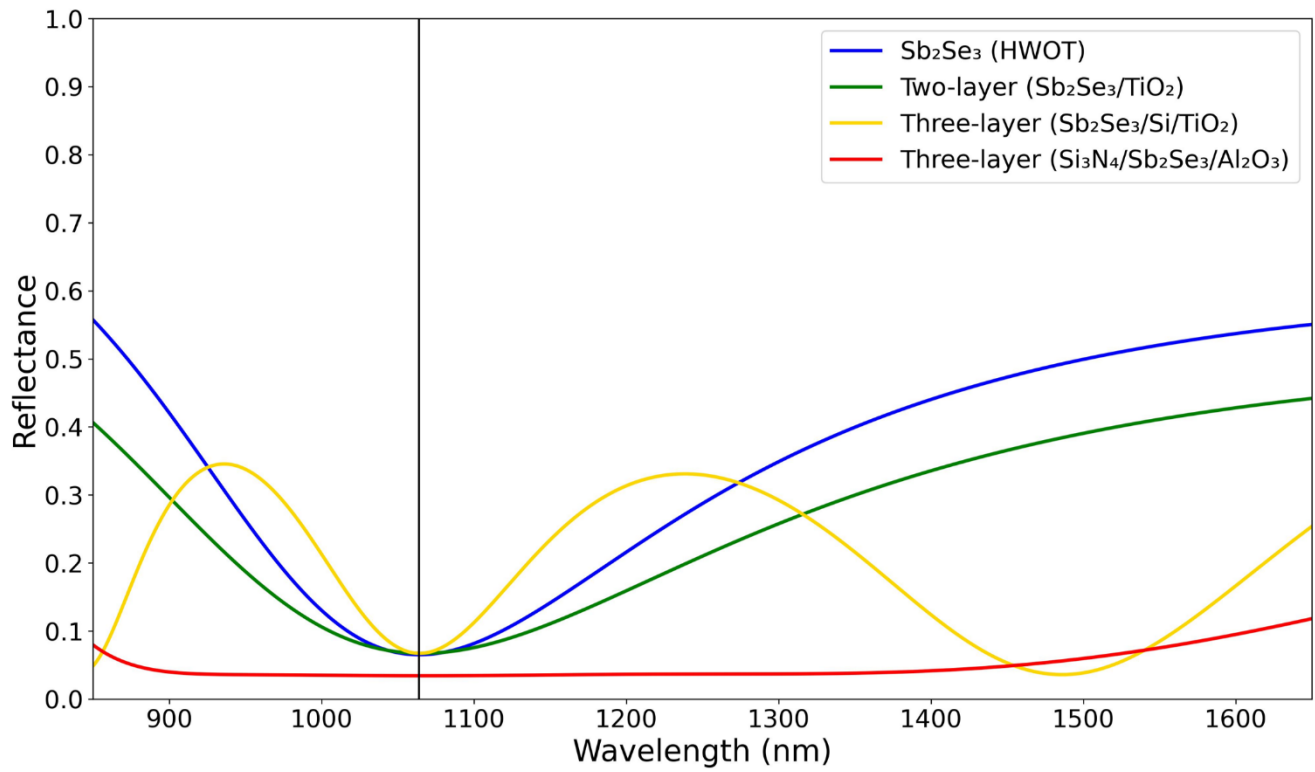

(a) Reflectance of each design

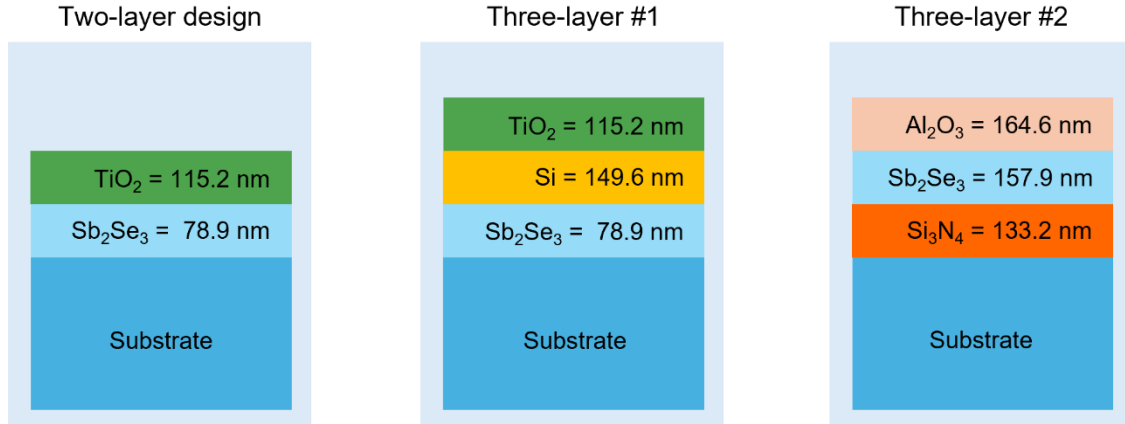

(b) Thickness of each design

FIGURE 3. (a) The reflectance profiles of four different designs. The single-layer, two-layer, and three-layer design with Sb_2Se_3 at the bottom have around the $R = 6.5\text{--}6.7\%$. However, the three-layer design with Sb_2Se_3 as middle layer has refractive index ratio of n_{r1} and n_{r2} closer to ideal values, so its reflectance value is the lowest at $R = 3.4\%$. (b) Cross-section diagrams showing each layer thickness.

From Eq. 13, it can be seen that the refractive index of the top film must be smaller than the bottom film ($n_{r2} < n_{r1}$). For example, at $\lambda_0 = 1064$ nm, if we use the same SiO_2 as substrate ($n_s = 1.46$) and Sb_2Se_3 as the bottom film ($n_{r1} = 3.37$), the ideal refractive index of the top film (n_{r2}) is 2.78. A commonly used material with the closest refractive index is TiO_2 ($n_{\text{TiO}_2} = 2.31$) [33]. Compared to the single-layer Sb_2Se_3 design, the two-layer $\text{Sb}_2\text{Se}_3/\text{TiO}_2$ design has a lower reflectance at 1064 nm

and wider AR region, as shown in Fig. 3. Another way to create a two-layer AR condition is to fix the two film refractive indices and vary the thickness of each film, as explained in Chapter 5.2 of [30]. However, this method narrows the spectral range of the antireflection region.

A three-layer design with an HWOT-thick film in the middle (Q/H/Q) requires refractive index orderings of $n_s < n_{r1} < n_{r2}$ and $n_{r2} > n_{r3} > n_a$ for antireflection properties. The middle

layer (n_2) acts as an absentee layer when the incident wavelength is the same as the reference wavelength ($\lambda = \lambda_0$). The reflection coefficient is equal to

$$r = \frac{n_a - n_{r3}}{n_a + n_{r3}} = \frac{n_a - \left(\frac{n_{f3}^2}{n_{r2}}\right)}{n_a + \left(\frac{n_{f3}^2}{n_{r2}}\right)} = \frac{n_a - \left(\frac{n_{f3}^2}{n_{f1}/n_s}\right)}{n_a + \left(\frac{n_{f3}^2}{n_{f1}/n_s}\right)} \quad (14)$$

Because the middle film layer (n_2) is HWOT thick, it behaves as an absentee layer [30, 34]. So $n_{r2} = n_{r1} = n_{f1}^2/n_s$. A three-layer antireflection condition occurs when


$$\frac{n_a}{n_s} = \frac{n_{f3}^2}{n_{f1}^2} \quad (15)$$

The refractor index ratio of top and bottom films is similar to that of the two-layer design. As an example, if the bottom layer (n_1) is Sb_2Se_3 (QWOT), then the ideal top layer ($n_{f3, \text{ideal}}$) is 2.78, so TiO_2 ($n_{\text{TiO}_2} = 2.31$) is used again. The middle layer needs to have the highest refractive index, so Silicon (Si) is used ($n_{\text{Si}} = n_2 = 3.55$) [35]. As shown in Fig. 3, the reflectance of the three-layer design (yellow) at wavelengths further from λ_0 (i.e., 1400 nm and longer) is lower than that of a single (blue) or two-layer design (green). This is a benefit of adding an extra absentee layer in the middle, it contributes to a broader operating bandwidth [34].


Instead of placing the PCM as the bottom film layer, Sb_2Se_3 can be moved to the middle so that the selection of ideals n_1 and n_3 is easier. The bottom layer could be Si_3N_4 ($n_1 = 2.00$) [36] and the ideal top layer calculated using Eq. 15 has $n_3 = 1.65$, which Al_2O_3 has the closest refractive index ($n_{\text{Al}_2\text{O}_3} = 1.62$) [33]. These designs are shown in Fig. 3, where the reflectance of the designs with Sb_2Se_3 deposited directly on top of the substrate, i.e., single-layer, two-layer, and three-layer designs, are ~6.5%. But the three-layer design with Sb_2Se_3 placed in the middle ($n_2 = \text{Sb}_2\text{Se}_3$) has a reflectance of 3.4%, which is the same value as that of an ideal single-layer design (3.4%). This improvement can be explained by the selection of n_1 and n_3 which are closer to ideal values.

D. LONG-PASS EDGE-FILTER DESIGN

In previous sections, we only consider the reflectance of the design when Sb_2Se_3 is in amorphous phase (ON mode). However, because we want to modulate the performance of our optical filters, the reflectance when Sb_2Se_3 transition to crystalline phase (OFF mode) should also be considered. A high reflectance contrast between crystalline and amorphous phases ($\Delta R = R_c - R_a$) indicates a good modulation power. The reflectance plots of the four designs from Fig. 3 are shown in Fig. 4. The single-layer design reflectance profile red-shifted for ~250 nm and is the only one that has reflectance contrast higher than 50% (Fig 4a, blue: $\Delta R=55\%$). More importantly, the three-layer design with Sb_2Se_3 in the middle, which has the lowest reflectance in amorphous phase ($R_a = 3.4\%$), only has $R_c = 14.8\%$ (Fig 4b, red: $\Delta R=11.4\%$).

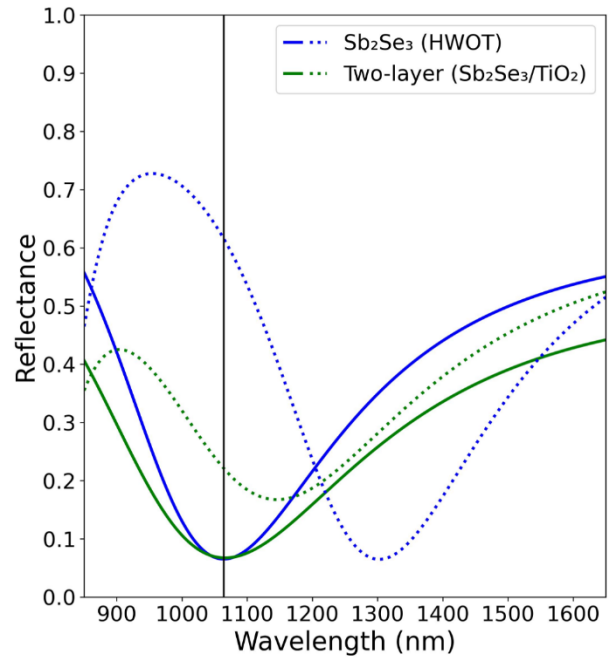

(a) Reflectance of single and two-layer designs

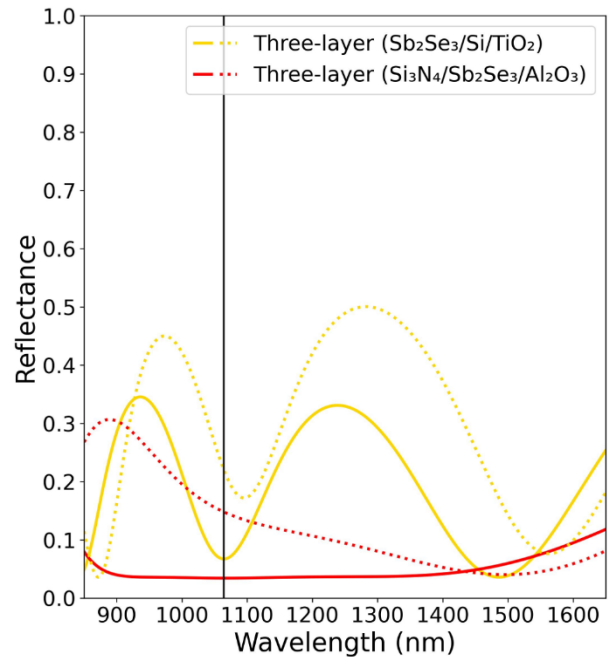

(b) Reflectance of different three-layer designs


FIGURE 4. Reflectance of the designs in Fig. 3 before (solid) and after (dotted) phase transition. The single-layer design has the highest reflectance contrast ($\Delta R = R_a - R_c$) of 55.0%.

So, we need a new structure that has high reflectance contrast but still maintain low reflection in amorphous phase. This introduces us to edge-filter design, the reflectance profile has HR-region centered around the reference wavelength, while the regions outside of this are both AR regions, with a steep spectral edges between the AR- and HR-regions. Edge


filter consists of QWOT-thick high-index film (H) and low-index film (L) deposited on top of each other in a structure called unit cell (U), it can either be a long-pass ($H/2 \ L \ H/2$) or a short-pass designs ($L/2 \ H \ L/2$), the $1/2$ symbol denotes half QWOT thickness ($OT = \lambda/8$). The spectral width of HR-region is directly correlated to the difference between H and L layer's refractive index, and the number of unit cell directly correlated to the steepness of spectral edge between region. Long-pass design has stable, low reflectance in the longer-wavelength AR region, while short-pass design has the opposite behavior. Long-pass design is selected for this work since it minimize the device thickness.

As an examples, Sb_2Se_3 is H layer, and MgF_2 as L layer, the reference wavelength is changed to $\lambda_0 = 740$ nm. Figure 5 illustrates the effect the number of unit cell has on the reflectance profile. By increasing the number of unit cell from 1 to 6, the spectral edge is getting steeper. Also, the interested wavelength (black vertical-line) shifted from AR-region in amorphous phase (Fig. 5a) to HR-region in crystalline phase (Fig. 5b), this create a reflectance contrast higher than single-, double- or three-layer designs previously shown.

The reasoning for selecting $\lambda_0 = 740$ nm is shown in Fig. 6. Here, λ_0 are varied from 700–760 nm in the same 4-unit-cell configuration as shown in Fig. 5a (green). At every λ_0 , the interested wavelength of 1064 nm is at the edge of AR region (Fig. 6a, solid). So, when Sb_2Se_3 switched to crystalline phase and the reflectance profile redshifted, the interested wavelength is now in high-reflection region (Fig. 6a, dotted). When we look at the reflectance contrast in Fig. 6b, both $\lambda_0 = 740$ (green) and $\lambda_0 = 750$ nm (yellow) have the same contrast $\Delta R = 90.6\%$ (Fig. 6b). However, λ_0 is proportional to film thickness, so shorter $\lambda_0 = 740$ is used. The cross-sectional view of long-pass and short-pass designs and layer thickness of long-pass design with $\lambda_0 = 740$ nm is provided in Fig. 6c. The figures only show 2 unit-cells due to spacing, all long-pass edge-filters in Fig. 6a and Fig. 6b are 4-unit-cell designs.

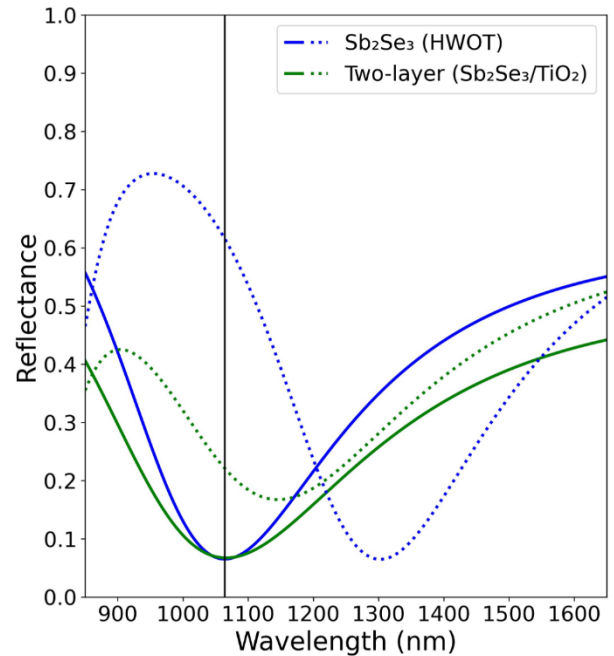


(a) Reflectance of single and two-layer designs

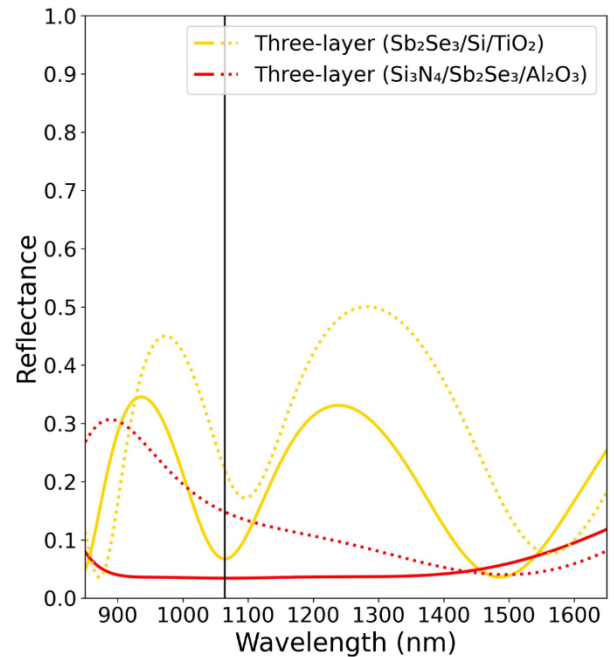


(b) Reflectance of different three-layer designs


FIGURE 5. Reflectance profile of long-pass edge-filter designs in each phases. The design used increasing number of unit cell, from 1–6 unit cells. (a) When devices are in amorphous phase (ON mode), the wavelength of interest (black vertical line) is in the AR region. (b) When devices are changed to crystalline phase (OFF mode), the wavelength of interest is in the high-reflection region.

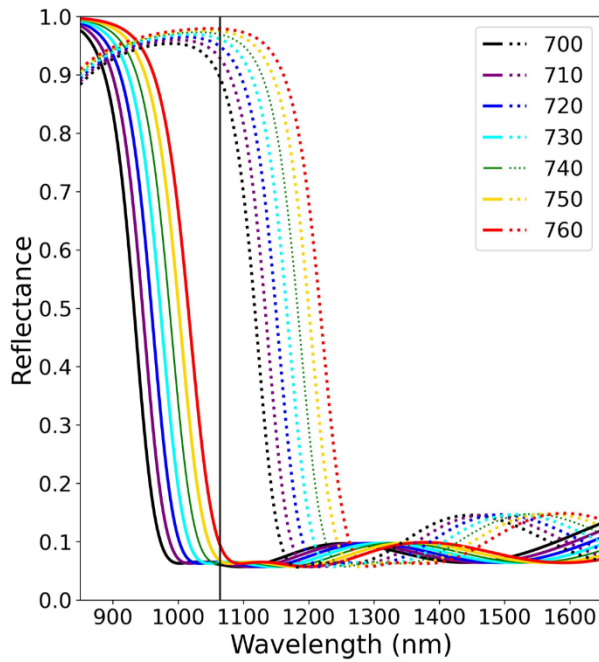

(a) Reflectance of N=4 designs

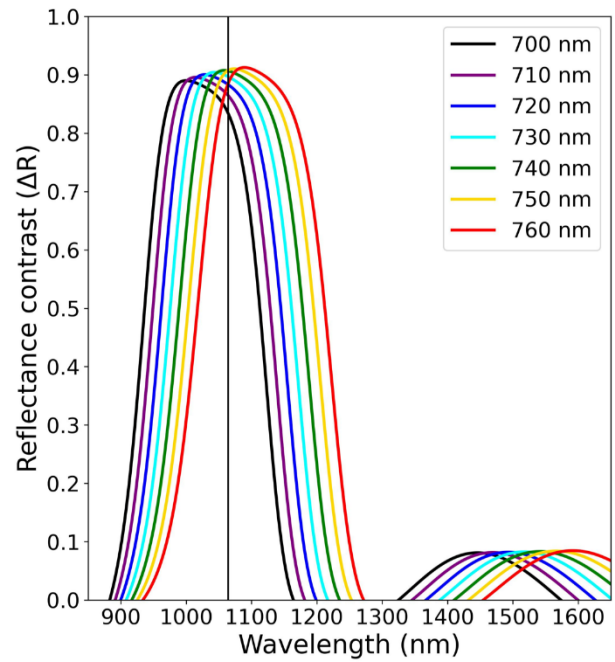

(b) Reflectance contrast of N=4 designs

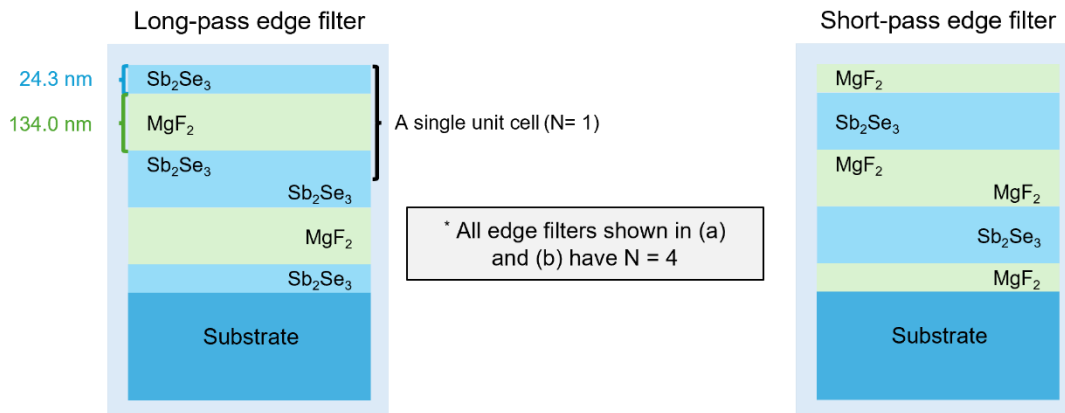

(c) Thickness of long-pass and short-pass edge-filter design ($\lambda_0 = 740$ nm)

FIGURE 6. Reflectance profile of long-pass edge-filter designs with reference wavelength (λ_0) from 700 to 760 nm. (a) Reflectance before (solid) and after (dotted) phase transition shows that increasing λ_0 also increase the spectral profiles. (b) The reflectance contrasts at 1064 nm of $\lambda_0 = 740$ and $\lambda_0 = 750$ nm are the same $\Delta R = 90.6\%$. We select $\lambda_0 = 740$ nm for the following design since it allows for slightly thinner device size. (c) Cross-section diagrams showing long-pass and short-pass thickness, $\lambda_0 = 740$.

III. METHODS

A. SIMULATION OF OPTICAL PERFORMANCES

We use transfer matrix method (TMM) of Fresnel equation to calculate the transmittance, absorptance, and reflectance of each design. The computation codes are based on [30], but other simulation software are also applicable. The simulations are going to be from 850–1650 nm at an interval of every 1 nm. The dataset of most element in this work can be found in the website *refractiveindex.info* [37], with the only exception being Sb_2Se_3 [22]. The high-index layers (H) are silicon with refractive index at 1064 nm

equal to $n_{\text{Si}} = 3.56$ [35], titanium dioxide ($n_{\text{TiO}_2} = 2.31$) [33], and silicon nitride ($n_{\text{Si}_3\text{N}_4} = 2.00$) [36], while the low-index layers (L) are aluminium oxide ($n_{\text{Al}_2\text{O}_3} = 1.62$) [33], silicon dioxide ($n_{\text{SiO}_2} = 1.47$) [31], and magnesium fluoride ($n_{\text{MgF}_2} = 1.38$) [32]. The substrate layer has the same refractive index as n_{SiO_2} and is 3 mm thick. The reflection from the substrate-air layer on the backside is calculated. Every dataset have measuring interval of less than 4 nm. The incident angle is 0° , and light polarization mode is transverse electric (TE), unless specifically mentioned.

The performance indicators are going to be transmittance values at 1064 nm (high T_{ON} , low T_{OFF}), transmittance contrast ΔT FWHM, transmittance at different polarization and incident angle, the total PCM used, design thickness, and the complexity of the design which is indicated by the number of layers and the number of material types used.

B. SIMULATION OF OPTICAL ENDURANCE AND STABILITY UNDER LARGE PHASE SWITCHING CYCLES

Experimental studies have demonstrated that Sb_2Se_3 can has phase switching cycles with minimal degradation of its optical contrast and maintain a low-loss, reversible modulation in the order of 10^6 phase switching cycles [24]. Even so, Sb_2Se_3 still exhibits a slight complex refractive index drift due to structural relaxation and cumulative thermal damage. Accounting for these variations is essential for ensuring long-term reliability and precision in high-endurance photonic applications [24, 25]. To account for this, the complex refractive index ($\tilde{n}$) can be rewritten as

$$\tilde{n}_p(C) = n_p(C) + ik_p(C), \quad (16)$$

where C is the number of the phase switching cycle. The real part of the refractive index (n) is described by an exponential relaxation towards a saturated value such that

$$n_p(C) = n_{p,\infty} - (n_{p,\infty} - n_{p,0})e^{-\alpha_p C}, \quad (17)$$

where $n_{p,\infty}$ is the asymptotic refractive index after many cycles, $n_{p,0}$ is the refractive index at the first cycle (obtained from ellipsometry or literature data), and α_p is the drift coefficient per cycle of phase p [22, 38].

Meanwhile, the imaginary part k can be approximated from a linear growth as

$$k_p(C) = k_{p,0}(1 + \beta_p C), \quad (18)$$

where $k_{p,0}$ is the initial loss, and β_p is the loss growth coefficient. Parameter β_p is the relative loss per cycle of phase p [24, 39]. The model from Eq. 18 is adopted in this work, they are consistent with experimental trends and with general PCM endurance theory, providing a practical way to assess contrast degradation and threshold drift of PCM-based devices over large cycles [22, 24, 38, 39].

Optical endurance can be quantified using the following metrics; percentage transmitting contrast degradation (D_{pct}) and insertion loss (IL). Transmittance contrast degradation is defined as the change in transmittance contrast after N cycles:

$$D_{pct}(C) = \frac{\Delta T(C) - \Delta T_0}{\Delta T_0}, \quad (19)$$

where ΔT_0 is the transmittance contrast between the amorphous and crystalline phases in the initial cycle $C = 0$ ($\Delta T_0 = T_a(0) - T_c(0)$). A negative D_{pct} indicates a decreasing contrast.

The insertion loss (IL) of the device at cycle C compares the high-transmittance amorphous phase after the initial cycle:

$$IL_{dB}(C) = 10 \log \left[\frac{T_a(C)}{T_a(0)} \right]. \quad (20)$$

A increasing $IL_{dB}(C)$ indicates increasing loss, which is typically driven by the linear growth of the imaginary index $k_p(C)$ and by detuning of the resonance due to drift in $n_p(C)$.

IV. RESULTS & DISCUSSIONS

A. OPTICAL PROPERTIES OF 1064-NM OPTICAL FILTERS

The design architectures, number of layers, total thickness of Sb_2Se_3 , overall thickness, transmittance in ON-OFF modes, and transmittance contrast ($\Delta T = T_{ON} - T_{OFF}$) of each design are shown in Table I. The operating wavelength is 1064 nm, the reference wavelength (λ_0) is 1064 nm for single-, two-, and three-layer designs, but $\lambda_0 = 740$ nm for every edge-filter designs. The simulation show that only edge-filter designs with at least three unit-cells ($N \geq 3$) have ΔT higher than 50%, with 6-unit-cell design having the highest ΔT of 94.5%. However, there is only marginal improvement in ΔT when N exceeds 3, the Sb_2Se_3 layer thickness and the overall device thickness increase drastically. For examples, at 1064 nm, when comparing $N = 4$ to $N = 3$ designs, ΔT improves by +2% and the thickness increases for +33.3%, but when comparing $N = 5$ to $N = 4$ designs, ΔT increases by only +0.6%, but the device needs to be 25.0% thicker. It is important to note that increasing unit cell numbers also require more Sb_2Se_3 material, and less Sb_2Se_3 used has the benefit of minimizing the energy required for phase transition.

In edge-filter designs, the transmittance in OFF mode decrease with increasing N until it reaches zero in 6-unit-cell design. This is because, unlike the amorphous phase, crystalline phase Sb_2Se_3 still has a small absorption at 1064 nm ($k_{\text{SbSe}, \text{cry}} = 0.0097$), so light is absorbed by each layer until T_{OFF} is reduced to zero. For context, the absorption of crystalline Sb_2Se_3 is still an order of 10^2 smaller than other PCMs, e.g. GST ($k_{\text{GST}, \text{cry}} = 2.4540$) or VO_2 ($k_{\text{VO}_2, \text{metallic}} = 1.4580$). Figure 7 shows the transmittance contrast (ΔT) of single-layer design and edge-filter designs ($1 \leq N \leq 6$). The ΔT at 1064 nm of edge-filters with $N \geq 2$ are around the same value, the spectral width of high- ΔT region is noticeably wider in design with higher unit-cell counts. This property should be considered if the filter is intended to be used in broad spectrum applications.

Two other properties that might need be in consideration are the optical performance at varying incident angles and the polarization mode of the incident light (TE or TM). Figure 8 shows 4-unit-cell and 5-unit-cell designs with incident angles ranging from 0° to 90° , and with polarization in TE (Fig. 8a and 8c) and TM (Fig. 8b and 8d). For both TE and TM polarized light, ΔT at 1064 nm remains higher than 90% from 0° to $\sim 30^\circ$.

TABLE I
DESIGNS OF Sb_2Se_3 -BASED OPTICAL FILTERS

Design	Layout	Number of layer	Sb_2Se_3 used (nm)	Device size (nm)	T_{ON} (%)	T_{OFF} (%)	ΔT (%)
Single-layer	Sb_2Se_3	1	157.9	157.9	93.5	37.2	56.3
Two-layers	$\text{Sb}_2\text{Se}_3/\text{TiO}_2$	2	78.9	194.1	93.3	76.9	16.4
Three-layers	$\text{Sb}_2\text{Se}_3/\text{MgF}_2/\text{TiO}_2$	3	78.9	580.3	93.3	76.9	16.4
Three-layers	$\text{Si}_3\text{N}_4/\text{Sb}_2\text{Se}_3/\text{Al}_2\text{O}_3$	3	157.9	455.7	96.6	83.3	13.3
Edge filter	$(\frac{\text{Sb}_2\text{Se}_3}{2}/\text{MgF}_2/\frac{\text{Sb}_2\text{Se}_3}{2})^1$	3	48.5	182.5	94.1	54.3	39.8
Edge filter	$(\frac{\text{Sb}_2\text{Se}_3}{2}/\text{MgF}_2/\frac{\text{Sb}_2\text{Se}_3}{2})^2$	5	97.0	365.0	95.0	16.3	78.7
Edge filter	$(\frac{\text{Sb}_2\text{Se}_3}{2}/\text{MgF}_2/\frac{\text{Sb}_2\text{Se}_3}{2})^3$	7	145.5	547.6	94.8	4.0	90.8
Edge filter	$(\frac{\text{Sb}_2\text{Se}_3}{2}/\text{MgF}_2/\frac{\text{Sb}_2\text{Se}_3}{2})^4$	9	194.0	730.1	93.7	0.9	92.8
Edge filter	$(\frac{\text{Sb}_2\text{Se}_3}{2}/\text{MgF}_2/\frac{\text{Sb}_2\text{Se}_3}{2})^5$	11	242.6	912.6	93.6	0.2	93.4
Edge filter	$(\frac{\text{Sb}_2\text{Se}_3}{2}/\text{MgF}_2/\frac{\text{Sb}_2\text{Se}_3}{2})^6$	13	291.1	1,095.1	94.5	0.0	94.5

Transmittance is calculated at $\lambda = 1064$ nm. Single, two, and three-layer designs all have $\lambda_0 = 1064$ nm, but all edge-filter designs have $\lambda_0 = 740$ nm

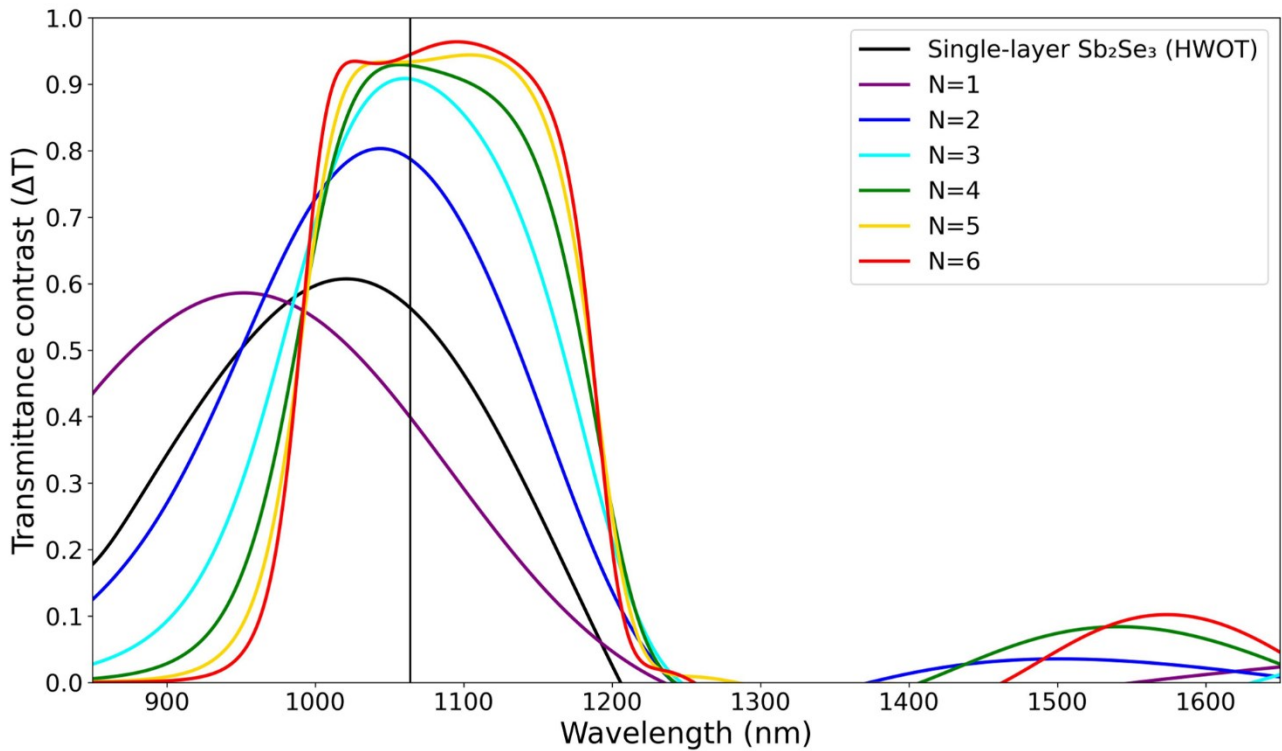


FIGURE 7. Transmittance contrast (ΔT) of a single-layer and edge-filter designs with different number of unit cells (N). The vertical black line indicates the interested 1064 nm wavelength

At higher incident angle, the high- ΔT spectral profiles (yellow-green) shifted to shorter wavelengths. For TE polarized light, the blueshift of wavelength with the highest ΔT at 45° compared to 0° incident angle are -37 and -57 nm for 4-unit-cell and 5-unit-cell designs, respectively. And at 60° angles the blueshift are -90, -143 nm, respectively. For

TM polarized light, the peak ΔT blueshift in 4- and 5-unit-cell designs at 45° are -103 and -168 nm, respectively. At 60° incident angles they are -156 and -226 nm, respectively. It can be seen that the ΔT profiles of both polarization modes blueshifted with increasing incident angle, with TM polarization causing longer blueshift. This effect is

surprisingly counterintuitive, since one would normally think that: 1) increasing incident angle effectively increases the physical thickness t of each film layer, 2) increase t increase optical thickness OT, and 3) from Eq. 2, increase OT should have decreased k_0 and increase the wavelength (Eq. 6), thereby causing the spectral profile to redshift. However, high transmission is caused by satisfying antireflection condition with destructive interference from the top and bottom interface in each layer, as seen in Fig. 1. From Eq. 6, incident angle can be factor by simply multiplying $\cos(\vartheta)$:

$$\theta = k_0 n t \cos(\vartheta) = \frac{2\pi}{\lambda} n t \cos(\vartheta), \quad (21)$$

at normal incident ($\vartheta=0$) the equation remains unchanged. However, at increasing incident angle, the phase thickness θ become smaller. To restore the same phase thickness required for destructive interference, λ must become smaller (blueshift).

From Fig. 8, the spectral widths of the high- ΔT region in both designs are comparable, but the 5-unit-cell design has a higher ΔT across the spectrum, which indicates a better broadband, wide-angle, tunable optical device.

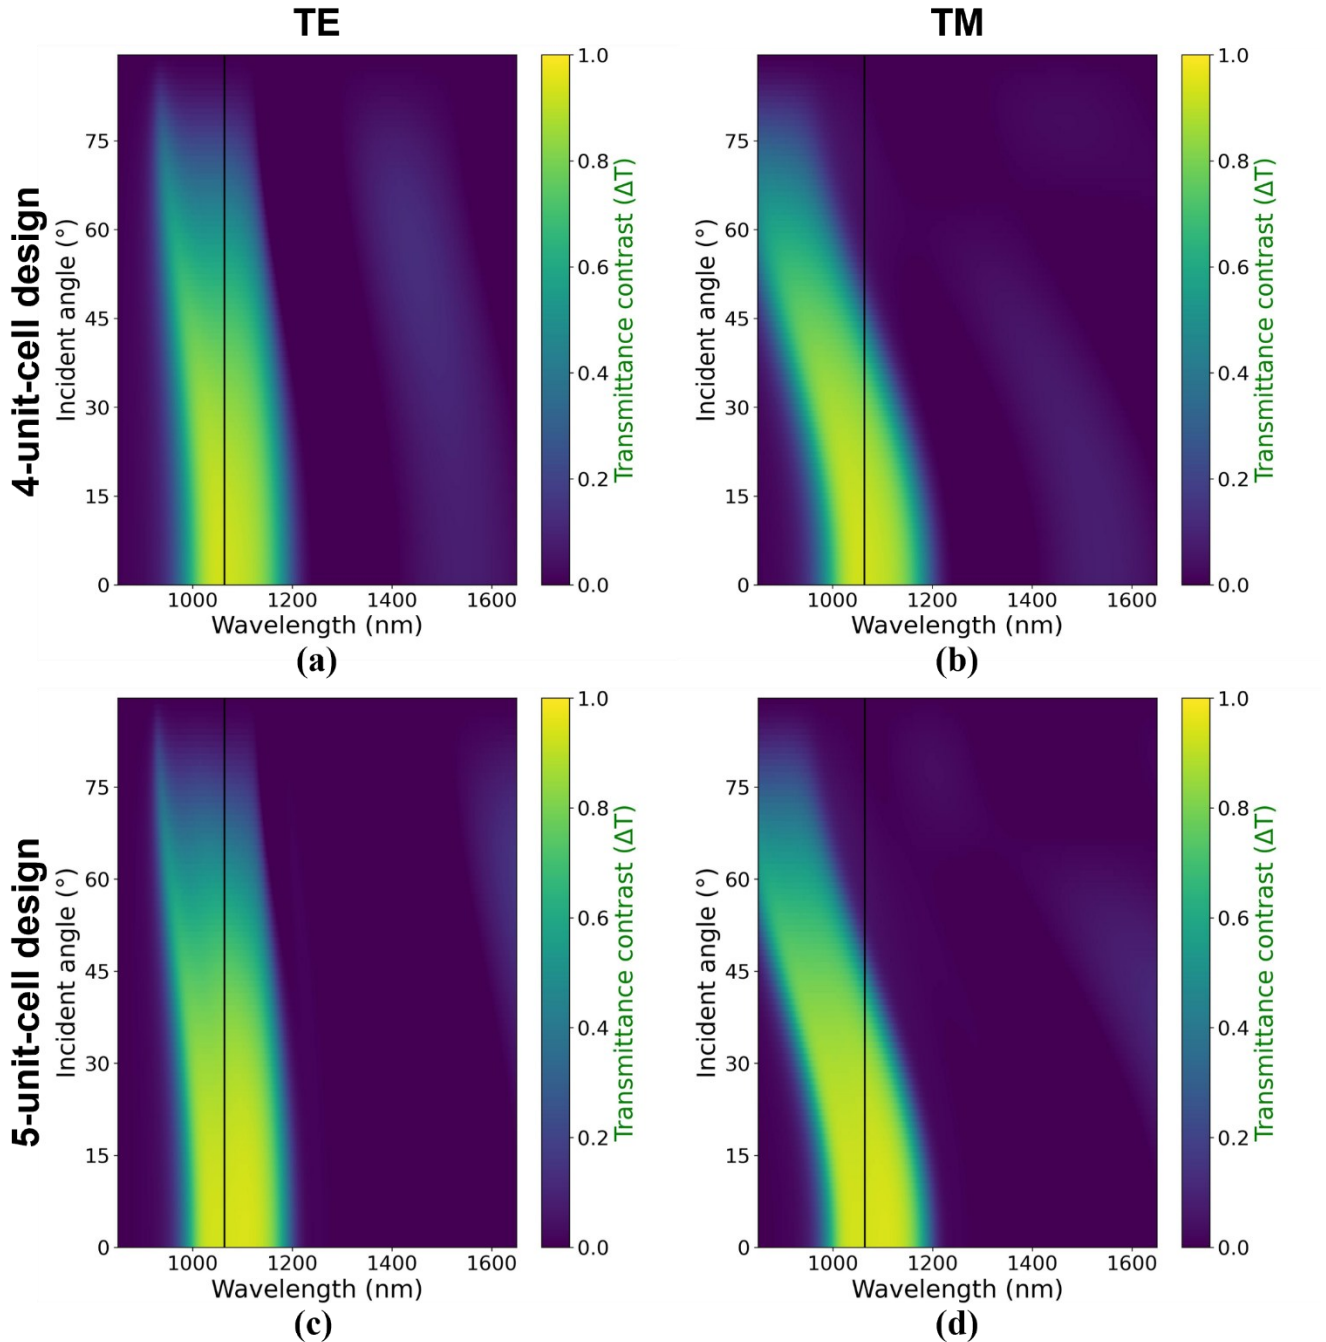


FIGURE 8. Transmittance contrast at different incident angles and polarization mode of 4-unit-cell and 5-unit-cell long-pass edge-filter designs.

With the simulated results shown in Table I and the two figures (Fig. 7, 8), one could say that it is difficult to decide which design is exactly the best without quantitative values from a figure-of-merit (FOM). However, we argue that quantitative analysis using FOM is partially a qualitative analysis. Because the selection of FOM equation or weighting are inherently subjective and can be done in such a way that any of the design can be the best. As an example, if we use unweight transmittance at 1064 nm over design thickness (t), ' $\Delta T(1064)/t$ ', then 1-unit-cell design is actually the best, we can also weight this FOM to ' $0.9 \times \Delta T(1064)/0.1 \times t$ ' which result in 6-unit-cell being the best design. On the other side of the argument, a FOM is a useful tool for decision making and represent the purpose of the design. So, we decided to use unweighted spectral width with $\Delta T > 90\%$ over design thickness to reflect our goal of broadband filtering,

$$FOM = \Delta \lambda_{\Delta T > 90\%} / t \quad (22)$$

this results in 5-unit-cell being the best design. As a comparison, the value of each design are: $FOM_{N=3} = 0.048$, $FOM_{N=4} = 0.099$, $FOM_{N=5} = 0.131$, and $FOM_{N=6} = 0.124$ arbitrary unit. The reason why FOM values are not provided in Table 1 is to prevent out-of-context comparison. Again, we want to emphasize that the selection of FOM is subjective, and one should change the equation to match the applications.

B. ENDURANCE SIMULATION OF 1064-NM OPTICAL FILTERS

Endurance simulation at 1064 nm of the single-layer Sb_2Se_3 , and 5-unit-cell edge-filter designs demonstrated that all three resonant optical filters remain operational up to 1.5×10^6 phase switching cycles, with design-dependent degradation of their transmittance metrics. For the single-layer design, both the amorphous (T_a) and crystalline phases transmittance (T_c) decrease modestly (Fig. 8a). And both the corresponding percentage transmittance contrast degradation (D_{pct}) and insertion loss (IL) also decrease with cycling number, as shown in Fig. 8d and 8g, respectively.

For both the 4- and 5-unit-cell edge-filter designs, the T_a and insertion loss decrease at a rate slower than in the single layer design, and their T_c increased slightly near the end. This causes their percentage transmittance contrast degradation to become two and three times larger, Fig. 8e and 8f, respectively. Their larger D_{pct} are attributed to the fact that their T_c become higher at the latter cycle. Edge-filter designs have a stronger field confinement so they exhibit less insertion losses when compared to the single-layer design.

These simulation results confirm that designs with multiple layers of Sb_2Se_3 still maintains comparable transmittance endurance to a simple, single-layer design. Their larger D_{pct} might become a problem at larger switching cycle but is overall negligible in the confine of our simulation. Overall, the edge-filter designs still have a higher transmittance contrast and a lower insertion loss after 1.5×10^6 cycles.

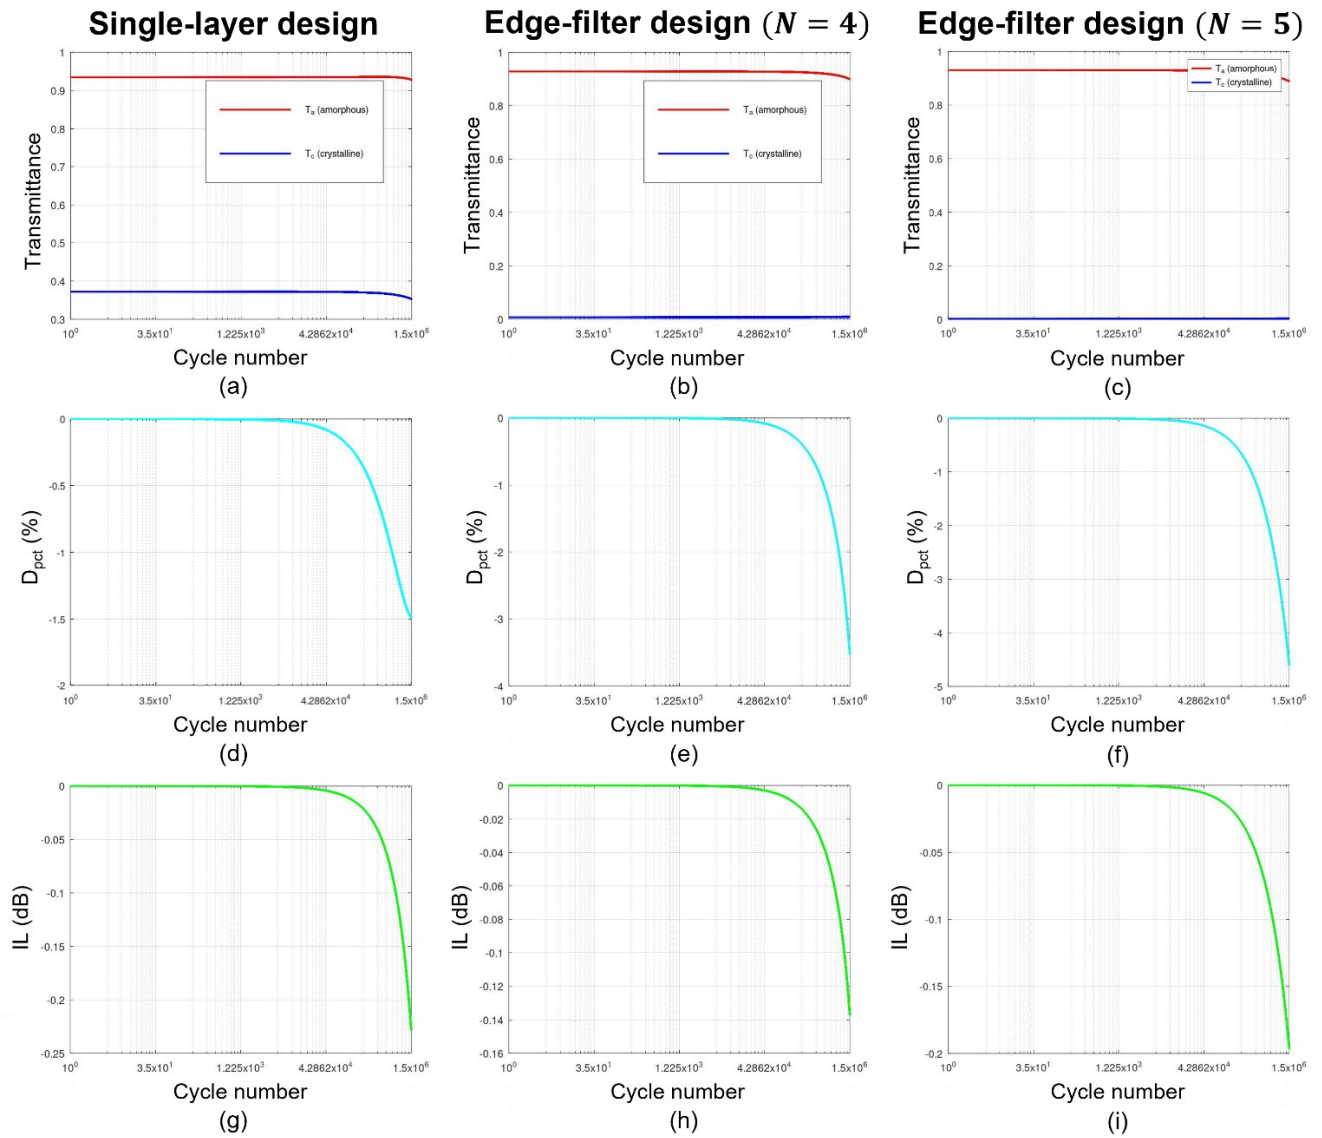


FIGURE 9. Optical endurance at 1064 nm of the single-layer, 4-unit-cell and 5-unit-cell edge-filter designs after 1.5×10^6 phase-switching cycles. (a,b,c) Transmittance in amorphous (red) and crystalline phases (blue). (d,e,f) The percentage transmittance contrast degradation relative to the initial value. (g,h,i) Insertion loss in amorphous phase, expressed in dB. Note a different y-axis scales.

C. TRANSMITTANCE AMPLITUDE TUNABILITY AND OPTIMIZATION

Edge-filter designs have multiple layers of Sb_2Se_3 which complicates the phase switching setup. When laser-induced heating is used as a switching method, the phase transition of every Sb_2Se_3 layer does not occur simultaneously and the transmission changes gradually. This effect is shown in the optical limiter of Sarangan, et al. [3] Their device use a similar long-pass edge-filter design but the H layers are GST instead of Sb_2Se_3 , and the L layers are SiO_2 instead of MgF_2 . Their experimental results showed that the phase switching of GST layers occurs layer-by-layer in an order that is determined by the changes in the optical field distribution and thermal crosstalk between layers, which does not necessarily start from layer in the air -side to the substrate-side (top to bottom). However, our device is intended to be used as a transmittance-tunable filter that does not require a fast switching speed; therefore, electrical heating is also available as an alternative phase switching method. The ability to manually control the phase of each Sb_2Se_3 layer enables the filter to have multiple transmittance values. Using the 5-unit-cell edge-filter design described in Table I, which consists of 11 layers of Sb_2Se_3 and MgF_2 (six layers of Sb_2Se_3), there would be a total of 2^6 configurations for the Sb_2Se_3 phases. Figure 9 highlights some of these configurations; the legend denotes Sb_2Se_3 in the amorphous (a) or crystalline (c) phase, and the ordering from left to right is from the substrate to the

air side (f_1 to f_6). With the correct phase configuration, the transmittance can be gradually reduced from peak of 93.4% to 0.0%.

The peak transmittance contrast of each design shown in Fig. 7 does not always correspond to the desired operating wavelength of 1064 nm. This is explained by the arbitrary selection of the reference wavelength in edge-filter designs. So, an optimization algorithm can be used to improve the optical performance. A simple merit function found in OpenFilters [40] is used in this example. The optimization goal for the 5-unit-cell edge-filter design is to have a transmittance value of at least 97% from 1000 to 1200 nm at intervals of every 20 nm. The optimization took less than 5 s, and the new design now required 304.2 nm of Sb_2Se_3 , 25% more than the original design, but the overall thickness is now 845.6 nm, 7% less than the original, the thickness of each layer is shown in Table II. Figure 10a shows the transmittance of the original (green) and optimized designs (blue) in the amorphous (solid) and crystalline phases (dotted). Overall, the optimized design has a higher transmittance in the desired 1000 to 1200 nm spectrum, but the spectral profile has been blue shifted by a small amount. The transmittance contrast at 1064 nm (Fig. 10b) of the optimized design is also higher, 95.8%, compared to 93.4% of the original. The transmittance contrast FWHM also extended slightly to 207.4 nm (original: 197.0 nm)

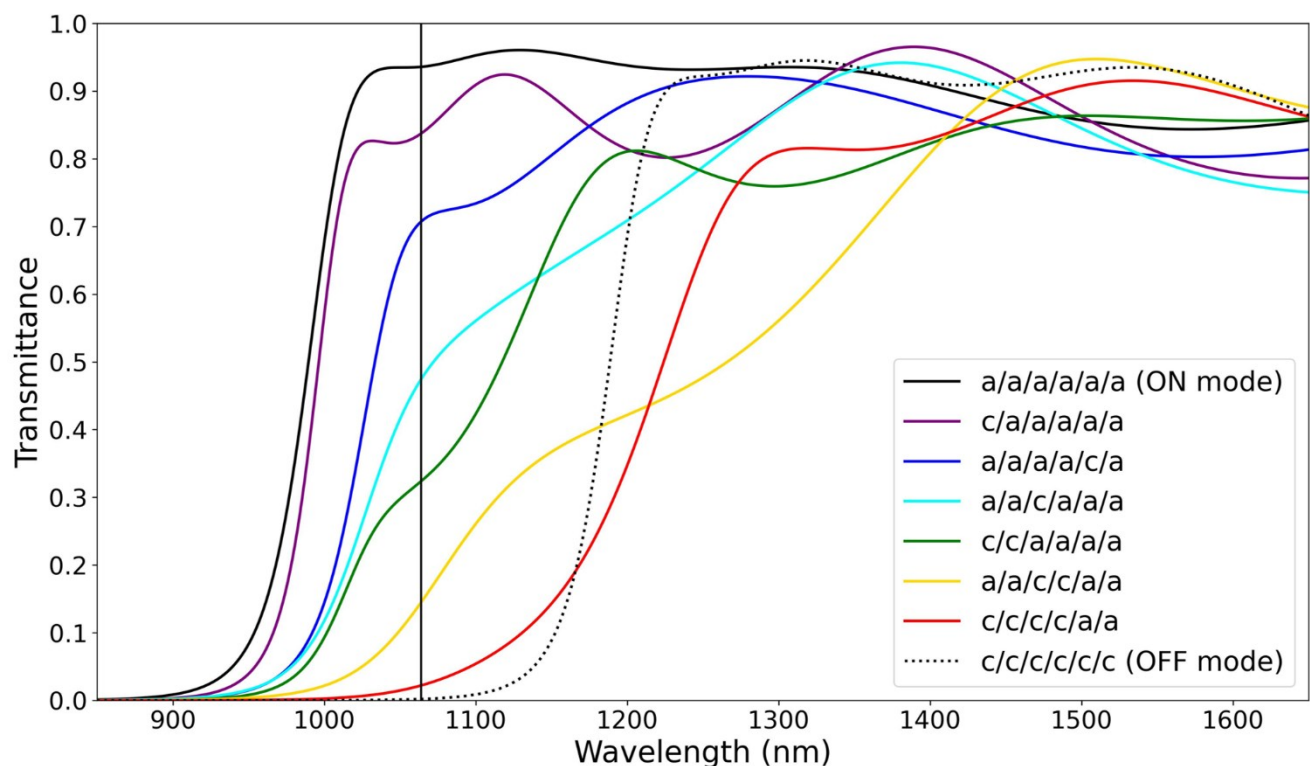


FIGURE 10. Transmittance of the five-unit-cell edge-filter design in 8 different configurations. Each Sb_2Se_3 layer is in amorphous (a) or crystalline (c) phases, and the layout ordering from left to right is substrate-side to air-side.

TABLE II
THICKNESS OF EACH LAYER BEFORE AND AFTER OPTIMIZATION

Design	SiO ₂	Sb ₂ Se ₃	MgF ₂	Sb ₂ Se ₃	MgF ₂	Sb ₂ Se ₃	MgF ₂	Sb ₂ Se ₃	MgF ₂	Sb ₂ Se ₃	MgF ₂	Sb ₂ Se ₃
Original	3 nm	24.3	134.0	48.5	134.0	48.5	134.0	48.5	134.0	48.5	134.0	24.3
Optimized	3 nm	46.1	67.5	59.3	148.1	55.0	89.3	50.0	145.3	63.3	91.2	30.5

Original design is the 5-unit-cell long-pass edge filter. The thickness unit of Sb₂Se₃ and MgF₂ is nm.

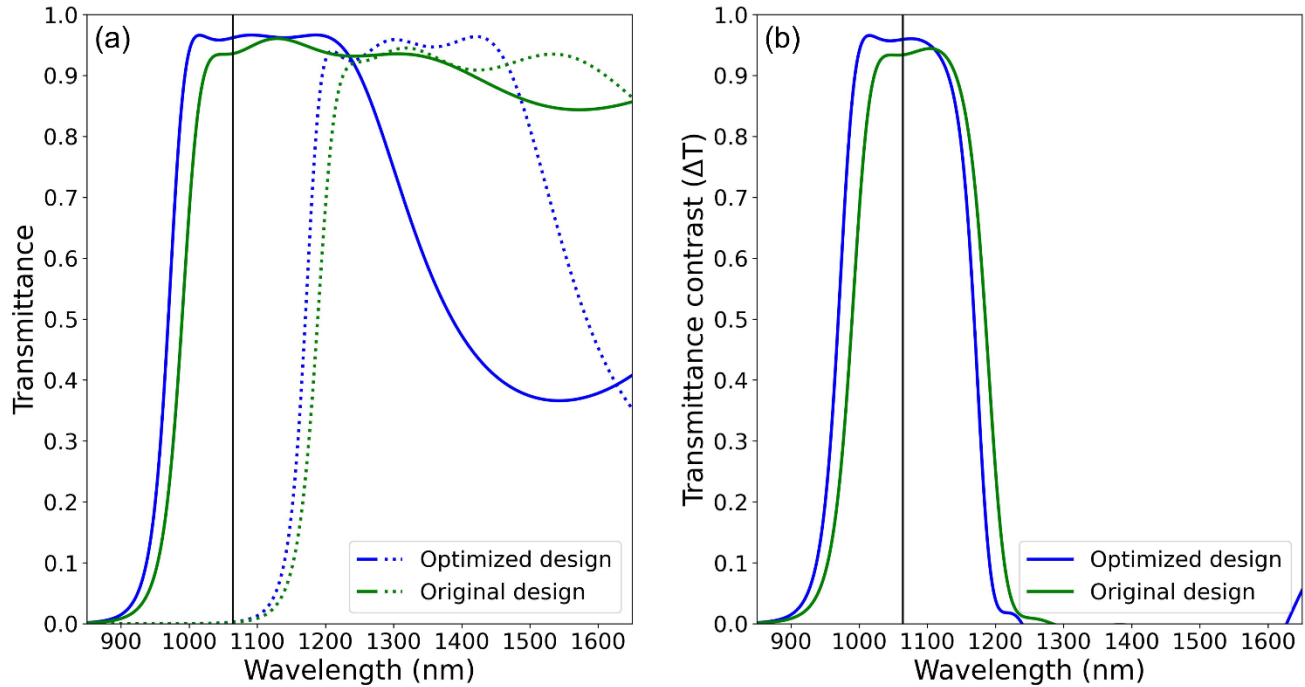


FIGURE 11. Transmittance comparison of 5-unit-cell edge-filter design before (green) and after (blue) optimization. (a) The transmittance in ON mode (solid) and OFF mode (dotted). (b) The transmittance contrast (ΔT). An optimized design has higher optical performance from 900 to 1200 nm, but the high- ΔT region has been blueshifted by a small amount.

D. COMPARISON WITH OTHER OPTICAL DEVICES

In order to understand the benefits and limitations of our proposed five-unit-cell optical filter, we create Table III comparing our proposed design to other recent optical devices (optical filters, waveguide switch, optical limiter, non-PCM antireflection coating). The table is written in an order of similar design purpose, not necessary from similar material. When directly compared to other 1064-nm PCM-based optical filter [17, 28], our design has higher transmittance in amorphous phase (T_{ON}), higher transmittance contrast (ΔT). These can be attributed from the low-loss property in Sb₂Se₃ and the design architecture (edge filter), but not necessary from optimization. However, edge-filter design required more layers and the device size is much thicker than [17] (but less than [28]). When compared to non-PCM-based antireflection coating [18], our design is thicker and T_{ON} is still lower which indicate further optimization may be possible.

It is important to remember that Table III is not for direct benchmarking, it is unfair to compares theoretical simulation work to real fabrication measurement. The purpose is to

highlight Sb₂Se₃-based edge filter is suitable for high- ΔT application where device size is not a concern.

TABLE III
COMPARISON BETWEEN OUR FIVE-UNIT-CELL DESIGNS AND OTHER OPTICAL DEVICES

Design	PCM	Operating wavelength	Number of layer	Device size (nm)	T _{ON} (%)	T _{OFF} (%)	ΔT (%)	Reference
5-unit-cell long-pass edge filter ⁽¹⁾	Sb ₂ Se ₃	1064	11	912	93.6	0.2	93.4	-
Optimized 5-unit-cell long-pass edge filter ⁽¹⁾	Sb ₂ Se ₃	1064	11	845.6	96.1	0.3	95.8	-
Fabry-Pérot cavity single-channel filter ⁽¹⁾	Sb ₂ Se ₃	941	7	230	71	~11	~60	[17]
Fabry-Pérot cavity multi-channel filter	Sb ₂ Se ₃	~1070	7	245	~50	~6	~44	[17]
Fabry-Pérot cavity single-channel filter (2 DBR, 4% vol. frac.) ⁽¹⁾	VO ₂ -P4VP	1064	9	1889 (calculate from OT)	~61	~25	~36	[28]
Resonat cavity two-channel filter	GSST	850	7	160	~75	0	~75	[15]
Micro-ring resonator optical switch	Sb ₂ Se ₃	1551.3	1	1300 x 700	93	1	92	[27]
4-unit-cell long-pass optical limiter	GST	~1700–2000	9	1059	~80	0	~80	[3]
Three-layer AR coating	Non PCM	550	3	301	97.2	-	-	[18]
Four-layer AR coating (double sided)	Non PCM	550	4 × 2 = 8 ⁽²⁾	401 × 2 = 802 ⁽²⁾	99.4	-	-	[18]

⁽¹⁾ Simulation data. ⁽²⁾ The '× 2' is due to double-sided deposition (front and backside).

E. LIMITATIONS AND FUTURE WORK SUGGESTIONS

One of the limitation mentioned by several reviewers is the lack of experimental validation. Furthermore, complication can arise during fabrication process. In the only other published Sb₂Se₃-based optical filter we could find at this wavelength [17], their experimental values differ greatly from simulated data. To account for this concerns, we simulate the transmittance contrast (ΔT) of our proposed 5-unit-cell designs (pre- and post-optimized) by randomly varying the thickness of each layer by ±10%, and refractive index of each material by ±2% for 200 simulations for each design (Monte Carlo). The simulated results are shown in Fig. 12, the solid color line is the ideal ΔT (same value as Fig. 11b), the transparent area are plotted from 5th and 95th percentiles of the 200 simulations. At 1064 nm, the worst-case-scenario simulations have (a) ΔT_{original} = 74% and (b) ΔT_{optimized} = 79%, which are still slightly higher than filter shown in Table III. Firstly; it can be pointed out that optimization not only increase the optical performance but also increase the tolerance to fabrication imperfection. And secondly; in an unoptimized design (Fig. 12a), there are possibilities that fabrication imperfections could cause the ΔT(1064) to be increased by ~3% from the ideal design,

this effect is not observed in the optimized design (Fig. 12b). These two discussion points further support the use of thickness-optimization algorithm after the initial design process, even a simple merit function that can be done quickly is encouraged.

In this work, we proposed layer-dependent phase switching, which allows for a transmittance tuning in multiple steps, from peak 93% down to 0% (Fig. 10). However, no actual thermal simulation has been done. This is because such simulations require a more complex multiphysics simulation, which falls outside the scope of the TMM simulation in this work. Simulating thermal behaviour is beneficial for realizing phase switching mechanisms and can be an interesting future works.

A finite-thickness effect is a physical phenomenon where the complex refractive index of an ultra-thin film is not constant like bulk film but is a function of thickness. The thinnest layers in this work are the first and last Sb₂Se₃ layers of an unoptimized five-unit-cell design (half-QWOT thick, 24.3 nm) which is around where this effect starts to manifest [41]. The Sb₂Se₃ refractive index dataset used in this paper is measured from only 40-nm thick film [22], so we current have cannot model this effect.

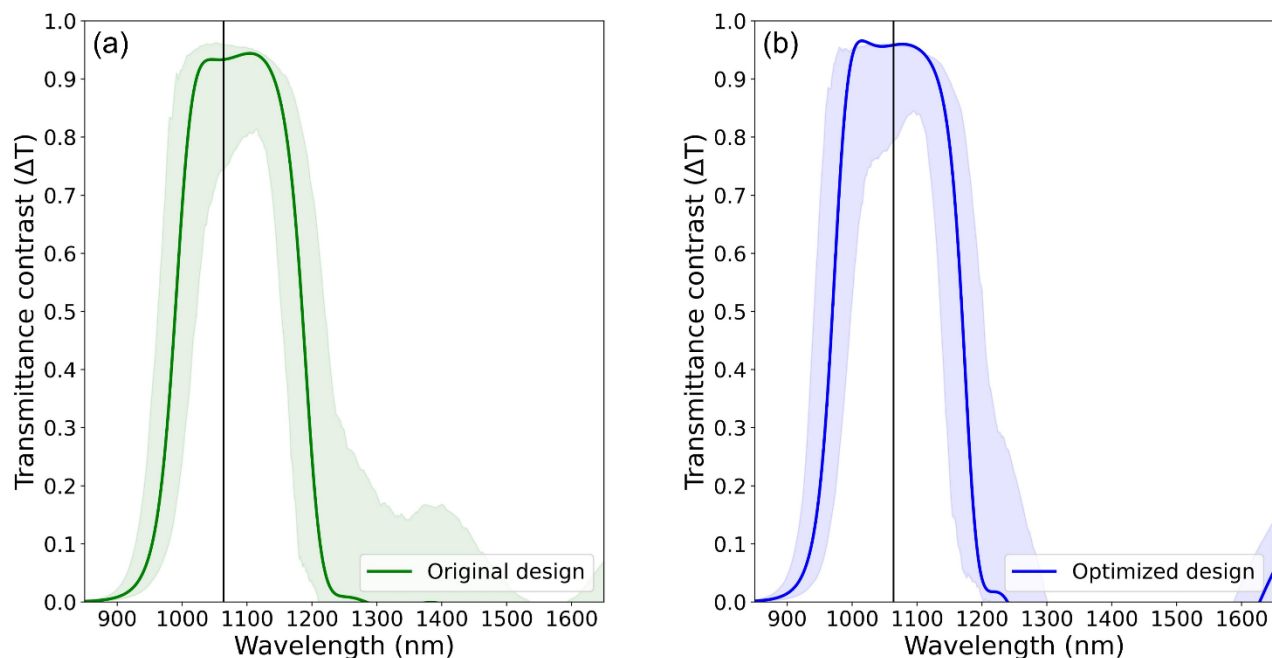


FIGURE 12. Simulation of transmittance contrast of our five-unit-cell designs before (a) and after (b) optimization. The transparent area are the 5th and 95th percentiles from 200 TMM simulations.

V. CONCLUSIONS

Using TMM simulation, we have shown that Sb_2Se_3 is a suitable PCM for high-efficient, broadband, tunable transmittance-amplitude optical filter operating around 1064 nm wavelength. The 5-unit-cell long-pass edge-filter design has the best compromise between high and stable ΔT for broadband operation, device size, and design complexity. This design required six Sb_2Se_3 layers and five MgF_2 layers and is 912 nm thick. Transmittance at 1064 nm in the ON mode is 93.4% and 0.2% in OFF mode, a contrast of 93.4% with ~ 200 nm FWHM. Simulations show that after 1.5×10^6 phase switching cycles, the transmittance contrast degradation and insertion loss in ON mode is still within acceptable ranges. The multilayer nature of edge-filter design enables the modulation of transmittance amplitude in a step by changing the phase of each Sb_2Se_3 layer. However, thermal simulation required for realizing phase switching mechanism has not been done yet. A quick and simple optimization algorithm can increase the ΔT from 1000–1200 nm and is worth doing for any future designs. When compared to other's works, our design has better transmittance contrast but required more layers and the overall size is larger. We also simulate fabrication imperfections by varying each layer thickness and each material refractive index from design value, the results shows that the designs still has higher transmittance contrast than design in other works.

ACKNOWLEDGMENT

The authors greatly appreciate the discussion, grammatical and format suggestions from Nathan Hagen, Center for Optical Research and Education, Utsunomiya University, Japan.

DISCLOSURE

The authors declare no competing interests.

DATA AVAILABILITY

Data and simulation codes underlying the results presented in this paper may be obtained from the corresponding author upon a reasonable request.

DECLARATION OF AI USAGE

Gemini was used for code debugging and grammar correction. Consensus was used to help with the initial literature review. The authors have reviewed and edited the content as needed after using these tools.

References

- [1] K. Matuszek, M. Kar, J. M. Pringle, and D. R. MacFarlane, "Phase Change Materials for Renewable Energy Storage at Intermediate Temperatures," *Chemical Reviews*, vol. 123, no. 1, pp. 491–514, 2023/01/11 2023, doi: 10.1021/acs.chemrev.2c00407.
- [2] R. Matos and N. Pala, "A Review of Phase-Change Materials and Their Potential for Reconfigurable Intelligent Surfaces," *Micromachines*, vol. 14, no. 6, p. 1259, 2023. [Online]. Available: <https://www.mdpi.com/2072-666X/14/6/1259>.
- [3] A. Sarangan, J. Duran, V. Vasilyev, N. Limberopoulos, I. Vitebskiy, and I. Anisimov, "Broadband Reflective Optical Limiter Using GST Phase Change Material," *IEEE Photonics*

- Journal*, vol. 10, no. 2, pp. 1–9, 2018, doi: 10.1109/jphot.2018.2796448.
- [4] K. Aryana *et al.*, "Optical and thermal properties of Ge₂Sb₂Te₅, Sb₂Se₃, and Sb₂S₃ for reconfigurable photonic devices [Invited]," *Opt. Mater. Express*, vol. 13, no. 11, 2023, doi: 10.1364/ome.503178.
- [5] W. Jia, R. Menon, and B. Sensale-Rodriguez, "Unique prospects of phase change material Sb₂Se₃ for ultra-compact reconfigurable nanophotonic devices," *Opt. Mater. Express*, vol. 11, no. 9, pp. 3007–3014, 2021/09/01 2021, doi: 10.1364/OME.435979.
- [6] S. Blundell *et al.*, "Ultracompact Programmable Silicon Photonics Using Layers of Low-Loss Phase-Change Material Sb₂Se₃ of Increasing Thickness," *ACS Photonics*, vol. 12, no. 3, pp. 1382–1391, 2025/03/19 2025, doi: 10.1021/acsp Photonics.4c01789.
- [7] C. Wan *et al.*, "Ultrathin Broadband Reflective Optical Limiter," *Laser & Photonics Reviews*, vol. 15, no. 6, p. 2100001, 2021, doi: <https://doi.org/10.1002/lpor.202100001>.
- [8] X. Ling, X. Pang, X. Chen, and Z. Shao, "Broadband mid-infrared optical limiter based on vanadium dioxide phase transition," *J. Opt. Soc. Am. B*, vol. 42, no. 9, pp. 2062–2067, 2025/09/01 2025, doi: 10.1364/JOSAB.569492.
- [9] M. Gandolfi *et al.*, "Optical Limiting Thin Multilayer Films Based On Phase Transition In VO₂," in *2022 Sixteenth International Congress on Artificial Materials for Novel Wave Phenomena (Metamaterials)*, 12–17 Sept. 2022 2022, pp. 148–150, doi: 10.1109/Metamaterials54993.2022.9920767. [Online]. Available: <https://ieeexplore.ieee.org/stampPDF/getPDF.jsp?tp=&arnumber=9920767&ref=>
- [10] A. Tognazzi *et al.*, "Opto-thermal dynamics of thin-film optical limiters based on the VO₂ phase transition," *Opt. Mater. Express*, vol. 13, no. 1, pp. 41–52, 2023/01/01 2023, doi: 10.1364/OME.472347.
- [11] Y. Li *et al.*, "An Adaptive Optical Limiter Based on a VO₂/GaN Thin Film for Infrared Lasers," *Photonics*, vol. 13, no. 2, p. 148, 2026. [Online]. Available: <https://www.mdpi.com/2304-6732/13/2/148>.
- [12] Y. Zhang *et al.*, "Broadband transparent optical phase change materials for high-performance nonvolatile photonics," *Nature Communications*, vol. 10, no. 1, p. 4279, 2019/09/30 2019, doi: 10.1038/s41467-019-12196-4.
- [13] H. Li, D. Zeng, Y. Huang, Q. Huang, and X. Zhang, "Ultra-compact, ultra-low-loss and broadband 2 x 2 nonvolatile optical switch based on Sb₂(Se₃) phase change material," *Opt. Express*, vol. 32, no. 20, pp. 35287–35297, Sep 23 2024, doi: 10.1364/OE.534645.
- [14] R. R. Ghosh and A. Dhawan, "Numerical modeling of an integrated non-volatile reflector switch and mode converter switch based on a low loss phase change material (Sb₂Se₃) in SiN platforms," *Opt. Mater. Express*, vol. 12, no. 11, pp. 4268–4283, 2022/11/01 2022, doi: 10.1364/OME.462912.
- [15] R. Heenkenda, K. Hirakawa, and A. Sarangan, "Tunable optical filter using phase change materials for smart IR night vision applications," *Opt. Express*, vol. 29, no. 21, pp. 33795–33803, 2021/10/11 2021, doi: 10.1364/OE.440299.
- [16] Y.-S. Huang *et al.*, "Tunable structural transmissive color in fano-resonant optical coatings employing phase-change materials," *Materials Today Advances*, vol. 18, p. 100364, 2023/06/01/ 2023, doi: <https://doi.org/10.1016/j.mtadv.2023.100364>.
- [17] M. Cui *et al.*, "Tunable multi-channel optical filter based on the near-infrared ultralow-loss phase change material Sb₂Se₃," *Opt. Express*, vol. 34, no. 5, pp. 7378–7387, 2026/03/09 2026, doi: 10.1364/OE.586098.
- [18] R. Patel, N. Patel, N. Bazzanella, and A. Miotello, "Fabricating multilayer antireflective coating for near complete transmittance in broadband visible light spectrum," *Optical Materials*, vol. 108, p. 110415, 2020/10/01/ 2020, doi: <https://doi.org/10.1016/j.optmat.2020.110415>.
- [19] X. Tian and Z.-Y. Li, "An Optically-Triggered Switchable Mid-Infrared Perfect Absorber Based on Phase-Change Material of Vanadium Dioxide," *Plasmonics*, vol. 13, no. 4, pp. 1393–1402, 2018/08/01 2018, doi: 10.1007/s11468-017-0643-9.
- [20] C. Liu *et al.*, "Tunable nonlinear optical absorption in amorphous and crystalline Sb₂Se₃ thin films," *Journal of Alloys and Compounds*, vol. 791, pp. 753–760, 2019/06/30/ 2019, doi: 10.1016/j.jallcom.2019.03.295.
- [21] I. O. Oguntoye, S. Padmanabha, M. Hinkle, T. Koutsougeras, A. J. Ollanik, and M. D. Escarra, "Continuously Tunable Optical Modulation Using Vanadium Dioxide Huygens Metasurfaces," *ACS Applied Materials & Interfaces*, vol. 15, no. 34, pp. 41141–41150, 2023/08/30 2023, doi: 10.1021/acsaami.3c08493.
- [22] M. Delaney, I. Zeimpekis, D. Lawson, D. W. Hewak, and O. L. Muskens, "A New Family of Ultralow Loss Reversible Phase-Change Materials for Photonic Integrated Circuits: Sb₂S₃ and Sb₂Se₃," *Advanced Functional Materials*, vol. 30, no. 36, 2020, doi: 10.1002/adfm.202002447.
- [23] A. A. Burtsev *et al.*, "Physical properties' temperature dynamics of GeTe, Ge₂Sb₂Te₅ and Ge₂Sb₂Se₄Te₁ phase change materials," *Materials Science in Semiconductor Processing*, vol. 150, p. 106907, 2022/11/01/ 2022, doi: <https://doi.org/10.1016/j.mssp.2022.106907>.
- [24] D. Lawson, S. Blundell, M. Ebert, O. L. Muskens, and I. Zeimpekis, "Optical switching beyond a million cycles of low-loss phase change material Sb₂Se₃," *Opt. Mater. Express*, vol. 14, no. 1, 2023, doi: 10.1364/ome.509434.
- [25] M. S. Alam *et al.*, "Fast Cycling Speed with Multimillion Cycling Endurance of Ultra-Low Loss Phase Change Material (Sb₂Se₃) by Engineered Laser Pulse Irradiation," *Advanced Functional Materials*, vol. 34, no. 14, p. 2310306, 2024, doi: <https://doi.org/10.1002/adfm.202310306>.
- [26] X. Chen, J. Lin, and K. Wang, "A Review of Integrated Photonic Devices Using Sb₂Se₃," *Advanced Physics Research*, vol. 4, no. 1, p. 2400080, 2024, doi: 10.1002/aprx.202400080.
- [27] Q. Zhang, Q. Hong, and Z. Zhu, "Low-loss Optical Switching Based on Phase-change Material Sb₂Se₃ in a Micro-ring Resonator," *Journal of Physics: Conference Series*, vol. 2597, p. 012020, 09/01 2023, doi: 10.1088/1742-6596/2597/1/012020.
- [28] Y. Liu *et al.*, "Design of near-infrared solid-state tunable Fabry-Perot filters based on VO₂/P4VP films," *Opt. Express*, vol. 32, no. 19, pp. 32585–32596, 2024/09/09 2024, doi: 10.1364/OE.530226.
- [29] B. Sun *et al.*, "Integrated Bragg grating filters based on silicon-Sb₂Se₃ with non-volatile bandgap engineering capability," *Opt. Express*, vol. 31, no. 17, pp. 27905–27913, 2023/08/14 2023, doi: 10.1364/OE.495196.
- [30] A. Sarangan, *Optical Thin Film Design*, 1st Edition ed. Boca Raton: CRC Press, 2020.
- [31] D. Franta, D. Nečas, I. Ohlídal, and A. Giglia, *Optical characterization of SiO₂ thin films using universal dispersion model over wide spectral range* (SPIE Photonics Europe). SPIE, 2016.
- [32] D. Franta, D. Nečas, A. Giglia, P. Franta, and I. Ohlídal, "Universal dispersion model for characterization of optical thin films over wide spectral range: Application to magnesium fluoride," *Applied Surface Science*, vol. 421, pp. 424–429, 2017/11/01/ 2017, doi: <https://doi.org/10.1016/j.apsusc.2016.09.149>.
- [33] S. V. Zhukovsky *et al.*, "Experimental Demonstration of Effective Medium Approximation Breakdown in Deeply Subwavelength All-Dielectric Multilayers," *Physical Review Letters*, vol. 115, no. 17, p. 177402, 10/23/ 2015, doi: 10.1103/PhysRevLett.115.177402.
- [34] Y. Li *et al.*, "Preparation of mechanically stable triple-layer interference broadband antireflective coatings with self-cleaning property by sol-gel technique," *RSC Advances*, vol. 10.1039/C7RA00844A, vol. 7, no. 24, pp. 14660–14668, 2017, doi: 10.1039/C7RA00844A.
- [35] D. Franta, P. Franta, J. Vohánka, M. Čermák, and I. Ohlídal, "Determination of thicknesses and temperatures of crystalline silicon wafers from optical measurements in the far infrared

- region," *Journal of Applied Physics*, vol. 123, no. 18, 2018, doi: 10.1063/1.5026195.
- [36] L. Y. Beliaev, E. Shkondin, A. V. Lavrinenko, and O. Takayama, "Optical, structural and composition properties of silicon nitride films deposited by reactive radio-frequency sputtering, low pressure and plasma-enhanced chemical vapor deposition," *Thin Solid Films*, vol. 763, p. 139568, 2022/12/01/ 2022, doi: <https://doi.org/10.1016/j.tsf.2022.139568>.
- [37] M. N. Polyanskiy, "Refractiveindex.info database of optical constants," *Scientific Data*, vol. 11, no. 1, p. 94, 2024/01/18 2024, doi: 10.1038/s41597-023-02898-2.
- [38] L. Martin-Monier *et al.*, "Endurance of chalcogenide optical phase change materials: a review," *Opt. Mater. Express*, vol. 12, no. 6, pp. 2145–2167, 2022/06/01 2022, doi: 10.1364/OME.456428.
- [39] Y. Zhang *et al.*, "Myths and truths about optical phase change materials: A perspective," *Applied Physics Letters*, vol. 118, no. 21, 2021, doi: 10.1063/5.0054114.
- [40] S. Larouche and L. Martinu, "OpenFilters: open-source software for the design, optimization, and synthesis of optical filters," *Appl. Opt.*, vol. 47, no. 13, pp. C219–C230, 2008/05/01 2008, doi: 10.1364/AO.47.00C219.
- [41] R. R. Willey, A. Valavičius, and F. T. Goldstein, "Designing with very thin optical films," *Appl. Opt.*, vol. 59, no. 5, pp. A213–A218, 2020/02/10 2020, doi: 10.1364/AO.383929.



CHETTANAT PADUNGATTAKIJ received the B.Sc. degree in applied physics from King Mongkut's Institute of Technology Ladkrabang, Thailand, in 2025, where he is currently pursuing the M.Sc. degree. His current research interests are optical thin film design from phase change material and neural network-based optical coherence tomography image generation.



PRATHAN BURANASIRI received the B.Sc. degree in physics from Ramkhamhaeng University, Thailand in 1993. He then received the M.Sc. in physics and Ph.D. degree in electrical engineering from The University of Alabama in Huntsville and University of Dayton, in 2000 and 2006, respectively.

Currently, he is an assistant professor at the Department of Physics of King Mongkut's Institute of Technology Ladkrabang, Bangkok, Thailand. His recent research interests include nanophotonics, photorefractive materials, metamaterials, phase change materials, and digital holography.



SUEBTARKUL SUCHAT received the B.Sc. degree in physics from Ramkhamhaeng University, Bangkok, Thailand in 1993. He then received the M.Sc. and Ph.D. degrees in applied physics from King Mongkut's Institute of Technology Ladkrabang, Bangkok, Thailand, in 1999 and 2007, respectively.

He is current an associate professor at Department of Applied Physics, Phranakhon Rajabhat University, Bangkok, Thailand. His research interests are quantum optics, optical sensors, and material sciences.



SURAWUT WICHARN (member, IEEE) received the B.Sc. with honor class, M.Sc., and Ph.D. degrees in applied physics from King Mongkut's Institute of Technology Ladkrabang, Bangkok, Thailand, in 2007, 2010, and 2014, respectively.

Currently, he is an assistant professor at the Department of Physics of Srinakharinwirot University, Bangkok, Thailand. His research areas have included nanophotonics, metamaterials, and computational electromagnetics.