

# Multisignal digital biosensors- digital Biosensors integrated with enzyme logic systems

Maren Krafft

Universitt Passau, Passau, Germany

**Abstract.** – biochemical logic systems

–

**Keywords:** Biomolecular computing · Biosensors · enzyme logic gates  
· biosensing · biocomputing systems · enzyme logic circuits · biomedical  
applications

## 1 Introduction

### 1.1 Context

s In the medical field Biosensors, analytic devices to convert a biological response into a electric signal, are a essential tool for monitoring and detection of a wide range of medical conditions from Diabetes to ..... While common biosensing devices are limited to a single input, the novelty of Biosensors based on enzyme-based logic systems can process mulple biochemical signals. This article concentrates on the concept of the mulisignal processing Biosensors and the resulting challenges.

Profound impact

Through processing automatically several biochemical inputs(physiological information), it can provide a rapid and reliable assessment of overall physiological conditions. This can help a optimal timley therapeutic intervention. They will realize sense/delivery feedback loops by coupling signal processing with chemical actuators to revolutionize patient monitoring and drug delivery.

In the Biosensors processing multiple biochemical signal, the core idea is to add a biocomputing layer that produces a final output in form of a yes/no response. Kapitel 1.2

Chances:

In contrast to recent biosensors, those with a 1111111111 logic promise a higher fidelity, a greater range of processable inputs, more complex applications such as sense-act-treat loops and rapid assessment of the respective substances.(mehr ausformulieren)

## 1.2 Biosensors logic systems

Biosensors logically processing multiple biochemical signals

-such procassed information produces a final output yes/no  
 - boolean logic networks composed of biomolecular systems

- multiple target analytes(inputs) for enzyme gates
- high-fidelity compared
- closed loop/feedback loops possible (sense/act/treat)
- rapid and reliable assessment of overall physiological condition
- could initiate optimal timely therapeutic intervention
- biosensors + enzyme logic gates
- allows direct coupling of signal processing with chemical actuators
- application of biomolecular logic systems for analytistic purposes could yield a novel class of biosensors: many input signals and binary outputs
- logically processed feedback between drug appl. and physiological conditions can significantly improve drug targeting and efficiency
- difficulties: complexity by assembling individual logic gates into complex logic networks (intelligent by molecular logic) (43-34-67)
- new approach for the sensor design and operation, interfach biocomputing system and electronic transducers

## 2 concept

To understand the concept of biocomputing biosensors it is fundamental to know the basics about biosensors and enzyme-based logic systems. A Biosensor is a device that transforms biochemical information, into an analytically useful signal. It contains usually the two basic components, the receptor and a transducer.


convert a biocolical response into an electrical signals. the receptor can recognise biological molecules include enzymes and the transducer senses physical changes and converts it into an electrical signal

### 2.1 Biocomputing: concept

**allgemein** In Biocomputing the reaction of different biomolecular tools, including enzyme, resulting in a desired end product is used to mimick Boolean logic gates such as AND and OR. To digitalize chemical processes two levels of concentrations of chemical reaction materials (enzymes) are considered as input signals. 0 is usually considered as the absence of an enzyme, but it can be altered. 1 equals a significant difference to the absence or the as 0 defined concentration. Output signal ein vorher bestimmter stoff, falls dieser vorhanden regel 1 falls nicht regel 0. (Katz)


In Fig 1 glucose oxidase and catalase, which are enzymes, operate as the logic gate machinery. The two input signals H<sub>2</sub>O<sub>2</sub> and glucose. When both substrates

present the inputs reacted and produces gluconic acid, which results in an optical absorbance change, that was defined as the output signal of the enzyme logic gate. The optical absorbance change just appeared in the presence of both inputs, mimicking the Boolean operation AND.

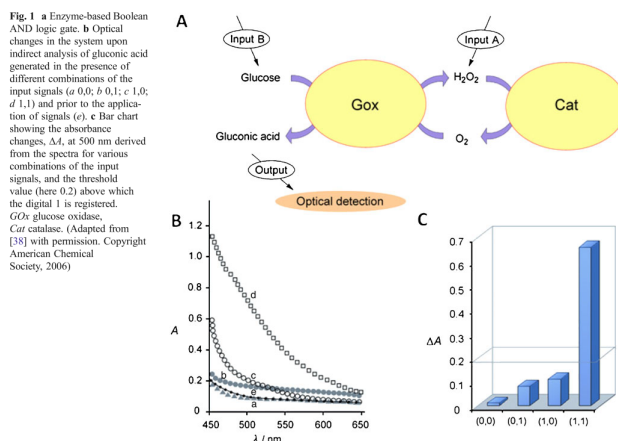

**Fig. 1.** Network diagramm

By assembling these single logic gates, mimicking Boolean operations, it is possible to create small logic networks (e.g. half-adder/ half subtractor)

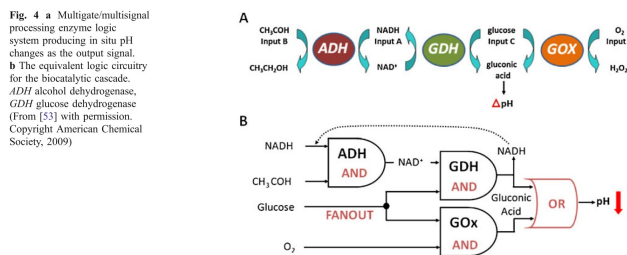

**Fig. 2.** Network diagramm

what would bring it to biosensors

- analysis of the chemical output signals generated by biomolecular logic systems is often limited.
- Enzyme logic system: multiassemblies to perform simple arithmetic functions

- idea: application of biomolecular logic system for analytical purpose new class of biosensors that accept many input signals and produce binary outputs in form yes/no
- example analyse protein libraries associated with multiple sclerosis(58)

example pH

- pH changes in solution as logic responds to input signals
- AND invertase + glucose oxidase (from 5.8 to 3.5)
- OR esterase and glucose oxidase in glucose and ethyl butyrate - when one of both present - acidification
- neutral pH = 3.5

Conclusion:

- don't solve real computing problem nor operate as useful biosensors
- represent first step toward the development of digital biosensors
- funfact optimization of enzymatic reaction, up to 10 logic gates concatenated with low noise in the system

#### for biochemical analytic applications

- design of biosensoric systems with logically processes signals represented by various biomarkers characteristic for different abnormal physiological conditions
- analysis of the chemical output signals generated by biomolecular logic systems is often limited.
- Enzyme logic system: multiassemblies to perform simple arithmetic functions
- idea: application of biomolecular logic system for analytical purpose new class of biosensors that accept many input signals and produce binary outputs in form yes/no
- example analyse protein libraries associated with multiple sclerosis(58)

### 3 possible application

- not just chronic but also .....
- state of the art
- feedback loop currently devoted to management of diabetes through integration of an electrochemical glucose sensing element with an insulin-delivery feedback loop for the optimal dose of insulin (69-71)
- example analyse protein libraries associated with multiple sclerosis(58)  
ENzyme logic system recognizing various injury-related physiological conditions
  - types of injuries result in concentrations of chemical substances in the body
  - example: lactate oxidase, horseradish peroxidase and glucose dehydrogenase = designed to process biochemical information related to pathological physiological conditions from brain injury

- markers: glucose(hemorrhagic shock),lactate(rhagic shock or traumatic brain injury) and norepinephrine(tramatic injury)
- logic 0 = normal concentrations
- change results into different numbers 1,2,3 - convenient
- = biocomputing logic system
- challenge: difference between normal and unnormal minimal =, not linear, should be sigmoidal

## 4 considerations

stabilization and confinement// optical transduction

### 4.1 surface immobilization of the biocomputing machinery

- optimal surface confinement of the biocomputing layer
- engineering enzyme microenvironment (transducer layer)
- contact between biocomputing layer and transducing surface
- combine individual logic-gates and maintain high enzymatic stability and reataining individual reagents
- leakage of cosubstrate
- no cross-reactions
- surface confinement? layer-by layer? more efficient and rational
- level of the surface confined reagents tailored for account of different input concentrations /enzyme activities
- coating: optimized for transport and excluding potential interfecece and protecting the surface

### 4.2 optimal transduction of biocomputing signal processes

- simultaneous measurements of multiple outputs require different transduction strategies (common: fixed potential )
- Requires:interface of biocomputing systems + electronic transducer  
Therefore
- scalability (increasing nuber of logic gates, assembling into complex networks)
- complexity(coupling of gates abd non boolean elements)
- composition, preparation and immobilization of the biocomputing surface layer
- layer by layer
- optimal surface confinement
- careful engineering of the enzyme microenvironment(on transducer surface) for performance
- biocomputing layer + transducing layer + combine individual logic-gate elements

## 5 Conclusion

good but needs lot of work  
sums up bla

## References

1. Parikha Mehrotra, Biosensors and their applications - A Review (2016)
2. Daniel R. Thevenot, Klara Toth, Richard A. Durst, George S. Wilson, Electrochemical biosensors: recommended definitions and classifications In: Biosensors and Bioelectronics 16 (2001) 121- 131
3. Joseph Wang, Evgeny Katz, Digital biosensors with build-in logic for biomedical applications- biosensors based on a biocomputing concept, in: Anal Bioanal Chem(2010) 1591-1603
4. Shengbo Sang, Wendong Zhang and Yuan Zhao, State of the Art in Biosensors, in: State of the Art of Biosensors(2013) 89-110
5. Evgeny Katz, Enzyme-Based Logic Gates and Networks with Outout Signals Analyzed by Various Methods, In: ChemPhysChem 2017, 18 1688-1713