






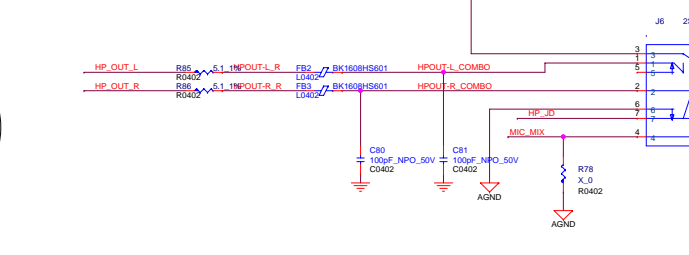

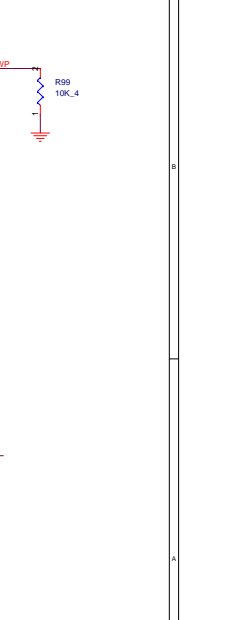
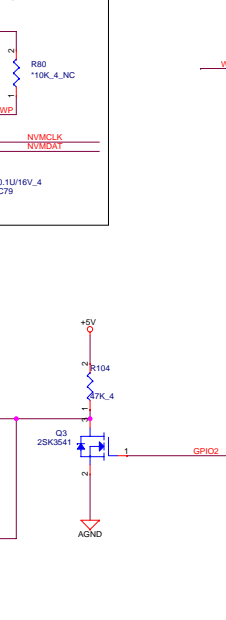
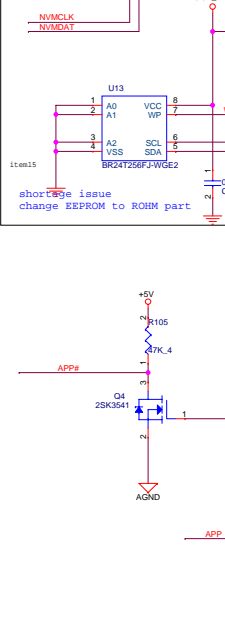
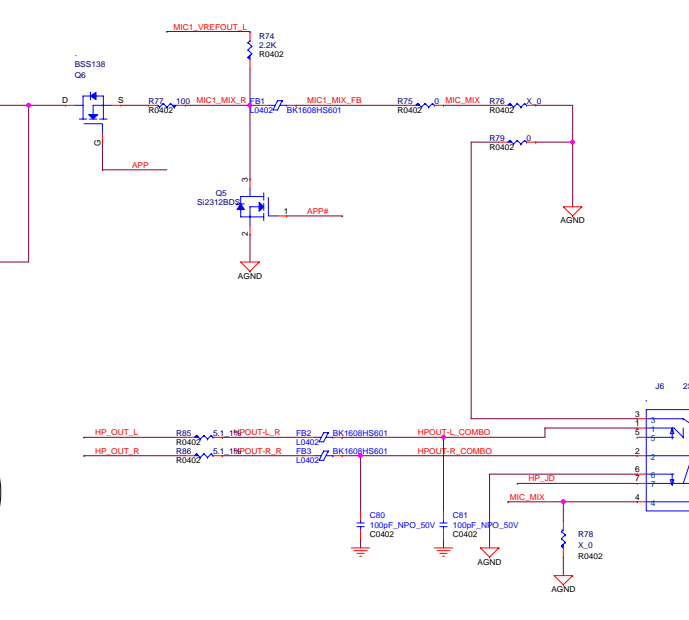
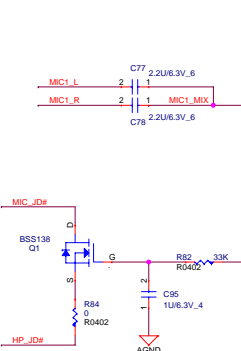

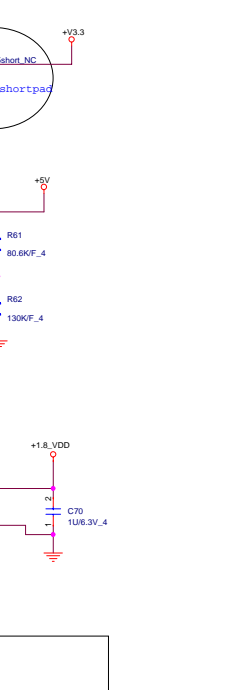
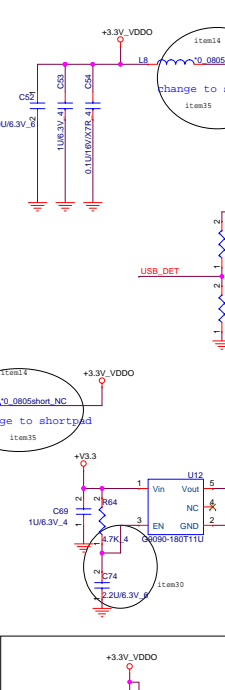



Use 250mils wide trace bridging AGND and DGND at codec.
See design guide.

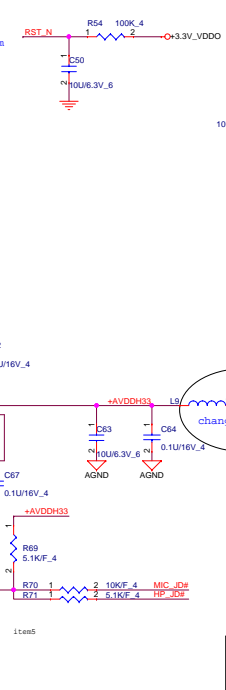




J3
SINGATRON_2DC-5061-Q05F

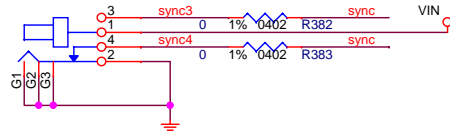

Change Package to 1206 and add 10UF/25V

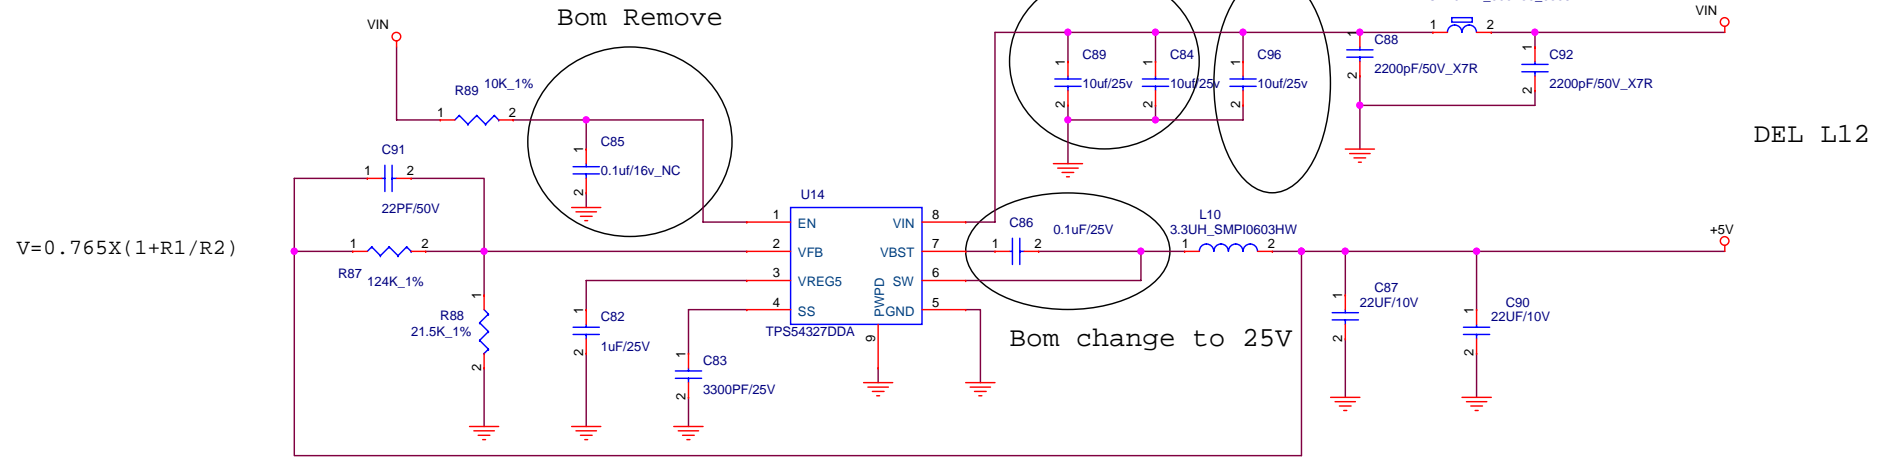

5.16V SUPPLY 3A



Title			<Title>
Size	Document Number	Rev	<RevCode>
B	<Doc>		
Date:	Monday, June 29, 2015	Sheet	4 of 5

