

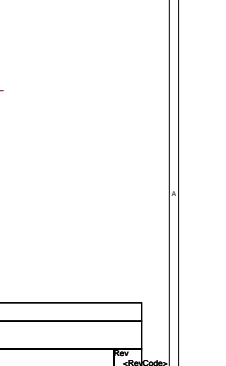
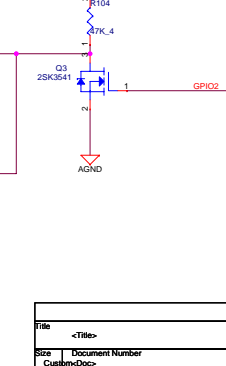
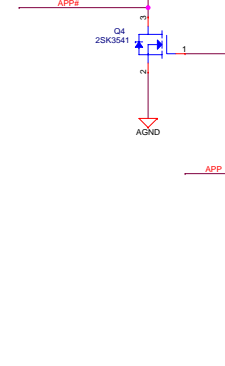
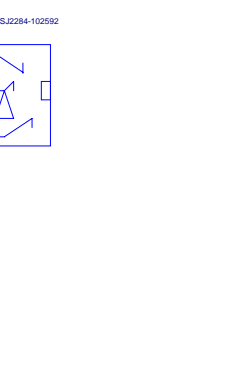
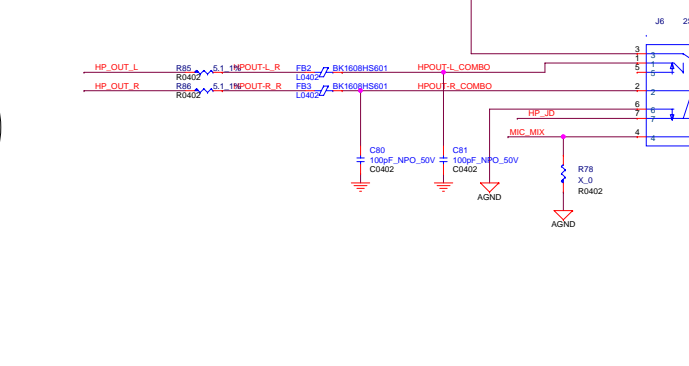
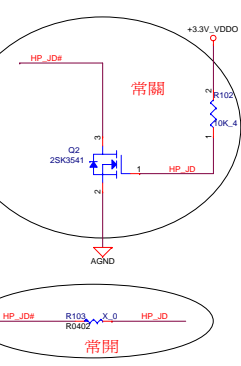
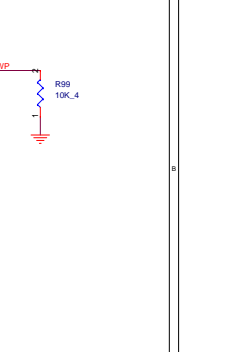
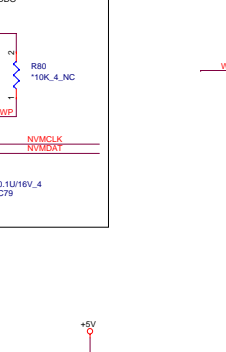
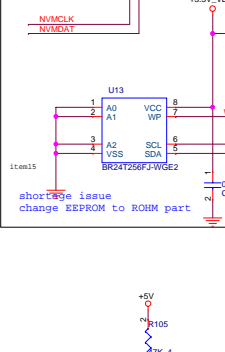
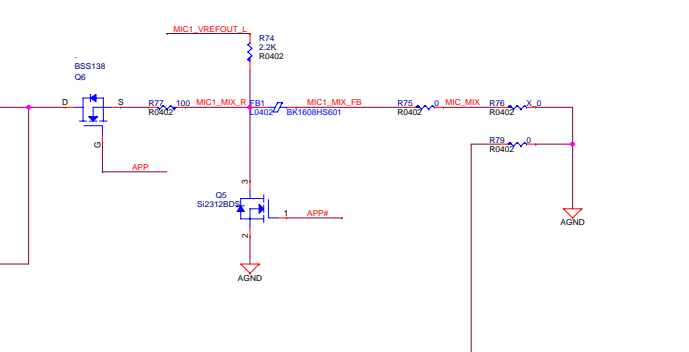
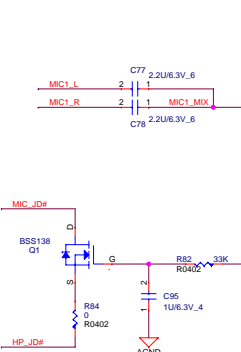

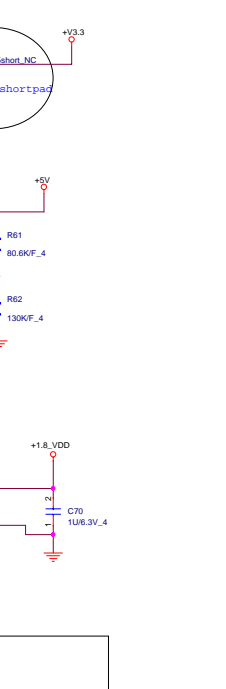
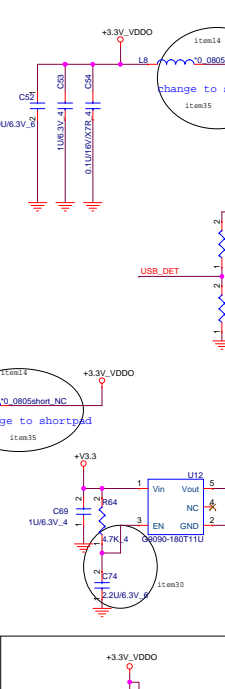


Use 250mils wide trace bridging AGND and DGND at codec.
See design guide.

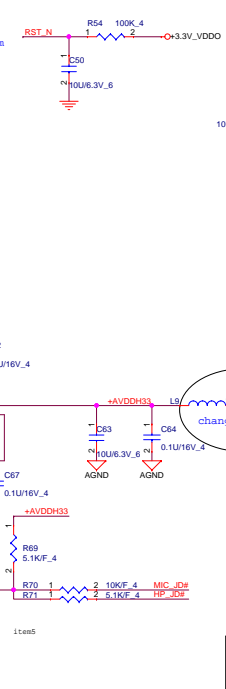


File	<Title>
Size	Document Number
Customer	DocID010
Date	Monday, March 23, 2015
Sheet	3 of 5



J3
SINGATRON_2DC-5061-Q05F

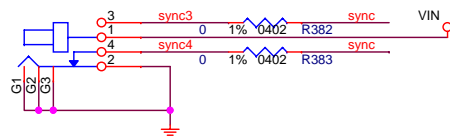

Change Package to 1206 and add 10UF/25V

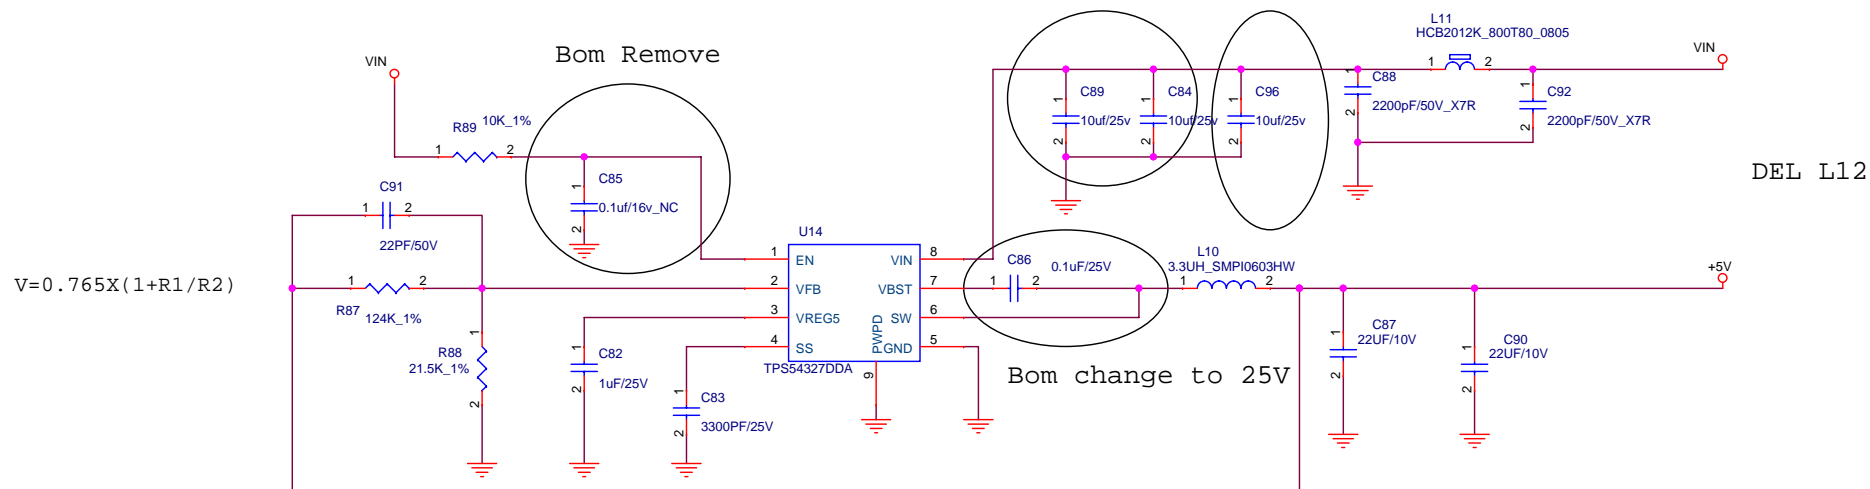

5.16V SUPPLY 3A



Title		<Title>
Size	Document Number	Rev
B	<Doc>	<RevCode>
Date:	Monday, March 23, 2015	Sheet 4 of 5

