


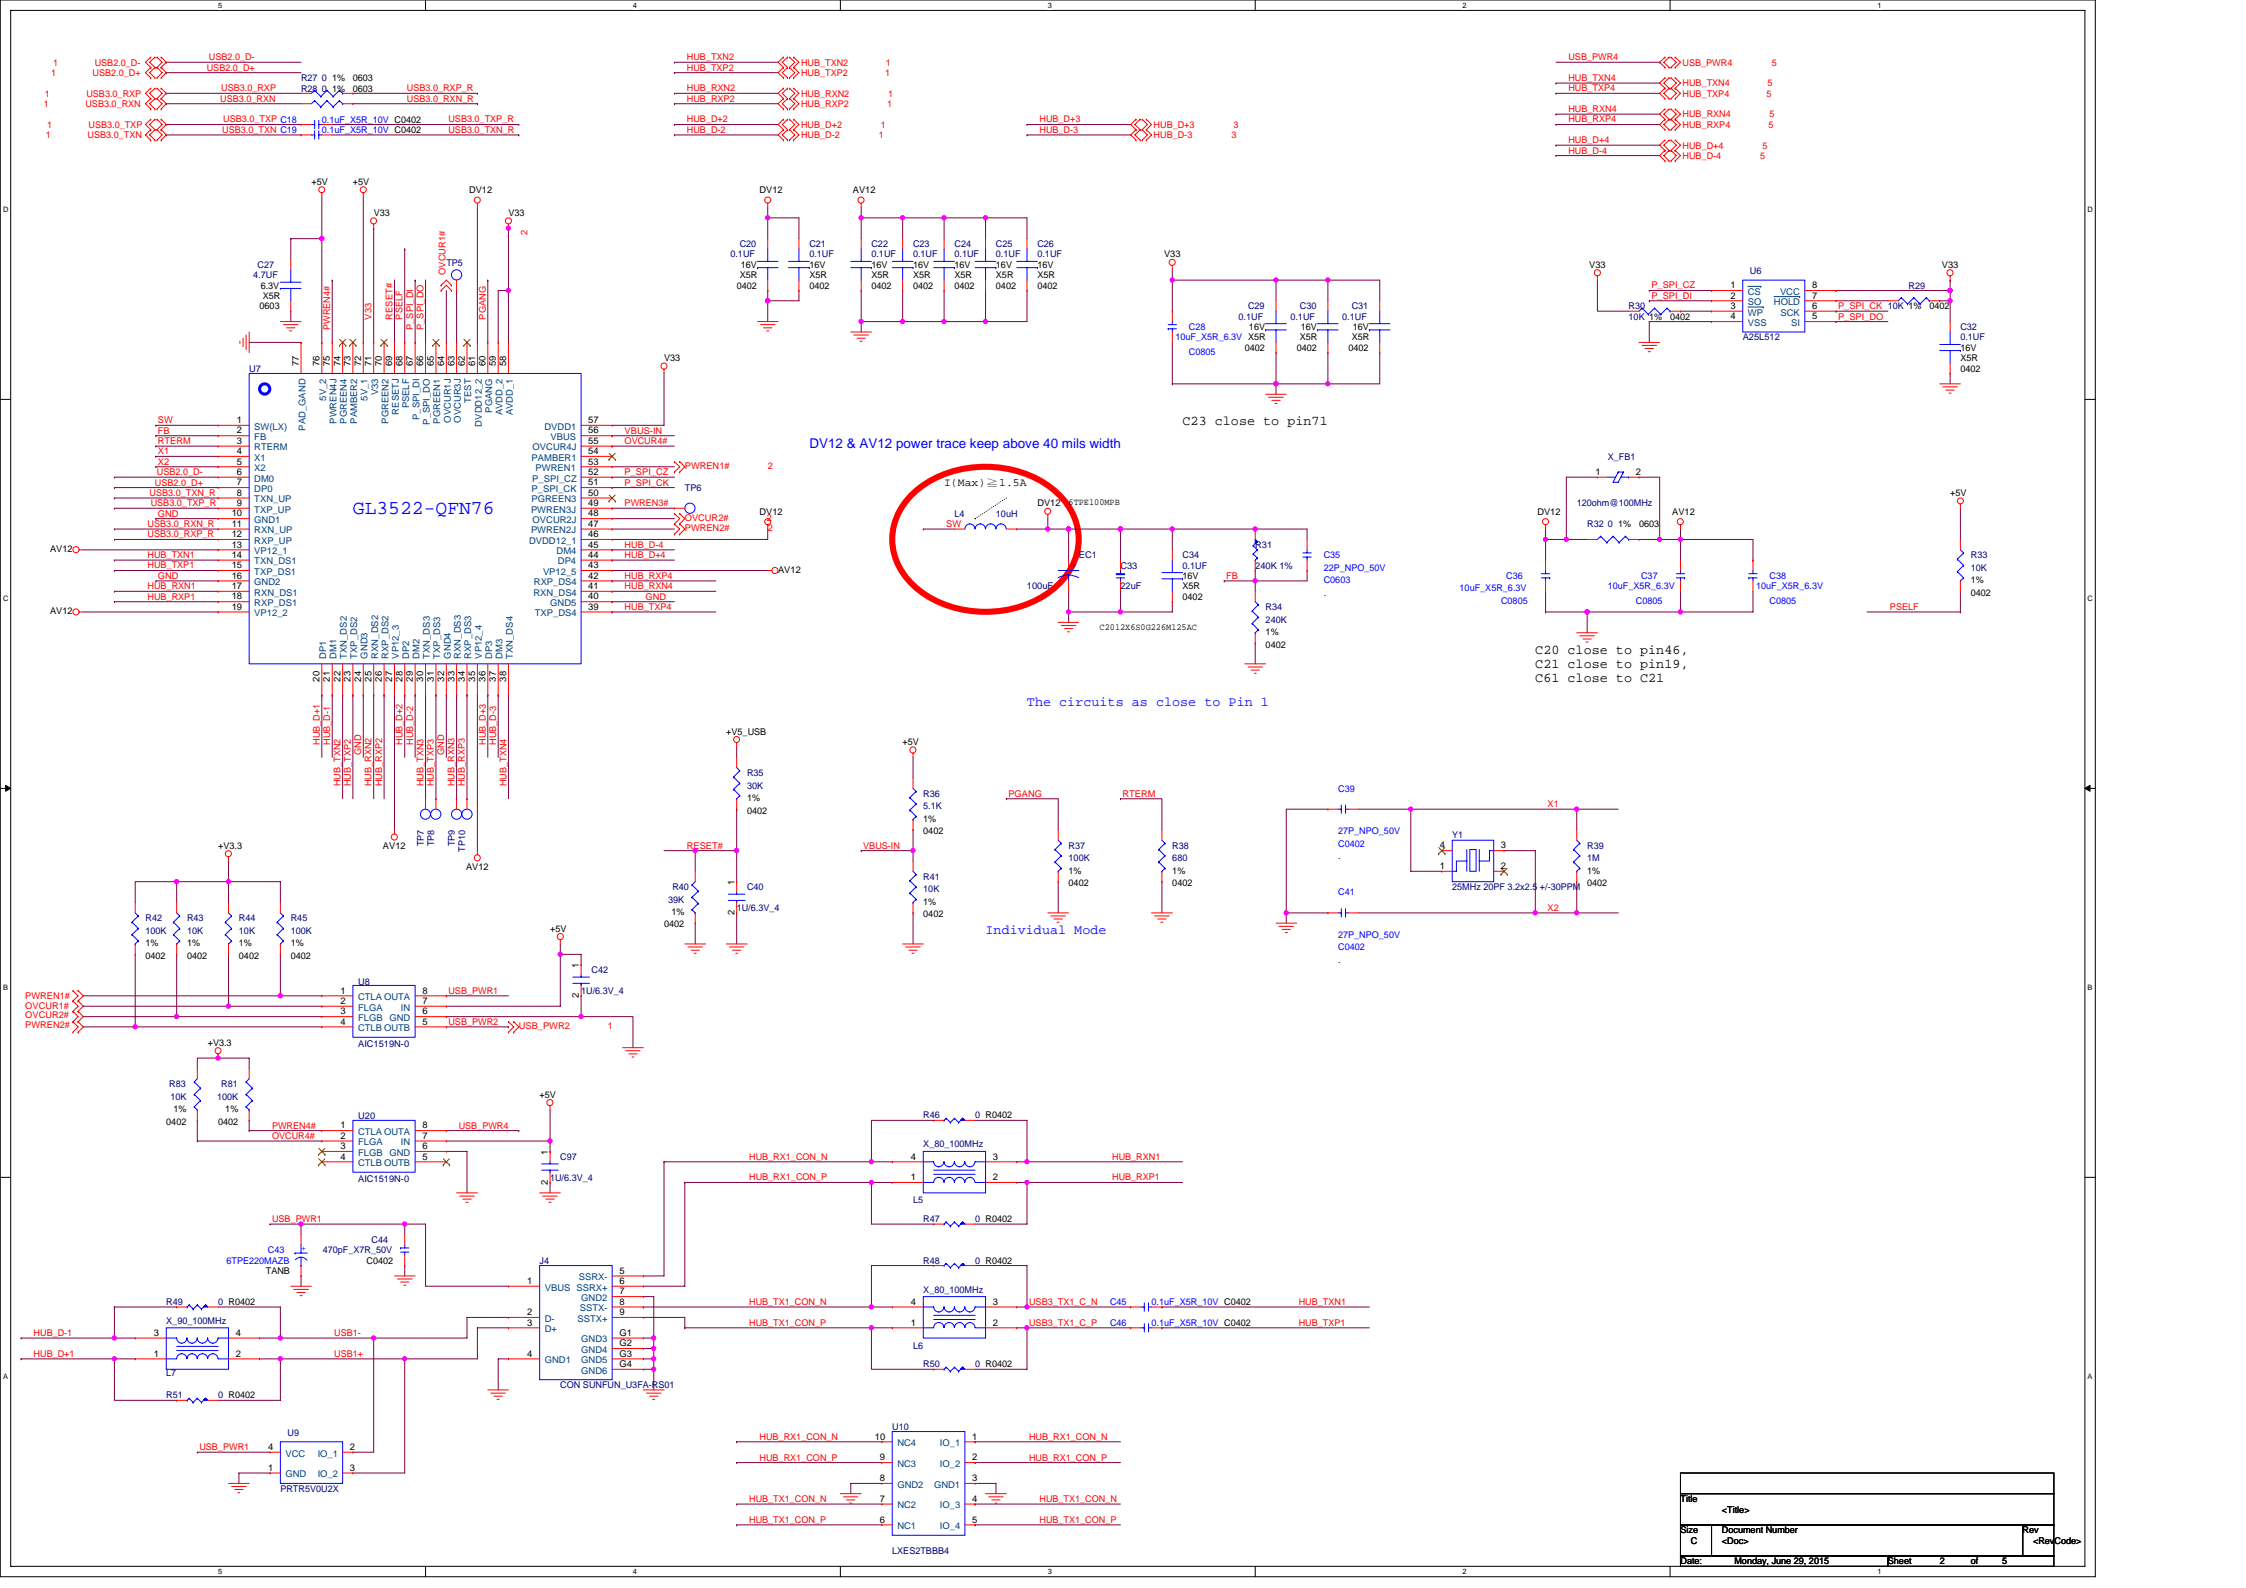
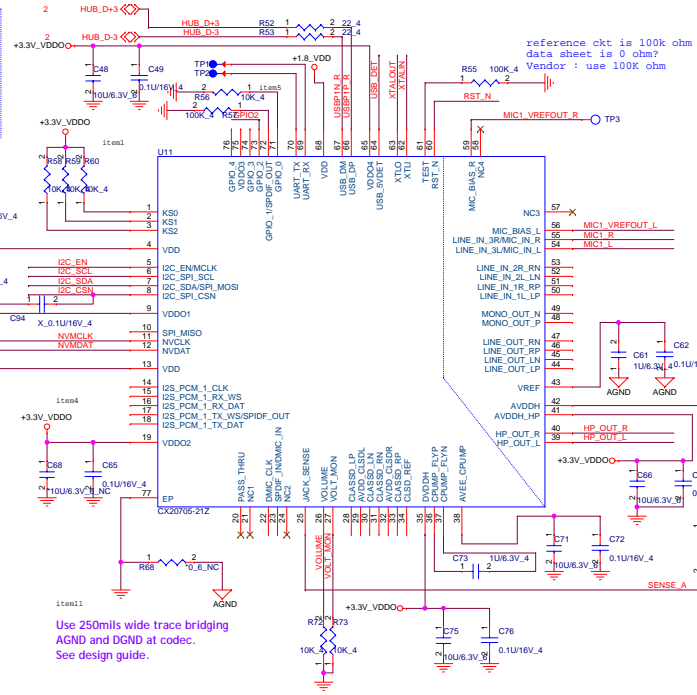



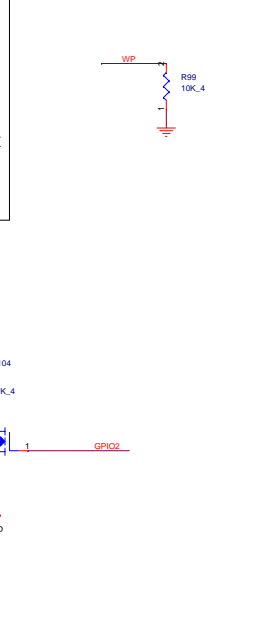
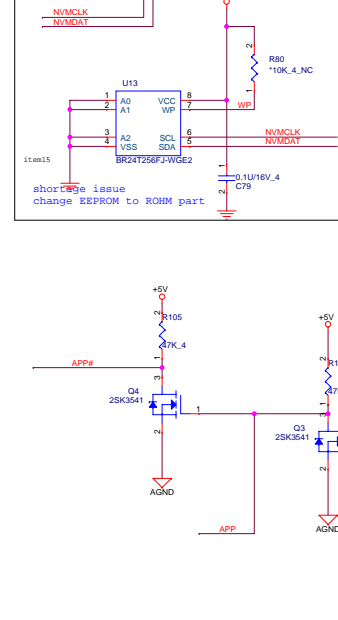

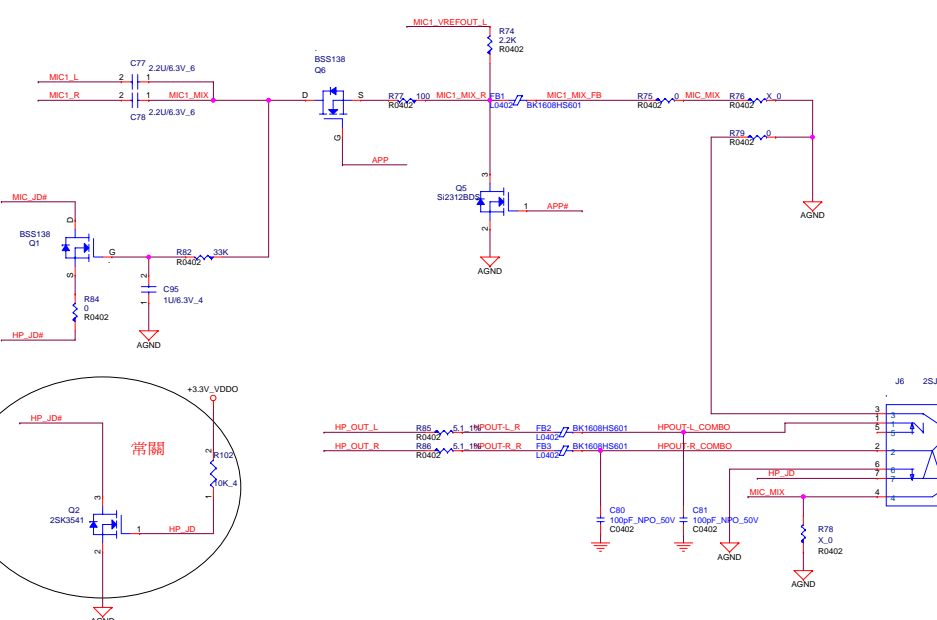
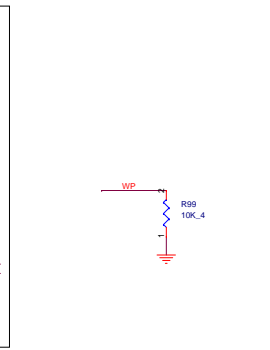
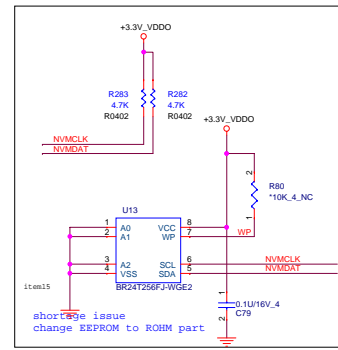


Title<Title>			
SizeCustom	Document Number<Doc>		Rev<RevCode>
Date:Wednesday, December 09, 2015	Sheet	1	of 1

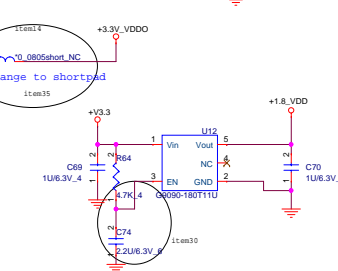

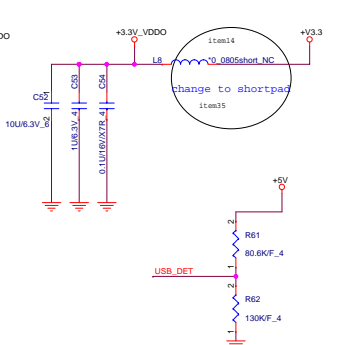


Use 250mils wide trace bridging  
AGND and DGND at codec.  
See design guide.




File	<Title>	Rev	<RevCode>
Size	Document Number		
Customer	DocID		
Date	Monday, June 29, 2015	Sheet	3 of 5




J3  
SINGATRON\_2DC-5061-Q05F

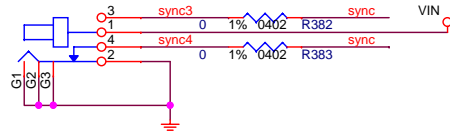

Change Package to 1206 and add 10UF/25V

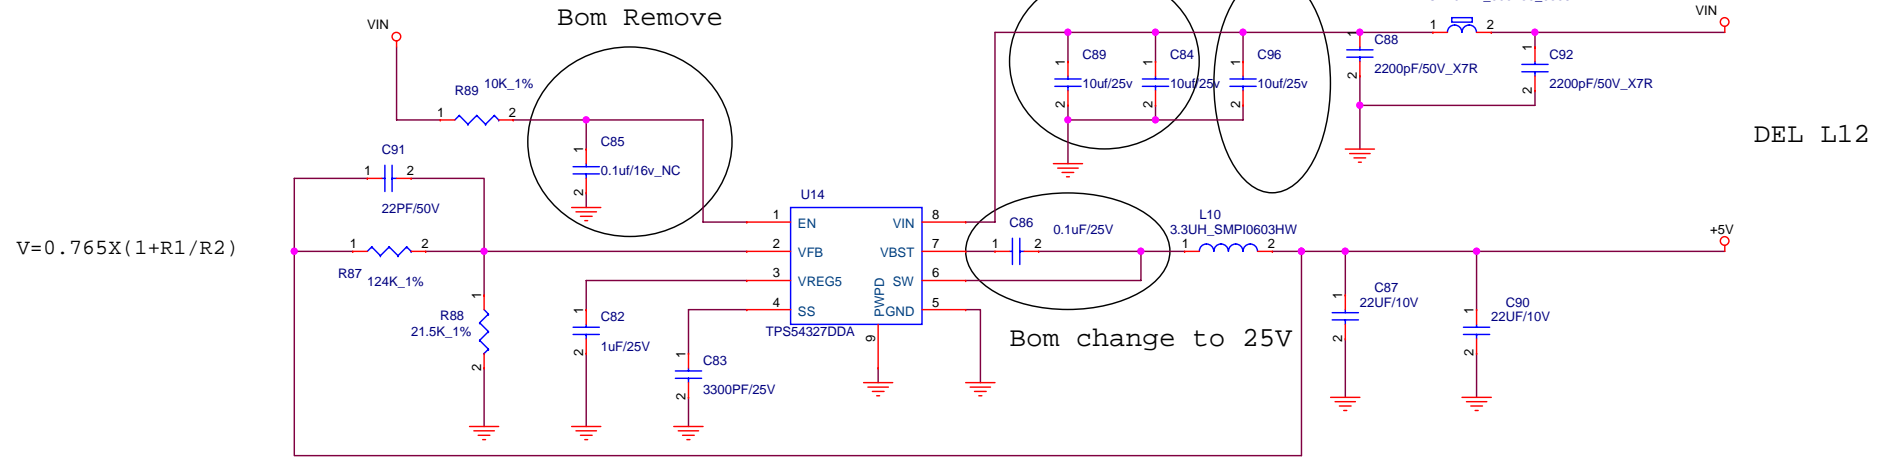

5.16V SUPPLY 3A



Title			<Title>
Size	Document Number	Rev	<RevCode>
B	<Doc>		
Date:	Monday, June 29, 2015	Sheet	4 of 5

