




QMTECH
(DUAL SDRAM)
DUAL_SDRAM
VGA_POWER
User
OSD
Reset
Power
User Port
No1 USB

Key Features	Description	
A/V Port	24-Bit Video DAC and Digital I2S Audio	
RTC Module	CR1220 Battery Not Included	
USB Hub	4-Port USB hub	
DUAL SDRAM	128MB SDRAM, Multiplexed with A/V Port	
SNAC Port	USB 3.0 Header !!!Must use level shift board when using it!!!	
User I/O Port	Three User LEDs and Three User Keys	
Secondary TF	Available for specific cores	

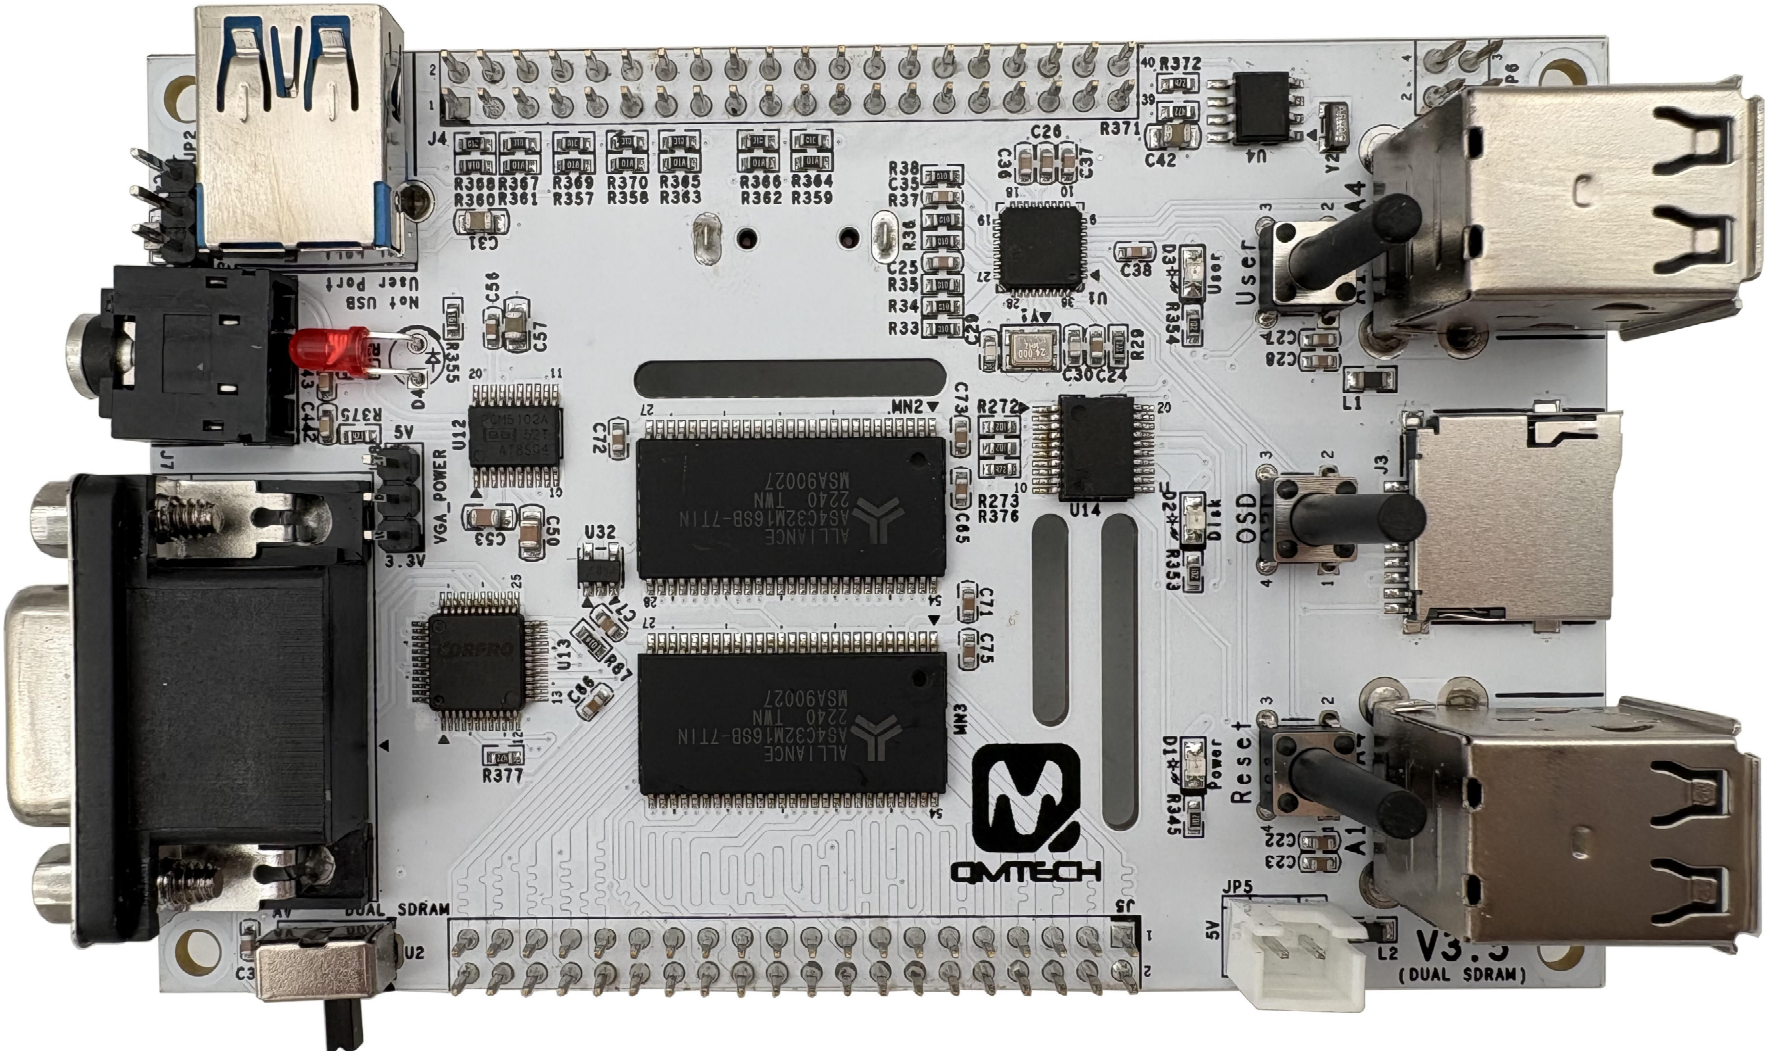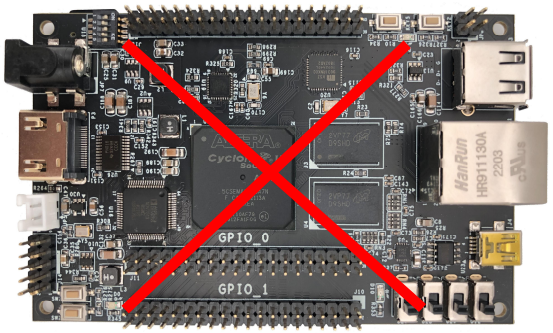


Main board without built-in SDRAM	Main board with built-in SDRAM
Not Supported	Supported

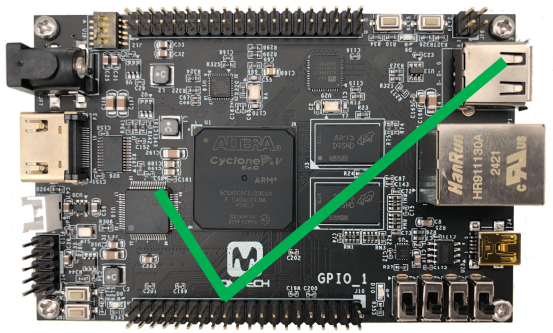


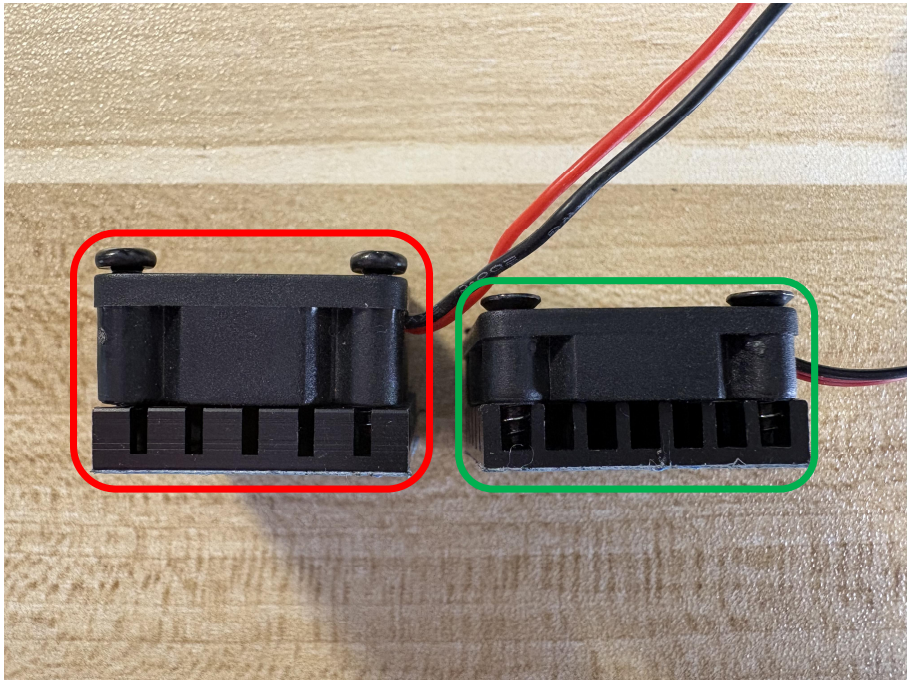


Origianl Fan: 25mm x 25mm x 10mm
New Fan: 25mm x 25mm x 7mm

Origianl Screws: 3.0mm x 14mm
New Screws: 2.8mm x 12mm

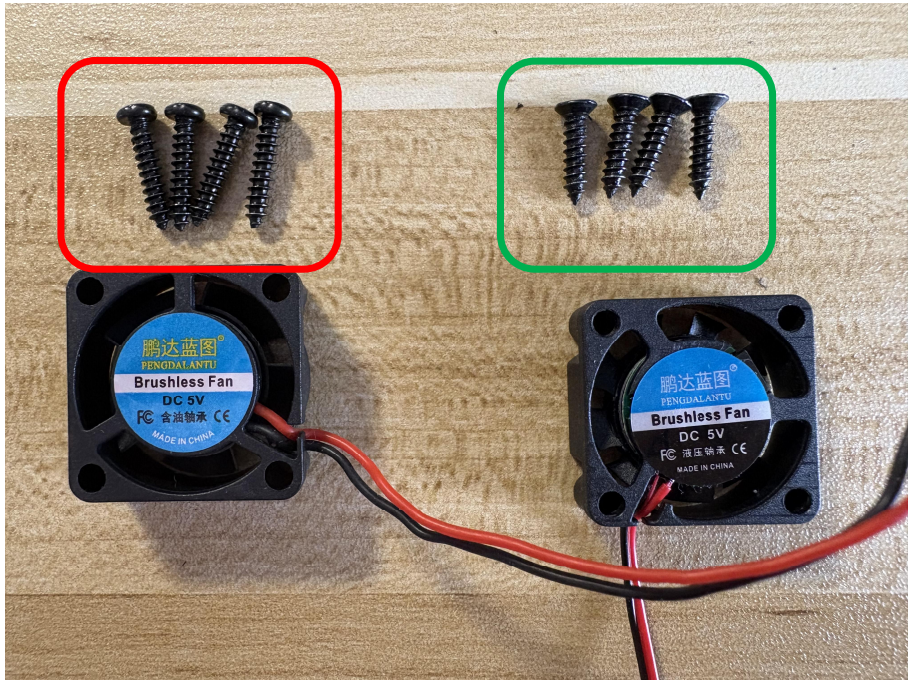

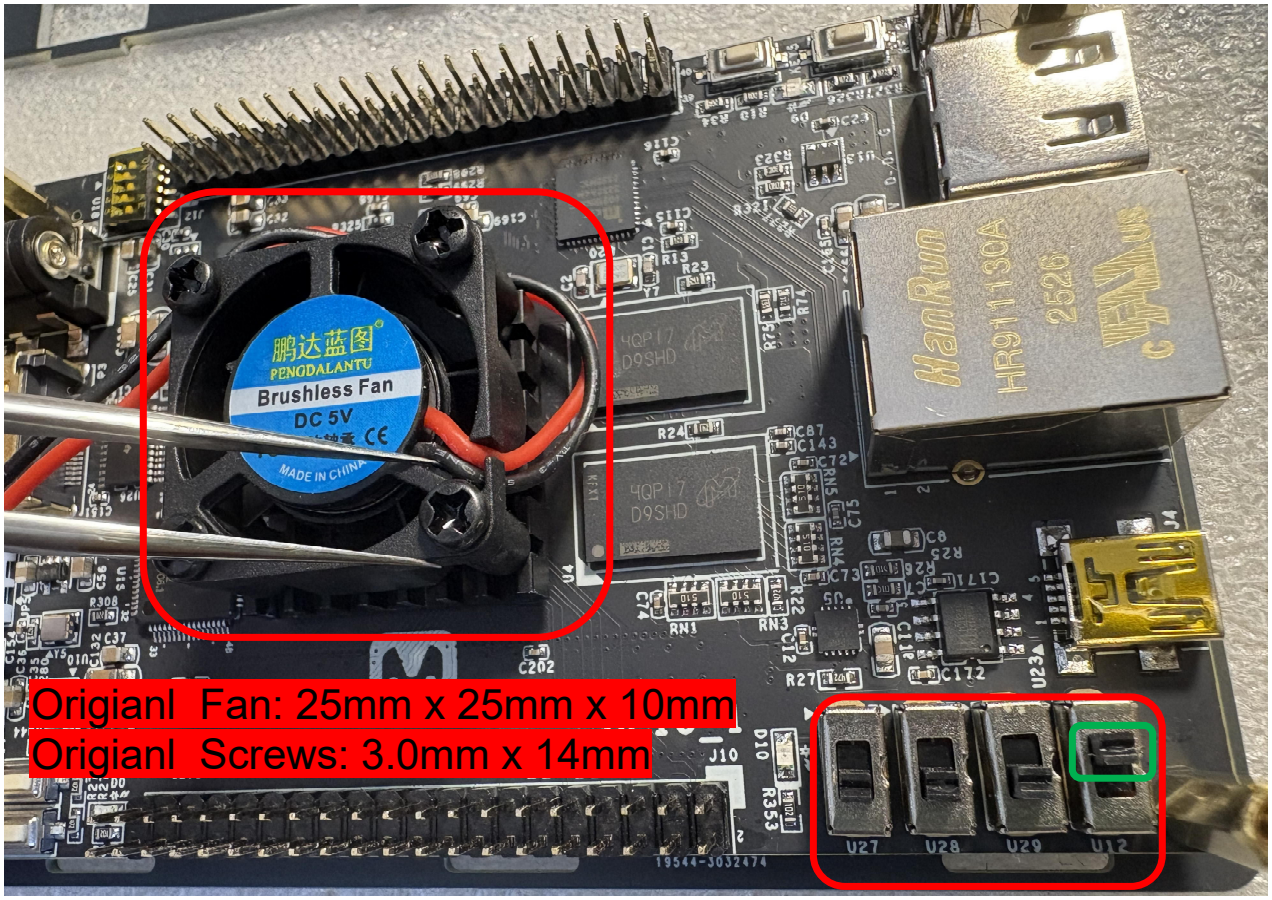


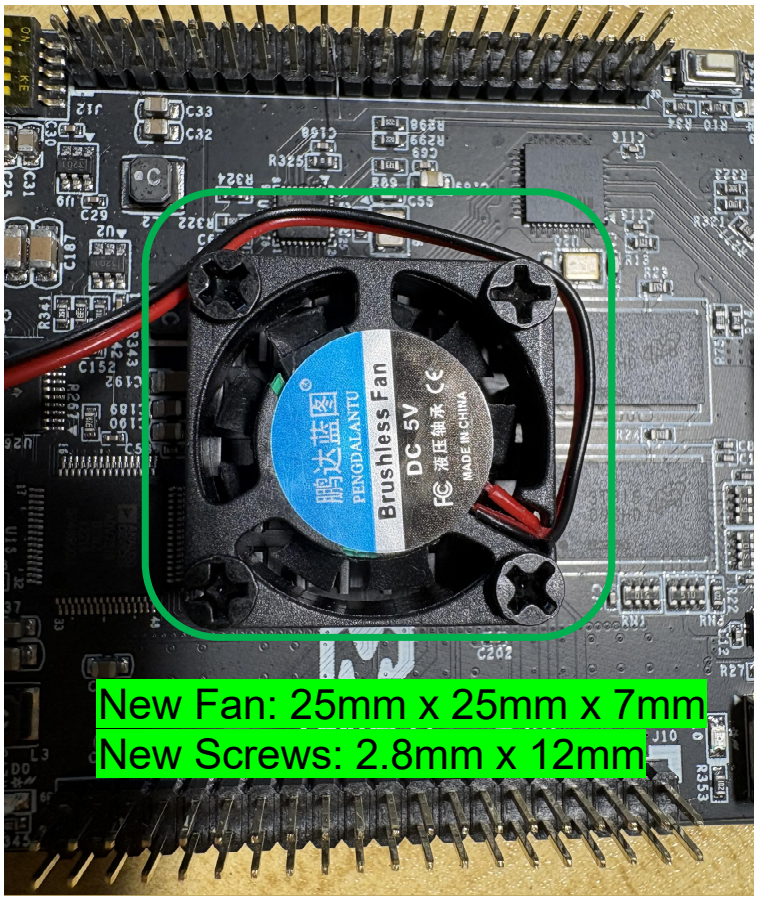

Step 1: Replace the original 25x25x10 fan with the new 25x25x7 fan.

!!!!!!!!!!!!!!!!!!DON'T REMOVE THE HEATSINK!!!!!!!!!!!!!!!!!!

Step 2: Set the SW3 switch into 'ON' status.

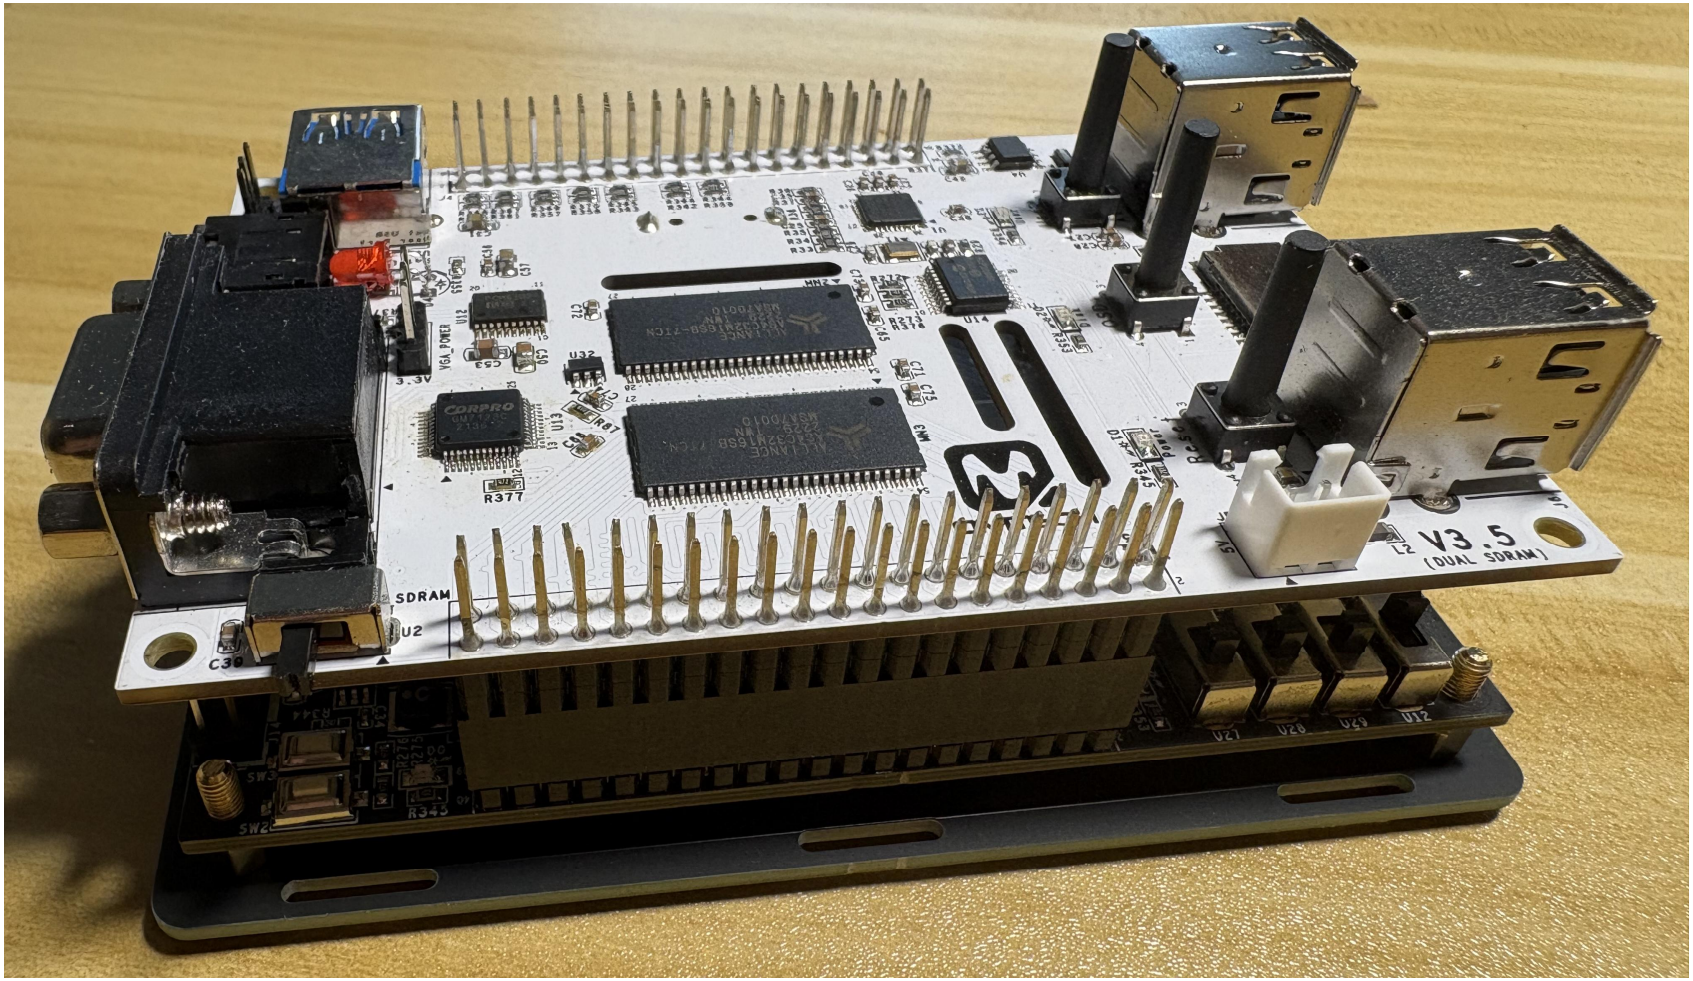

Step3: Make sure the V3.5 IO Board and Main board are tightly connected.



Switch Function Table

	Audio / Video	Secondary SDRAM
Switch -> A/V	Enabled	Disabled
Switch -> DUAL SDRAM	Disabled (No Output)	Enabled