




V4.1 IO BOARD
VGA_POWER
GND
Power
Disk
User
Reset
OSD
User
A1
A4
A1
A4



BT1
R63
C54
C55
C51
C52
C49
C48
R176
C59
C64
C58
R266
C65
C66
R269
R268
R267
R67
R66
C39

Key Features	Description	
A/V Port	24-Bit Video DAC and Digital I2S Audio (Share the same A/V stream as HDMI port)	
USB Hub	4-Port USB hub	
RTC Module	CR1220 Battery Not Included	
SNAC Port	USB 3.0 Header !!!Must use level shift board when using it!!!	
User I/O Port	Three User LEDs and Three User Keys	
Secondary TF	Available for specific cores	

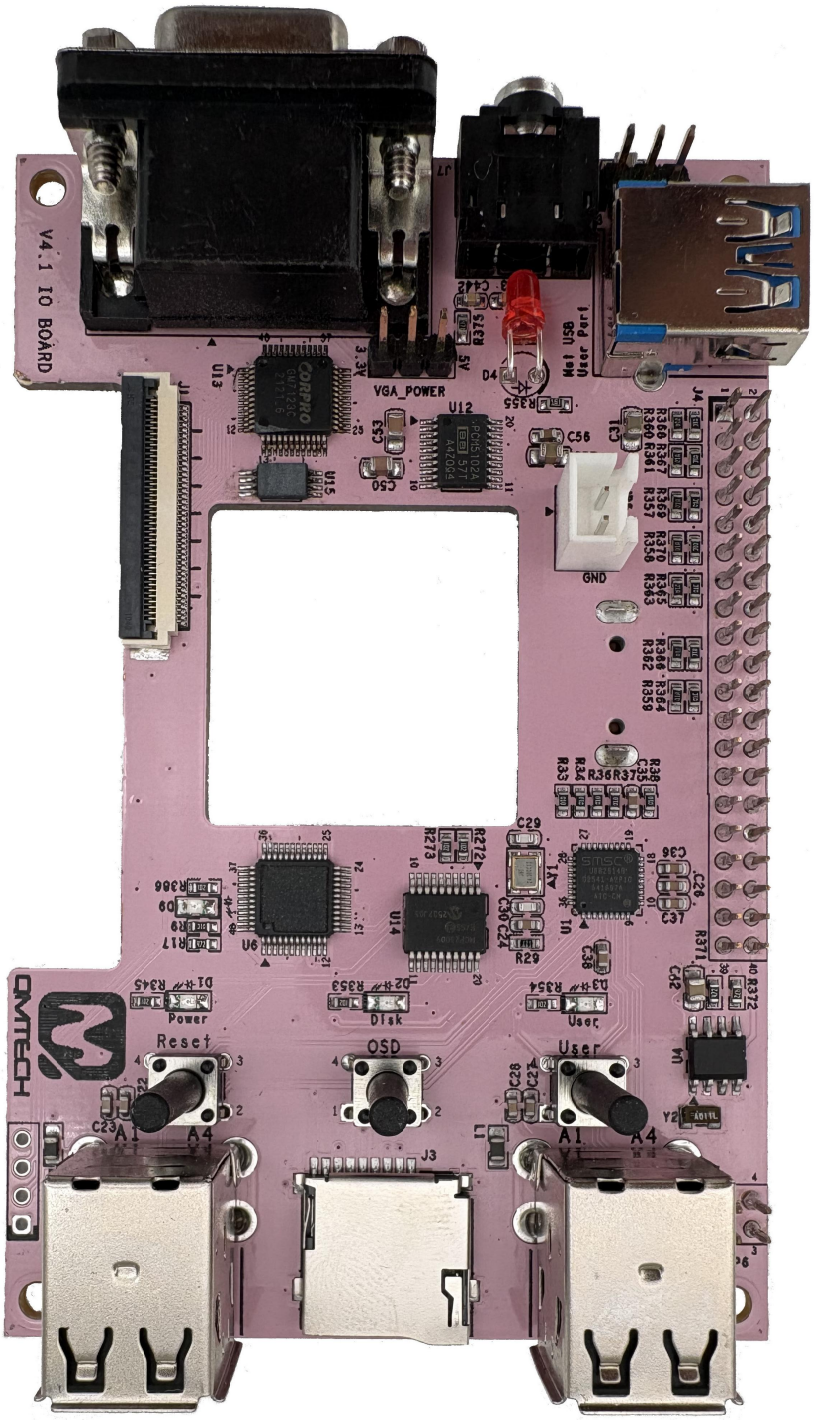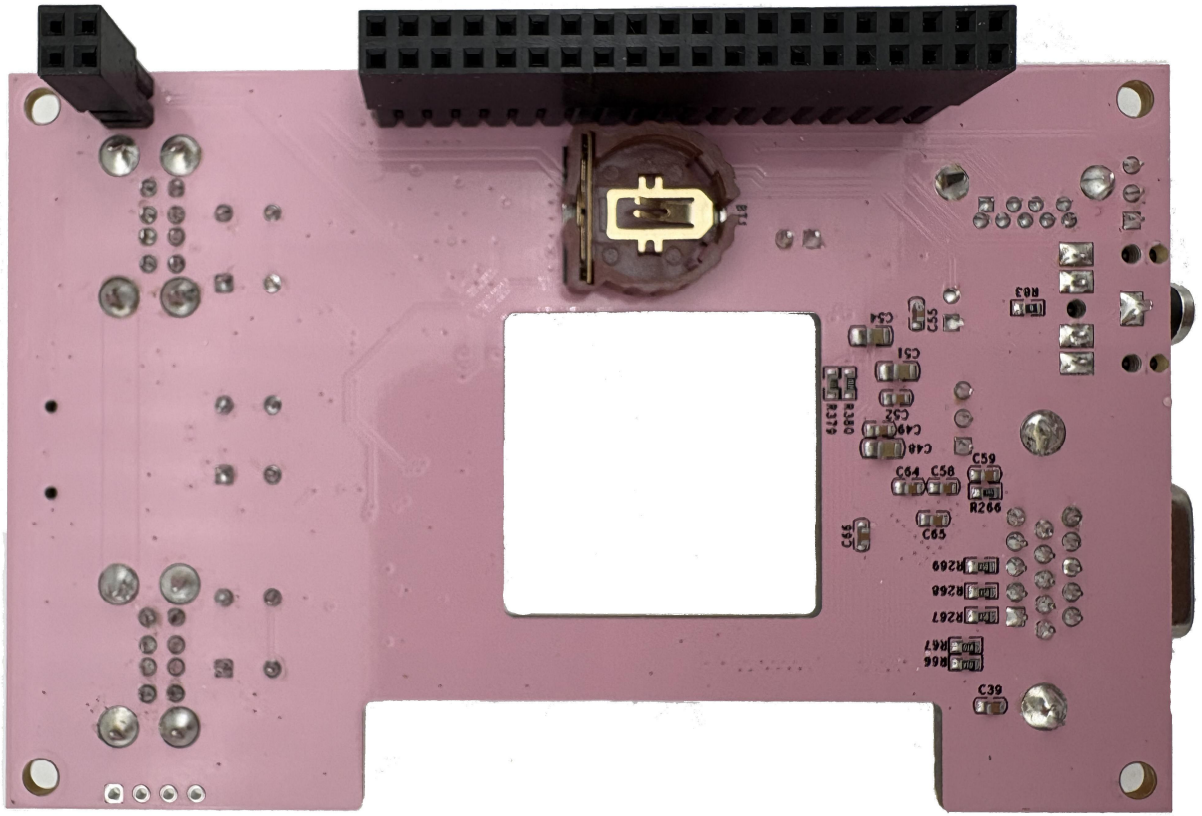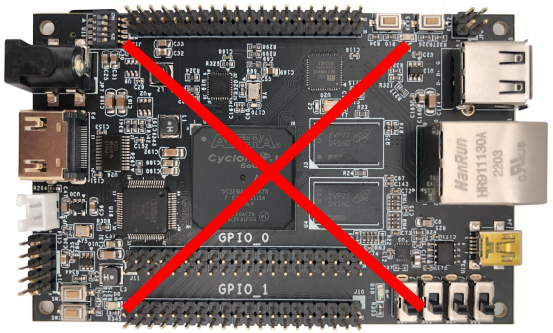


Main board without built-in SDRAM	Main board with built-in SDRAM
Not Supported	Supported

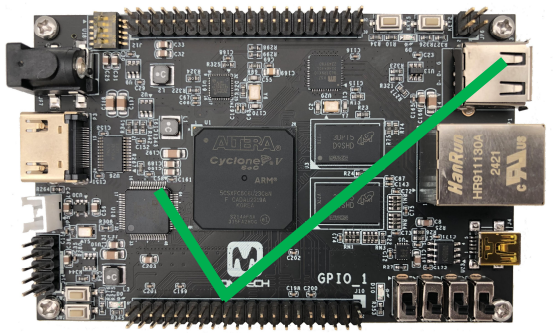


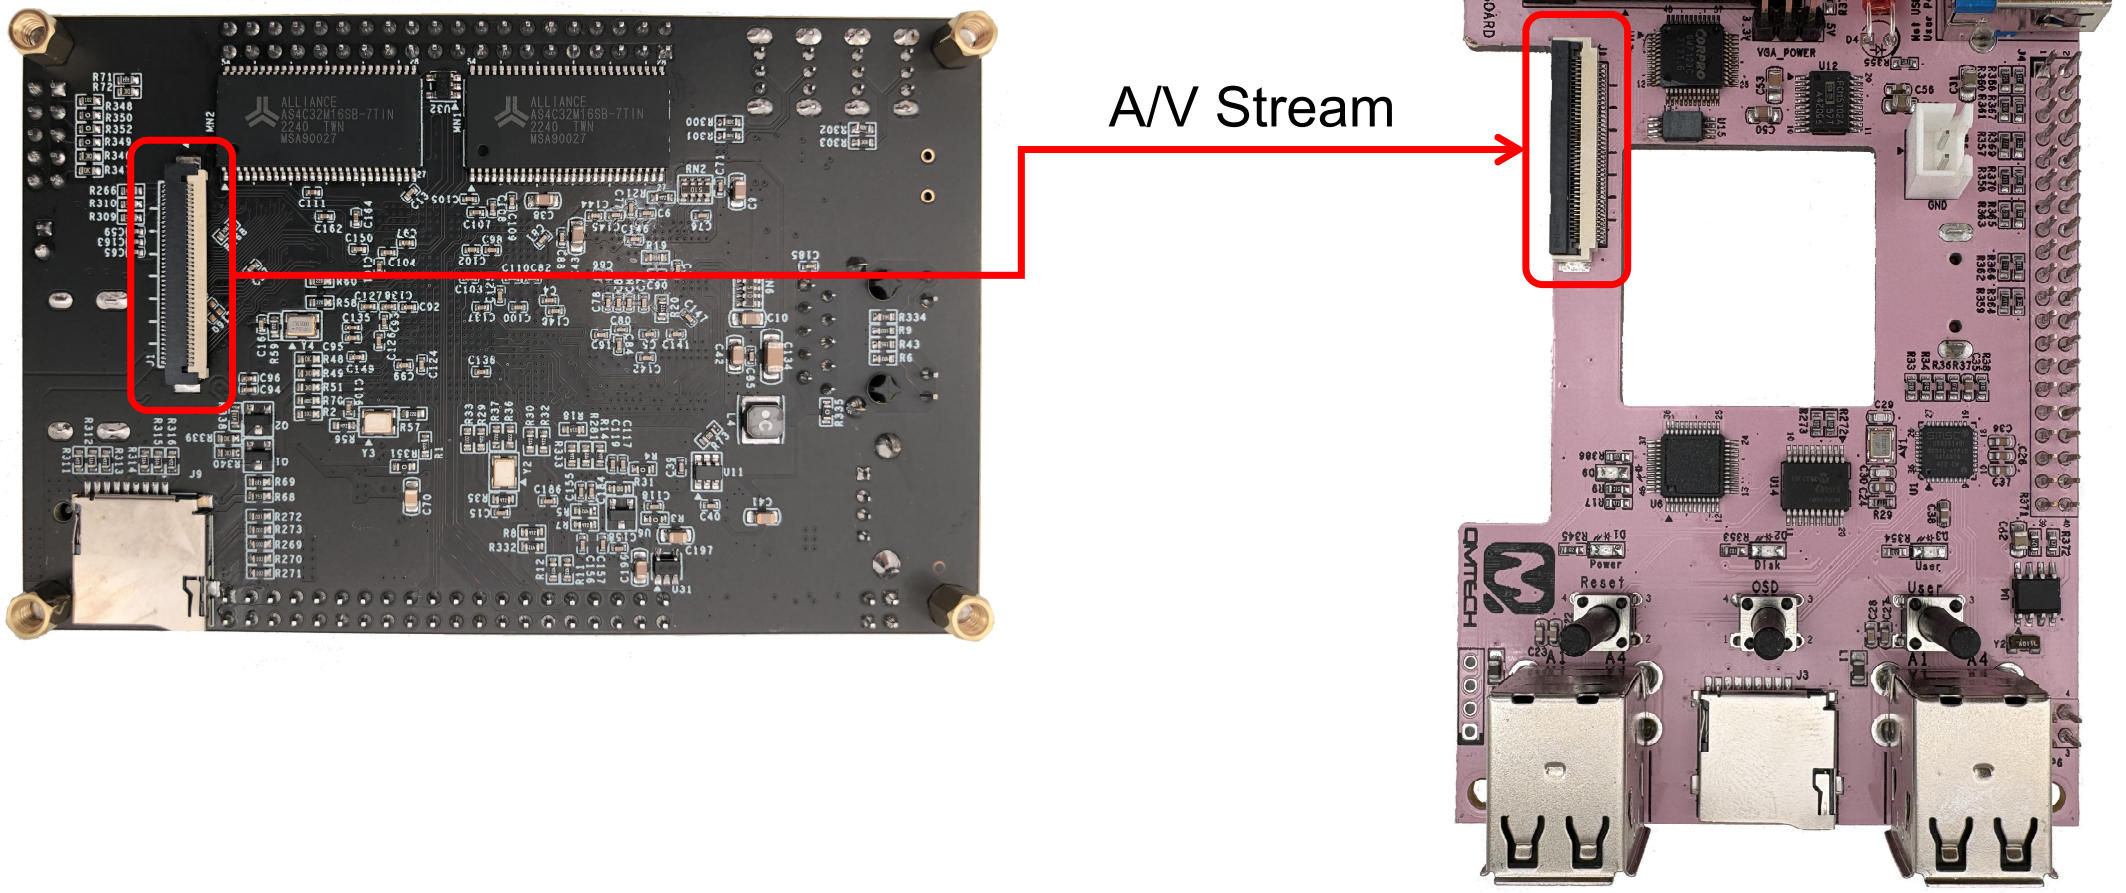
A/V Stream
V4.1 IO BOARD
VGA_POWER
Reset
OSD
User




Fold the FPC cable

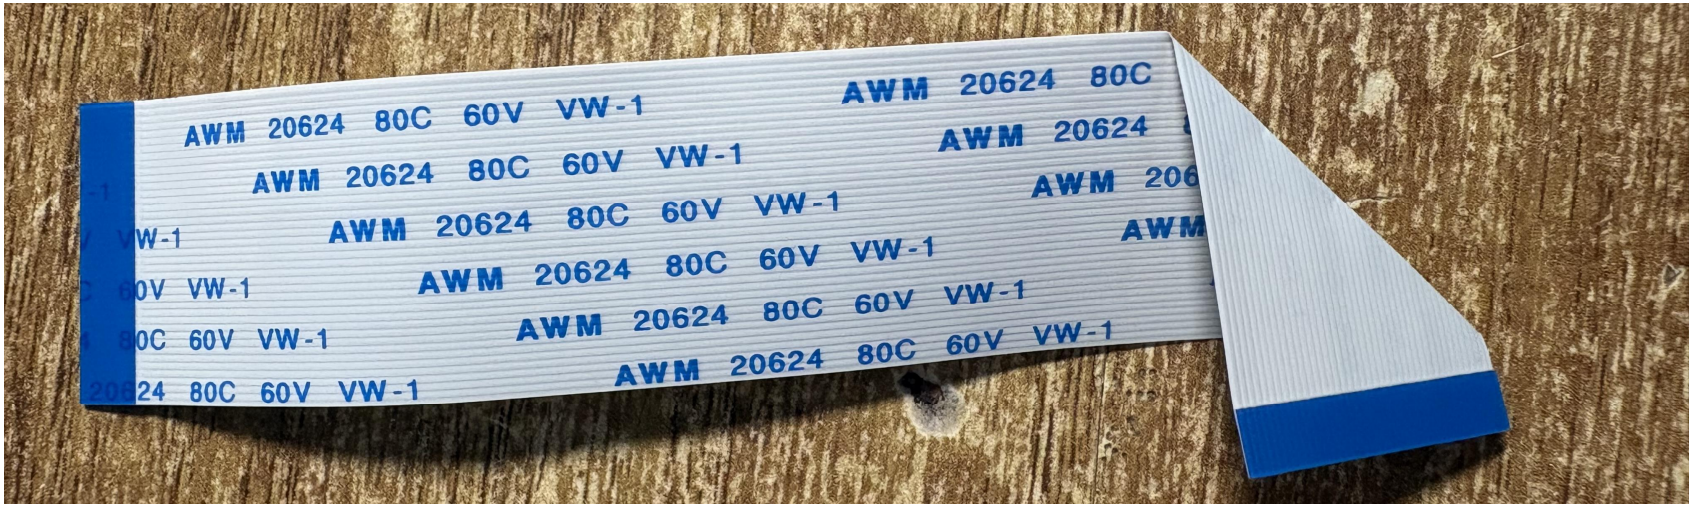


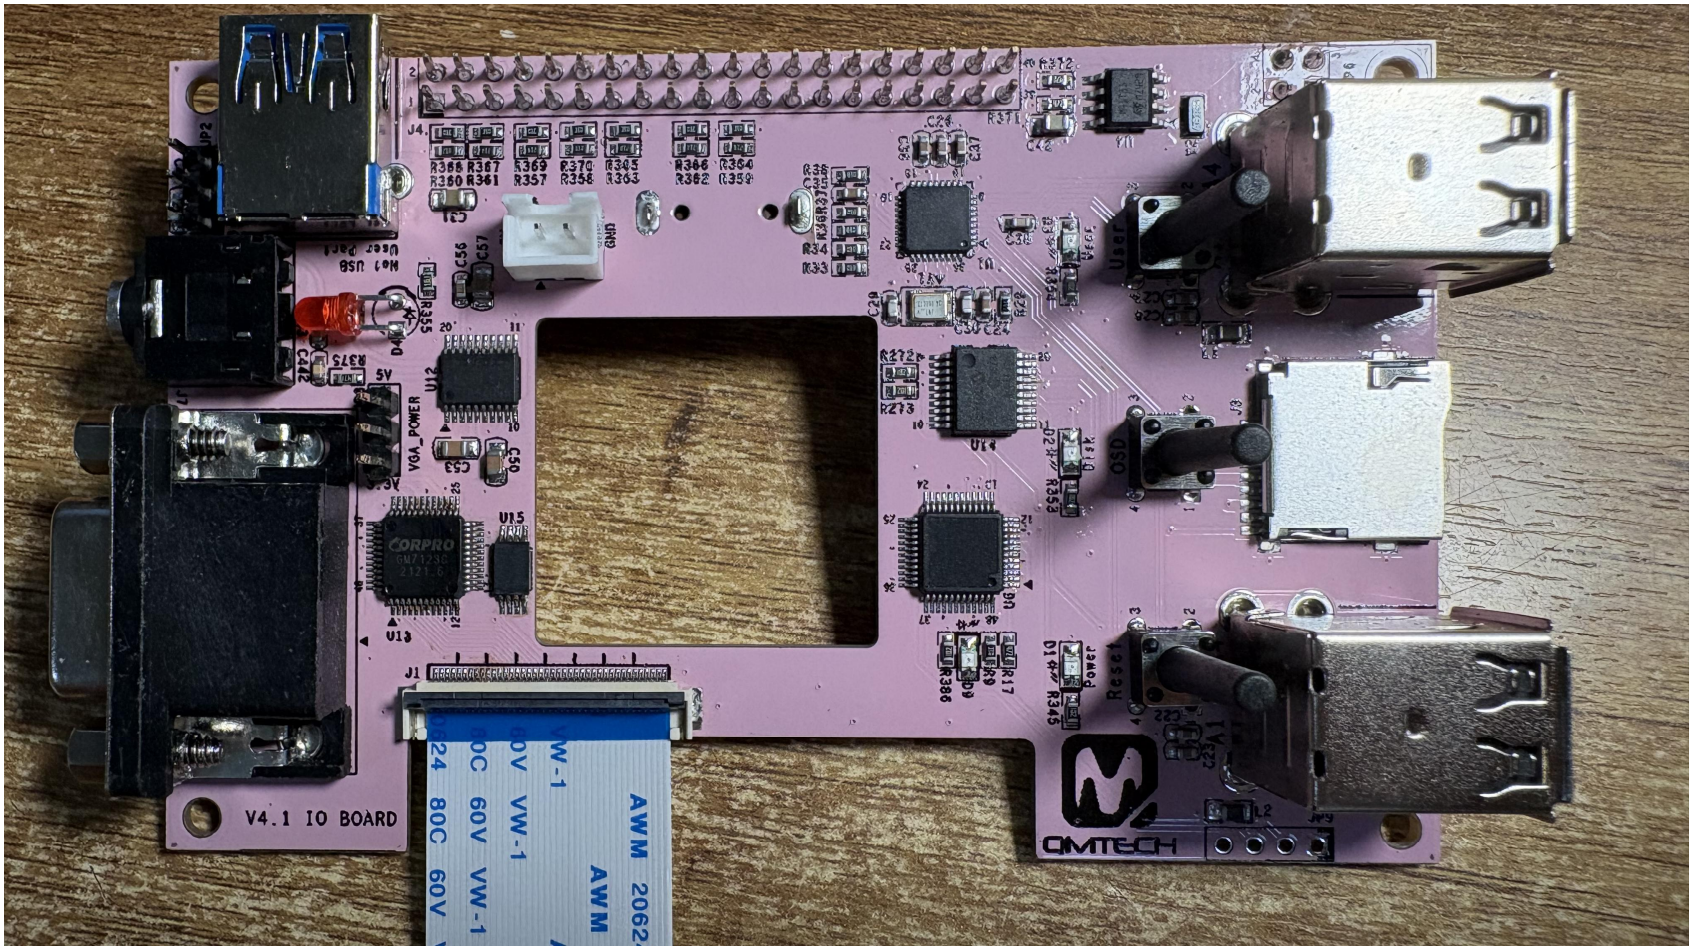


Insert the FPC cable to the FPC conntecor. Blue side faces upwards.

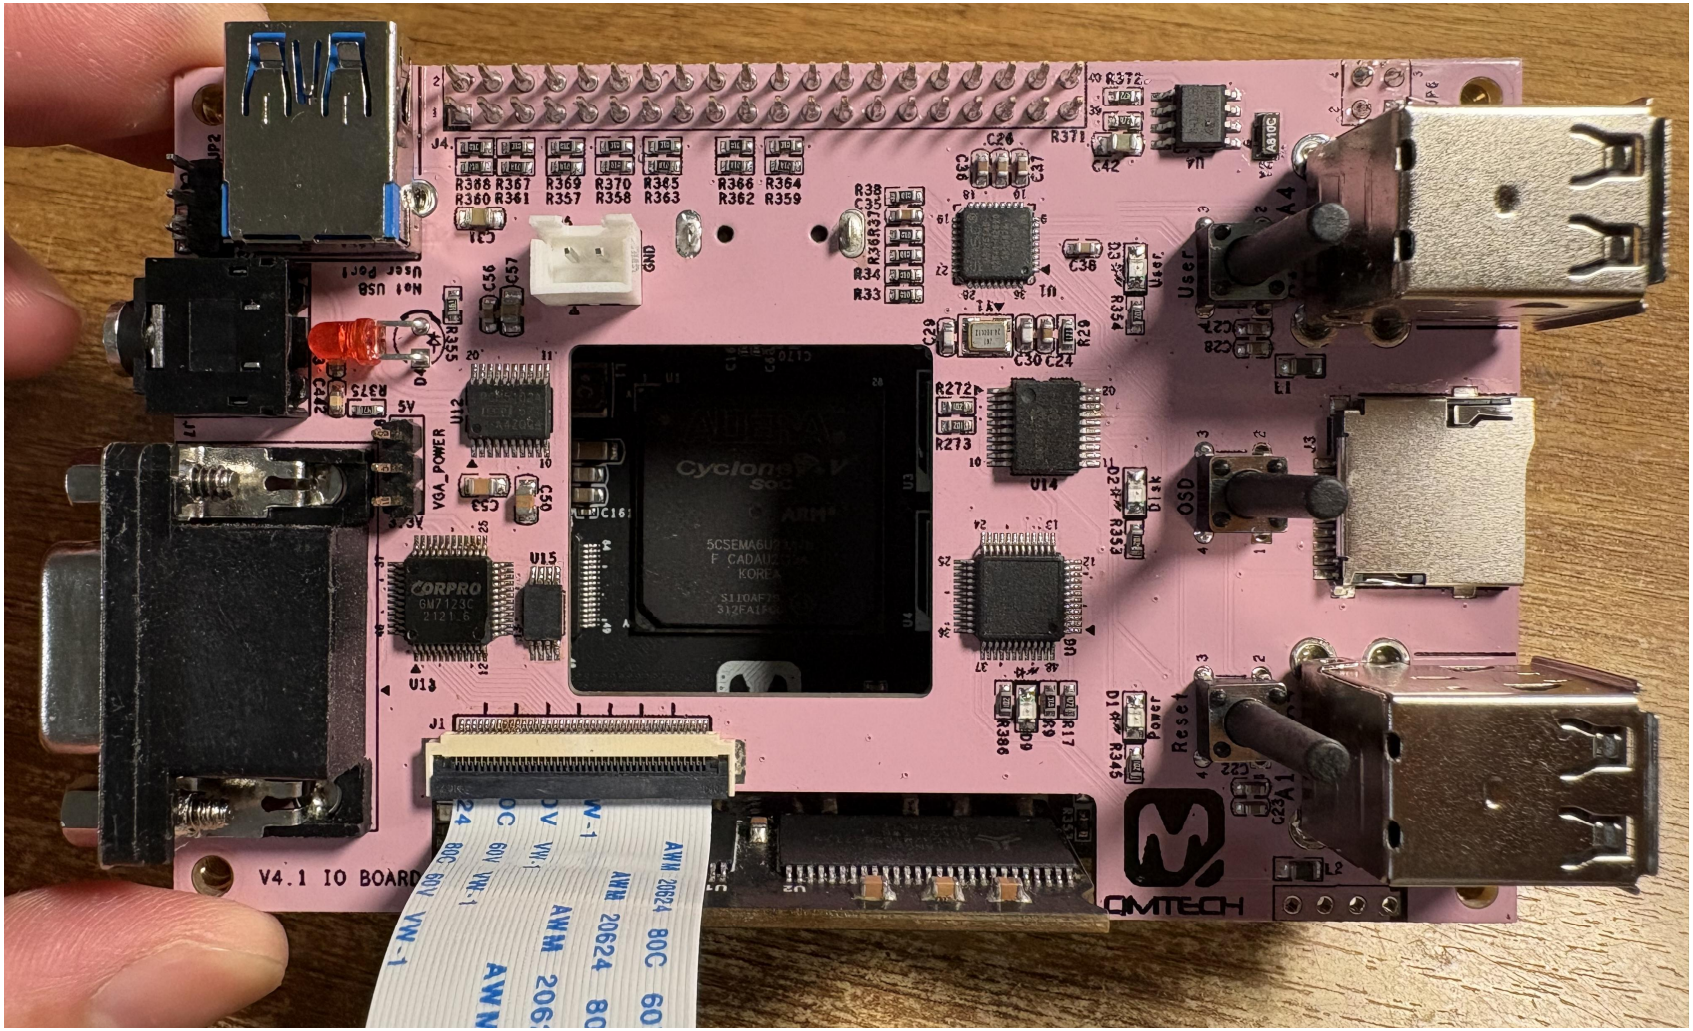


Blue part is fully covered by the FPC connector. Then insert the IO board into the main board.

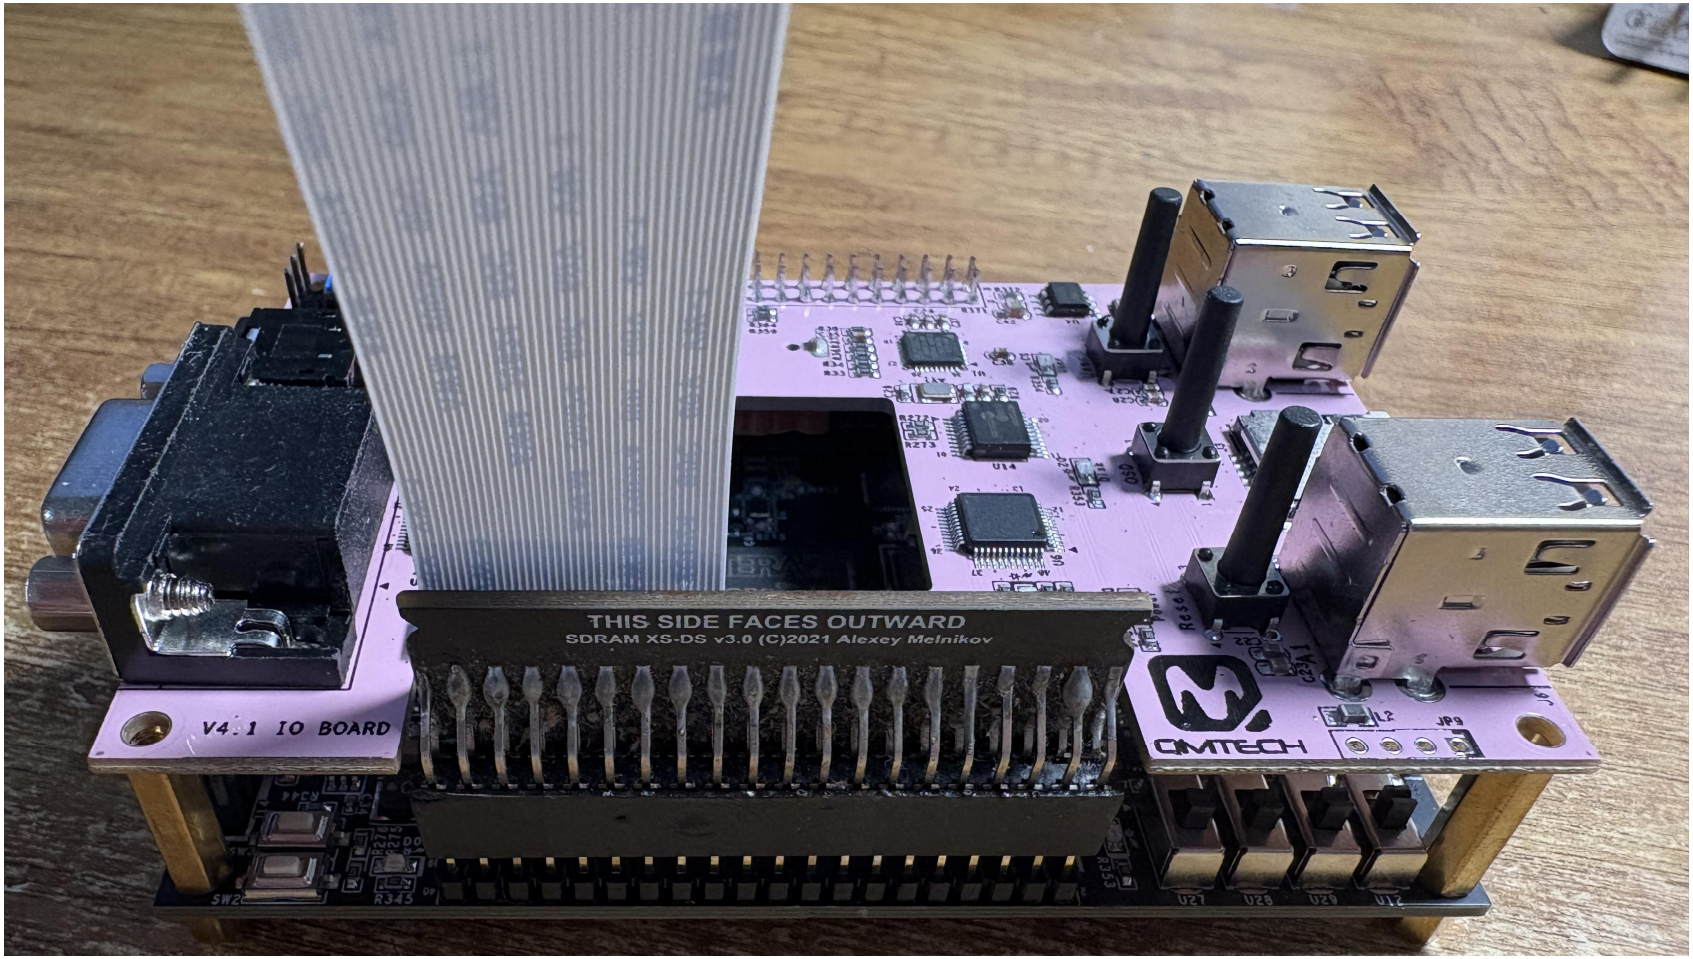


Side view of the setup. Notice the installation of the second SDRAM module.

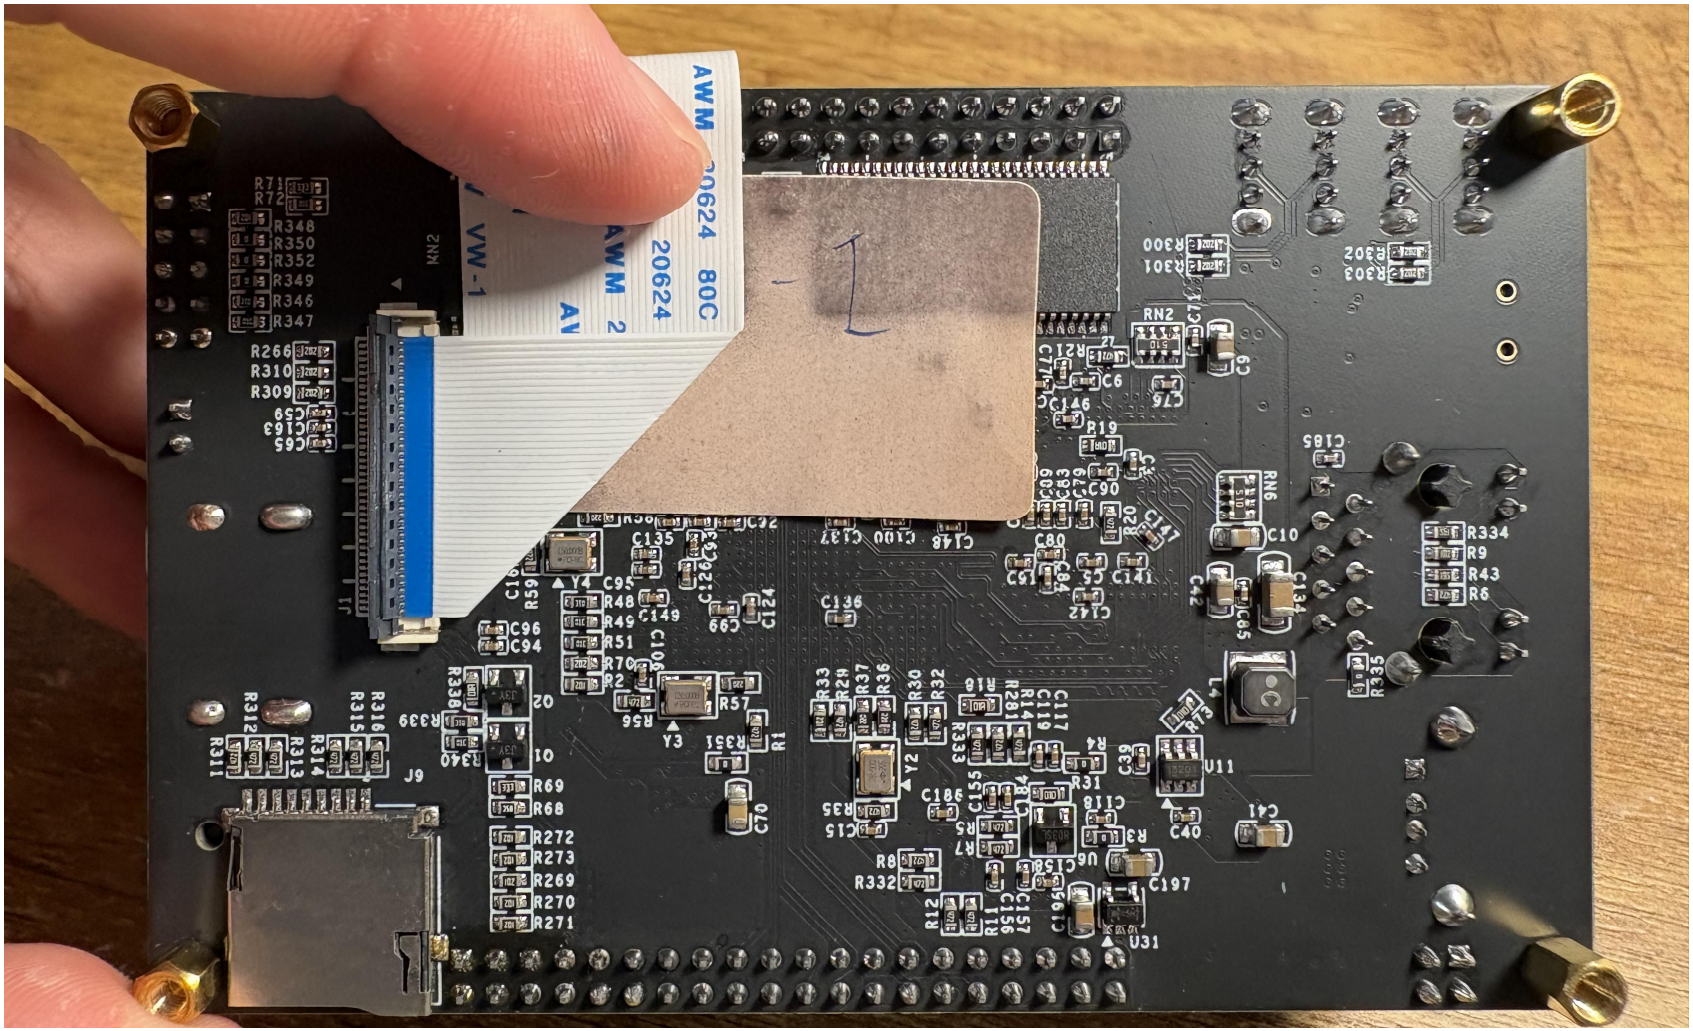

Insert the FPC cable to the FPC conntecor. Blue side faces upwards.

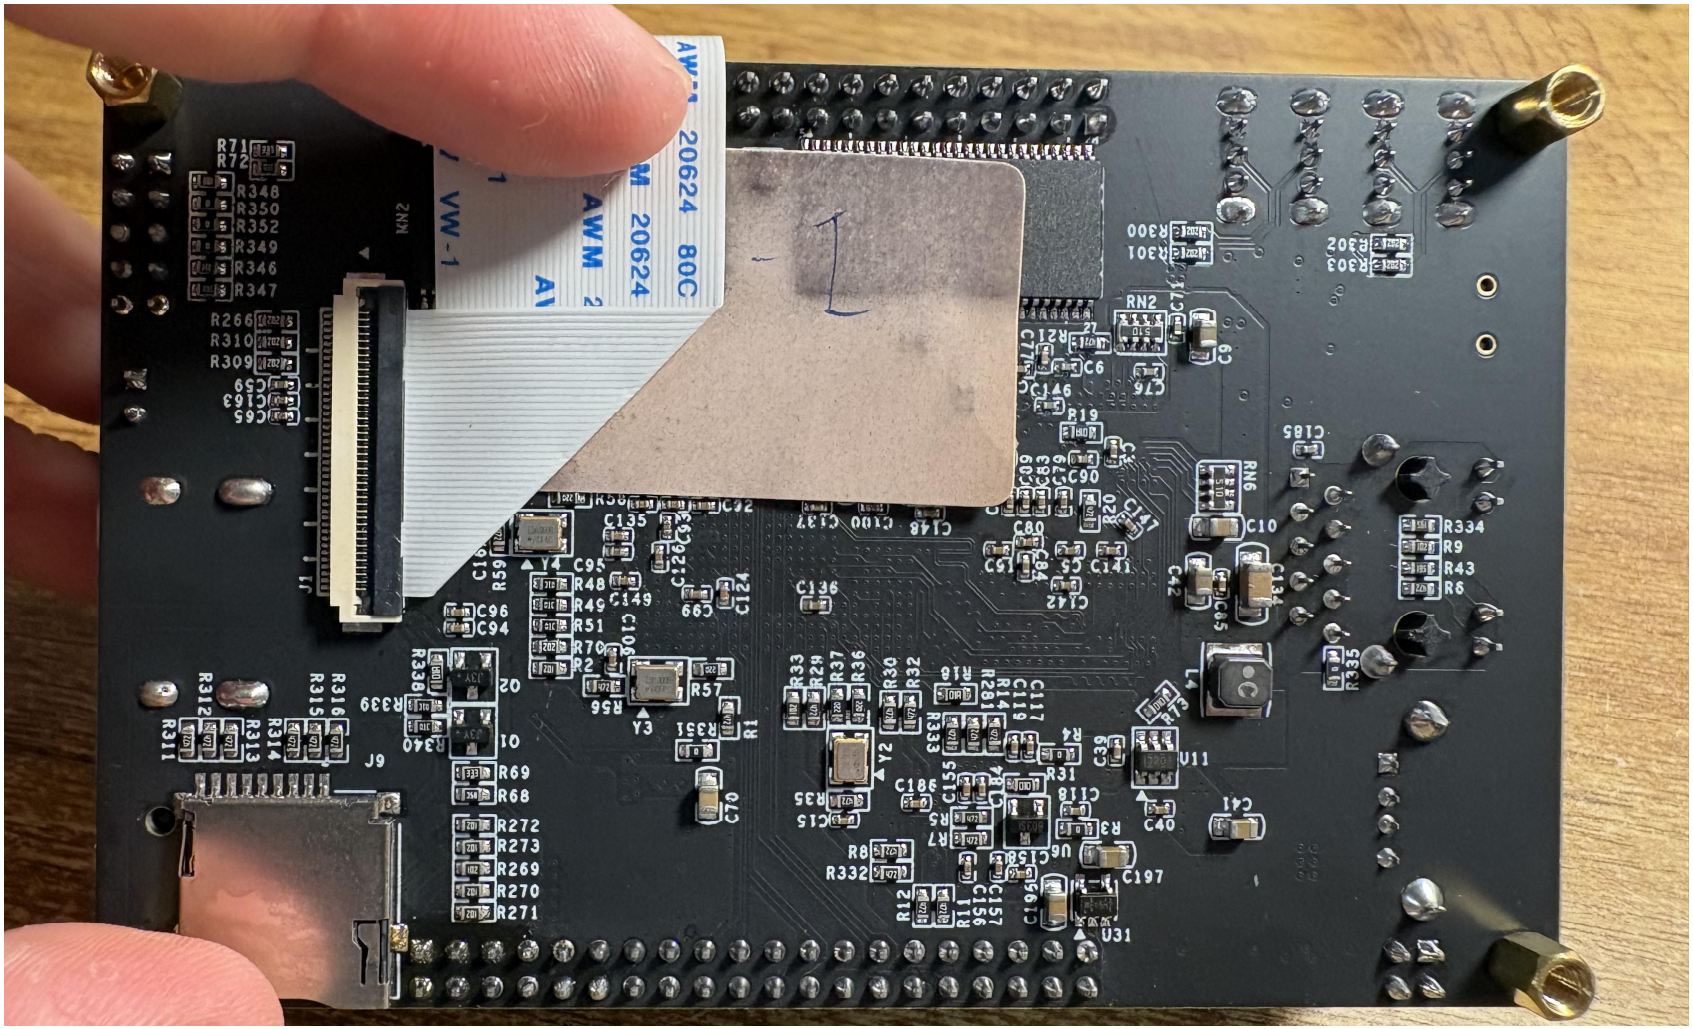

Blue part is fully covered by the FPC connector.

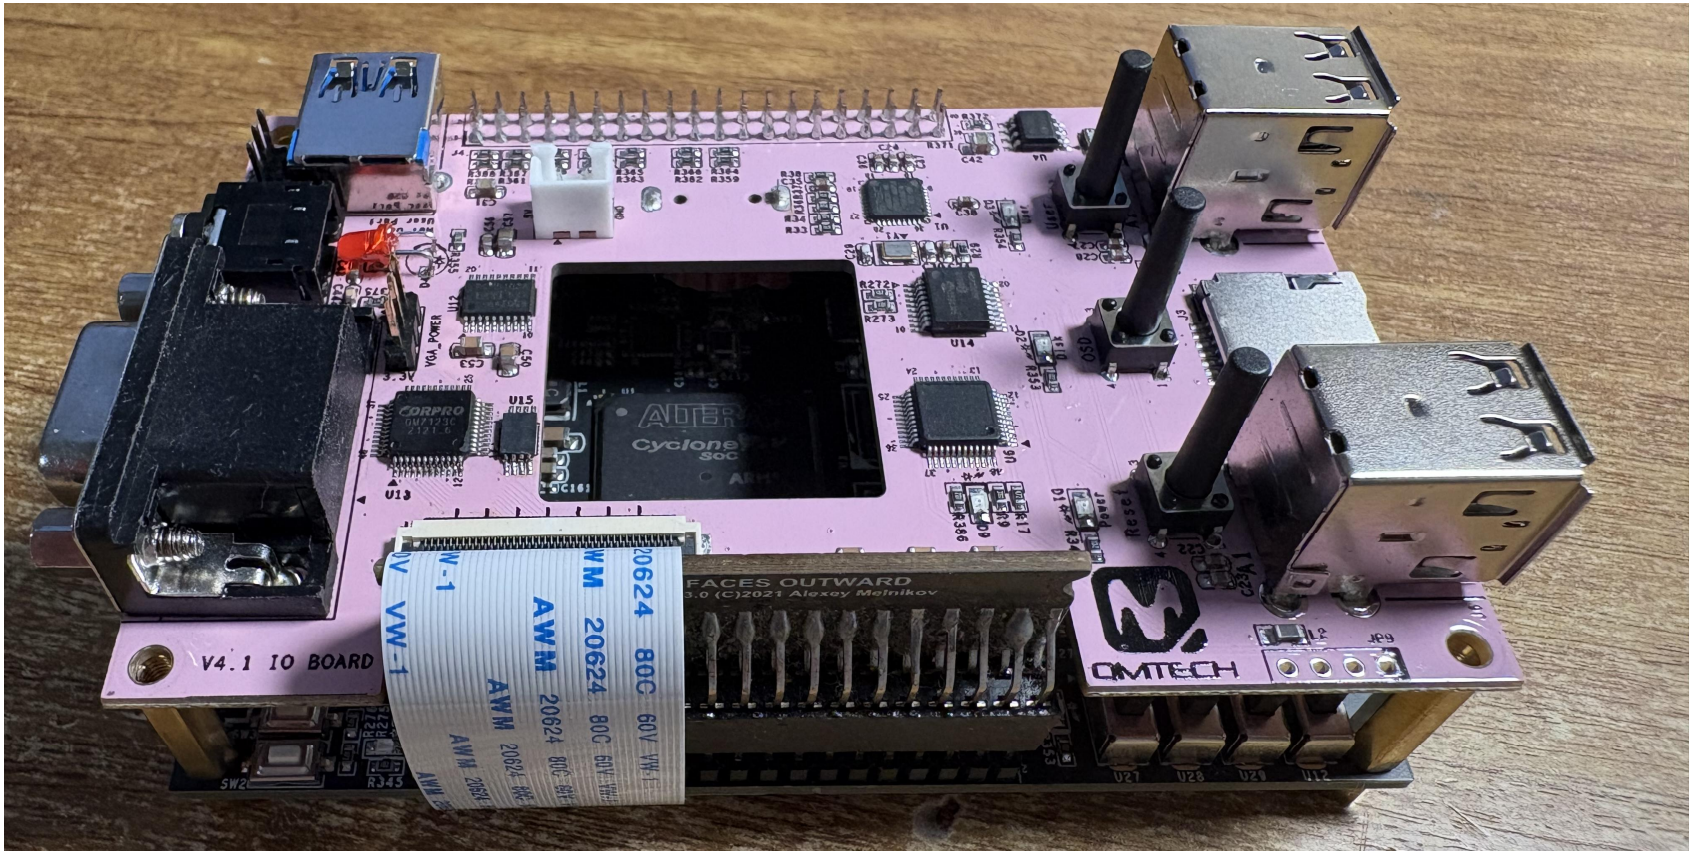
V4.1 IO BOARD
FACES OUTWARD
3.0 (C)2021 Alexey Melnikov
Cyclone
SoC
CORPRO
OMTECH
AWM 20624 80C 60V VW-1