
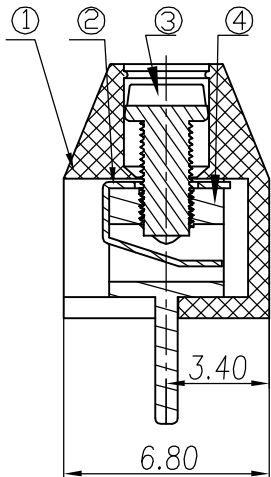
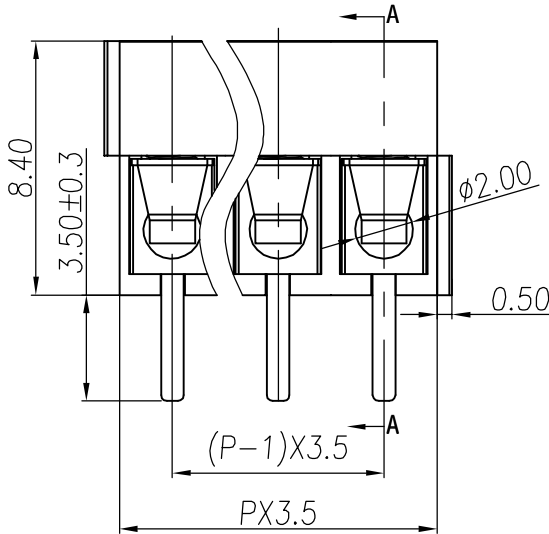
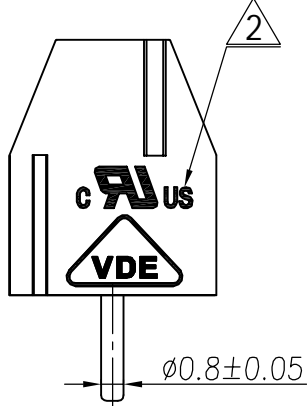


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		Drawing revise	Haoyh	03/17/06
△		增加VDE标志	LJH	12/25/07

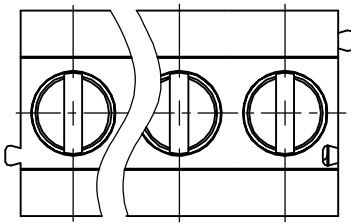

SECTION A-A

- Notes:
1. Pitch: 3.5mm
 2. Rated voltage/current: UL 300V/10A
VDE 130V/10A
 3. Operation temperatures: -40℃~+105℃
 4. Withstanding Voltage: AC1500V/1Min
 5. Insulation Resistance: 5000MΩ /DC1000V
 6. Wire Range: 24-18AWG, 1.0mm²
 7. Max. Torque Value: 2.04kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					
to	over	to	over	to	over	to	
6	10	10	24	30	60	100	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

4	DG350(A) Pin header	4017B00010(H)	XX	Brass	SnCe
3	DG350 M2" Screws	S000001400(H)	XX	Steel	Cr ³⁺ Zn
2	DG350 Spring	X000000290 (H)	XX	Phosphor bronze	Ni plated

1	DG350-3.5-Housing	4017A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME DG350-3.5-XXP-1Y-00A(H)					
DRAWING NO. DG350-3.5-E01					
/PART NO.					
DO NOT SCALE DRAWING					
SHEET 1 OF 1					