


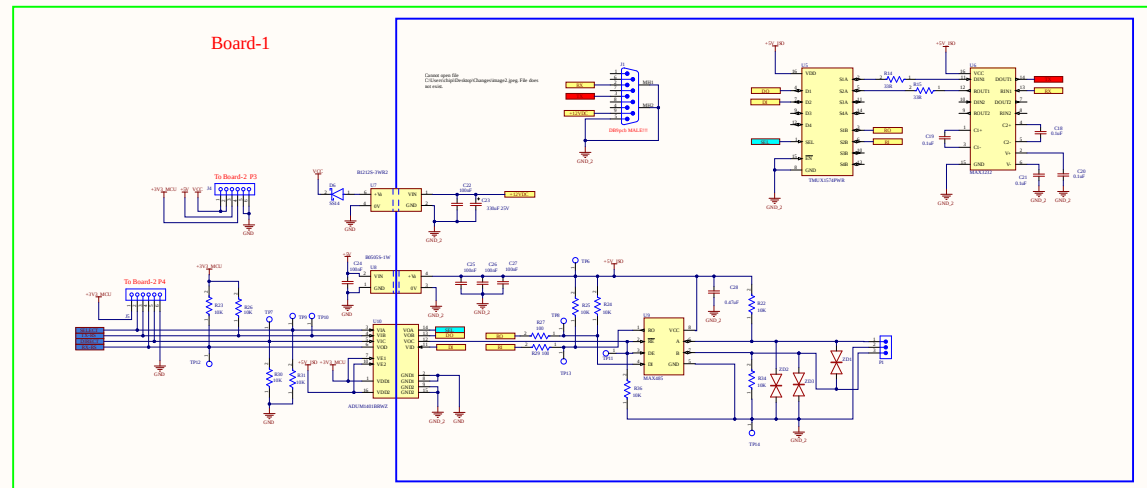

Comment	Description	Designator	Footprint	LibRef	Quantity
0.1uF	0.1uF	C18, C19, C20, C21	CAP-0603	CAP-NON-POLAR	4
100nF		C22, C24, C25, C26, C27	CAP-0603	CAP-NON-POLAR	5
330uF 25V		C23	CAP_SMD_Size_E	CAP_POL_SMD	1
0.47uF		C28	CAP-0805	CAP-NON-POLAR	1
SS14		D6	DO-214-AC	SS14	1
DB9 pcb MALE!!		J1	DB-9_2	DB9	1
61300611821	WR-PHD Socket Header, THT, Vertical, pitch 2.54mm, 1 Row, 6P	J4, J5	61300611821	61300611821	2
691305340003	WR-TBL Series 3053 Horizontal PCB Header, THT, pitch 3.81mm, 3p	P1	691305340003	691305340003	1
33R	33R	R14, R15	RES-0603	RES-CONST	2
10K	10K	R22, R23, R24, R25, R26, R30, R31, R34, R36	RES-0603	RES-CONST	9
100	100	R27, R29	RES-0603	RES-CONST	2
Test_Point_PCB	Test_Point	TP6, TP7, TP8, TP9, TP10, TP11, TP12, TP14	Test_Point	TP_PCB?	8
	Test_Point	TP13	Test_Point	TP_PCB?	1
TMUX1574PWR		U5	TSSOP-16-A	TMUX1574PWR	1
MAX3232		U6	SOIC-16-M	MAX3232	1
B1212S-3WR2		U7	B1212S-3WR2	B1212S-3WR2	1
B0505S-1W		U8	B0505S-1W	B0505S-1W	1
MAX485		U9	SOIC-8-MFG	MAX485	1
ADUM1401BRWZ	Quad Channel Digital Isolator, 2.5 KVrms Insulation Rating, 10 Mbps Data Rate, 50 ns Delay, Industrial, 16-pin SOIC (RW-16), Tube	U10	ADI-RW-16_M	CMP-0534-00565-1	1
P6SMB16CA		ZD1, ZD2, ZD3	DO-214AA	P6SMB16CA	3