DESCRIPTION

more...

Description:

1. Multi-function display, with RS485 Modbus communication, LED indicator pulse output.

2. With good reliability, 35mmDIN standard rail installation, flexible and convenient installation.

3. With two-way measurement, display current, voltage, power factor and other functions.

4. High measurement accuracy, high-quality ABS housing, strong anti-interference, long service life.

5. Wide range of applications: factories, laboratories, power monitoring, electronic DIY and other fields.

Parameters:

Voltage: 220/230V

Current: 5 (60A)

Rated frequency: 50-60Hz

Energy range: 999999.9KWh

Constant pulse: 1600imp/kWh

Power consumption: ≤2W, 10VA

Operating temperature: -20~55℃

Storage temperature: -25 ~ 70℃

Mounting method: 35mm standard DIN rail

Product size: 93*36*76mm

Package included:

1 x Single Phase LCD Digital Energy Meter Voltage Current Power Consumption Counter Electric Wattmeter 220V Din Rail RS485 Modbus

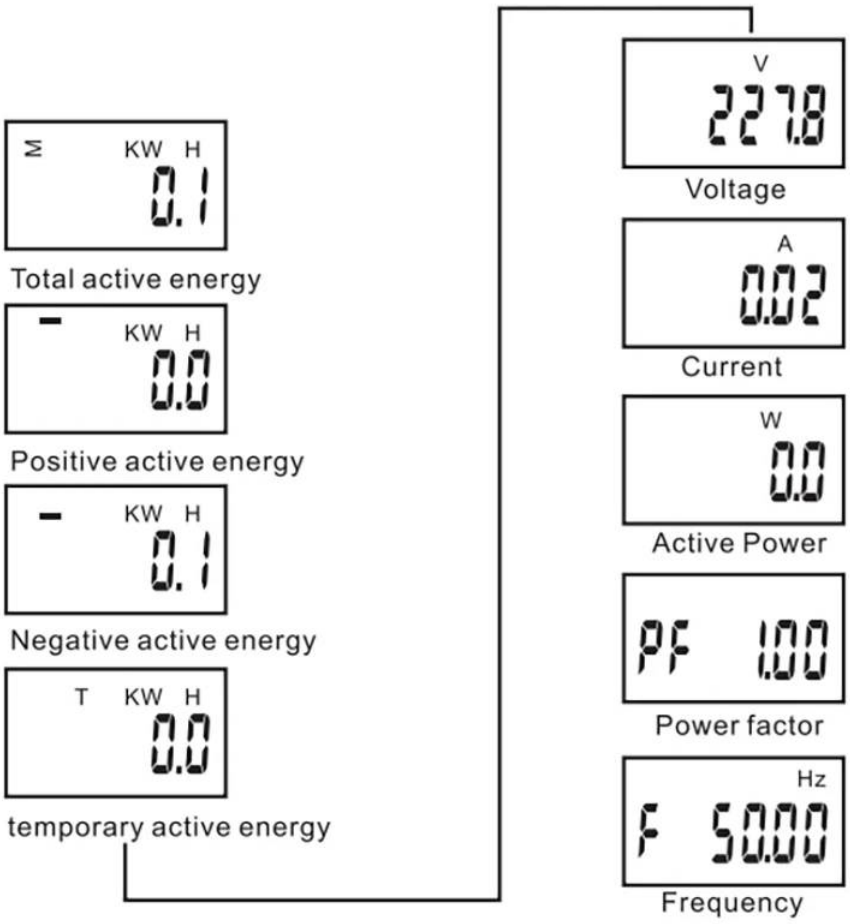
PICTURES

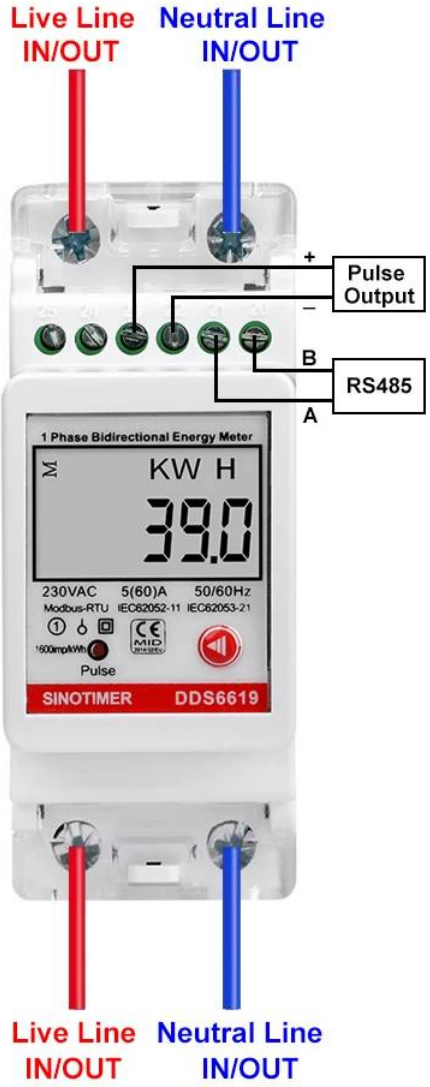
more...



Display and Key operation

Press ↵ To Switch Parameter Display

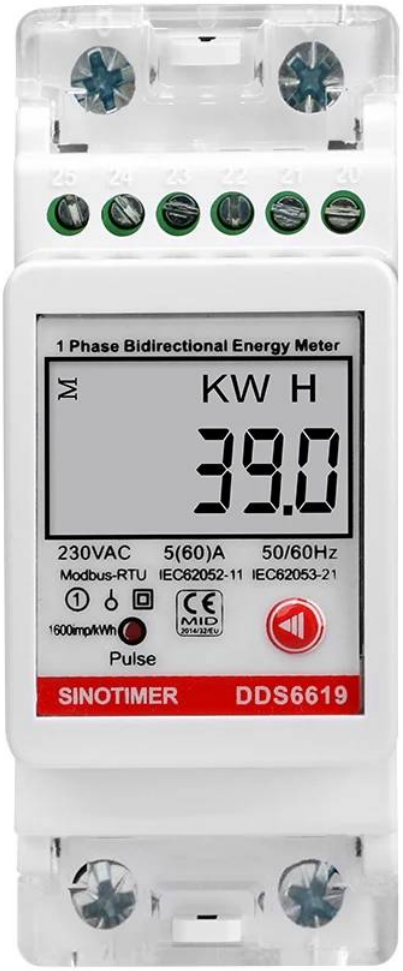



Live Line
IN/OUT
Neutral Line
IN/OUT
+
Pulse
Output
–
B
RS485
A
1 Phase Bidirectional Energy Meter
M
KW H
39.0
230VAC 5(60)A 50/60Hz
Modbus-RTU IEC62052-11 IEC62053-21
Pulse
SINOTIMER DDS6619
Live Line
IN/OUT
Neutral Line
IN/OUT


1 Phase Bidirectional Energy Meter
KW H
390
230VAC
Modbus-RTU
5(60)A
IEC62052-11
50/60Hz
IEC62053-21
1600imp/kWh
Pulse
SINOTIMER
DDS6619

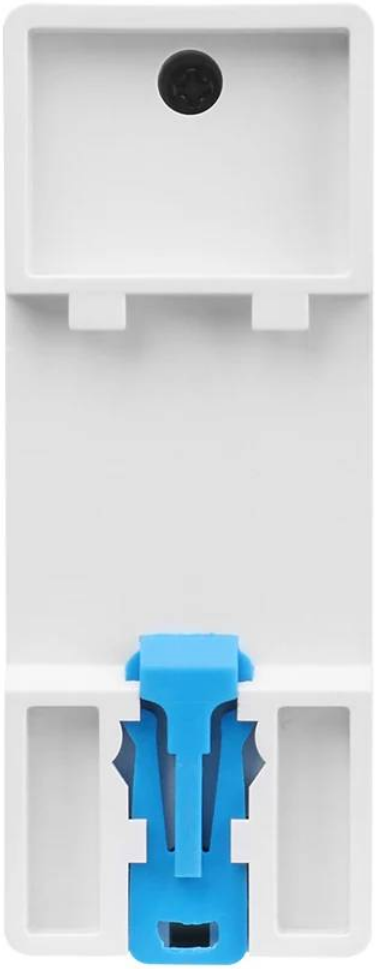

1 Phase Bidirectional Energy Meter
KW H
39.0
230VAC
Modbus-RTU
5(60)A
50/60Hz
Pulse
SINOTIMER
DDS6619

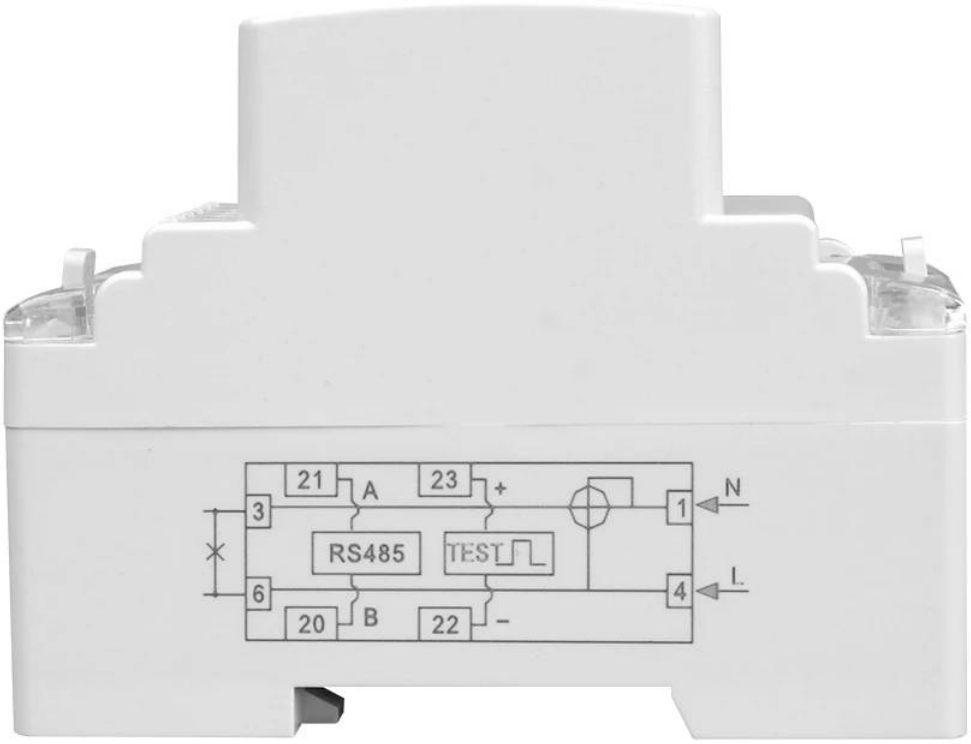

1 Phase Bidirectional Energy Meter
KW H
39.0
230VAC
5(60)A
50/60Hz
Modbus-RTU
IEC62052-11
IEC62053-21
Pulse
SINOTIMER
DDS6619
RS485
A
B


1 Phase Bidirectional Energy Meter
M
KW H
39.0
230VAC 5(60)A 50/60Hz
Modbus-RTU IEC62052-11 IEC62053-21
1600imp/kWh
Pulse
SINOTIMER DDS6619


1 Phase Bidirectional Energy Meter
M
KW H
39.0
230VAC 5(60)A 50/60Hz
Modbus-RTU IEC62052-11 IEC62053-21
1600imp/kWh
Pulse
SINOTIMER DDS6619


1 Phase Bidirectional Energy Meter
M
KW H
39.0
230VAC
5(60)A
50/60Hz
Modbus-RTU
IEC62052-11
IEC62053-21
1600imp/kWh
Pulse
SINOTIMER
DDS6619




21
A
23
+
3
1
N
RS485
TEST
6
4
L
20
B
22
–