



Industrial PC

# CS-A76-BOX



PN: CS-RK3588-BOX

Content can change at anytime, check our website for latest information of this product.  
[www.chipsee.com](http://www(chipsee.com)

# Contents

---

CS-A76-BOX	3
1. Product Overview	7
2. Ordering Options	8
2.1. Operating System	8
2.2. Optional Features	9
3. Hardware Features	10
4. Power Input	12
4.1. Default Connector	12
4.2. DC Jack	13
4.3. Ignition Signal	14
5. Connectivity	15
5.1. RS232/RS485/CAN	15
5.2. USB Connectors	17
5.3. LAN Connectors	19
5.4. WiFi & BT Module	20
5.5. 4G/LTE Module	21
6. GPIO	23
7. TF Card Slot	26
8. Audio Connectors	27
9. HDMI Connector	28
10. PROG Button	29
11. Mounting Procedure	30
12. Mechanical Specifications	31
13. Disclaimer	32
14. Technical Support	32

# CS-A76-BOX

Front View



## Rear View



## Side View 1



# Side View 2



## Product Overview

The fanless embedded PC CS-A76-BOX (PN: CS-RK3588-BOX) is a Cortex®-A76 series high-quality industrial PC. Thanks to the fanless design, it is stable and reliable in client terminal, multimedia and other industry applications.

### Key Applications

- Industrial Automation
- Process Control
- Smart Grid Management
- CNC Manufacturing
- Environmental Monitoring
- Predictive Maintenance

The offered CPU consumes very little power, around 4.35W (max). From the ground-up, the CPU is built for low power consumption. As such, it is best suited for mobile and power-constrained industrial or field applications. A specially designed aluminum alloy housing with fins for increased heat dissipation serves as a passive cooler, eliminating the need for built-in fans. The fanless design reduces noise, as well as the maintenance costs and efforts, leading to increased reliability at the same time.

The CS-A76-BOX Industrial PC is based around the powerful RK3588 System on Chip (SoC), powered by the Rockchip RK3588 low-power processor which integrates a Quad(4)-core Cortex®-A76 (2.4GHz) and Quad(4)-core Cortex®-A55 (1.8GHz) processor.

The RK3588 supports multi-format video decoders and has a high-performance 8GB LPDDR4 RAM capable of sustaining demanding memory bandwidths. It also provides a complete set of peripheral interfaces.

# Ordering Options

Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the [Hardware Features](#) section provides information about the default options bundled with the product.



## Note

You can order the [CS-A76-BOX](#) from the official [Chipsee Store](#) or from your nearest distributor.

## Operating System

This product comes with a pre-installed OS of your choice. Please see the list below for the supported OSes, which can also be obtained from the [Software Documentation](#) section, along with the detailed installation instructions.

- Debian 11
- Buildroot Linux Qt 5.15



## Warning

The [Software Documentation](#) section provides a detailed instruction on how to install different OSes on your own. However, bear in mind that Chipsee can't take the responsibility of inadequate installation procedure. If you "brick" your device, please contact Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com) for further assistance

## Optional Features

The CS-A76-BOX Industrial PC does not include 4G/LTE module by default. The module is optional and can be selected at the Chipsee store during the ordering process.

### Warning

Installation, repair, and maintenance tasks should be performed by trained personnel only. Chipsee does not bear any responsibility for damage caused by inadequate handling of the product.

# Hardware Features

The CS-A76-BOX Industrial PC offers a broad range of performance and connectivity options for scalable integration, providing expandability according to future needs. Some of the key features are listed in the table below.

CS-A76-BOX	
<b>CPU</b>	Rockchip RK3588, Quad(4)-core Cortex-A76 (2.4GHz) and Quad(4)-core Cortex-A55 (1.8GHz)
<b>GPU</b>	ARM Mali-G610 MC4. Up to 8K60 FPS video decoding, up to 8K30 FPS video encoding.
<b>NPU</b>	Neural network acceleration engine with 6Tops int8, support Int4/8/16/FP16/BF16/TF32.
<b>RAM</b>	8GB LPDDR4
<b>eMMC</b>	64GB
<b>SSD</b>	N/A
<b>Storage</b>	TF Card, Supports up to 128GB SDHC
<b>Display</b>	N/A
<b>HDMI</b>	1 x HDMI-D (Micro-HDMI) Out
<b>Touch</b>	N/A
<b>USB</b>	2 x USB 3.0 HOST, 1 x USB Type-C <sup>1</sup>
<b>LAN</b>	2 x RJ45, GbE
<b>POE</b>	N/A
<b>Audio</b>	3.5mm Audio In/Out Connector, 2W Internal Speaker
<b>Buzzer</b>	Yes
<b>RTC</b>	High accuracy RTC with farad capacitor, can work 1 week after power off ( <b>default</b> ). High accuracy RTC with lithium coin battery, can work 3 years after power off ( <i>optional</i> ).
<b>RS232</b>	default 2 x RS232 (Optional 6 x RS232 at most, include 1 debug port) <sup>2</sup>
<b>RS485</b>	default 3 x RS485 at most <sup>2</sup>
<b>CAN</b>	default 2 x CAN
<b>GPIO</b>	8 Channels Isolated IO, 4 x Input and 4 x Output
<b>WiFi/BT</b>	Integrated WiFi/BT Module
<b>4G/LTE</b>	Supported, Optional
<b>Power Input</b>	From 6V to 36V (supports <b>optional</b> 24V ignition signal)
<b>Current</b>	290mA (max) at 15V

CS-A76-BOX	
<b>Power Consumption</b>	4.35W (max)
<b>Working Temperature</b>	From -40°C to +85°C
<b>OS</b>	Debian11, Buildroot Linux Qt 5.15
<b>Dimensions</b>	CS-A76-BOX (PN: CS-RK3588-BOX): 209 x 125 x 37.3mm
<b>Weight</b>	CS-A76-BOX (PN: CS-RK3588-BOX): 900g
<b>Mounting</b>	CS-A76-BOX (PN: CS-RK3588-BOX): Rear, VESA

## Key Features

- 1** The USB-A host (near RJ45) and USB-C **can't be used** at the same time. Before boot into OS, USB-C is enabled for install OS image; after boot into OS, USB-A is enabled but USB-C is disabled. In Android, these can be configured; in Linux, these can't be configured.
- 2(1,2)**This product has 6 x UART channels in total. The default configuration is 2 x RS232 and 3 x RS485, including 1 debug port. CAN0 can be configured to RS232. UART can be swapped between RS232 and RS485 modes easily, if you need a different RS232/RS485 configuration, please get in touch with the Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com)

## Power Input

The CS-A76-BOX Industrial PC can be powered by a wide range of input voltages: From 6V to 36V (supports **optional** 24V ignition signal) DC.

There are two DC input interfaces on this device: a **3-pin, 3.81mm terminal**, and a **2.1mm I.D x 5.5mm O.D x 9.5mm DC connector**.



*Power Input*

Note that the "+" sign represents the positive power input. The "-" terminal is shorted to the ground.

### Default Connector

By default, the 3 pins are +, - and ground.

Power Input Definition		
Pin Number	Definition	Description
Pin 1	Positive Input	DC Power <b>Positive Terminal</b>
Pin 2	Negative Input	DC Power <b>Negative Terminal</b>
Pin 3	Ground	<b>Power System Ground</b>

*Power Connector*

#### Note

The system ground "G" is connected to power negative "-" on board.

## DC Jack

For a proper 2.1mm x 5.5mm x 9.5mm DC power connector, refer to the figure below::



## Ignition Signal

The product has a “ignition signal” **optional** feature. By default the ignition signal is not installed. If you need this feature you can contact us when placing an order. In this setup, Pin 3 is the ignition signal pin.

The DC jack doesn’t support ignition signal.

To use this feature, apply a 24V DC input (relative to -) to Pin 3. If Pin 3 detects a low input voltage, the product will be shutdown. If Pin 3 detects a high input voltage, the product will be boot and running.



*Power Input (with Ignition Signal)*

Power Input Definition		
Pin Number	Definition	Description

Power Input Definition		
Pin 1	Positive Input	DC Power <b>Positive Terminal</b>
Pin 2	Negative Input	DC Power <b>Negative Terminal</b>
Pin 3	Ignition	<b>Ignition Signal</b>

Power Connector with Ignition Signal

## Connectivity

There are many connectivity options available on the CS-A76-BOX industrial PC. It has 2 x USB 3.0 HOST, 1 x USB Type-C, 2 x RJ45, GbE (RJ45) Ethernet connector supporting up to 1 Gbps, and 5 x UART terminals (RS232/RS485), 2 x CAN.

### RS232/RS485/CAN

The serial communication interfaces (RS485, RS232, and CAN) are routed to a **16-pin 3.81mm terminal**, as illustrated on the figure below.



RS232 RS485 CAN Pins

The table below offers more detailed description of every pin and its definition:

Pin Number	Definition	Description	OS Node
Pin 16	CAN1_H	CPU CAN2_M1, CAN H signal	
Pin 15	CAN1_L	CPU CAN2_M1, CAN L signal	CAN1
Pin 14	CAN0_H	CPU CAN1_M1, CAN H signal	
Pin 13	CAN0_L	CPU CAN1_M1, CAN L signal	CAN0

Pin Number	Definition	Description	OS Node
Pin 12	RS485_5-	CPU UART1, RS485 -(B) signal	
Pin 11	RS485_5+	CPU UART1, RS485 +(A) signal	/dev/ttyS1
Pin 10	RS485_4-	CPU UART0, RS485 -(B) signal	
Pin 9	RS485_4+	CPU UART0, RS485 +(A) signal	/dev/ttyS0
Pin 8	RS485_3-	CPU UART4, RS485 -(B) signal	
Pin 7	RS485_3+	CPU UART4, RS485 +(A) signal	/dev/ttyS4
Pin 6	RS232_0_RXD	CPU UART6, RS232 RXD signal	
Pin 5	RS232_0_TXD	CPU UART6, RS232 TXD signal	/dev/ttyS6
Pin 4	RS232_2_RXD	CPU UART2, RS232 RXD signal, Debug Port	
Pin 3	RS232_2_TXD	CPU UART2, RS232 TXD signal, Debug Port	/dev/ttyFIQ
Pin 2	GND	System Ground	
Pin 1	+5V	System +5V Power Output, No more than 1A Current output	

### RS232 / RS485 / CAN Pin Definition


#### ⚠ Attention

1. RS485\_3, RS485\_4 and RS485\_5 can control the input and output direction automatically. There's no need to control it from within the software.
2. The 120Ω match resistor for the RS485 is mounted by default.
3. The 120Ω match resistor for the CAN bus is NOT mounted by default.

## USB Connectors

There are 2 x **USB HOST** and 1 x **USB DEVICE** (for flashing OS) ports onboard: 2 x USB 3.0 HOST, 1 x USB Type-C, as shown in the figures below.

The USB-A host (near RJ45) and USB-C **can't be used** at the same time. Before boot into OS, USB-C is enabled for install OS image; after boot into OS, USB-A is enabled but USB-C is disabled. In Android, these can be configured; in Linux, these can't be configured.

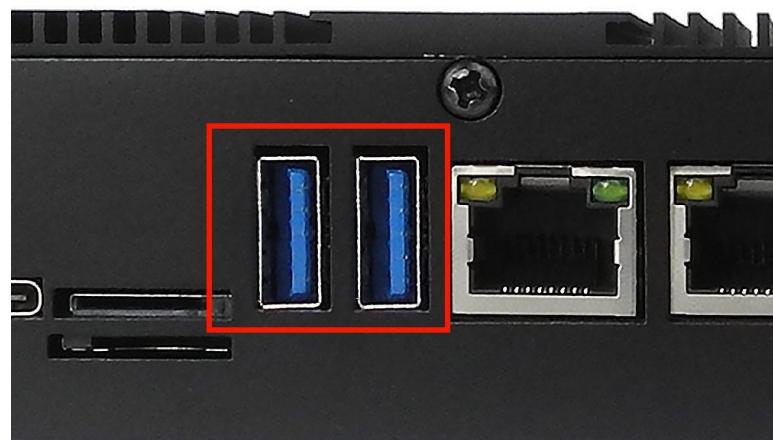

USB 3.0 HOST Port



USB Type-C Port

### ⚠ Warning

Be careful not to touch surrounding electronic components accidentally while plugging USB devices into the embedded IPC version.

## LAN Connectors

**LAN (RJ45) connector** provides 2 x RJ45 Ethernet connectivity over standardized Ethernet cables as shown in the figure below. The integrated Ethernet interface supports up to 1 Gbps data throughput.



*RJ45 LAN Connector*

 **Note**

Use CAT5 or better cables to achieve full data throughput over maximum distance defined by the 1000BASE-T standard (100m).

## WiFi & BT Module

The CS-A76-BOX Industrial PC is equipped with the WiFi-6 **Realtek RTL8852BE WiFi/BT** chip (through CPU PCIe lane) which supports Bluetooth V2.1+EDR/4.2/5.2, as well as IEEE802.11a/b/g/n/ac/ax 2.4/5 GHz Wireless LAN (WLAN).



*Realtek RTL8852BE Chip*

The CS-A76-BOX includes an SMA connector for an external WiFi/BT antenna, as illustrated in the figure below.



*WiFi+BT Antenna SMA*

## 4G/LTE Module


The CS-A76-BOX Industrial PC is equipped with a **mini-PCIe connector** (through USB CPU lane) that can connect an **optional** 4G/LTE module. The customer will also need a SIM Card Holder and a 4G/LTE antenna connector to ensure 4G/LTE works on the CS-A76-BOX. SIM card does **NOT** support hot plug. **Power off** before inserting or removing SIM card.



*Mini PCI-e and 4G/LTE Module*



*4G/LTE Antenna*

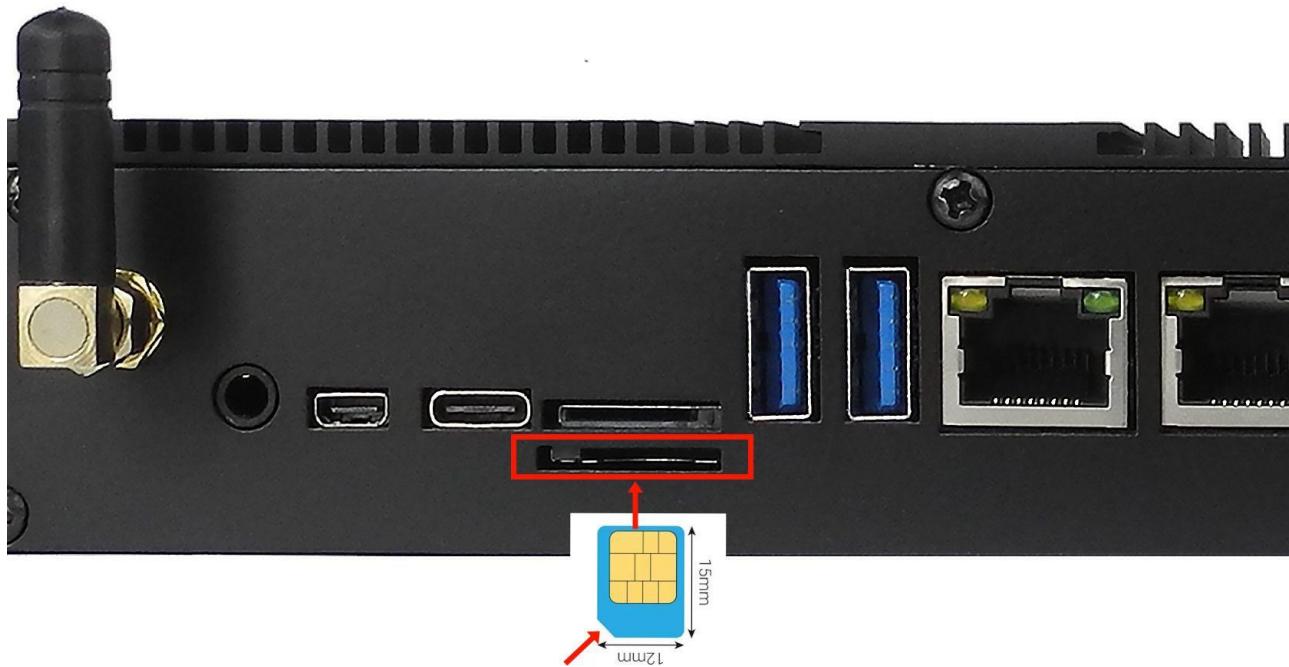

### SIM Card Direction

#### **⚠ Attention**

The product does not come shipped with the 4G/LTE module by default. The customer can choose the 4G/LTE module option when placing an order, we will install all the necessary components.


## GPIO

The CS-A76-BOX Industrial PC features a **10-pin 3.81 mm terminal** that provides 8 x opto-isolated GPIO pins, of which 4 x are output, and 4 x are input pins. The 10-pin terminal also includes an isolated PSU input in the range of 5 to 24 VDC. The exact pinout is given in follow table.

The GPIO **HIGH** output level corresponds to the voltage connected at the isolated Power Input, while the GPIO **LOW** output level corresponds to the isolated Ground Input. Each GPIO output can drive loads up to 500mA, enough to drive various applications directly, such as relays or solenoid valves.



GPIO Terminal

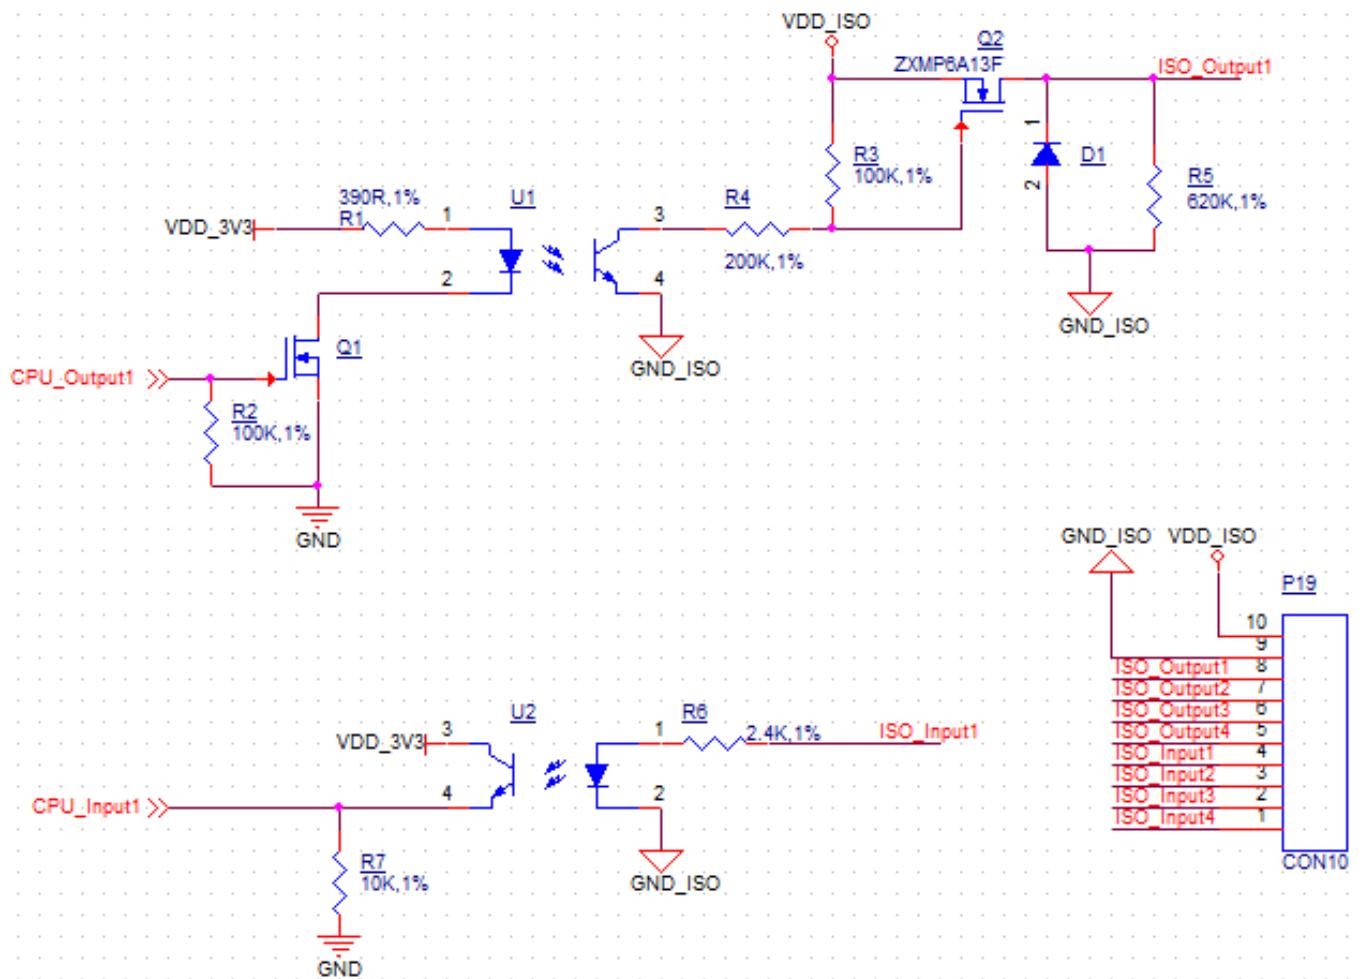

Isolated GPIO reduced schematic

Pin Number	Definition	GPIOD Chip	GPIO Line
Pin 1	Isolated Power Input <sup>3</sup>		
Pin 2	Isolated Ground Input		
Pin 3	OUT1	4	14
Pin 4	OUT2	4	13
Pin 5	OUT3	4	8
Pin 6	OUT4	4	7
Pin 7	IN1	4	6
Pin 8	IN2	1	9
Pin 9	IN3	1	8
Pin 10	IN4	1	6

GPIO Pinout

- 3 If the isolation is not a requirement, it is possible to use a non-isolated PSU instead.

It is also possible to use the onboard 5V power supply: it can be re-routed to the *Isolated Power Input* pin by populating two PCB resistor footprints with  $0\Omega$  resistors.

Note that in this case, the *Isolated Power Input* pin will become an output for the onboard 5V power supply.

## TF Card Slot

The CS-A76-BOX Industrial PC features 1 x **TF Card (micro SD) slot**. TF Card can address up to 128GB of storage.



*TF (micro SD) Card Slot*

 **Note**

The product does not come shipped with the TF Card by default.


## Audio Connectors

The CS-A76-BOX Industrial PC features some audio peripherals. It has a **3.5mm audio input/output jack**, an **internal speaker**, as well as a small **buzzer**.



*Audio Connector (enclosed PC version)*

The miniature 2W embedded speaker is handy for audio reproduction, the small buzzer can play alarm/notification sounds.

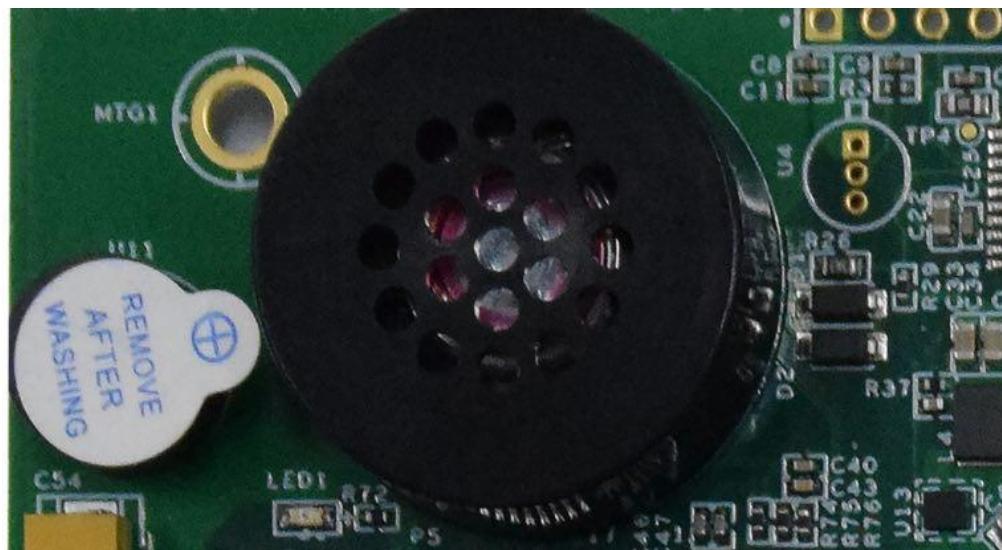

*2W Micro Speaker and Buzzer*

### ⚠ Attention

By plugging in the headphone cable, the internal speaker will be disabled automatically.

## HDMI Connector

The CS-A76-BOX Industrial PC is equipped with 1 x HDMI-D (Micro-HDMI) Out port. The HDMI connector allows connecting an additional (external) monitor. HDMI output resolution can be configured by the software.



*HDMI Connector*

## PROG Button

The CS-A76-BOX Industrial PC has one button on the board marked as PROG, as shown in the figure below.

When the button is pressed before powering up, the CS-A76-BOX will enter MASKROM mode. In this mode you can use a USB Type-C cable to upgrade its operating system. You can use this feature to flash another OS to the internal eMMC.

When the button is not pressed before and during power up, the CS-A76-BOX will boot normally.

There is no need to press the button during regular operation. However, if you need to flash the OS in MASKROM mode, the button will be used. Please refer to the [software documents](#) for more information.



*PROG Button*

## Mounting Procedure


You can mount CS-A76-BOX with VESA mounting ([guide](#)): **75 x 75** mm, 4 x **M4** (6mm) screws.

You can also mount CS-A76-BOX with rear mounting method ([guide](#)).

# Mechanical Specifications

For CS-A76-BOX, the outer mechanical dimensions are 209 x 125 x 37.3mm (W x L x H).

Please refer to the technical drawing in the figure below for details related to the specific product measurements.

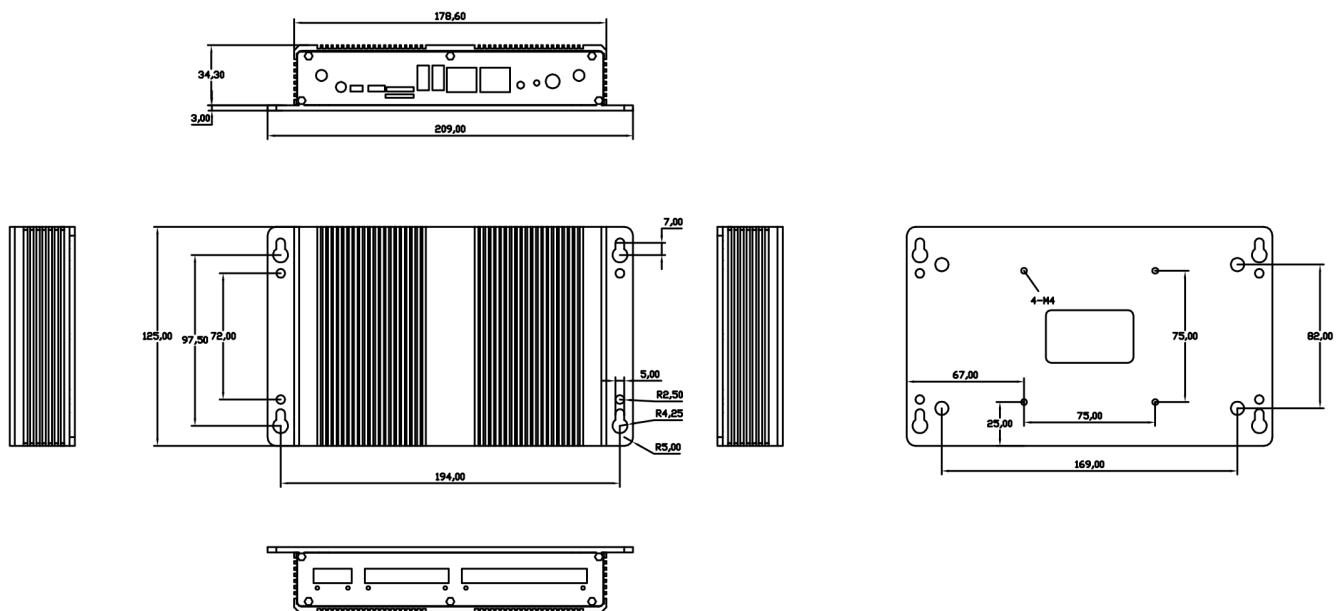

CS-A76-BOX Technical Drawing

## Disclaimer

**This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.**

**While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.**

**Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.**

## Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com), providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.