



Industrial PC

HPC-MT6771-080



PN: HPC-MT6771-080

Content can change at anytime, check [documentation website](http://www.chipsee.com) for latest information.
www.chipsee.com


Contents

1. HPC-MT6771-080	3
1.1. Overview	4
1.2. Standard Accessories	5
1.3. Optional Modules	6
1.4. Hardware Specification	6
1.5. Connectivity	8
1.5.1. TF Card and SIM Card	8
1.5.2. NFC	9
1.5.3. Scanner	10
1.5.4. Serial Port	11
1.5.5. Bottom Pogo Pins	12
1.5.6. Rear Pogo Pins	13
1.5.7. Fingerprint Module	13
1.5.8. USB	14
1.5.9. Ethernet	15
1.6. Charging	15
1.7. Buttons	17
1.8. Dimension	18
1.9. While Using the Device	18
1.9.1. USB	18
1.9.2. Cleaning	19
1.9.3. Case and Panel	19
1.9.4. Before Moving the Device	19
1.9.5. When Not Using the Device	19
1.9.6. Faults	19
1.9.7. Others	19
1.10. Safety	20
1.11. Trouble Shooting	21
1.12. Disclaimer	22
1.13. Technical Support	22

HPC-MT6771-080




Front View

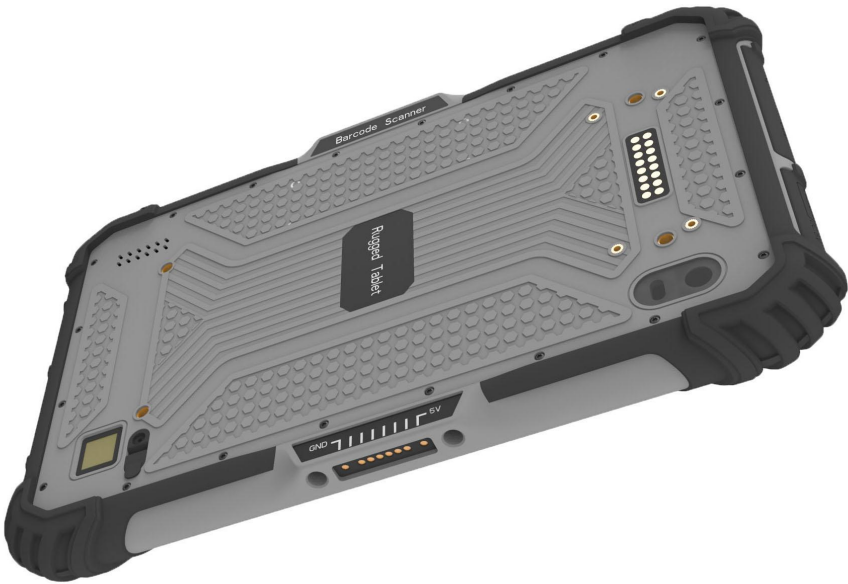

Rear View



Side View 1

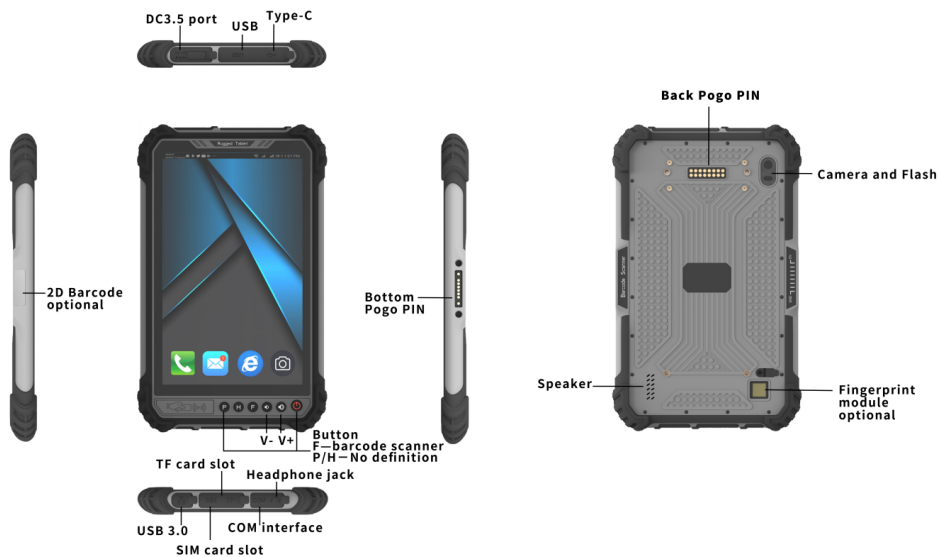

Side View 2

Overview

The HPC-MT6771-080 Handheld Tablet PC is an 8.0 inch rugged tablet PC, it's waterproof, dustproof, suitable for outdoor operation scenarios, especially in warehousing, supermarkets, medicare, retail and other fields.

The device supports 2D barcode scanner and RFID, it takes advantage of LAN, GPRS, 4G, WiFi, Bluetooth and other wireless communication channels to transmit data at a high speed efficiently. This portable handheld tablet complies with IP-65 protection level, it can be used in harsh environments.

This tablet PC adopts a 1200 x 1920 capacitive 10 point touch screen, it supports Android 11 operating system. It is easy to use, meets various needs, responsive and efficient.

Standard Accessories

- 1 x 5V/3A Charger.
- 1 x Hand strap.
- 1 x Screen Protector



The standard accessories include a hand strap. When you use the strap, notice the installation directions, as shown in the image below: 1 - 4 or 2 - 3 are the correct strap installation directions.



Optional Modules

The HPC-MT6771-080 **does not** include the following modules, you may purchase these optional modules from our online store while placing an order.

- 1. **Fingerprint module:** 1020A fingerprint identification module / ZAZ-0A0 module.
- 2. **2D/1D scanner module:** N1 Scanner module / SE4710 Scanner module.
- 3. **Ultra high frequency (UHF) RFID:** internal / external, US / EU.

Hardware Specification

CPU	Helio P60, MediaTek MT6771, Octa(8)-Core 2.0GHz, 4 x Cortex-A53 + 4 x Cortex-A73 @ 2.0 GHz(Max)
GPU	Mali-G72, 800MHz(Max)
RAM/Storage	4GB+64GB/6GB+128GB Embedded Multi Chip Package(eMCP)

CPU	Helio P60, MediaTek MT6771, Octa(8)-Core 2.0GHz, 4 x Cortex-A53 + 4 x Cortex-A73 @ 2.0 GHz(Max)
Display	8.0-inch(diagonal), 1200x1920, 400 NIT
LCD	IPS; Active Area: 107.64(H)x172.22(V)
Touch	Capacitive, 10-point Multi Touch, Surface Tempered Glass + Sensor Glass
Camera	13MP Main Rear Camera, 5MP Front Camera, Flashlight, Autofocus
Audio	1.5W/8Ω Internal Speaker; 1 x 3.5mm Audio Jack
Microphone	Sensitivity: -32±2dB, Output Impedance: 2.2kΩ
USB	1 x USB2.0 Type-A, 1 x USB Type C (Download, Charging), 1 x USB2.0 (Through Rear Pin), 1 x USB2.0 (Through Bottom Pin)
Charging	DC 5V/3A 3.5 mm Terminal; Pogo Pin (Through Bottom Pin); USB Type-C
Battery	3.8V, 7800mAh, Unremovable Li-ion Polymer Battery, 15+ Hours Video Playback(70% Volume, 70 Brightness, 1080P Video Playback); 200 hours(idle)
Buttons	Power Button, Volume+/- Buttons, 1 x F Button(Scanner), 1 x P(No definition), 1 x H(No definition)
SIM Slot	1 x SIM Slot
TF Slot	1 x TF Slot
GSM/GPRS/EDGE	850/900/1800/1900
TD-SCDMA	B34/B35/B36/B37/B38/B39/B40/B41/B42/B43
WCDMA	B1, B2, B5, B8
4G/LTE	FDD-LTE: B1/B2/B3/B4/B5/B7/B8/B10/B12/B13/B14/B17/B20/B23/B24/B25/B26; TDD-LTE: B34/B38/B39/B40/B41/B66
Ethernet	1 x RJ45 10/100Mbps (Through USB3.0, port is USB3.0)
RS232	1 x RS232 (Through MiniUSB)
WiFi	802.11 a/b/g/n/ac, 2.4G+5G
Bluetooth	BT4.0, BLE, Backwards Compatible
GPS	Support for GPS/BeiDou/GLONASS; Acquisition Sensitivity: -163dBm
NFC	PN553 module, Support for ISO/IEC14443, ISO/IEC15693, MIFARE, Felica; Distance: 3-5cm; Front NFC
Fingerprint	Support for 1020A Module(optional): 150 Fingerprints, Identification Time < 1 Second, Recognition Mode is 1 : N Recognition or 1 : 1 Authentication
Barcode Scanner	Supported for N1 Scanner module / SE4710 Scanner module(optional)
Sensors	Air Pressure Sensor, Distance Sensor, Light Sensor, Electronic Compass, Gyroscope, Accelerometer
OS	Android 11

CPU	Helio P60, MediaTek MT6771, Octa(8)-Core 2.0GHz, 4 x Cortex-A53 + 4 x Cortex-A73 @ 2.0 GHz(Max)
Operating Temp.	From -20°C to +60°C
Storage Temp.	From -25°C to +80°C
Waterproof	IP65; Designed for IP67
Dropping Proof	1.2m, Six Sides
Dimensions	234 x 144 x 16.8 mm
Weight	650g
Accessories	5V/3A Charger, USB Type-C Cable

Table 311 Hardware Specification

Connectivity

TF Card and SIM Card

The HPC-MT6771-080 supports one SIM card and one TF card. To insert a TF card or SIM card, check the image below for the correct direction.



NFC

The HPC-MT6771-080 has one NFC module. By default, NFC is enabled in the Android OS. If NFC is not responding, please go to system settings to check if NFC is enabled. If NFC is enabled, but is still not working, try rebooting the device then test NFC again.



Scanner

When using a scanner to scan 1D/2D barcode or QR code, first ensure the scanner switch is toggled to "ON" in the system setting.

While holding the "F" button, the scanner's led will be turned on, then you can aim the scanner at 1D barcode or 2D barcode, the code data will appear on the screen.



Serial Port


RS232	Port
Mini USB	/dev/ttysWK1

There is a Serial Chat app installed in the Android system, you can use a mini USB cable to connect the RS232 port (protocol is RS232, data is transmitted through mini USB) and test with the app.



Bottom Pogo Pins

The bottom pogo pin supports charging the device in a dock, here is the pin definition:

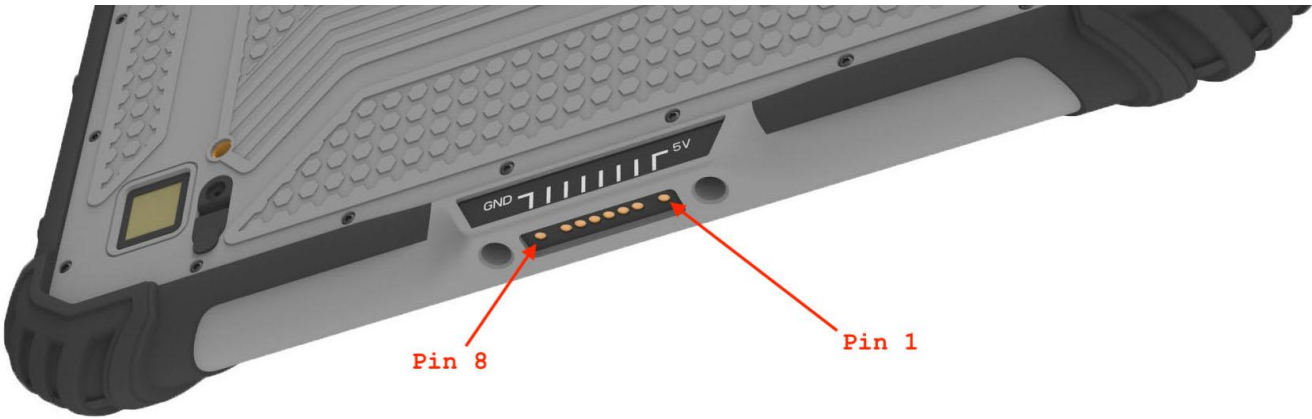

Pin	Definition	Note
Pin 1	VCHG(5V IN)	Charging
Pin 2	VBUS(5V OUT)	OTG
Pin3	DM3	USB2.0
Pin4	DP3	USB2.0
Pin5	GND	
Pin6	RS232-TX0(Not supported on Android)	
Pin7	RS232-RX0(Not supported on Android)	

Pin	Definition	Note
Pin8	GND	Charging


Rear Pogo Pins

The rear pogo pins are reserved for customization, they do not have functionalities out of factory.



Fingerprint Module


There is an **optional** fingerprint module (Biovo 1020A) on the device. To use the module, ensure the system fingerprint module setting switch is “ON”. If you need this module, we will install it for you.

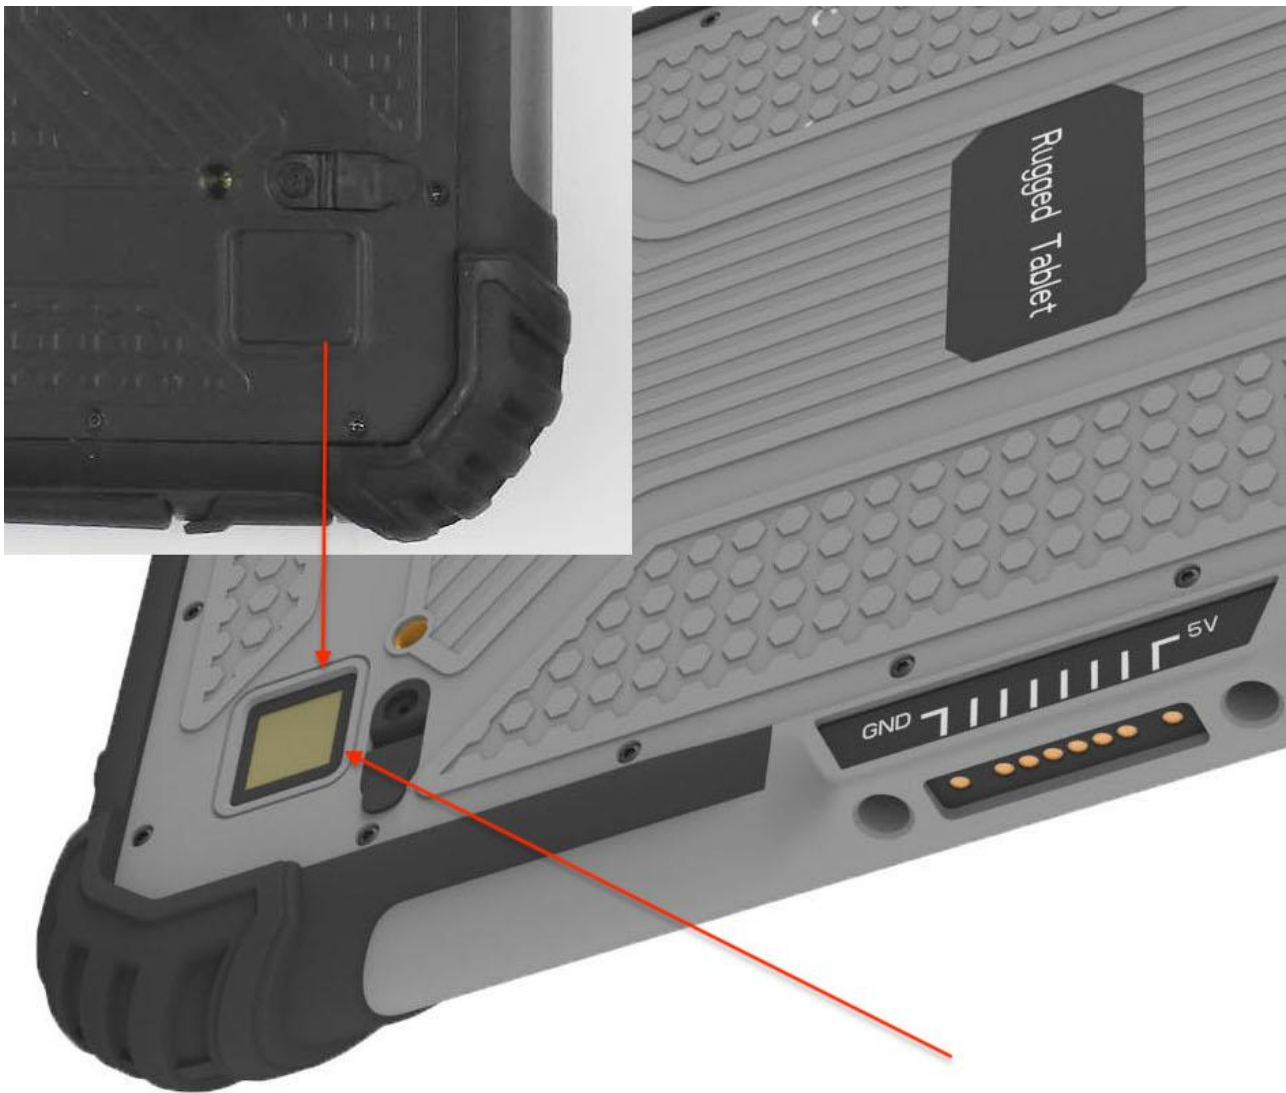

USB

There is a software OTG switch in the system setting. When USB OTG is toggled to “OFF”, USB-C is enabled, USB-A is disabled. When OTG is toggled to “ON”, USB-C is disabled, USB-A is enabled.

USB-A port and USB type-C port are mutually exclusive, they **cannot** be used at the same time.

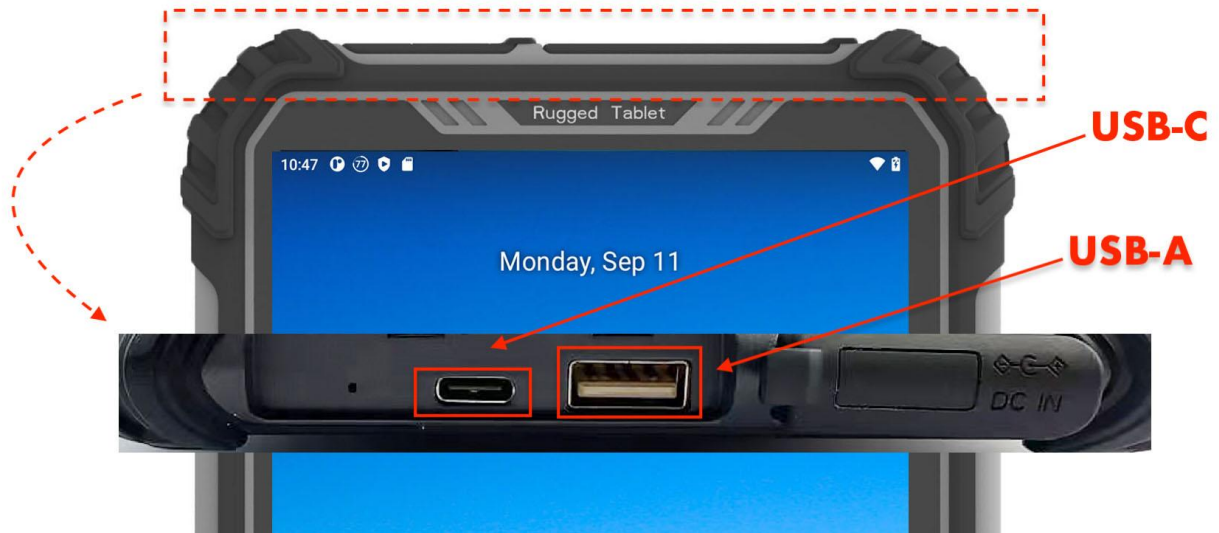

Ethernet

The HPC-MT6771-080 supports Ethernet through a USB3.0 type-A port.




Charging

The HPC-MT6771-080 can be charged through:

1. 5V/3A DC charger.
2. USB-C port.
3. Rear Pogo Pin.

The HPC-MT6771-080 ships with a 5V/3A charger; you can charge the device through the DC input port on the top of the product.

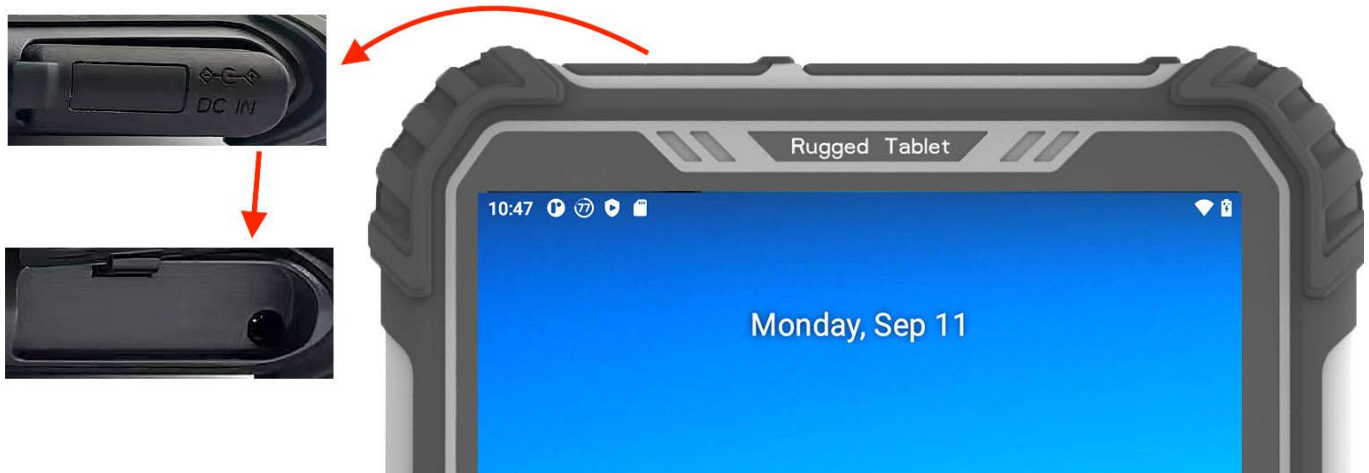

The product ships with a DC charger.



Alternatively, you can also charge the device through its USB-C port on the top of the product.


The HPC-MT6771-080 also provides an **optional** dock for charging.



Buttons

There are several buttons on the device, here is how to use them.

Key P/H are reserved for customization, they have no functionality out of factory. If you need to use them, please contact us when placing an order, we will customize it for you.

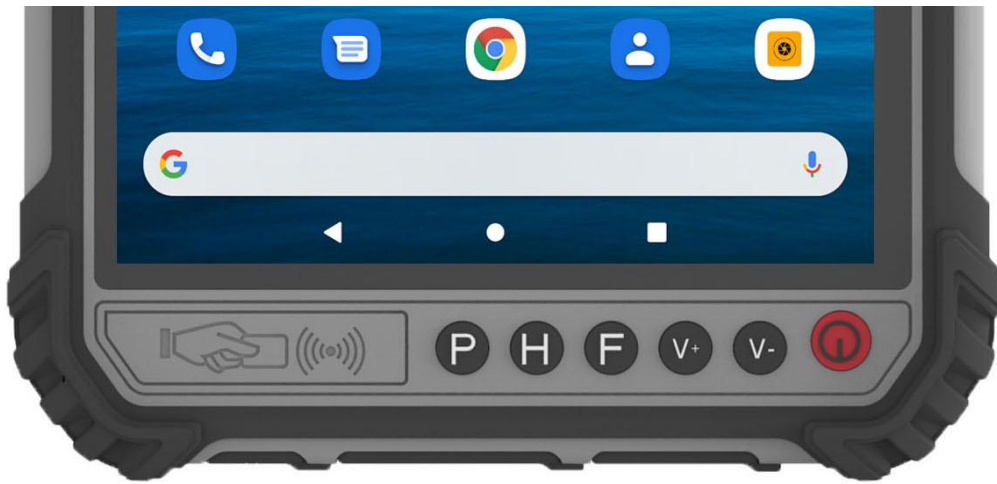

1. Power Button

- Short press: wake the device/put the device to sleep.
- Long press: turn on/off the device, emergency call, reboot.

2. Volume up/down

- Press: adjust volume to high/low.
- Press volume up *and* power button: turn on vibrate.
- Press volume down *and* power button: screenshot.

3. The P/H/F buttons

- F: **scanner** button.
- P: customizable button, key 184, reserved for customization, no functionality out of factory.
- H: customizable button, key 185, reserved for customization, no functionality out of factory.

Dimension

The dimension of HPC-MT6771-080 is 234 x 144 x 16.8 mm.

While Using the Device

USB

Do not short circuit the ports with metal, it might damage the circuits inside the device.

Cleaning

Please use dry, soft cloth when cleaning. Do not use chemical solvent, or the color might fade and the case might deformate.

Case and Panel

Volatiles might damage the case and screen, and might cause malfunction, do not pour those to the case or panel. Also do not put rubber or PVC on the device, long time contact with these materials might damage the device.

Before Moving the Device

Unplug the power cord and cables when carrying the device. After using the device, detach the cables from the ports if there is any.

When Not Using the Device

If the device will not be used for a long time, avoid draining the battery, maintain the battery at a proper interval. The battery performance will degrade when it's at low level for a long time, it will also take longer to charge the battery. If you find it only takes very short time to charge the battery to full, and the device lasts only a short time while you use it, please replace the old battery with a new one.

Faults

When the device emits strange or suspicious noise, smell, or smoke, if possible, power off the device and unplug the power cable immediately, and contact us as soon as possible.

Others

1. Fully charge the battery the first and every time you use it is recommended.
2. If an abnormality occurs in the device, please turn off the device immediately, then reboot it.
3. Avoid exposure to direct strong sunlight or heat, they might affect the internal circuit and the case.
4. Condensation might occur when environment temperature changes rapidly. In this case, wait an hour before using the device, to allow it to adapt to the new environment.
5. Strong electromagnetic fields affect the device's internal circuit, and may cause malfunctions. For example, when transmitting data between the device and a mobile phone, keep the mobile phone at least 1 meter away from the device, because phone generated electromagnetic waves may interfere with communications.

Safety

Please take care of the following aspects when you use this device:

1. Follow the regulations when the device is used in the hospitals.
2. Keep the device and accessories out of children's reach.
3. Put the batteries in e-waste bins if the old batteries are to be recycled.
4. Do not paint the device, because paints affect the peripherals of the device.
5. Keep the device away from precision instruments.
6. Do not use harsh chemicals, harsh detergents or caustic cleaners to clean the device.
When cleaning the device, wipe gently with normal soap water.
7. Do not store or use the device and its accessories in unsuitable high temperature, low temperature, high humidity or very dusty environments.
8. Keep the battery safe, avoid strong shakes or collisions.
9. Keep the device dry. Rain, moisture and various liquids may contain minerals that can corrode the circuits
10. Keep the device away from magnetic devices such as magnetic cards and floppy disks.
Do not put the device, batteries and chargers in electromagnetic fields such as induction cooktops and microwave ovens.
11. Please do not put the device in a high temperature area, as high temperature may shorten the lifespan of electronic devices, damage batteries, and cause plastic parts to deform or melt.
12. Do not keep the device in a cold location because when you move the device from a low temperature location to a normal temperature location, moisture generates inside the device, it can damage the circuit boards.
13. Please use original standard batteries, chargers and other accessories. We will not be responsible if you use third party accessories.
14. Only appointed professionals are allowed to disassemble the device, do not disassemble it by yourself. If the device needs repairing, return the device to us, or contact a professional to repair.
15. Charge the battery to full capacity before it's used for the first time.
16. Take care of the UIM card, avoid scratching or bending.
17. Use the genuine accessories of the device.
18. The device has a built-in antenna, it has radiation like any other mobile devices. Do not get too close to the antenna, take care of your own safety.

19. If the wireless signal is poor, go to the coverage area to take advantage of the wireless communication features.
20. Screen performance might change due to significant temperature changes and long time usage.

Trouble Shooting

If below **situations** occur, please follow the instructions to fix the issues. Contact a professional if none of these help.

• Device Does Not Turn On

- a. *(Not pressing the power button correctly)* Hold the power button for at least 2 seconds.
- b. *(Insufficient power)* Charge the battery.

• Some Applications Do Not Launch

- a. *(Insufficient storage)* Delete unnecessary media and apps, delete downloaded contents.

• Short Standby Time

- a. *(Battery performance degradation)* Replace the battery with a new one.
- b. *(Playing games or music)* Restrict gaming and music playing activities.

• Charging

- a. *(Bad contact)* Check or replace the power cable and plug.
- b. *(Low battery label)* Charge for 30 minutes(charging indicator often does not display), unplug, then plug in the power cable to charge again.
- c. *(Battery faults)* Replace the battery with a new one.
- d. *(Charger faults)* Use a proper charger or repair the charger.
- e. *(Using a wrong charger model)* Use a proper charger.

• Device Turns Off Automatically

- a. *(Insufficient power)* Charge the battery.
- b. *(Settings related)* Check if the device is set to power off automatically intentionally.
- c. *(External interference)* Reboot.

Disclaimer

This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.

While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.

Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.

Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at support@chipsee.com, providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.