




Industrial PC

# PPC-RK3576-050

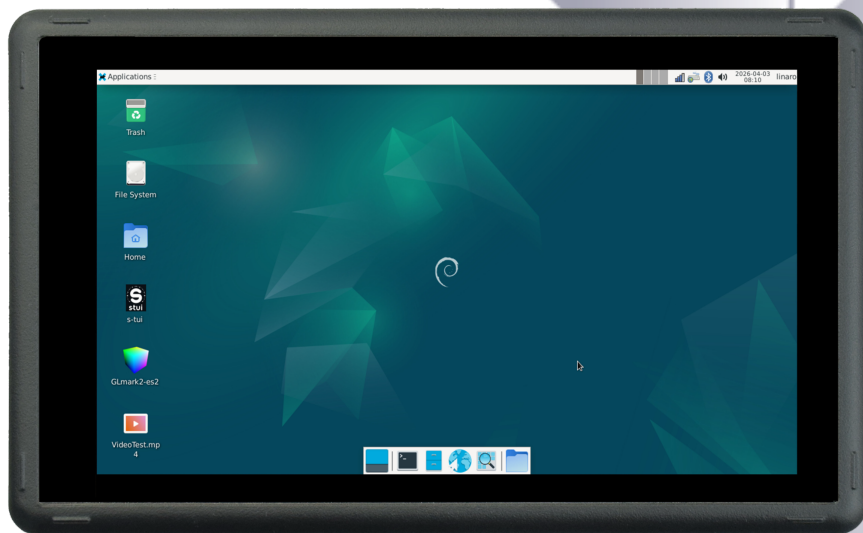

PN: CS12720-RK3576-050P

Content can change at anytime, check our website for latest information of this product.

[www.chipsee.com](http://www.chipsee.com)


# Contents

---

|                               |    |
|-------------------------------|----|
| PPC-RK3576-050                | 3  |
| 1. Product Overview           | 7  |
| 2. Ordering Options           | 8  |
| 2.1. Operating System         | 8  |
| 3. Hardware Features          | 9  |
| 4. Power Input                | 11 |
| 5. Touch Screen               | 13 |
| 6. Connectivity               | 14 |
| 6.1. RS232+RS485+CAN          | 14 |
| 6.2. USB Connectors           | 15 |
| 6.3. LAN Connector            | 17 |
| 6.4. WiFi & BlueTooth Module  | 18 |
| 7. TF Card Slot               | 19 |
| 8. Audio Connectors           | 20 |
| 9. HDMI Connector             | 21 |
| 10. PROG Button               | 22 |
| 11. Mounting Procedure        | 23 |
| 12. Mechanical Specifications | 24 |
| 13. Disclaimer                | 25 |
| 14. Technical Support         | 25 |

# PPC-RK3576-050

## Front View

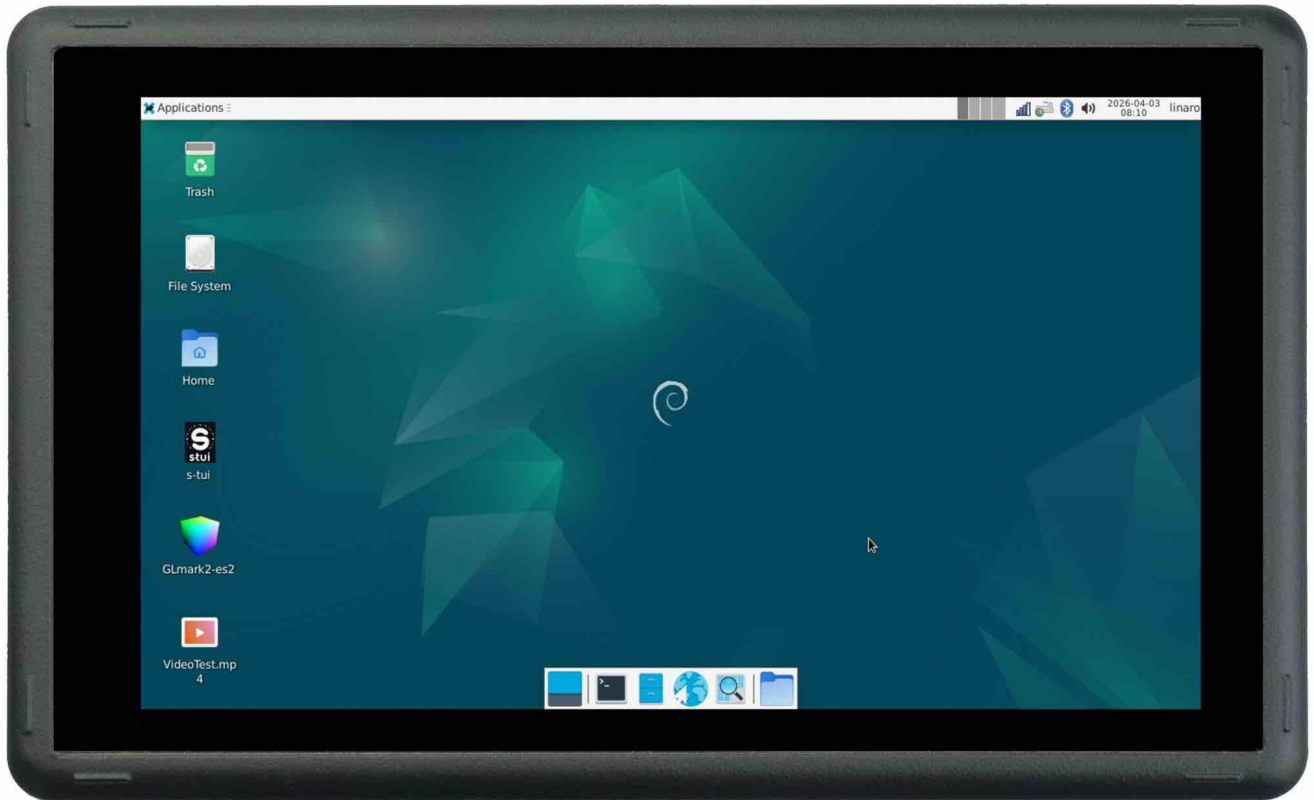

## Rear View



# Side View 1



## Side View 2



## Product Overview

The Cortex<sup>®</sup>-A72+ Cortex<sup>®</sup>-A53 series PPC-RK3576-050 (PN: CS12720-RK3576-050P) is a high-quality IP65-compliant industrial panel PC. This single board computer features a 5.0" 5-point capacitive touch screen with 1mm Armored Glass with a resolution of 1280 x 720 pixels and a brightness of 400 cd/m<sup>2</sup>.

### Key Applications

- Human Machine Interface HMI
- Mobile Applications
- Video Processing
- Machine Learning
- Video Gaming
- Process Control
- Process Monitoring
- ATM...

It is available as a device housed in an aluminum casing with bezels, thus facilitating different installation options:

- Installation on an industrial cabinet
- Integration with the existing equipment

The PPC-RK3576-050 Industrial Panel PC is based around the powerful RK3576 System on Chip (SoC), powered by the Rockchip RK3576 low-power processor which integrates a Quad-core Cortex-A72(1.6GHz) + Quad-core Cortex-A53(1.4GHz) processor, and a 6 TOPS(Sparsity)@INT8 computing power NPU (neural processing unit).

The RK3576 supports multi-format video decoders and has a high-performance 4GB LPDDR5 RAM capable of sustaining demanding memory bandwidth. It also provides a complete set of peripheral interfaces.

## Ordering Options

Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the [Hardware Features](#) section provides information about the default options bundled with the product.

### Note

You can order the [PPC-RK3576-050](#) from the official [Chipsee Store](#) or from your nearest distributor.

## Operating System

This product comes with a pre-installed OS of your choice. Please see the list below for the supported OSes, which can also be obtained from the [Software Documentation](#) section, along with the detailed installation instructions.

- Android 14
- Debian 12
- Buildroot Linux Qt 5.15

### Warning

The [Software Documentation](#) section provides a detailed instruction on how to install different OSes on your own. However, bear in mind that Chipsee can't take the responsibility of inadequate installation procedure. If you "brick" your device, please contact Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com) for further assistance



## Hardware Features

The PPC-RK3576-050 Industrial Panel PC offers a broad range of performance and connectivity options for scalable integration, providing expandability according to future needs. Some of the key features are listed in the table below.

| PPC-RK3576-050 |                                                                                                                                                                                                 |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU            | Rockchip RK3576J, Quad-core Cortex-A72 (1.6GHz) + Quad-core Cortex-A53 (1.4GHz)                                                                                                                 |
| RAM            | 4GB LPDDR5                                                                                                                                                                                      |
| NPU            | 6 TOPS(Sparsity)@INT8                                                                                                                                                                           |
| eMMC           | 64GB                                                                                                                                                                                            |
| Storage        | TF Card, Supports up to 128GB SDHC                                                                                                                                                              |
| PCIe           | N/A                                                                                                                                                                                             |
| Display        | 5.0" LCD, 1280 x 720, High Brightness: 400 cd/m <sup>2</sup>                                                                                                                                    |
| Touch          | 5-point capacitive touch screen with 1mm Armored Glass                                                                                                                                          |
| HDMI           | 1 x HDMI-D (Micro-HDMI) Out                                                                                                                                                                     |
| USB            | 1 x USB 2.0 HOST, 1 x USB 3.0 HOST, 1 x USB Type-C (USB 3.0 port and USB-C port cannot be used at the same time)                                                                                |
| LAN            | 1 x RJ45, GbE                                                                                                                                                                                   |
| POE            | N/A                                                                                                                                                                                             |
| Audio          | 3.5mm Audio In/Out Connector, 2W Internal Speaker                                                                                                                                               |
| Buzzer         | Yes                                                                                                                                                                                             |
| RTC            | High accuracy RTC with farad capacitor, can work 1 week after power off <b>(default)</b> .<br>High accuracy RTC with lithium coin battery, can work 3 years after power off <i>(optional)</i> . |
| RS232          | Default to 2 x RS232 (including 1 debug port). Up to 4 x RS232 by swapping 2 x RS485 to RS232. <sup>1</sup>                                                                                     |
| RS485          | Default to 2 x RS485. Optionally, these 2 x RS485 can be configured to RS232.<br>Optionally, 1 x RS485 can be configured to CAN(CAN0) <sup>1</sup>                                              |
| CAN            | Default to 1 x CAN FD. Optionally, 1 x RS485 can be configured to CAN(CAN0), providing up to 2 x CAN FD.                                                                                        |
| GPIO           | N/A                                                                                                                                                                                             |
| WiFi/BT        | Integrated WiFi/Bluetooth Module                                                                                                                                                                |
| 4G/LTE         | N/A                                                                                                                                                                                             |
| Power Input    | From 9V to 30V                                                                                                                                                                                  |
| Current        | 500mA Max at 15V                                                                                                                                                                                |

| PPC-RK3576-050      |                                                                    |
|---------------------|--------------------------------------------------------------------|
| Power Consumption   | 7.5W Max                                                           |
| Working Temperature | From -20°C to +60°C                                                |
| OS                  | Android 14, Debian12, Buildroot Linux Qt 5.15                      |
| Dimensions          | PPC-RK3576-050 (PN: CS12720-RK3576-050P): 138.55 x 84.70 x 27.10mm |
| Weight              | PPC-RK3576-050 (PN: CS12720-RK3576-050P): 310g                     |
| Mounting            | PPC-RK3576-050 (PN: CS12720-RK3576-050P): Panel, VESA              |

Key Features

1(1,2)This product has 4 x UART by default. The default configuration is 2 x RS232 and 2 x RS485, including 1 RS232 debug port. The 2 x RS485 can be configured to 2 x RS232. UART can be swapped between RS232 and RS485 modes easily, if you need a different RS232/RS485 configuration, please get in touch with the Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com)

## Power Input

The PPC-RK3576-050 Industrial Panel PC can be powered by a wide range of input voltages: From 9V to 30V DC.

There is a DC input interface on this device: a **3-pin, 3.81mm screw terminal** connector. As shown in the figure below.



Power Input

Note that the “+” sign represents the positive power input. The “-” terminal is shorted to the ground.

| Power Input Definition |                |                                   |
|------------------------|----------------|-----------------------------------|
| Pin Number             | Definition     | Description                       |
| Pin 1                  | Positive Input | DC Power <b>Positive Terminal</b> |
| Pin 2                  | Negative Input | DC Power <b>Negative Terminal</b> |
| Pin 3                  | Ground         | <b>Power System Ground</b>        |

Power Connector

Note

The system ground “**G**” is connected to power negative “-” on board.

## Touch Screen

The PPC-RK3576-050 Industrial Panel PC uses a 5-point capacitive touch screen with 1mm Armored Glass. However, the Debian OS supports only One-Point touch.



*Capacitive Touch Connector*

### Attention

A capacitive touch screen is susceptible to power noise and Electromagnetic Radiation (EMR). It may cause LCD ripples or even capacitive touch malfunction. If using a capacitive multi-touch test application, you might notice the touch points float erratically across the display. There are several solutions to this problem:


1. Use a high-quality Power Adapter Unit (PSU) with low EMR. You can also provide power from a battery.
2. Make sure that the PPC-RK3576-050 Power Input connector (pin 3) is properly connected to the Power System Ground to provide sufficient EMI shielding and eliminate the problem entirely.
3. Bad GND problem can also be confirmed by touching pin 3 of the Power Input connector with one hand while operating the capacitive touch screen with the other hand. In this case, the operator's body acts as the Power System Ground.

## Connectivity

There are many connectivity options available on the PPC-RK3576-050 industrial PC. It has 1 x USB 2.0 HOST, 1 x USB 3.0 HOST, 1 x USB Type-C, 1 x network connector (RJ45) supporting up to 1 Gbps, 1 x CAN FD and 4 x UART terminals (RS232/485).

### RS232+RS485+CAN

The serial communication interfaces (RS485, RS232, and CAN FD) are routed to a **12-pin 3.81mm terminal**, as illustrated in the figure below. Serial communication on both RS485 and RS232 interfaces can reach up to 115200 kbps.

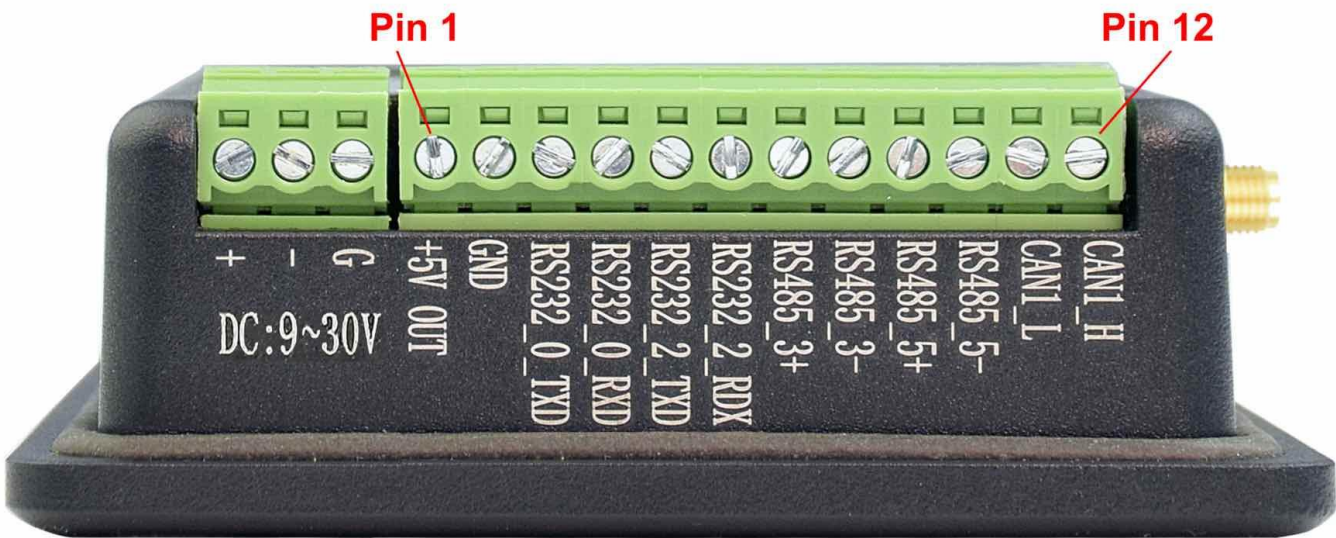

#### Attention

- The 120Ω match resistor for **CAN** bus is **NOT mounted** by default.
- The 120Ω match resistor for **RS485** is **already mounted** by default.
- This product supports changing 2 x RS485 to 2 x RS232, providing up to 4 x RS232 (including one debug port).
- This product supports changing 1 x RS485 to 1 x CAN, providing up to 2 x CAN FD. In this case, Pin 10 is CAN0 H, Pin 9 is CAN0 L, OS node is CAN0.

The table below offers a detailed description of every pin:

| Pin Number | Definition | Description                  | OS Node    |
|------------|------------|------------------------------|------------|
| Pin 12     | CAN1_H     | CPU SPI0, CAN H signal       |            |
| Pin 11     | CAN1_L     | CPU SPI0, CAN L signal       | CAN1       |
| Pin 10     | RS485_5-   | CPU UART5, RS485 -(B) signal |            |
| Pin 9      | RS485_5+   | CPU UART5, RS485 +(A) signal | /dev/ttyS5 |
| Pin 8      | RS485_3-   | CPU UART3, RS485 -(B) signal |            |



| Pin Number | Definition  | Description                                             | OS Node      |
|------------|-------------|---------------------------------------------------------|--------------|
| Pin 7      | RS485_3+    | CPU UART3, RS485 +(A) signal                            | /dev/ttyS3   |
| Pin 6      | RS232_2_RXD | CPU UART2, RS232 RXD signal                             |              |
| Pin 5      | RS232_2_TXD | CPU UART2, RS232 TXD signal                             | /dev/ttyS2   |
| Pin 4      | RS232_0_RXD | CPU UART0, RS232 RXD signal, Debug Port                 |              |
| Pin 3      | RS232_0_TXD | CPU UART0, RS232 TXD signal Debug Port                  | /dev/ttyFIQ0 |
| Pin 2      | GND         | System Ground                                           |              |
| Pin 1      | +5V         | System +5V Power Output, No more than 1A Current output |              |

RS232 / RS485 / CAN Pin Definition for 5 inch product

## USB Connectors


There are 2 x **USB HOST** and 1 x **USB DEVICE** (for flashing OS) ports onboard: 1 x USB 2.0 HOST, 1 x USB 3.0 HOST, 1 x USB Type-C, as shown in the figures below.

### Warning

Please unplug USB mouse/keyboard from the USB3.0 port when flashing OS.

The USB 3.0 type-A host and USB-C **can't be used** at the same time. Before boot into OS, USB-C is enabled for installing OS image; after boot into OS, USB-A is enabled but USB-C is disabled.

In Android, these can be configured, USB3.0 type A is enabled by default, but you can switch to using USB-C in the software for debugging; in Linux, these can't be configured.

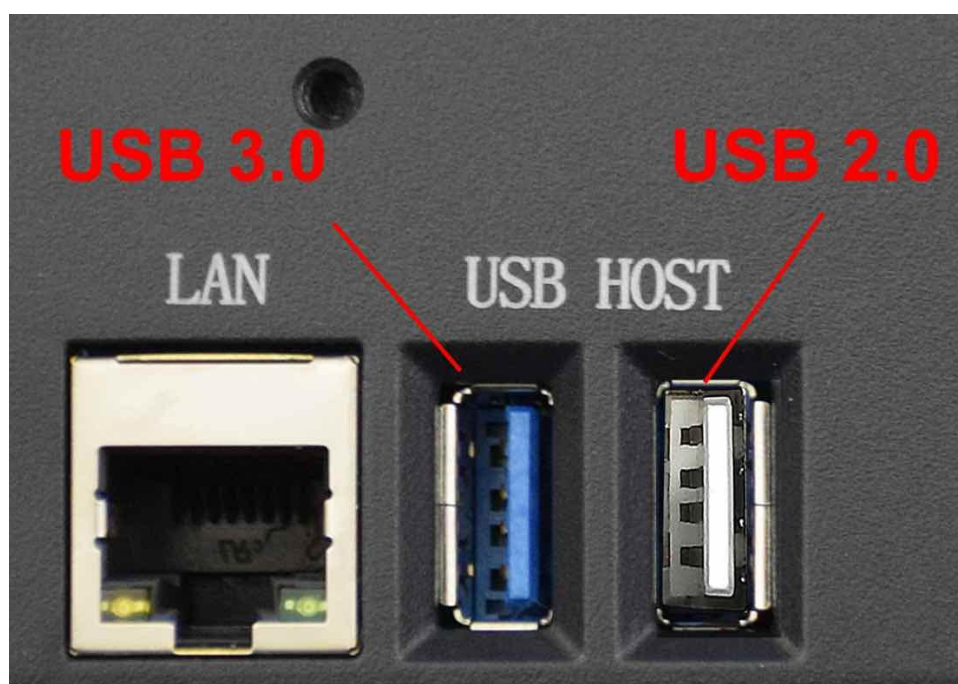


*USB HOST Ports**USB Type-C Port*



## LAN Connector

**LAN (RJ45) connector** provides 1 x RJ45 Ethernet connectivity over standardized Ethernet cables as shown in the figure below. The integrated Ethernet interface supports up to 1 Gbps data throughput.

This product does not support PoE(Power over Ethernet).

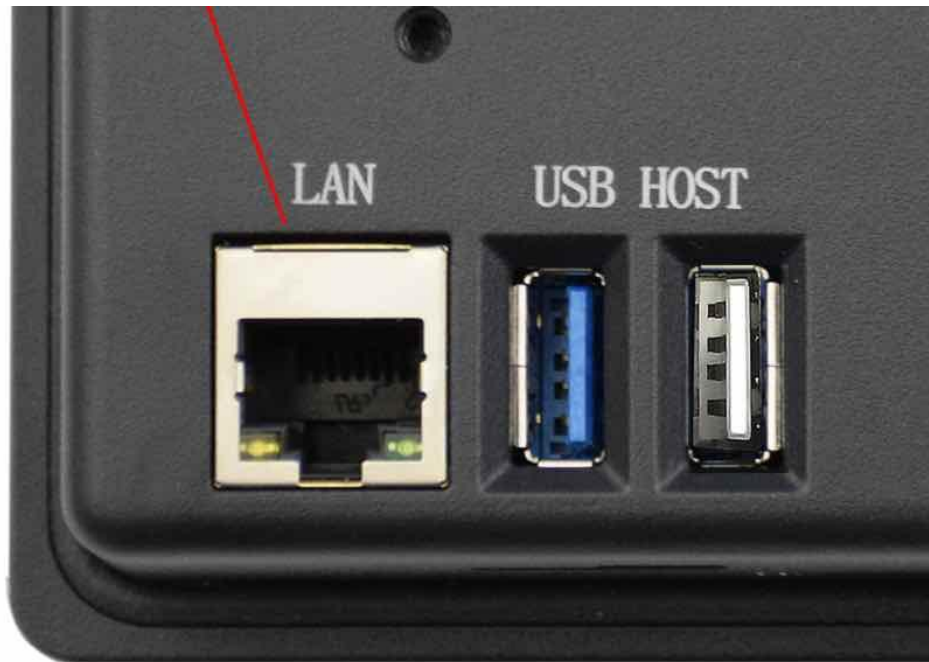

*RJ45 LAN Connector*

### Note

Use CAT5 or better cables to achieve full data throughput over maximum distance defined by the 1000BASE-T standard (100m).

## WiFi & BlueTooth Module

The PPC-RK3576-050 Industrial Panel PC is equipped with the popular **Realtek RTL8821CS WiFi/BT module** which supports BT/BLE 2.1/3.0/4.2, as well as 802.11ac/abgn 433Mbps 2.4/5.8 GHz Wireless LAN (WLAN).



*RTL8821CS WiFi/BT Module*

The PPC-RK3576-050 includes an SMA connector for an external WiFi/BT antenna, as illustrated in the figure below.



*WiFi+BT Antenna SMA*

## TF Card Slot

The PPC-RK3576-050 Industrial Panel PC features 1 x **TF Card (micro SD) slot**. TF Card can address up to 128GB of storage.



*TF (micro SD) Card Slot*

### Note

The product does not come shipped with the TF Card by default.

## Audio Connectors

The PPC-RK3576-050 Industrial Panel PC features some audio peripherals. It has a **3.5mm audio input/output jack**, an **internal speaker**, as well as a small **buzzer**.



*Audio Jack*

The miniature 2W embedded speaker is handy for audio reproduction, the small buzzer can play alarm/notification sounds.




*2W Micro Speaker and Buzzer*

### ⚠ Attention

By plugging in the headphone cable, the internal speaker will be disabled automatically.

## HDMI Connector

The PPC-RK3576-050 Industrial Panel PC is equipped with 1 x HDMI-D (Micro-HDMI) Out port. The HDMI connector allows connecting an additional (external) monitor. HDMI output resolution can be configured by the software.

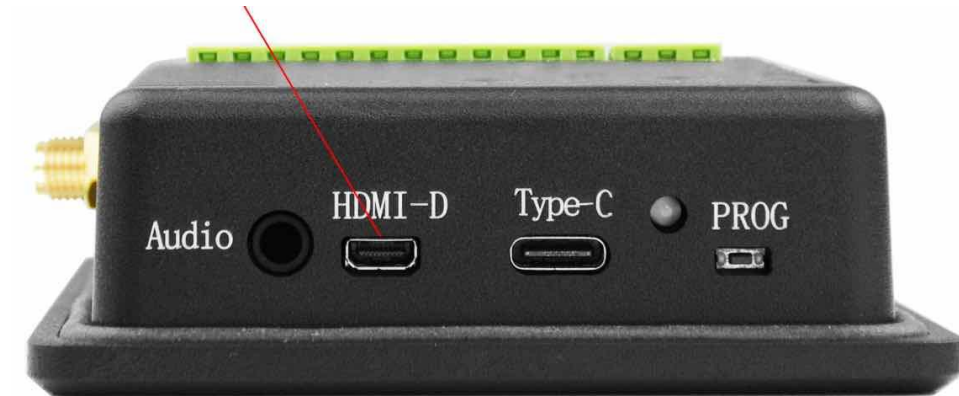

*HDMI Connector*

## PROG Button

The PPC-RK3576-050 Industrial Panel PC has one button on the board marked as PROG, as shown in the figure below.

When the button is pressed before powering up, the PPC-RK3576-050 will enter LOADER mode. In this mode you can use a USB Type-C cable to upgrade its operating system. You can use this feature to flash another OS to the internal eMMC.

When the button is not pressed before and during power up, the PPC-RK3576-050 will boot normally.

There is no need to press the button during regular operation. However, if you need to flash the OS in MASKROM mode, the button will be used. Please refer to the [software documents](#) for more information.



*PROG Button*

## Mounting Procedure

You can mount PPC-RK3576-050 with VESA mounting ([guide](#)): **75 x 75** mm, 4 x **M4** (6mm) screws.

You can mount PPC-RK3576-050 with PANEL mounting ([guide](#)).




### Attention

Please make sure the display is not exposed to high pressure when mounting into an enclosure.

# Mechanical Specifications

For PPC-RK3576-050, the outer mechanical dimensions are 138.55 x 84.70 x 27.10mm (W x L x H).

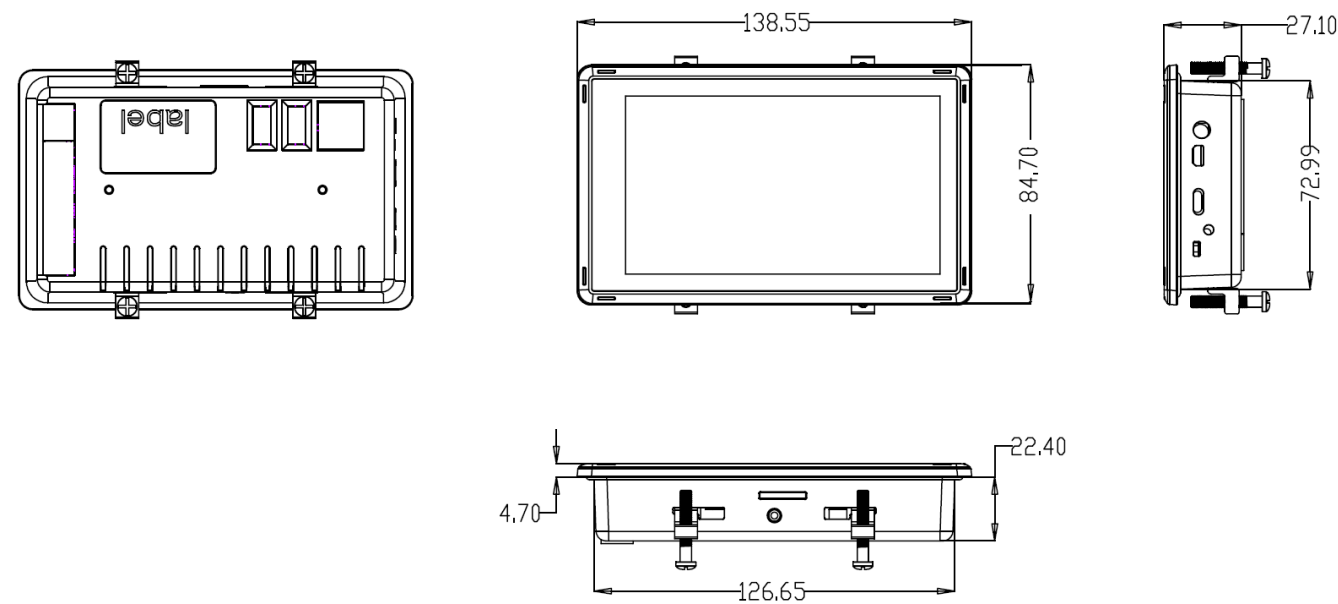

Technical Drawing (PPC-RK3576-050)



## Disclaimer

**This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.**

**While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.**

**Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.**

## Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com), providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.