Chipsee

Rugged Tablet PC

PPC-101-A1X



10.1” Fully Rugged Tablet PC

Content can change at anytime, check our website for latest information of this product.
www.chipsee.com

Contents

1 Product Overview 3

2 Ordering Options 3

2.1 Operating System 4

2.2 Optional Features 4

3 Hardware Features 4

4 Interfaces 5

5 Accessories 6

6 Disclaimer 6

7 Technical Support 7

PPC-101-A1X



Front View



Rear View



Side View 1



Side View 2

1 Product Overview

The PPC-101-A1X fully rugged tablet PC is a 10.1” tablet built for the most demanding environments. It is powered by a 12th Gen Intel® Core™ processor, and its sunlight-readable display stays readable outdoors.

The rugged aluminum alloy chassis is IP65 rated against dust and water, and the tablet works reliably in extreme temperatures. Optionally, it can be made resistant to mold, salt spray and damp heat, and to transportation vibration, vibration and shock, and it can comply with MIL-STD EMC requirements. Its quick-release I/O expansion modules add USB, Ethernet, serial or scanner ports when needed.

2 Ordering Options

Most of the Chipsee products can be customized during the ordering process. The product will be shipped with the factory defaults if no extra requirements are specified. The table in the Hardware Features section lists the default and optional features of the product.

> **Note**
>
> You can order PPC-101-A1X from the official Chipsee Store or from your nearest distributor.

2.1 Operating System

PPC-101-A1X supports Microsoft® Windows 10/11 Pro 64-bit, KylinOS V10 and Linux.

2.2 Optional Features

By default, PPC-101-A1X has no wireless communication module installed. Wi-Fi, Bluetooth, 5G/4G LTE and GPS/GLONASS/BeiDou modules can be selected during the ordering process, as well as the cameras, the fingerprint reader and the expansion modules.

> **Warning**
>
> Installation, repair, and maintenance tasks should be performed by trained personnel only.
> Chipsee does not bear any responsibility for damage caused by inadequate handling of the product.

3 Hardware Features

The key features of PPC-101-A1X are listed in the table below.

Key Features


	PPC-101-A1X
CPU	Intel® Core™ i7-1255U, 10 cores / 12 threads, 12MB cache, up to 4.7GHz or i5-1235U
GPU	Intel® Iris® Xe Graphics eligible
RAM	1 x SO-DIMM DDR4, up to 32GB
Storage	1 x M.2 2280 SSD (SATA), 512GB / 1TB / 2TB
Display Size	10.1”
Display Type	Sunlight-readable LCD
Display Resolution	1920 x 1200 (16:10)
Brightness	Up to 1000 cd/m^2
Touch Technology	Capacitive multi-touch
Glass	Tempered glass
USB	2 x USB 3.0 Type-A
LAN	2 x RJ45, 10/100/1000Mbps auto-sensing
HDMI	1 x HDMI Out
Serial Port	1 x DB9, RS232/RS422/RS485, up to 115200bps
Audio	Speakers, microphone, 1 x 3.5mm combo audio jack
TF/SIM Slot	1 x TF/Nano SIM combo card slot
Antenna	3 x MCX antenna signal enhancement ports

PPC-101-A1X	
WiFi/BT	Wi-Fi, Bluetooth **(optional)**
4G/5G	5G/4G LTE **(optional)**
GPS	GPS, GLONASS, BeiDou **(optional)**
Camera	5MP front and 5MP rear HD cameras **(optional)**
Fingerprint Module	Fingerprint reader **(optional)**
Expansion Port	Quick-release I/O expansion module: 2 x USB 2.0, 1 x GbE and 1 x COM, or 2 x USB 2.0, 1 x GbE and 1 x scanner **(optional)**
Buttons	9 function buttons: Brightness+, Brightness-, Volume+, Volume-, Start menu, Mute, Power, and P1 and P2 with customizable functions
LED Indicator	1 x battery indicator
Battery	14.4V, 7000mAh, 100.8Wh Li-ion battery
Power Input	120W AC/DC power adapter, 19V DC output
OS	Windows 10/11 Pro 64-bit, KylinOS V10, Linux
Dimensions	From 280.0 x 201.0 x 35.0mm
Weight	From 2.5kg, with Li-ion battery
Operating Temp.	From -20°C to +55°C (system unit, excluding battery)
Storage Temp.	From -40°C to +60°C
Shell Material	Aluminum alloy
Waterproof	IP65 (IEC 60529 compliant)
Humidity	95% RH, non-condensing
Vibration	5 to 500Hz, 1.5Grms
Shock	20G peak acceleration (11ms duration)
Environmental Resistance	Mold, salt spray and damp heat **(optional)**
Mechanical Protection	Transportation vibration, vibration and shock **(optional)**
EMC	CE101, CE102, CS101, RE101, RE102 **(optional)**

> **Note**
>
> The battery only operates above -20°C; its performance will degrade below 0°C.
>
> The internal battery is rated for operation from 0°C to +55°C. For environments below 0°C, use of an external power supply is recommended.

4 Interfaces

The figure below shows the interfaces of PPC-101-A1X.

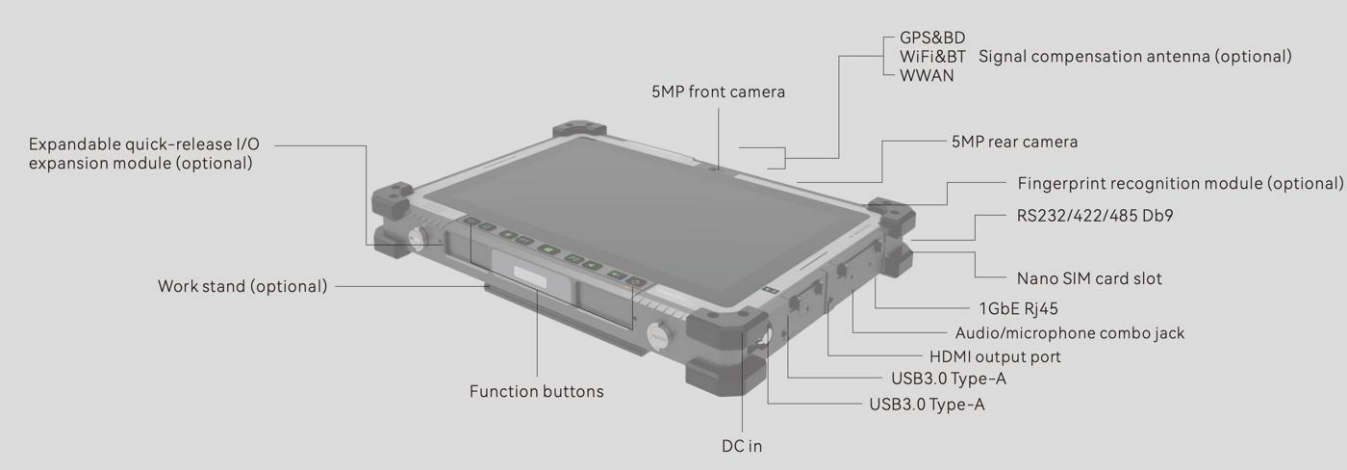

Interfaces of the product

5 Accessories

Accessory	Specification	Supply
Power adapter	120W AC/DC, 19V DC output	Default
Li-ion battery	14.4V, 7000mAh, 100.8Wh	Default
2-point hand strap	Two-point straight quick-release carrying handle	Default
4-point hand strap	4-point quick-release hand strap	Default
DVD drive	USB 8X DVD-RW	Optional
Desktop stand	Desktop mounting stand (with stylus)	Optional
Crossbody bag	Water-resistant fabric single-shoulder carrying bag	Optional
Air suitcase	High-strength polycarbonate carrying case with drop and vibration resistance	Optional

6 Disclaimer

This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.

While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.

Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.

7 Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at **support@chipsee.com**, providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.