Chipsee

Industrial Display

# PIM-156-P



PN: CS-D156P

**Revision 1.2**

Content can change at anytime, check our website for latest information of this product.
**www.chipsee.com**

# Contents

1 Product Overview 3

2 Ordering Options 3

3 Specification 4

4 Mounting Procedure 5

5 Mechanical Specifications 5

6 Disclaimer 6

7 Technical Support 6

# PIM-156-P



Front View




Rear View



Side View

## 1 Product Overview

PIM-156-P (PN: CS-D156P) is a 15.6” industrial display that features a 10-point capacitive touch screen with a 1920 x 1080 (16:9) resolution and a brightness of 450 cd/$m^2$. The front glass (3.0mm Tempered Glass with Black Silk-screen) keeps the screen water and steam resistant.

The typical power consumption is ≤ 24W, while in standby mode, PIM-156-P uses around ≤ 2W, making it ideal for all kinds of applications.

## 2 Ordering Options

Most of the Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the Specification section provides information about the product.

> **Note**
>
> You can order PIM-156-P from the official Chipsee Store or from your nearest distributor.

# 3 Specification

### Key Features

| PIM-156-P | |
|---|---|
| **Display Size** | 15.6” |
| **Display Resolution** | 1920 x 1080 (16:9) |
| **Brightness** | 450 cd/$m^2$ |
| **Contrast Ratio** | 800:1 |
| **Viewing Angle** | Horizontal: 160°(min)~170°(typ) / Vertical: 160°(min)~170°(typ) |
| **Display Color** | 16.2M Colors |
| **Response Time** | 13ms |
| **Refresh Frequency** | 60Hz |
| **Backlight** | LED |
| **Glass** | 3.0mm Tempered Glass with Black Silk-screen |
| **Touch Technology** | Projecting Capacitance (G+G) |
| **Touch Point** | 10 |
| **Type of Pen** | Fingers, Hands with Gloves, Conductive Stylus |
| **Waterproof** | Touch surfaces will not be affected by water droplets or steam |
| **Calibration** | No Calibration Tool |
| **Multi Touch Protocol Support** | Based on the operating system of the host PC |
| **Connect** | 1 x USB 2.0 (Type-B) |
| **Connector** | VGA / HDMI |
| **Input Resolution** | 1920 x 1080 (16:9) @ 60Hz |
| **Operating System** | N/A |
| **Built-in Speaker** | N/A |
| **OSD Control** | Button |
| **OSD Language** | Multilingual Support |
| **Power Input** | 12V 3A DC**(default)**, 9-30V **(optional)** |
| **Power Supply** | ≤ 24W |
| **Standby Power** | ≤ 2W |
| **Dimensions** | 400 × 256 × 52.5mm |
| **Weight** | 4500g |
| **Mounting Methods** | VESA and PANEL |

| PIM-156-P | |
|---|---|
| **Packaging Size** | 440 x 325 x 90mm |
| **Work Environment (temp.)** | From -30°C to +85°C, 90% RH (No condensation) |
| **Storage Environment** | From -30°C to +85°C, 90% RH (No condensation) |
| **Accessories** | Mounting Clip / HDMI Cable / USB Cable / Power Adapter |

# 4 Mounting Procedure


The PIM-156-P industrial display supports VESA 100 x 100 mounting pattern with 4 x M4 screws, enabling simplified installation onto any standard VESA mounting rack. Other mounting options might also be supported according to the table in the Specification section.

You can find detailed information about mounting in the Mount IPC Guide.

# 5 Mechanical Specifications

The outer mechanical dimensions of The PIM-156-P industrial display are 400 × 256 × 52.5mm (W x L x H). Please refer to the technical drawing in the figure below for details related to the specific product measurements.

The cutout dimensions of this 15.6 inch product is 392mm x 243mm.

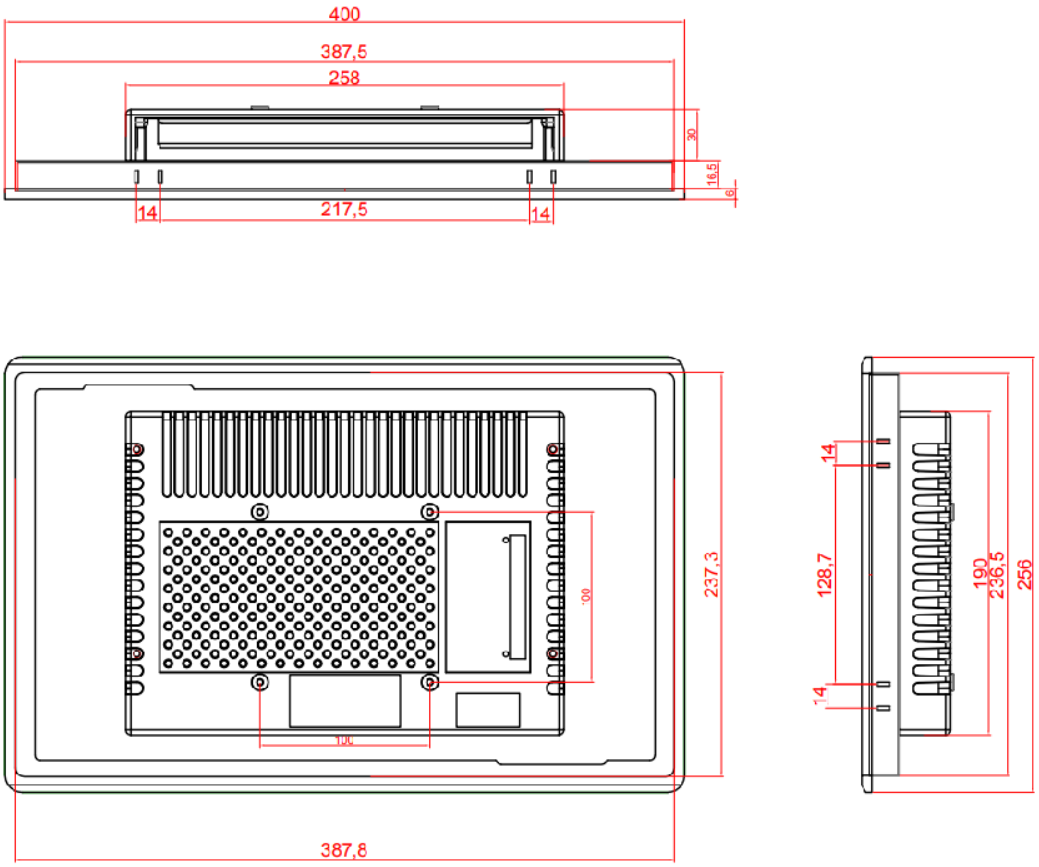


Technical Drawing

# 6 Disclaimer

**This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.**

**While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.**

**Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.**

# 7 Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at **support@chipsee.com**, providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.