
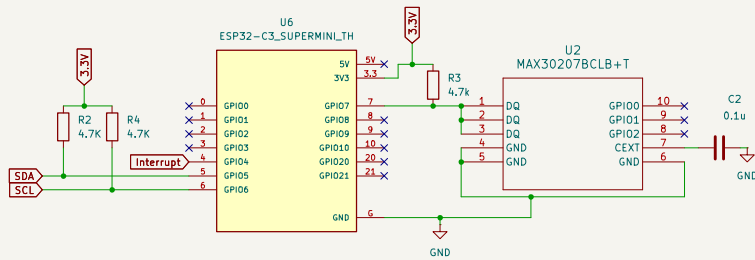


The image displays two circuit diagrams for the MAX30102 module.


POWER SUPPLY: This diagram shows the power regulation section. It starts with a BT2 3034 fuse connected to a 3.3V input. The input is connected to the VDD pin of the TP57A0518PDBVR voltage regulator (U1). The regulator's output (pin 5) provides a 1.8V supply to the rest of the circuit. A 1uF capacitor (C3) is connected between the input and ground, and another 1uF capacitor (C4) is connected between the output and ground. A 3.3V LED (D1) is connected between the 1.8V output and ground.

HEART-SENSOR: This diagram shows the sensor interface. The MAX30102 (U5) is connected to a 3.3V supply (VDD) and ground (GND). The SCL and SDA pins are connected to an I2C bus. The VLED+ pin is connected to a 3.3V supply through a 4.7k resistor (R5). The INT pin is connected to an interrupt signal. The module is labeled U5 GND MAX30102.



Gyroscope

The diagram shows a BMI270 gyroscope module (yellow PCB) connected to an Arduino Uno. The module is powered by a 3.3V regulator (U4) and has a 0.1uF capacitor (C5) connected to its VDDIO pin. The module's pins are connected to the Arduino's digital pins as follows: VDDIO to 5, VDD to 8, OSCB to 10, CSB to 12, SCX to 13, SDX to 14, SDO to 1, ASCX to 3, ASDX to 2, INT1 to 4, INT2 to 9, GND to 7, and GNDIO to 6. A 10k resistor (R6) is connected between the SCL and SDA pins of the module and the Arduino's I2C pins (13 and 14).

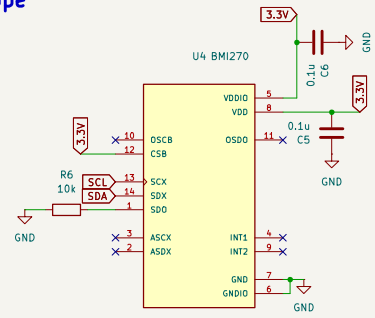

Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.2		Id: 1/1